

---

# **AMICI Documentation**

***Release 0.11.29***

**The AMICI developers**

**May 06, 2022**



# ABOUT

|           |  |            |
|-----------|--|------------|
| <b>1</b>  | <b>About AMICI</b>                                       | <b>3</b>   |
| 1.1       | Features . . . . .                                       | 3          |
| 1.2       | Interfaces & workflow . . . . .                          | 4          |
| <b>2</b>  | <b>Availability</b>                                      | <b>5</b>   |
| 2.1       | Source code . . . . .                                    | 5          |
| 2.2       | Python package . . . . .                                 | 5          |
| 2.3       | Installation instructions . . . . .                      | 5          |
| <b>3</b>  | <b>License conditions</b>                                | <b>7</b>   |
| 3.1       | AMICI . . . . .  | 7          |
| 3.2       | AMICI Logo . . . . .                                     | 7          |
| 3.3       | Dependencies . . . . .                                   | 8          |
| <b>4</b>  | <b>How to cite AMICI</b>                                 | <b>9</b>   |
| <b>5</b>  | <b>References</b>  | <b>11</b>  |
| <b>6</b>  | <b>Background</b>  | <b>13</b>  |
| 6.1       | Publications on various features of AMICI . . . . .      | 13         |
| 6.2       | Third-Party numerical algorithms used by AMICI . . . . . | 13         |
| <b>7</b>  | <b>Changelog</b>   | <b>15</b>  |
| 7.1       | v0.X Series . . . . .                                    | 15         |
| 7.2       | What's Changed . . . . .                                 | 15         |
| <b>8</b>  | <b>Glossary</b>  | <b>47</b>  |
| <b>9</b>  | <b>Contributing</b>                                      | <b>49</b>  |
| 9.1       | Contributing to AMICI . . . . .                          | 49         |
| 9.2       | Code of Conduct . . . . .                                | 49         |
| <b>10</b> | <b>Python interface</b>                                  | <b>51</b>  |
| 10.1      | Installing the AMICI Python package . . . . .            | 51         |
| 10.2      | Using AMICI's Python interface . . . . .                 | 57         |
| 10.3      | FAQ . . . . .  | 140        |
| 10.4      | AMICI Python API . . . . .                               | 141        |
| <b>11</b> | <b>C++ interface</b>                                     | <b>283</b> |
| 11.1      | Building the C++ library . . . . .                       | 283        |
| 11.2      | Using AMICI's C++ interface . . . . .                    | 284        |

|           |   |            |
|-----------|---|------------|
| 11.3      | AMICI C++ API . . . . .                       | 286        |
| <b>12</b> | <b>Matlab interface</b>                       | <b>535</b> |
| 12.1      | Installing the AMICI MATLAB toolbox . . . . . | 535        |
| 12.2      | Using AMICI's MATLAB interface . . . . .      | 535        |
| 12.3      | FAQ . . . . .                                 | 542        |
| 12.4      | AMICI Matlab API . . . . .                    | 543        |
| <b>13</b> | <b>AMICI developer's guide</b>                | <b>577</b> |
| 13.1      | Branches / releases . . . . .                 | 577        |
| 13.2      | When starting to work on some issue . . . . . | 577        |
| 13.3      | Code contributions . . . . .                  | 577        |
| 13.4      | Further topics . . . . .                      | 579        |
| <b>14</b> | <b>Handling of Discontinuities</b>            | <b>587</b> |
| 14.1      | Mathematical Considerations . . . . .         | 587        |
| 14.2      | Algorithmic Considerations . . . . .          | 587        |
| <b>15</b> | <b>Indices and tables</b>                     | <b>589</b> |
|           | <b>Python Module Index</b>                    | <b>591</b> |
|           | <b>Index</b>                                  | <b>593</b> |

Version: 0.11.29

Source code: <https://github.com/AMICI-dev/amici>



## ABOUT AMICI

AMICI provides a multi-language (Python, C++, Matlab) interface to the *SUNDIALS* solvers *CVODES* (for *ODEs*) and *IDAS* (for *DAEs*). AMICI allows the user to read differential equation models specified as *SBML* or *PySB* and automatically compiles such models into Python modules, C++ libraries or *.mex* simulation files (Matlab).

In contrast to the (no longer maintained) *sundialsTB* Matlab interface, all necessary functions are transformed into native C++ code, which allows for a significantly faster simulation.

Beyond forward integration, the compiled simulation file also allows for forward sensitivity analysis, steady state sensitivity analysis and adjoint sensitivity analysis for likelihood-based output functions.


The interface was designed to provide routines for efficient gradient computation in parameter estimation of biochemical reaction models but it is also applicable to a wider range of differential equation constrained optimization problems.

### 1.1 Features

- *SBML* import
- *PySB* import
- Generation of C++ code for model simulation and sensitivity computation
- Access to and high customizability of *CVODES* and *IDAS* solver
- Python, C++, Matlab interface
- Sensitivity analysis
  - forward
  - steady state
  - adjoint
  - first- and second-order (second-order Matlab-only)
- Pre-equilibration and pre-simulation conditions
- Support for discrete events and logical operations

## 1.2 Interfaces & workflow

The AMICI workflow starts with importing a model from either *SBML* (Matlab, Python), *PySB* (Python), or a Matlab definition of the model (Matlab-only). From this input, all equations for model simulation are derived symbolically and C++ code is generated. This code is then compiled into a C++ library, a Python module, or a Matlab *.mex* file and is then used for model simulation.

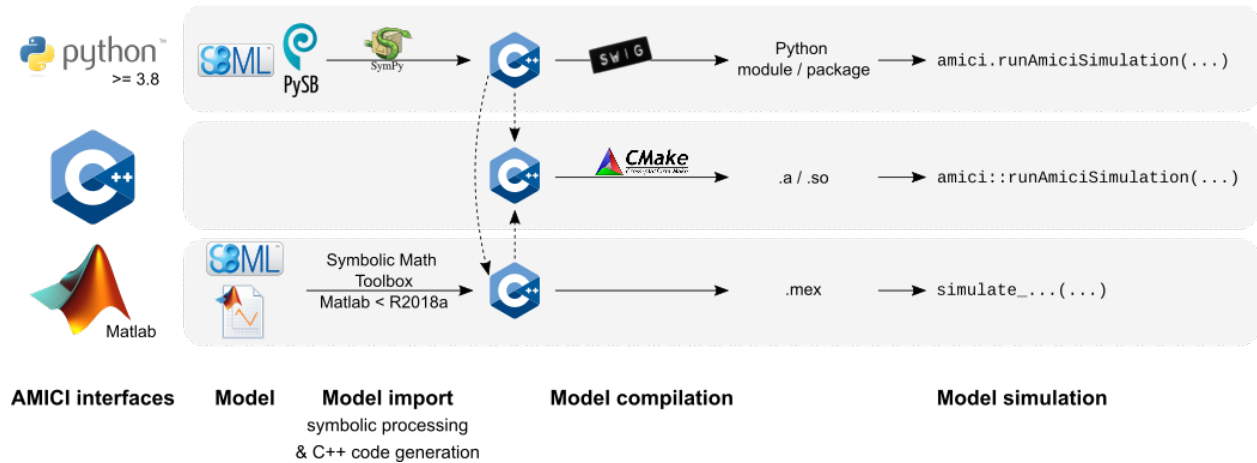

The functionality of the Python, Matlab and C++ interfaces slightly differ, as shown in the following table:

| Feature \ Interface        | Python                 | C++ | Matlab         |
|----------------------------|------------------------|-----|----------------|
| <i>SBML</i> import         | yes ( <i>details</i> ) | no  | yes (<=R2017b) |
| <i>PySB</i> import         | yes                    | no  | no             |
| <i>DAE</i> import          | no                     | no  | yes            |
| Forward sensitivities      | yes                    | yes | yes            |
| Adjoint sensitivities      | yes                    | yes | yes            |
| Steadystate sensitivities  | yes                    | yes | yes            |
| Second-order sensitivities | no                     | no  | yes            |
| Events                     | yes                    | yes | yes            |
| <i>preequilibration</i>    | yes                    | yes | yes            |
| <i>presimulation</i>       | yes                    | yes | no             |



## AVAILABILITY

### 2.1 Source code

The AMICI source code is available as

- [tar archive](#)
- [zip archive](#)
- Git repository on [GitHub](#)

If AMICI was downloaded as an archive, it needs to be unpacked. If AMICI was obtained via cloning the Git repository, no further unpacking is necessary.

#### 2.1.1 Obtaining AMICI via the Git version control system

In order to always stay up-to-date with the latest AMICI versions, simply pull it from our Git repository and recompile it when a new version is available. For more information about Git, check out their [website](#).

The Git repository can currently be found at <https://github.com/AMICI-dev/AMICI> and clone is done via:

```
git clone https://github.com/AMICI-dev/AMICI.git AMICI
```

### 2.2 Python package

A Python package is available on [PyPI](#).

### 2.3 Installation instructions

Installation instructions are available for

- *Python*
- *C++*
- *Matlab*



## LICENSE CONDITIONS

### 3.1 AMICI

AMICI is released under the 3-Clause BSD License (BSD-3-Clause) with the following terms:

Copyright (c) 2015-2020, Fabian Fröhlich, Jan Hasenauer, Daniel Weindl and Paul Stapor All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS “AS IS” AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

### 3.2 AMICI Logo

The AMICI logo is released under the Creative Commons CC0 1.0 Universal (CC0 1.0) license with the terms given in [documentation/gfx/LICENSE.md](#).

### 3.3 Dependencies

- Parts of the *SUNDIALS* solver suite are redistributed under the BSD 3-Clause License (BSD-3-Clause) with terms given in `ThirdParty/SuiteSparse/LICENSE.txt`
- Parts of *SuiteSparse* are redistributed under the various licenses with the terms given in `ThirdParty/SuiteSparse/LICENSE.txt`
- *gsl-lite* is redistributed under the MIT License (MIT) with the terms given in `ThirdParty/gsl/gsl/gsl-lite.hpp`
- *xml2struct* and *struct2xml* are redistributed under the BSD 2-Clause License (BSD-2-Clause) with terms given in `matlab/auxiliary/xml2struct/license.txt` and `matlab/auxiliary/struct2xml/license.txt`
- *CalcMD5* is redistributed under the BSD 2-Clause License (BSD-2-Clause) with terms given in `matlab/auxiliary/CalcMD5/license.txt`

## HOW TO CITE AMICI

### Citable DOI for the latest AMICI release:

There is a list of [publications using AMICI](#). If you used AMICI in your work, we are happy to include your project, please let us know via a Github issue.

When using AMICI in your project, please cite

- Fröhlich, F., Weindl, D., Schälte, Y., Pathirana, D., Paszkowski, Ł., Lines, G.T., Stapor, P. and Hasenauer, J., 2021. AMICI: High-Performance Sensitivity Analysis for Large Ordinary Differential Equation Models. *Bioinformatics*, btab227, DOI:10.1093/bioinformatics/btab227.

```
@article{frohlich2020amici,  
  title={AMICI: High-Performance Sensitivity Analysis for Large Ordinary  
↪Differential Equation Models},  
  author={Fr{"o}hlich, Fabian and Weindl, Daniel and Sch{"a}lte, Yannik and  
↪Pathirana, Dilan and Paszkowski, {\L}ukasz and Lines, Glenn Terje and Stapor,  
↪Paul and Hasenauer, Jan},  
  journal = {Bioinformatics},  
  year = {2021},  
  month = {04},  
  issn = {1367-4803},  
  doi = {10.1093/bioinformatics/btab227},  
  note = {btab227},  
  eprint = {https://academic.oup.com/bioinformatics/advance-article-pdf/doi/10.1093/  
↪bioinformatics/btab227/36866220/btab227.pdf},  
}
```

When presenting work that employs AMICI, feel free to use one of the icons in [documentation/gfx/](#), which are available under a [CC0](#) license:





## REFERENCES

List of publications using AMICI. Total number is 66.

If you applied AMICI in your work and your publication is missing, please let us know via a new Github issue.





## BACKGROUND

*This section is to be extended.*

### 6.1 Publications on various features of AMICI

Some mathematical background for AMICI is provided in the following publications:

- Fröhlich, F., Kaltenbacher, B., Theis, F. J., & Hasenauer, J. (2017). Scalable Parameter Estimation for Genome-Scale Biochemical Reaction Networks. *PLOS Computational Biology*, 13(1), e1005331. doi:[10.1371/journal.pcbi.1005331](https://doi.org/10.1371/journal.pcbi.1005331).
- Fröhlich, F., Theis, F. J., Rädler, J. O., & Hasenauer, J. (2017). Parameter estimation for dynamical systems with discrete events and logical operations. *Bioinformatics*, 33(7), 1049-1056. doi:[10.1093/bioinformatics/btw764](https://doi.org/10.1093/bioinformatics/btw764).
- Terje Lines, Glenn, Łukasz Paszkowski, Leonard Schmiester, Daniel Weindl, Paul Stapor, and Jan Hasenauer. 2019. “Efficient Computation of Steady States in Large-Scale Ode Models of Biochemical Reaction Networks. *IFAC-PapersOnLine* 52 (26): 32–37. DOI: [10.1016/j.ifacol.2019.12.232](https://doi.org/10.1016/j.ifacol.2019.12.232).
- Stapor, Paul, Fabian Fröhlich, and Jan Hasenauer. 2018. “Optimization and Profile Calculation of ODE Models Using Second Order Adjoint Sensitivity Analysis.” *Bioinformatics* 34 (13): i151–i159. DOI: [10.1093/bioinformatics/bty230](https://doi.org/10.1093/bioinformatics/bty230).

---

**Note:** Implementation details of the latest AMICI versions may differ from the ones given in the references manuscripts.

---

### 6.2 Third-Party numerical algorithms used by AMICI

AMICI uses the following packages from SUNDIALS:

- CVODES:  
The sensitivity-enabled ODE solver in SUNDIALS. Radu Serban and Alan C. Hindmarsh. *ASME 2005 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference*. American Society of Mechanical Engineers, 2005. [PDF](#)
- IDAS

AMICI uses the following packages from SuiteSparse:

- Algorithm 907: **KLU** A Direct Sparse Solver for Circuit Simulation Problems. Timothy A. Davis, Ekanathan Palamadai Natarajan, *ACM Transactions on Mathematical Software*, Vol 37, Issue 6, 2010, pp 36:1-36:17. [PDF](#)

- Algorithm 837: **AMD**, an approximate minimum degree ordering algorithm, Patrick R. Amestoy, Timothy A. Davis, Iain S. Duff, *ACM Transactions on Mathematical Software*, Vol 30, Issue 3, 2004, pp 381-388. [PDF](#)
- Algorithm 836: **COLAMD**, a column approximate minimum degree ordering algorithm, Timothy A. Davis, John R. Gilbert, Stefan I. Larimore, Esmond G. Ng *ACM Transactions on Mathematical Software*, Vol 30, Issue 3, 2004, pp 377-380. [PDF](#)

Others:

- SuperLU\_MT  
“A general purpose library for the direct solution of large, sparse, nonsymmetric systems of linear equations” ([https://crd-legacy.lbl.gov/~xiaoye/SuperLU/#superlu\\_mt](https://crd-legacy.lbl.gov/~xiaoye/SuperLU/#superlu_mt)). SuperLU\_MT is optional and is so far only available from the C++ interface.

## CHANGELOG

### 7.1 v0.X Series

#### 7.1.1 v0.11.29 (2022-05-06)

### 7.2 What's Changed

#### Features:

- Performance: Limit newton step convergence check by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1780>
- More informative NaN/Inf warnings by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1640>
- SBML import can now handle initial events by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1789>

#### Fixes:

- Avoid error if no measurements in PETab problem; fixed type handling in PETab parameter mapping by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1783>
- Fixed substitution of expressions in root and stau by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1784>
- Workaround for PETab problems with state-dependent noise models by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1791>

**Full Changelog:** <https://github.com/AMICI-dev/AMICI/compare/v0.11.28...v0.11.29>

#### 7.2.1 v0.11.28 (2022-04-08)

#### New features:

- Added `Solver.setSteadyStateToleranceFactor` and `Solver.setSteadyStateSensiToleranceFactor` to specify a steady state tolerance factor by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1758>  
**NOTE: This also relaxed the default steady state (sensitivity) tolerances by a factor of 100.**
- Added support for `pathlib.Path` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1769>
- Allow specifying initial timepoint with `ExpData` by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1776>

#### Performance:

- Speedup for models with conservation laws by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1765>

- Improved efficiency of newton step convergence check by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1775>

Fixes:

- Fixed deprecation warning for `pandas.DataFrame.append` in `rdatas_to_measurement_df` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1770>
- Fixed Rule-target handling in PETab import by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1753>

Removed functionality:

- Removed long deprecated `sbml2amici` arguments `modelName` and `constantParameters` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1774>

**Full Changelog:** <https://github.com/AMICI-dev/AMICI/compare/v0.11.27...v0.11.28>

## 7.2.2 v0.11.27 (2022-04-04)

New features:

- Checking condition number when computing sensitivities via Newton by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1730>
- Removed SPBCG solver by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1729>
- Added Newton step convergence checks to steadystate solver by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1737>
- Removed legacy options/members `amioption.newton_preeq` and ``Solver::r...` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1744>
- Added `ReturnData::cpu_time_total` to track total time spent in `runAmiciSimulation` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1743>
- SBML import: Alternative algorithm for identifying conservation laws by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1748>
- Use `amici.AmiciVersionError` to indicate version mismatch by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1764>

Performance:

- Optional parallel computation of derivatives during model import by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1740>
- Sparsify jacobian by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1766>
- Speedup conservation law computation by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1754>
- Exploit stoichiometric matrix in `pysb` import by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1761>
- Speedup `edata` construction from petab problems by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1746>

Fixes:

- Fixed `get_model_settings` that would to setting incorrect initial states and initial state sensitivities for models with parameter-dependent initial states by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1751>
- Use correct tolerances for convergence check in Newton solver by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1728>
- Harmonized convergence checks by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1731>

- Made sundials' KLU\_INDEXTYPE match actual klu index type by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1733>
- Fixed `Model::setStateIsNonNegative` logic that would raise exceptions in cases where it shouldn't by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1736>
- Fixed undefined reference to `dladdr` by @kristianmeyerr in <https://github.com/AMICI-dev/AMICI/pull/1738>
- Fixed HDF5 OSX intermediate group creation errors by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1741>
- Fixed recent cmake-based build issues due to changed sundials library directory by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1756>
- Updated Windows installation instructions by @paulflang in <https://github.com/AMICI-dev/AMICI/pull/1763>

... and other contributions by @FFroehlich, @dweindl

**Full Changelog:** <https://github.com/AMICI-dev/AMICI/compare/v0.11.26...v0.11.27>

### 7.2.3 v0.11.26 (2022-03-14)

New features:

- Import of BioNetGenLanguage (BNGL) models by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1709>
- Added support for observable-dependent sigmas by @dweindl, @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1692>
- Added support for pysb local functions by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1666>
- Added experimental support for conservation laws for non-constant species to SBML import: conservation laws for non-constant species by @stephanmg, @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1669> Enable this feature by setting environment variable `AMICI_EXPERIMENTAL_SBML_NONCONST_CLS` to any value
  - Allow using states eliminated by conservation laws to be used in root functions by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1677>
  - Added support for parameter-dependent conservation laws by @dweindl, @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1678>
- Added optional caching for symbolic simplifications in ODE export by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1672>
- Added CLI option `--no-sensitivities` to `amici_import_petab` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1688>

Fixes:

- SBML import: Raise in case of nested observables by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1690>
- Sympy 1.10 compatibility by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1694>

**Full Changelog:** <https://github.com/AMICI-dev/AMICI/compare/v0.11.25...v0.11.26>

### 7.2.4 v0.11.25 (2022-02-09)

- Fixed a bug where `Model::setStateIsNonNegative(Model::getStateIsNonNegative())` would raise an exception in case conservation laws were enabled - by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1648>
- Fixed a bug where `Model::setStateIsNonNegative` would be ignored in certain model expressions - by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1650>
- Fixed a bug where special function parsing inside `min()` and `max()` would not be parsed correctly - by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1655>
- Fixed a numpy dependency issues for Mac+ARM systems - by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1657>
- Fixed convergence check in Newton method - by @plakrisenko in <https://github.com/AMICI-dev/AMICI/pull/1663>
- Add `AMICI_CXX_OPTIONS` to pass libamici-specific compiler options during CMake-based builds - by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1664>
- Fixed various warnings and updated documentation - by @dweindl

**Full Changelog:** <https://github.com/AMICI-dev/AMICI/compare/v0.11.24...v0.11.25>

### 7.2.5 v0.11.24 (2022-02-01)

Features:

- Introduced environment variable `AMICI_DLL_DIRS` to control DLL directories on Windows (useful for setting BLAS library directory, as required by Python $\geq$ 3.8) by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1637>
- Dropped Python3.7 support by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1635>
- Include header files in CMake targets for better IDE integration by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1639>

Fixes:

- Fixed an issue in PETab import where all-integer parameters would previously result in a `TypeError` by @stephanmg in <https://github.com/AMICI-dev/AMICI/pull/1634>
- Fixed tempdir deletion issues for test suite on Windows by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1636>
- Added functions to provide state IDs/names for `x_solver` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1638>
- Fixed docs on RTD by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1643>

**Full Changelog:** <https://github.com/AMICI-dev/AMICI/compare/v0.11.23...v0.11.24>

### 7.2.6 v0.11.23 (2022-01-11)

Features:

- Added overload for `Model::setParameterScale` with vector by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1614>
- Removed `assert_fun` argument from gradient checking, improve output by @dweindl, @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1609>
- Added `get_expressions_as_dataframe` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1621>
- Added `id` field to `ExpData` and `ReturnData` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1622>
- Included condition `id` in dataframes by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1623>

Fixes:

- C++: Fixed `SUNMatrixWrapper` ctor for size 0 matrices by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1608>
- Python: Handle `TemporaryDirectory` cleanup failures on Windows by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1617>
- Python: `pysb.Model.initial_conditions` throws a `DeprecationWarning` by @PaulJonasJost in <https://github.com/AMICI-dev/AMICI/pull/1620>
- Fixed wrong array size in warnings by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1624>

NOTE: AMICI 0.11.23 requires `numpy<1.22.0`

**Full Changelog:** <https://github.com/AMICI-dev/AMICI/compare/v0.11.22...v0.11.23>

### 7.2.7 v0.11.22 (2021-12-02)

- **Require `sympy>=1.9`, `pysb>=1.13.1`** by @FFroehlich, @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1599>
- Fixed sympy deprecation warning by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1600>
- Updated Windows installation instructions for `Python>=3.8` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1597>
- Fixed plot labels by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1598>

**Full Changelog:** <https://github.com/AMICI-dev/AMICI/compare/v0.11.21...v0.11.22>

### 7.2.8 v0.11.21 (2021-11-21)

Fixes:

- Fixed a bug in recursion depth computation for model expressions. This may have resulted in incorrect sensitivities for models with expressions nested more than 2 levels. (#1595)
- Fixed improper handling of Piecewise functions in PySB import which may have produced incorrect simulation results. (#1594)
- Fixed changed googletest reference which broke the CMake-based build if tests were enabled (#1592)

New:

- It's now possible to build AMICI using Ninja (#1593)

## 7.2.9 v0.11.20 (2021-11-12)

New:

- Changed parameter mappings such that unassigned values have non-nan default values. This fixes erroneous evaluation of 11h as NaN in some situations (#1574)
- Added support for Python 3.10 (#1555)

Fixes:

- Fixed a bug when simulation start time was not transferred when copying a solver instance (#1573)
- Fixed a bug which led to incorrect sensitivities for models with multiple assignment rules or rate rules (#1584)

Other:

- Update CI and documentation settings (#1569, #1527, #1572, #1575, #1579, #1580, #1589, #1581)
- Extend set of validated benchmark models that is checked during CI (#1571, #1577)
- Fixed string formatting in derivative checks (#1585)
- Added helper methods to save and restore model instance-only settings (#1576)

## 7.2.10 v0.11.19 (2021-10-13)

New:

- Added support for observable transformations (lin/log/log10) (#1567). Thereby supporting additional noise distributions in combination with least squares solvers.

Fixes:

- Fixed a bug when Newton sensitivity computation was activated despite specifying `newton_steps == 0`. The error occurs when simulation converges to a steadystate but simulation sensitivities are not converged according to convergence criteria. In that case simulation returned failure, but the newton rootfinding “finds” a steadystate even before the iteration check, leading to the erroneous computation of sensitivities via Newton/IFT. For singular jacobians this means the overall simulation still fails, but a different, more informative error message is displayed. (#1541)
- Fixed a bug where argument “outdir” in `ODEExporter.init` would not be used (#1543)

Other:

- Improve checking support for SBML extensions (#1546)
- SBML import: Use more descriptive IDs for flux expressions (#1551)
- Optimized `SUNMatrixWrapper` functions (#1538)
- C++: Changed test suite from `CppUTest` to `gtest` (#1532)
- Add `CITATION.cff` (#1559)
- Updated documentation (#1563, #1554, #1536)
- Removed `distutils` dependency (#1557)
- Require `sympy < 1.9`



### 7.2.11 v0.11.18 (2021-07-12)

New:

- Allow specifying maximum integration time via `amici::Solver::setMaxTime()` (#1530)
- Py: Add `failfast` and `num_threads` argument to `simulate_petab` (#1528, #1524)
- Enable typehints / static type checking for AMICI-generated model modules (#1514) (`amici.ModelModule`, available with Python $\geq$ 3.8)

Fixes:

- Python: Fix unused argument `generate_sensitivity_code` in `pysb2amici` (#1526)
- Python: Fix C(++) stdout redirection which could have led to deadlocks in exotic situations (#1529)
- Py: Fixed deprecation warning (#1525)
- Py: Proper typehints for SWIG interface (#1523), enabling better static type checking and IDE integration (available with Python $\geq$ 3.9)
- C++: Fixed clang compiler warning (#1521)
- C++: Fix inherited variadic ctor in exception class (#1520)
- PETab: More informative output for unhandled species overrides (#1519)
- Return `SbmlImporter` from PETab model import (#1517)

### 7.2.12 v0.11.17 (2021-05-30)

Fixes:

- Fix “maybe-uninitialized” compiler warning (#1495)
- Fix substitution of expressions in ``drootdt_total`` (#1512)
- C++: Fix serialization and `==` operator (#1493)
- C++: Avoid `w` in `root` and `stau` headers (refactor) (#1503)

Documentation:

- Updated OpenBLAS Windows installation instructions (#1496)
- Updated how-to-cite to Bioinformatics paper (#1499)
- Updated list of papers using AMICI (#1509)

Other:

- Remove `sllh` computation from `petab_objective.simulate_petab` (#1498)
- Add `main.py` to Python package to provide info on AMICI installation via `python -m amici` (#1500)

### 7.2.13 v0.11.16 (2021-04-13)

Fixes:

- Fixed serialization bug (#1490)

New:

- Construction of condition specific plist for parameter mappings (#1487, #1488)
- **Add support for error residuals** (#1489)

### 7.2.14 v0.11.15 (2021-03-31)

Fixes:

- Fixed initial state sensitivities in adjoint preequilibration (#1468)
- Fixed various model import / parameter mapping issues (#1469, #1473, #1475)

New:

- New AMICI releases will automatically trigger releases at <https://biosimulators.org/simulators/amici/latest>
- Transparent logo

### 7.2.15 v0.11.14 (2021-03-16)

New features:

- **Python import now supports SBML Events** (#1443)
- Implement support for compilation without sensitivities (#1454)

Fixes:

- Issue #1446: Check whether constant parameters are valid targets (#1450)
- Issue #1422: Fix Steadystate solver failing if preequilibration starts in steadystate (#1461)
- Issue #1401: Ensure diagnostics variables in ReturnData are always of expected length (#1438, #1447)
- Fix FIM approximation for parameter dependent sigma (#1441)
- Fix invalid SBML in PETab/PySB import (#1433)
- Fix: No context for inspect.getouterframes (#1432)

Documentation:

- Added this CHANGELOG
- Added feature request issue template (#1437)
- Updated reference list (#1430)
- Overhauled experimental conditions notebook (#1460)

CI:

- Test Matlab interface on GHA (#1451)
- Include componentTags in SBML test suite output (#1462)
- Split SBML semantic test suite into multiple jobs (#1452)

- Fix Crauste ref val, fixes #1458 (#1459)

Misc:

- Various cleanup (#1465, #1448, #1455)
- Micro-optimize SUNMatrixWrapper::transpose (#1439)
- Remove constant triggers from roots in Heaviside (#1440)

## 7.2.16 v0.11.13 (2021-02-20)

Breaking changes:

- AMICI requires Python $\geq$ 3.7
- Updated package installation (PEP517/518): Creating source distributions requires <https://github.com/pypa/build> (#1384) (but now handles all package building dependencies properly)

Features:

- More flexible state reinitialization (#1417)

Updated dependencies:

- Upgrade to sundials 5.7.0 (#1392)

Fixes:

- Python: account for heaviside functions in expressions (#1382)
- Python: allow loading of existing models in import\_petab\_problem (#1383)
- Python: Don't override user-provided compiler/linker flags (#1389)
- Python: PETab import reinitialization fixes (#1417)
- Python: Fix PETab observables for pysb models (#1390)
- Python: Substitute expressions in event condition expressions (#1404)
- Python: Unspecified initial states in PETab conditions table default to SBML initial value (#1397)
- C++: Fix timepoint out of bounds access (#1402)
- C++: Fix exported CMake config (#1388)
- Fixed Dockerfile: add python3-venv (#1398, #1408)

Other:

- Slim exported swig interface (#1425)
- Updated documentation
  - Getting started tutorial (#1423)
  - List supported SBML test tags (#1428)
  - Add AMICI C++/Python/Matlab feature comparison (#1409)
  - ...
- Various minor CI improvements
- ...

### 7.2.17 v0.11.12 (2021-01-26)

Features:

- Add expression IDs and names to generated models (#1374)

Fixes:

- Raise minimum sympy version to 1.7.1 (Closes #1367)
- Fix species assignment rules in reactions (#1372)
- Fix id vector for DAEs (#1376)

Docs:

- Update how-to-cite (#1378)

### 7.2.18 v0.11.11 (2020-12-15)

#### Python

- Restore support for species references (#1358)
- Add support for noise models in pysb (#1360)
- Proper handling of discontinuities in the ODE rhs (#1352)
- Fix directly calling AMICI from snakemake (#1348 )
- Extend mathml function support, particularly for numerical arguments (#1357)
- Restore support for sympy 1.6 (#1356)

#### C++

- Fix some compiler related warnings (#1349, #1362 )
- Fix a rare segfault for adjoint sensitivities (#1351)

#### CI

- Move windows tests to GHA (#1354)
- Pin breathe to 4.24.1

#### Docker

- Update ubuntu to 20.04

### 7.2.19 v0.11.10 (2020-11-30)

Bugfix release that restores compatibility with sympy 1.7

### 7.2.20 v0.11.9 (2020-11-29)

#### Python

- General improvements to SBML import (#1312, #1316, #1315, #1322 , #1324 #1333, #1329)
- Small bugfixes and improvements (#1321 )
- Improve derivative computation for instances of `power` (#1320 )

#### C++

- Fix FIM and residual computation for models with parameter dependent sigma. (#1338)
- Disable chi2/residual/FIM computation for non-gaussian objective functions. (#1338)
- Bugfix for integration failure during adjoint solve (#1327)

#### Doc

- Update references (#1331, #1336)

#### CI

- Update OpenBLAS for windows (#1334)

### 7.2.21 v0.11.8 (2020-10-21)

#### Python

- Fix pysb-petab support (#1288)
- Fix ExpData constructor overloading (#1299)
- Fix support for positivity enforcement (#1306)
- **Refactor SBML import, adds support for parameter rate rules and initial assignments** (#1284, #1296, #1304)
- Improve model generation for models with many parameters (#1300)
- Add support for PEtab based synthetic data generation (#1283)

## C++

- Make HDF5 an optional dependency (#1285)

## Doc

- General Improvements to Documentation (#1289, #1291, #1292, #1293, #1294, #1286, #1277, #1281)

## CI

- Add python 3.9 support test (#1282)
- Allow manual triggering of GitHub actions (#1287)
- Remove appveyor config (#1295)
- Update GHA env and path management (#1302)

## 7.2.22 v0.11.7 (2020-09-22)

### Python

- Improve and extend available objective functions (#1235)
- Fix processing of compartment definitions (#1223)
- Fix replacement of reserved symbols (#1265)
- Use Hierarchical Derivatives for Expressions (#1224, #1246)
- Fix duplicate running of swig (#1216)
- Overload python interface functions for amici.{Model,Solver,ExpData} and amici.{Model,Solver,ExpData}Ptr (#1271)

## C++

- Fix and extend use of sparse matrix operations (#1230, #1240, #1244, #1247, #1271)
- **Fix application of maximal number of steps.** MaxNumStep parameter now limit total number of steps, not number of steps between output times. (#1267)

## Doc

- Move all Documentation to RTD (#1229, #1241)
- General Improvements to Documentation (#1225, #1227, #1219, #1228, #1232, #1233, #1234, #1237, #1238, #1239, #1243, #1253, #1255, #1262)

## CI

- Better check for doc building (#1226)
- Add more gradient checks (#1213)
- Update GHA to Ubuntu 20.04 (#1268)

### 7.2.23 v0.11.6 (2020-08-20)

## Python

- Bugfix for piecewise functions (#1199)
- Refactor swigging - generate one single wrapper (#1213)

## C++

- Fix warnings: account for zero indexing in nan/inf error (#1112)

## Doc

- Update Windows build instructions (#1200, #1202)
- Update README: Projects using AMICI (#1209)
- Add CODE\_OF\_CONDUCT.md (#1210)
- Update documentation for Python interface (#1208)

## CI

- Create sdist on GHA using swig4.0.1 (#1204) (Fixing broken pypi package)
- Fix links after repository move
- Speed-up swig build: disable all languages except python (#1211)
- Fix doc generation on readthedocs (#1196)

### 7.2.24 v0.11.5 (2020-08-07)

## General

- Move repo to new organization (#1193)
- Update Bibliography

## Python

- Fix bug for energyPySB models (#1191)

## CI

- Fix release deployment (#1189)

## 7.2.25 v0.11.4 (2020-08-06)

## Python

- Skip unnecessary expressions in pysb models (#1185)
- MSVC compiler support (this time for real... #1152)

## CI

- Implement MSVC tests (#1152)
- Rename and group GitHub actions (#1186)
- Fix release deployment (#1186)

## 7.2.26 v0.11.3 (2020-08-06)

## Python

- Fix simplification for pysb models (#1168)
- Pass verbosity flags to pysb network generation (#1173)
- Enable experimental pysb-petab support (#1175)
- Add installation instructions for Fedora (#1177)
- Implement support for SBML rate-references (#1180)

## C++

- Refactoring (#1162, #1163)

## CI

- Move majority of tests to Github Actions (#1166, #1160)
- Improve reporting of skipped tests in SBML testsuite (#1183)



### 7.2.27 v0.11.2 (2020-07-17)

#### Python

- Speed up model import, compilation (#1123, #1112)
- Improve/Add steady-state solver documentation (#1102)
- Improve extension import (#1141)
- Bugfixes SBML import (#1135, #1134, #1145, #1154)
- Fixed issue that prevented simplification (#1158)

#### C++

- Bugfixes (#1121, #1125, #1131, #1132, #1136)
- Enable openMP by default (#1118)
- Improve memory footprint for simulations with replicates (#1153)
- Improve steady-state solver and add option to to adjoint-steadystate hybrid (#1143, #1099, #1129, #1146)

#### CI

- Store build artifacts from github actions (#1138)

### 7.2.28 v0.11.1 (2020-06-05)

#### Python

- Upgrade to sympy 1.6.0, which is now required minimum version (#1098, #1103)
- Speed up model import
  - Speed-up computation of `sx0`, reduce file size (#1109)
  - Replace terribly slow `sympy.MutableDenseMatrix.is_zero_matrix` by custom implementation (#1104)
- speedup dataframe creation in `get*AsDataFrame` (#1088)
- Allow caching edatas for `simulate_petab` (#1106)
- Fix wrong deprecation warning (Fixes #1093)
- Fix segmentation faults in `NewtonSolver` under certain conditions (#1089, #1090, #1097)
- fix wrong power function call in `unscale_parameter` (#1094)
- Fix MathML conversion (#1086)
- Fix deepcopy of SymPy objects (#1091)

## Matlab

- handle empty `rdata->{pre|post}eq_numlinsteps` (Closes #1113), which previously made the matlab interface unusable
- Fix generation of `compileMexFile.m` for matlab compilation of python code (#1115)

## C++

- Reduce memory requirements and speedup compilation of large models (#1105)
- Place generated code into own namespace (#937) (#1112)
- Fix several msvc compiler warnings (#1116) (Note that MSVC support is still experimental) **breaking change for users of C++ interface**
- Fix swig warning: ensure base class `ContextManager` is known before use (Fixes #1092) (#1101)

## CI

- Don't install/run valgrind on travis CI (done with github actions... (#1111)

## 7.2.29 v0.11.0 (2020-05-10)

Python:

- **Implement support for variable compartments (#1036)**
- Better handling of constant species (#1047)
- **Better handling of C++ enums, this makes `amici.SensitivityMethod_forward` available as `amici.SensitivityMethod.forward` (#1042)**
- Improve installation routines (#1055, #1056, #1058, #1076)
- Add option to reduce memory usage (#1044)
- **Fix handling of symbolic expressions in nested rules (#1081, 1069)**

Library:

- Update Sundials to 5.2.0 (#1039)
- Update SuiteSparse to 5.4.0 (#1040)
- Refactor use of `ReturnData`, now completely created post-hoc (#1002)
- **Fix propagation of reinitialization in `ExpData` constructor (#1041)**
- **Fix issue where `InternalSensitivityParameter` was sometimes not set (#1075)**
- **Fix or disable certain combinations of equilibration, presimulation and adjoint sensitivity analysis**

CI:

- Move from Codacy to Sonarcloud (#1065)
- Run SBML Testsuite when appropriate (#1058)

### 7.2.30 v0.10.21 (2020-04-04)

Library:

- Fix: Handle paths with blanks in build scripts
- Feature: Add function to write amici::Solver settings to HDF5 (#1023)
- Fix: typehints (#1018, #1022)
- Refactor: Move creation of parameter mapping for objective<->simulation to classes (#1020)

CI:

- Refactor: Cleanup and reorganize tests (#1026)
- Fix: benchmark problem test should fail on missing files (Closes #1015)

### 7.2.31 v0.10.20 (2020-03-18)

- Fixed (re)initialization of sensitivities if ExpData::fixedParametersPreequilibration is set (#994)
- Fixed sensitivities for parameters in sigma expressions for Python/SBML in case provided expression was not just a single parameter ID
- Enable parallel compilation of model files from Python (#997) based on AMICI\_PARALLEL\_COMPILE environment variable
- Fixed computation of log-likelihood for log10-normal distributed noise
- Added `reinitializeFixedParameterInitialStates` to ExpData (#1000) (**breaking change**: overrides settings in `amici::Model`)
- Python model import now verifies that chosen model name is a valid identifier (Closes #928)
- Made `w` available in ReturnData (Closes #990) (#992)
- Fixed setting of log level when passing boolean values to verbose (#991)
- Documentation now on ReadTheDocs <https://amici.readthedocs.io/en/>
- Use proper state/observable names in plotting functions (#979)
- PETab support:
  - Adapt to most recent PETab (0.1.5)
  - Extended support for import of PETab models
  - Added support for computing cost function based on PETab problem
  - Implemented handling of species in condition table
  - `petab_import.import_model` now provides reproducible parameter list (Closes #976)
  - Fix python import error in `import_petab_problem`: Add absolute paths to python path, invalidate caches and reload (#970)
  - Added example notebook
- CI: PETab test suite integrated in CI workflow
- Added AMICI dockerfile and image deployment to dockerhub (#948)
- Removed mention of ‘mex’ in warning/error ids (#968)
- More informative errors on SWIG interface import failures (#959)

### 7.2.32 v0.10.19 (2020-02-13)

Python:

- Fix logo display on pypi
- Fix deadlocks in multithreaded python environments when using openMP parallelization

Matlab:

- Fix compilation errors due to switch to C++14

### 7.2.33 v0.10.18 (2020-02-11)

General:

- AMICI now comes with a logo
- implement getName function for models
- Updated documentation / examples

Python:

- Enable MSVC compilation of Python extensions (#847)
- Always recompile clibs and extensions (Closes #700)
- Extended PETab support (Running
- enable multithreading in swig (#938)
- Fixes pysb (#902) (#907)

C++

- Build optimized AMICI and sundials by default (Closes #934)

Matlab:

- Fix(matlab) Compile CalcMD5 on demand (Fixes #914)
- Don't pass empty include strings to mex
- Fix Matlab compilation error if AMICI or model path contains blanks

CI:

- Running additional test models

... and various minor fixes/updates

### 7.2.34 v0.10.17 (2020-01-15)

- **added python 3.8 support, dropped python 3.6 support** (#898)
- Added logging functionality (#900)
- Fixes PySB import (#879, #902)
- Fixes symbolic processing (#899)
- Improved build scripts (#894,
- Improved petab support (#886, #888, #891)

- CI related fixes (#865, #896)

### 7.2.35 v0.10.16 (2019-12-11)

- **Sparsify dwdp to reduce computation time for adjoints (#858)**
- Fix(matlab) update example name example\_dae\_events->example\_calvetti (Closes #866)
- Fix nullptr deferencing for simulations with events when no measurements are provided (Fixes #866)
- Fix accessing empty vector during adjoint state event update (Closes #866)
- Fix pysb\_import (fixes #878)

### 7.2.36 v0.10.15 (2019-12-03)

Bugfix release due to incorrect sensitivities w.r.t. sigmas introduced in 0.10.14.

No other changes.

### 7.2.37 v0.10.14 (2019-12-02)

**NOTE: For Python-imported SBML-models this release may compute incorrect sensitivities w.r.t. sigma. Bug introduced in 0.10.14, fixed in 0.10.15.**

Python:

- Don't require use of ModelPtr.get to call ExpData(Model)
- Fix import in generated model Python package
- Setup AMICI standalone scripts as setuptools entrypoints
- Simplify symbolic sensitivity expressions during Python SBML import Fixes Infs in the Jacobian when using Hill-functions with states of 0.0.
- Extended Newton solver #848 The changes that allow performing Newton tests from the paper: G. T. Lines, Ł. Paszkowski, L. Schmiester, D. Weindl, P. Stapor, and J. Hasenauer. Efficient computation of steady states in large-scale ODE models of biochemical reaction networks. accepted for Proceedings of the 8th IFAC Conference on Foundations of Systems Biology in Engineering (FOSBE), Valencia, Spain, October 2019.
- Use SWIG>=4.0 on travis to include PyDoc in sdist / pypi package (#841)
- **Fix choice of likelihood formula; failed if observable names were not equal to observable IDs**
- Fix(sbml-import) Compartment IDs in right-hand side of Rules are not replaced and lead to undefined identifiers in c++ files
- Fix invalid logging level
- Speed up sympy simplification (#871)

C++:

- Performance: Avoid unnecessary repeated function calls for SUNMatrixWrapper dimensions
- Add AmiciApplication class as context for handling so far global settings. This allows for example setting custom logging functions for concurrent AMICI runs, e.g. in multi-thread applications (Closes #576).

Misc:

- Setup performance test on github actions (#853)

- Update documentation and FAQ for CBLAS requirement and others
- Update reference list

### **7.2.38 v0.10.13 (2019-10-09)**

- BREAKING CHANGE: Renaming {get|set}tNewtonPreequilibration to {get|set}Preequilibration (Closes #720)
- Make wurlitzer non-optional requirement for AMICI python package (Fixes missing AMICI errors when running from jupyter notebooks)
- Compute initial state for Model::getInitialStates if not already set (Fixes #818)
- Make swig generate pydoc comments from doxygen comments #830 (Closes #745) to provide Python docstrings for C++ wrapper functions
- feature(cmake) Add option to disable compiler optimizations for wrapfunctions.cpp (Fixes #828) (#829)
- Change SBML test suite to pytest to allow for parallel test execution... (#824)
- Fix(cmake): -E option is not available in all sed versions. Neither is the equivalent -r. Use --regexp-extended instead (Closes #826)
- Refactor(python) Move PETab import code from command line script... (#825)
- Fix(core) Fix regular expressions for intel compiler (Closes #754) (#822)
- Update workflow figure to include PySB (Closes #799)
- Fix compiler warnings

### **7.2.39 v0.10.12 (2019-09-28)**

- Fix handling of species specified in PETab condition table (#813)
- Fix some Visual C++ issues, update cppcheck handling, cleanup (VisualC++ still not fully supported)
- Minor fixups (#801)
- Create SBML test suite result files for upload to <http://sbml.org/Facilities/Database/> (#798)

### **7.2.40 v0.10.11 (2019-08-31)**

- Fixed setting initial conditions for preequilibration (#784)
- Fixed species->parameter conversion during PETab import (#782)
- Set correct Matlab include directories in CMake (#793)
- Extended and updated documentation (#785, #787)
- Fix various SBML import issues
- Run SBML test suite using github actions instead of travisCI (#789)

### 7.2.41 v0.10.10 (2019-08-07)

- Simplify/fix AMICI installation
  - If available use environment modules to detect dependencies
  - Add SWIG installation script
- Update list of publication
- Update documentation
  - Update doc for SWIG build and custom SWIG location.
  - Add AMICI interface overview / workflow figure and show in README
  - Document environment variables for model/core compilation (Closes #737)
- Added handling of abs function, since there seem to be problems with case sensitivity (#713) Closes #770

Details: \* cmake: Use package\_ROOT environment variables \* fix(cmake) Fix finding version.txt \* cmake: Auto-detect loaded MKL environment module \* cmake: Use new FindPython3 modules where possible \* fix(python) Restore python3.6 compatibility \* Inside venv, use pip instead of pip3 which should point to the correct version \* fix(python) Workaround for missing ensurepip during venv creation [ci skip] \* feature(python) Use MKL from environment modules to provide cblas \* fix(python) Fix define\_macros not being passed to setuptools for Extension \* fix(python) Fix define\_macros not being passed to setuptools for clibs \* Do not always add 'cblas' library since users may want to override that by a cblas-compatible library with a different name (closes #736)\* Update HDF5 path hints; use shared library if static is not available. \* Check for HDF5\_BASE from environment module \* Fix system-dependent sundials library directory (Fixes #749) (#750) \* Handle OSTYPE==linux in scripts/buildBNGL.sh (Fixes #751) \* Add SWIG download and build script \* Improve finding swig executable and allow user override via SWIG environment variable \* Provide installation hints if no SWIG found (Closes #724) \* Allow overriding cmake executable with environment variables in build scripts (Closes #738)

### 7.2.42 v0.10.9 (2019-07-24)

Fixup for missing version bump in v0.10.8 release. No code changes compared to v0.10.8.

### 7.2.43 v0.10.8 (2019-07-24)

Changes in this release:

All:

- Updated / extended documentation
- Fix reuse of Solver instances (#541)

C++:

- Check for correct AMICI version for model in CMake
- Add reporting of computation times (#699)

Python:

- Fix manifest file (#698)
- Fix initial amounts/concentrations in SBML import

... and various other minor fixes/improvements

### 7.2.44 v0.10.7 (2019-05-01)

Python

- fix unset noise distribution when automatically generating observables in case None are passed (#691)

### 7.2.45 v0.10.6 (2019-04-19)

C++

- Add SuperLUMT support (#681)
- Sparsified dJydy (#686)
- Enabled support of impulse-free events for DAE models (#687) - thanks to Sebastien Sten for providing a testcase for this

Python

- Enabled support for piecewise functions in SBML import (#662)
- Fix numeric type when constructing ExpData from Dataframes (#690)
- Fix dynamic override in PETab

### 7.2.46 v0.10.5 (2019-04-08)

Bugfix release

Doc

- Update documentation of Windows installation

C++

- Fix missing source files in CMakeLists.txt (#658)
- Set CMake policies to prevent warnings (Closes #676) (#677)
- Start using gsl::span instead of raw pointers (#393) (#678)

Python

- PySB parsing fix (#669)
- Fix failure to propagate BLAS\_LIBS contents (#665)
- Require setuptools at setup (#673)
- Updated PETab import to allow for different noise models

### 7.2.47 v0.10.4 (2019-03-21)

Features / improvements:

- Implement ReturnData and ExpData wrappers as more efficient views (#657)
- Add list of references using AMICI (#659)
- Custom llh (normal/laplace, lin/log/log10) (#656)

Bugfixes:



- Speedup and fix travis build

### 7.2.48 v0.10.3 (2019-03-13)

Features / improvements:

- adds the option for early termination on integration failures for `runAmiciSimulations`
- improve runtime of `SUNMatrixWrapper::multiply`
- expose finite difference routines in public API
- enable parallel compilation of clib source files

Bugfixes:

- fixed symbolic processing for unreleased pysb features

### 7.2.49 v0.10.2 (2019-03-07)

Features / improvements:

- extended `ExpData` interface to allow for condition specific parameters, parameter scales, parameter lists, initial conditions and initial condition sensitivities.

Bugfixes:

- fixed output values of `ReturnData::x_ss` and `ReturnData::sx_ss`

### 7.2.50 v0.10.1 (2019-03-04)

- travis-ci.com migration
- fix problem with `has{variable}` functions
- allow to import sbml model from string, not only file

### 7.2.51 v0.10.0 (2019-03-01)

Features / improvements:

- updated sundials to 4.1.0
- updated SuiteSparse to 5.4.0
- added generic implementations for symbolic expressions that were sparse matrix vector products

Bugfixes:

- fixed return value of `rz` when no data is provided.

### 7.2.52 v0.9.5 (2019-02-26)

Features / improvements:

- allow python installations without compilation of c++ extension
- improvements to ExpData <-> pandas.DataFrame interface
- allow generation of matlab models from python
- implement CLI interface for PETab
- improve computation time for conservation laws from pysb import

Bugfixes:

- Fix sign in undamped Newton step.

Maintenance:

- use newer CI images

### 7.2.53 v0.9.4 (2019-02-11)

Minor fixes only:

- fix(core) Get solver diagnostics for first(last) timepoint (#588) (Closes #586)
- fix(ci) Fix autodeploy (Closes #589)

### 7.2.54 v0.9.3 (2019-02-07)

#### CRITICAL FIXES

- **fix(python) fix symbolic computations for adjoint (#583)**

#### Features

- feature(python) Check for matching AMICI versions when importing model (Closes #556). Set exact AMICI version as model package requirement.
- feature(core) Add option to rethrow AMICI exception (Closes #552)
- feature(python) Redirect C/C++ output in stdout is redirected (e.g. in ipython notebooks) (Closes #456)

#### Minor fixes

- fix(python) Fix doc and rename sys\_pipes to something more meaningful
- fix(ci) Fix premature exit of scripts/runNotebook.sh
- fix(deploy) Update pyenv shims to find twine

### 7.2.55 v0.9.2 (2019-01-30)

Bugfixes:

- fixes a critical bug in the newton solver
- fixes multiple bugs in sbml import for degenerate models, empty stoichiometry assignments and conversion factors
- improved error messages for sbml import
- #560
- #557
- #559

### 7.2.56 v0.9.1 (2019-01-21)

Features / improvements:

- make pure steadystate results available as `rdata['x_ss']` and `rdata['sx_ss']`
- add option to specify integration tolerances for the adjoint problem via `atolB` and `rto1B`

Bugfixes:

- improved conservation law identification to also account for constant species.
- fixed a bug where simulation results were written into results of the second newton solver attempt
- fixed an openMP related warning

Maintenance:

- attempt to fix automatic deploy to pypi via travis

### 7.2.57 v0.9.0 (2019-01-18)

Features / improvements:

- Allow computation and application of conservation laws for pysb importet models. This enables use of Newton-Solver for preequilibration for models where it was previously not possible.
- Use `klu_refactor` in the sparse Newton solver instead of always using `klu_factor` and only perform symbolic factorization once (#421)
- Allow more detailed finiteness checks (#514)

Bugfixes:

- #491

Maintenance:

- Several improvements to travis log sizes and folding
- Use default copy constructor for Model by implementing class wrappers for sundials matrix types (#516)
- Reenable run of SBML testsuite

### 7.2.58 v0.8.2 (2019-01-07)

Features / improvements:

- Speedup symbolic processing for ODE generation in python

Bugfixes:

- Fix(python) Add missing deepcopy (introduced in 6847ba675f2088854db583199b8754aaa6e01576)
- Fix(core) Prevent parameter scaling length mismatch (#488)
- Fix(python) Set distutils dependency to current version to fix `</usr/lib/python3.6/distutils/dist.py:261: UserWarning: Unknown distribution option: 'long_description_content_type'>`
- fix(python) add symlink to version.txt to be included in package

Backwards-compatibility:

- Replace 'newline' by literal to restore <R2016b compatibility (Fixes #493)

Maintenance:

- Remove obsolete swig library build via cmake and related file copying
- Provide issue template for bug reports
- Providing valid SBML document to import is not optional anymore
- Update documentation and tests
- Add python version check and raise required version to 3.6 to prevent cryptic error messages when encountering f-strings

### 7.2.59 v0.8.1 (2018-11-25)

- [all] **critical** Fix long standing bugs in solving steadystate problems (including preequilibration) (#471)
- [all] Fix AmiVector constructor from `std::vector` (#471)
- [python] Reenable Solver and Model copy constructors
- Update documentation

### 7.2.60 v0.8.0 (2018-11-25)

- replaced symengine by sympy for symbolic processing in python *which fixes several critical bugs* that were due to bugs in symengine (#467)

### 7.2.61 v0.7.13 (2018-11-18)

- fixes a critical bug in objective function computation for models compiled using `sbml2amici` and `pysb2amici` that was introduced in v0.7.12
- fixes a critical bug in sensitivity computation when `model.reinitializeFixedParameterInitialStates` was set to true
- readds the python interface to the `ExpData` copy constructor that was inadvertently removed in 0.7.12 and streamlines the respective convenience wrapper to provide access to the full range of constructors.

### 7.2.62 v0.7.12 (2018-11-17)

- fixed a critical bug in `amici.constructEdataFromDataFrame`
- enabled multithreaded simulation of multiple experiments (requires compilation with openMP)
- modularized sbml import and added pysb import

### 7.2.63 v0.7.11 (2018-10-15)

- [python] Added numpy and python wrappers that provide a more user friendly python API
- [python] Enable import of SBML models with non-float assignment rules
- [python] Enable handling of exceptions in python
- [python] Enable native python access to `std::vector` data-structures
- [core] Provide an API for more fine-grained control over sensitivity tolerances and steady-state tolerances
- [core] Provide an API to specify non-negative state variables (this feature is still preliminary)

### 7.2.64 v0.7.10 (2018-08-29)

- Fixed python SBML import `log()` issues (#412)

### 7.2.65 v0.7.9 (2018-08-24)

- fixes MATLAB compilation of models
- adds option to perform steady state sensitivity analysis via FSA
- condition dependent initial conditions are now newly set after preequilibration is done

### 7.2.66 v0.7.8 (2018-08-19)

- bugfixes for the ExpData interface
- created build configuration that enables debugging of c++ extensions on os x
- fixed python sbml import when stoichiometry is empty

### 7.2.67 v0.7.7 (2018-08-17)

Fixes a couple of bugs just introduced in v0.7.6

### 7.2.68 v0.7.6 (2018-08-13)

Important: Use AMICI v0.7.7 due to <https://github.com/ICB-DCM/AMICI/pull/403/commits/3a495d3db2fdbba70c2b0d52a3d465>

Bug fixes:

- Python import: Fix log10 issues in observables (#382)
- Matlab: Fix broken model compilation (#392)
- Fixed simulation for models without observables (#390)
- Fixed potential matlab memory leaks (#392)

Breaking C++ API changes:

- Revised ExpData interface (#388)

### 7.2.69 v0.7.5 (2018-07-30)

Features/enhancements:

- Add computation of residuals, residuals sensitivity, Fisher information matrix (#223)
- More efficient conversion of std::vector to numpy ndarray (#375)
- Allow specifying timepoints in ExpData (#370)

Minor fixes:

- Condition parameters in ExpData now only temporarily override Model parameters (#371)
- Ensure non-negative states for Newton solver (#378)

### 7.2.70 v0.7.4 (2018-07-27)

Features/enhancements:

- Check SBML model validity (#343)
- Allow per-parameter setting of amioptions::pscale from matlab interface (#350)
- Documentation

Major fixes:

- Don't compile main.cpp into python model module which broke modules if amici was compiled without libhdf5 (#363)

Minor fixes:

- Fix compiler warnings (#353)
- Plotting, SBML example mode, ...

### 7.2.71 v0.7.3 (2018-07-13)

Features:

- Added symbol names to python-wrapped models and make available via `Model.getParameterNames()`, `model.getStateNames()`, ...
- Extended Python interface example

Python package available via pypi: <https://pypi.org/project/amici/0.7.3/>

### 7.2.72 v0.7.2 (2018-07-03)

Features:

- Python package: more flexible HDF5 library localization
- Extended CI: python tests, preequilibration tests, run in venv

Major bugfixes:

- Fix python sbml model import / compilation error (undefined function)
- Fix model preequilibration

Minor fixes:

- Various fixes for mingw compilation of python source distribution
- Cmake compatibility with < 3.8 restored

### 7.2.73 v0.7.1 (2018-06-12)

Features:

- Allow specifying sigma-parameters from Python interface

Major bugfixes:

- Fix `dsigma_y/dp` and downstream sensitivity errors

### 7.2.74 v0.7.0 (2018-06-09)

- Major revision of documentation
- Improved Python interface
- More comprehensive Python interface example
- Fixed sensitivity computation in Python-generated models
- Various other bug fixes

WARNING:

- For models with sigma-parameters and `dsigma_y/dp != 0`, `dsigma_y/dp` was computed incorrectly. This propagates to all dependent sensitivities. This applies also to some older releases and has been fixed in v0.7.1.

### 7.2.75 v0.6.0 (2018-05-22)

Implement experimental support for python via swig. Python interface is now usable, but API will still receive some updates in the future.

WARNING:

- There is a bug in sensitivity computation for Python-generated models
- Matlab C++ compilation will fail due to undefined M\_PI -> Please use v0.7.0

### 7.2.76 v0.5.0 (2018-03-15)

Main new features are:

- Reimplemented support for DAE equations
- Added newton solver for steady state calculation and preequilibration
- Better caching for recompilation of models
- Blas support to allow compilation of large models with many observables
- Improved SBML support
- Added c++ interface
- Added support for second order adjoint computation
- Rewrote large parts of the code as proper c++11 code to allow easier code maintenance
- Substantially extended testing in continuous integration to assure code quality

### 7.2.77 v0.4.0 (2017-05-15)

- First citable version of AMICI (via zenodo integration).
- Better support for standalone compilation
- Improved SBML import scripts
- General Code Cleanup

### 7.2.78 v0.3.0 (2016-09-05)

This update comes with many improvements, bug fixes and several new features. Most notably:

1. AMICI should now run on older versions of MATLAB (back to R2014a)
2. AMICI now compiles using older versions of Visual Studio
3. AMICI now also supports second order adjoint sensitivities (full (via the o2flag = 1 and as a vector product via o2flag = 2)
4. AMICI now supports more SBML, SBML v2 and rate rules



### **7.2.79 0.2.1 (2016-05-09)**

Bugfix release. This release also includes some changes that should improve the performance on the new R2016a release of MATLAB.

### **7.2.80 v0.2 (2016-03-17)**

This update comes with many improvements to the computation time for both compilation and simulation. Moreover several new features were included:

1. Hessian Vector products for second order forward sensitivities
2. Correct treatment of parameter/state dependent discontinuities for both forward and adjoint sensitivities

### **7.2.81 v0.1 (2015-11-05)**

This is the initial release of the toolbox



## GLOSSARY

**BNGL** **BioNetGenLanguage** is a language for modular, structure-based modeling of biochemical reaction networks.

**CVODES** **CVODES** is a solver for stiff and non-stiff *ODE* systems with sensitivity analysis capabilities and is used by AMICI. It is part of the *SUNDIALS* solver suite.

**DAE** Differential-Algebraic Equation

**fixed parameters** In AMICI, *fixed parameters* are parameters with respect to which no sensitivities are computed. They usually correspond to experimental conditions. For fixed parameters, different values can be set for *preequilibration*, *presimulation* and simulation.

**IDAS** **IDAS** is a solver *DAE* systems with sensitivity analysis capabilities and is used by AMICI. It is part of the *SUNDIALS* solver suite.

**ODE** Ordinary Differential Equation

**PEtab** **PEtab** is a format for specifying parameter estimation problems. It is based on an *SBML* model and tab-separated value files specifying the observation model and experimental conditions.

**preequilibration** Simulating or solving the dynamical system for the steadystate.

**presimulation** Simulation for a fixed time before the regular simulation. Can be used to specify pretreatments.

**PySB** **PySB** is a tool for specifying rule-based systems biology models as Python code.

**SBML** The **Systems Biology Markup Language** is a commonly used format for specifying systems biology models.

**SUNDIALS** **SUNDIALS**: SUite of Nonlinear and Differential/ALgebraic equation Solvers. Provides the *CVODES* and *IDAS* solvers used by AMICI.

**SWIG** **SWIG** is a tool that creates interfaces for C(++) code to a variety of languages. Much of the AMICI Python interface is generated by SWIG.



## CONTRIBUTING

### 9.1 Contributing to AMICI

We are happy about contributions to AMICI in any form, be it new functionality, documentation, bug reports, or anything else.

If you would to contribute to AMICI, a good start is looking for issues tagged `good first issue` or `help wanted`. For other ideas or questions, just post an issue.

For code contributions, please read our `developer's guide` first.

### 9.2 Code of Conduct

#### 9.2.1 Our Pledge

In the interest of fostering an open and welcoming environment, we as contributors and maintainers pledge to making participation in our project and our community a harassment-free experience for everyone, regardless of age, body size, disability, ethnicity, sex characteristics, gender identity and expression, level of experience, education, socio-economic status, nationality, personal appearance, race, religion, or sexual identity and orientation.

#### 9.2.2 Our Standards

Examples of behavior that contributes to creating a positive environment include:

- Using welcoming and inclusive language
- Being respectful of differing viewpoints and experiences
- Gracefully accepting constructive criticism
- Focusing on what is best for the community
- Showing empathy towards other community members

Examples of unacceptable behavior by participants include:

- The use of sexualized language or imagery and unwelcome sexual attention or advances
- Trolling, insulting/derogatory comments, and personal or political attacks
- Public or private harassment
- Publishing others' private information, such as a physical or electronic address, without explicit permission
- Other conduct which could reasonably be considered inappropriate in a professional setting

### 9.2.3 Our Responsibilities

Project maintainers are responsible for clarifying the standards of acceptable behavior and are expected to take appropriate and fair corrective action in response to any instances of unacceptable behavior.

Project maintainers have the right and responsibility to remove, edit, or reject comments, commits, code, wiki edits, issues, and other contributions that are not aligned to this Code of Conduct, or to ban temporarily or permanently any contributor for other behaviors that they deem inappropriate, threatening, offensive, or harmful.

### 9.2.4 Scope

This Code of Conduct applies both within project spaces and in public spaces when an individual is representing the project or its community. Examples of representing a project or community include using an official project e-mail address, posting via an official social media account, or acting as an appointed representative at an online or offline event. Representation of a project may be further defined and clarified by project maintainers.

### 9.2.5 Enforcement

Instances of abusive, harassing, or otherwise unacceptable behavior may be reported by contacting the project team at [froehlichfab@gmail.com](mailto:froehlichfab@gmail.com). All complaints will be reviewed and investigated and will result in a response that is deemed necessary and appropriate to the circumstances. The project team is obligated to maintain confidentiality with regard to the reporter of an incident. Further details of specific enforcement policies may be posted separately.

Project maintainers who do not follow or enforce the Code of Conduct in good faith may face temporary or permanent repercussions as determined by other members of the project's leadership.

### 9.2.6 Attribution

This Code of Conduct is adapted from the [Contributor Covenant](https://www.contributor-covenant.org/version/1/4/code-of-conduct.html), version 1.4, available at <https://www.contributor-covenant.org/version/1/4/code-of-conduct.html>

For answers to common questions about this code of conduct, see <https://www.contributor-covenant.org/faq>

## PYTHON INTERFACE

### 10.1 Installing the AMICI Python package

#### 10.1.1 Short guide

Installation of the AMICI Python package has the following prerequisites:

- Python $\geq$ 3.8
- *SWIG* $\geq$ 3.0
- CBLAS compatible BLAS library (e.g., OpenBLAS, CBLAS, Atlas, Accelerate, Intel MKL)
- a C++14 compatible C++ compiler and a C compiler (e.g., g++, clang, Intel C++ compiler, mingw)

If these requirements are fulfilled and all relevant paths are setup properly, AMICI can be installed using:

```
pip3 install amici
```

If this worked, you can now import the Python module via:

```
import amici
```

If this does not work for you, please follow the full instructions below.

#### 10.1.2 Installation on Linux

##### Ubuntu 20.04

Install the AMICI dependencies via apt (this requires superuser privileges):

```
sudo apt install libatlas-base-dev swig  
  
# optionally for HDF5 support:  
sudo apt install libhdf5-serial-dev
```

Install AMICI:

```
pip3 install amici
```

## Fedora 32

Install the AMICI dependencies via apt (this requires superuser privileges):

```
sudo dnf install blas-devel swig
```

Install AMICI:

```
pip3 install amici
```

## 10.1.3 Installation on OSX

Install the AMICI dependencies using homebrew:

```
brew install swig

# optionally for HDF5 support:
brew install hdf5

# optionally for parallel simulations:
brew install libomp
```

Install AMICI:

```
pip3 install amici
```

## 10.1.4 Installation on Windows

Some general remarks:

- Install all libraries in a path not containing white spaces, e.g. directly under C:.
- Replace the following paths according to your installation.
- Slashes can be preferable to backslashes for some environment variables.
- See also [#425](<https://github.com/AMICI-dev/amici/issues/425>) for further discussion.

### Using the MinGW compilers

- Install [MinGW-W64](#) (the 32bit version will succeed to compile, but fail during linking).  
MinGW-W64 GCC-8.1.0 for x86\_64-posix-sjlj ([direct link](#)) has been shown to work on Windows 7 and 10 test systems.
- Add the following directory to your PATH: C:\mingw-w64\x86\_64-8.1.0-posix-sjlj-rt\_v6-rev0\mingw64\bin
- Make sure that this is the compiler that is found by the system (e.g. where gcc in a cmd should point to this installation).
- Download CBLAS headers and libraries, e.g. [OpenBLAS](#), binary distribution 0.2.19.

Set the following environment variables:

```
- BLAS_CFLAGS=-IC:/OpenBLAS-v0.2.19-Win64-int32/include
```



```
- BLAS_LIBS=-Wl,-Bstatic -LC:/OpenBLAS-v0.2.19-Win64-int32/lib -lopenblas -Wl,  
-Bdynamic
```

- Install [SWIG](#) and add the SWIG directory to PATH (e.g. C:\swigwin-3.0.12 for version 3.0.12)
- Install AMICI using:

```
pip install --global-option="build_clib" \  
            --global-option="--compiler=mingw32" \  
            --global-option="build_ext" \  
            --global-option="--compiler=mingw32" \  
amici --no-cache-dir --verbose`
```

---

**Note: Possible sources of errors:**

- On recent Windows versions, `anaconda3\Lib\distutils\cygwinccompiler.py` fails linking `msvcr140.dll` with `[...] x86_64-w64-mingw32/bin/ld.exe: cannot find -lmsvcr140`. This is not required for amici, so in `cygwinccompiler.py` return `['msvcr140']` can be changed to return `[]`.
- If you use a python version where `python/cpython#880` has not been fixed yet, you need to disable `define_hypot_hypot` in `anaconda3\include\pyconfig.h` yourself.
- `import amici` in Python resulting in the very informative

ImportError: DLL load failed: The specified module could not be found.

means that some amici module dependencies were not found (not the AMICI module itself). [DependencyWalker](#) can show you which ones.

---

## Using the Microsoft Visual Studio

---

**Note:** Support for MSVC is experimental.

---

We assume that Visual Studio (not to be confused with Visual Studio Code) is already installed. Using Visual Studio Installer, the following components need to be included:

- Microsoft Visual C++ (MSVC). This is part of multiple packages, including Desktop Development with C++.
- Windows Universal C Runtime. This is an individual component and installs some DLLs that we need.

## OpenBLAS

There are prebuilt OpenBLAS binaries available, but they did not seem to work well here. Therefore, we recommend building OpenBLAS from scratch.

To build OpenBLAS, download the following scripts from the AMICI repository:

- <https://github.com/AMICI-dev/AMICI/blob/master/scripts/installOpenBLAS.ps1>
- <https://github.com/AMICI-dev/AMICI/blob/master/scripts/compileBLAS.cmd>

The first script needs to be called in Powershell, and it needs to call `compileBLAS.cmd`, so you will need to modify line 11:

```
cmd /c "scriptscompileBLAS.cmd $version"
```

so that it matches your directory structure. This will download OpenBLAS and compile it, creating

```
C:\BLAS\lib\openblas.lib C:\BLAS\bin\openblas.dll
```

You will also need to define two environment variables:

```
BLAS_LIBS="/LIBPATH:C:\BLAS\lib openblas.lib"  
BLAS_CFLAGS="/IC:/BLAS/OpenBLAS-0.3.19/OpenBLAS-0.3.19"
```

One way to do that is to run a PowerShell script with the following commands:

```
[System.Environment]::SetEnvironmentVariable("BLAS_LIBS", "/LIBPATH:C:/BLAS/lib openblas.  
lib", [System.EnvironmentVariableTarget]::User)  
[System.Environment]::SetEnvironmentVariable("BLAS_LIBS", "/LIBPATH:C:/BLAS/lib openblas.  
lib", [System.EnvironmentVariableTarget]::Process)  
[System.Environment]::SetEnvironmentVariable("BLAS_CFLAGS", "-IC:/BLAS/OpenBLAS-0.3.19/  
OpenBLAS-0.3.19", [System.EnvironmentVariableTarget]::User)  
[System.Environment]::SetEnvironmentVariable("BLAS_CFLAGS", "-IC:/BLAS/OpenBLAS-0.3.19/  
OpenBLAS-0.3.19", [System.EnvironmentVariableTarget]::Process)
```

The call ending in `Process` sets the environment variable in the current process, and it is no longer in effect in the next process. The call ending in `User` is permanent, and takes effect the next time the user logs on.

Now you need to make sure that all required DLLs are within the scope of the `PATH` variable. In particular, the following directories need to be included in `PATH`:

```
C:\BLAS\bin C:\Program Files (x86)\Windows Kits\10\Redist\ucrt\DLLs\x64
```

The first one is needed for `openblas.dll` and the second is needed for the Windows Universal C Runtime.

If any DLLs are missing in the `PATH` variable, Python will return the following error upon `import amici`:

```
ImportError: DLL load failed: The specified module could not be found.
```

Almost all of the DLLs are standard Windows DLLs and should be included in either Windows or Visual Studio. But, in case it is necessary to test this, here is a list of some DLLs required by AMICI (when compiled with MSVC):

- `openblas.dll`
- `python37.dll`
- `MSVCP140.dll`
- `KERNEL32.dll`
- `VCRUNTIME140_1.dll`
- `VCRUNTIME140.dll`
- `api-ms-win-crt-convert-l1-1-0.dll`
- `api-ms-win-crt-heap-l1-1-0.dll`
- `api-ms-win-crt-stdio-l1-1-0.dll`
- `api-ms-win-crt-string-l1-1-0.dll`
- `api-ms-win-crt-runtime-l1-1-0.dll`
- `api-ms-win-crt-time-l1-1-0.dll`
- `api-ms-win-crt-math-l1-1-0.dll`

MSVCP140.dll, VCRUNTIME140.dll, and VCRUNTIME140\_1.dll are needed by MSVC (see Visual Studio above). KERNEL32.dll is part of Windows and in C:\Windows\System32. The api-ms-win-crt-XXX-l1-1-0.dll are needed by openblas.dll and are part of the Windows Universal C Runtime.

---

**Note:** Since Python 3.8, the library directory needs to be set either from Python:

```
import os
# directory containing `openblas.dll`
os.add_dll_directory("C:\\BLAS\\bin")
import amici
```

or via the environment variable AMICI\_DLL\_DIRS.

---

If Python returns the following error upon `import amici`, try updating to the latest Python version.

OSError: [WinError 87] The parameter is incorrect: “

## 10.1.5 Further topics

### Installation of development versions

To install development versions which have not been released to PyPI yet, you can install AMICI with pip directly from GitHub using:

```
pip3 install -e git+https://github.com/AMICI-dev/amici.git@develop#egg=amici\&
↪subdirectory=python/sdist
```

Replace `develop` by the branch or commit you want to install.

Note that this will only work on Windows if you have enabled developer mode, because symlinks are not supported by default ([more information](#)).

### Light installation

In case you only want to use the AMICI Python package for generating model code for use with Matlab or C++ and don't want to be bothered with any unnecessary dependencies, you can run

```
pip3 install --install-option --no-libs amici
```

---

**Note:** Following this installation, you will not be able to simulate the imported models in Python.

---

---

**Note:** If you run into an error with above installation command, install all AMICI dependencies listed in [setup.py](#) manually, and try again. (This is because `pip --install-option` is applied to *all* installed packages, including dependencies.)

---

## Custom installation

Installation of the AMICI Python package can be customized using a number of environment variables:

| Variable               | Purpose  | Example                     |
|------------------------|--|-----------------------------|
| SWIG                   | Path to the <i>SWIG</i> executable   | SWIG=\$HOME/bin/swig4.0     |
| CC                     | Setting the C(++) compiler   | CC=/usr/bin/g++             |
| CFLAGS                 | Extra compiler flags used in every compiler invocation                                   |                             |
| BLAS_CFLAGS            | <b>Compiler flags for, e.g. BLAS</b><br>include directories                              |                             |
| BLAS_LIBS              | Flags for linking BLAS   |                             |
| ENABLE_GCOV_COVERAGE   | Set to build AMICI to generate code coverage information                                 | ENABLE_GCOV_COVERAGE=TRUE   |
| ENABLE_AMICI_DEBUGGING | Set to build AMICI with debugging symbols  | ENABLE_AMICI_DEBUGGING=TRUE |
| AMICI_PARALLEL_COMPILE | Set to the number of parallel processes to be used for C(++) compilation (defaults to 1) | AMICI_PARALLEL_COMPILE=4    |

## Installation under Anaconda

To use an Anaconda installation of Python <https://www.anaconda.com/distribution/>, Python>=3.7), proceed as follows:

Since Anaconda provides own versions of some packages which might not work with AMICI (in particular the gcc compiler), create a minimal virtual environment via:

```
conda create --name ENV_NAME pip python
```

Here, replace ENV\_NAME by some name for the environment.

To activate the environment, run:

```
source activate ENV_NAME
```

(and `conda deactivate` later to deactivate it again).

*SWIG* must be installed and available in your PATH, and a CBLAS-compatible BLAS must be available. You can also use conda to install the latter locally, using:

```
conda install -c conda-forge openblas
```

To make AMICI use openblas, set the following environment variable:

```
export BLAS_LIBS=-lopenblas
```

BLAS\_LIBS needs to be set during installation of the AMICI package, as well as during any future model import.

To install AMICI, now run:

```
pip install amici
```

The pip option `--no-cache` may be helpful here to make sure the installation is done completely anew.

Now, you are ready to use AMICI in the virtual environment.

---

**Note: Anaconda on Mac**

If the above installation does not work for you, try installing AMICI via:

```
CFLAGS="-stdlib=libc++" CC=clang CXX=clang pip3 install --verbose amici
```

This will use the clang compiler.

You will have to pass the same options when compiling any model later on. This can be done by inserting the following code before model import:

```
import os
os.environ['CC'] = 'clang'
os.environ['CXX'] = 'clang'
os.environ['CFLAGS'] = '-stdlib=libc++'
```

(For further discussion see <https://github.com/AMICI-dev/AMICI/issues/357>)

---

### Optional Boost support

Boost is an optional C++ dependency only required for special functions (including e.g. gamma derivatives) in the Python interface. Boost can be installed via package managers via

```
apt-get install libboost-math-dev
```

or

```
brew install boost
```

As only headers are required, also a [source code](#) download suffices. The compiler must be able to find the module in the search path.

## 10.2 Using AMICI's Python interface

In the following we will give a detailed overview how to specify models in Python and how to call the generated simulation files.

### 10.2.1 Model definition

This document provides an overview of different interfaces to import models in AMICI. Further examples are available in the AMICI repository in the [python/examples](#) directory.

## SBML import

AMICI can import *SBML* models via the `amici.sbml_import.SbmlImporter()` class.

## Status of SBML support in Python-AMICI

Python-AMICI currently **passes 1030 out of the 1821 (~57%) test cases** from the semantic *SBML Test Suite* (current status).

The following SBML test suite tags are currently supported (i.e., at least one test case with the respective test passes; [tag descriptions](#)):

### Component tags:

- AssignmentRule
- Compartment
- CSymbolAvogadro
- CSymbolTime
- EventNoDelay
- FunctionDefinition
- InitialAssignment
- Parameter
- RateRule
- Reaction
- Species

### Test tags:

- 0D-Compartment
- Amount
- AssignedConstantStoichiometry
- AssignedVariableStoichiometry
- BoolNumericSwap
- BoundaryCondition
- Concentration
- ConstantSpecies
- ConversionFactors
- DefaultValue
- EventT0Firing
- HasOnlySubstanceUnits
- InitialValueReassigned
- L3v2MathML
- LocalParameters

- MultiCompartment
- NoMathML
- NonConstantCompartment
- NonConstantParameter
- NonUnityCompartment
- NonUnityStoichiometry
- ReversibleReaction
- SpeciesReferenceInMath
- UncommonMathML
- VolumeConcentrationRates

In addition, we currently plan to add support for the following features (see corresponding [issues](#) for details and progress):

- Algebraic rules ([#760](#))

However, the following features are unlikely to be supported:

- any SBML extensions
- *factorial()*, *ceil()*, *floor()*, due to incompatibility with symbolic sensitivity computations
- *delay()* due to missing *SUNDIALS* solver support
- events with delays, events with non-persistent triggers

## Tutorials

A basic tutorial on how to import and simulate SBML models is available in the [Getting Started notebook](#), while a more detailed example including customized import and sensitivity computation is available in the [Example Steadystate notebook](#).

### PySB import

AMICI can import *PySB* models via `amici.pysb_import.pysb2amici()`.

### BNGL import

AMICI can import *BNGL* models via `amici.bngl_import.bngl2amici()`.

### PEtab import

AMICI can import *PEtab*-based model definitions and run simulations for the specified simulations conditions. For usage, see [python/examples/example\\_petab/petab.ipynb](#).

## Importing plain ODEs

The AMICI Python interface does not currently support direct import of ODEs. However, it is straightforward to encode them as RateRules in an SBML model. The [yaml2sbml](#) package may come in handy, as it facilitates generating SBML models from a YAML-based specification of an ODE model. Besides the SBML model it can also create [PEtab](#) files.

## SED-ML import

We also plan to implement support for the [Simulation Experiment Description Markup Language \(SED-ML\)](#).

## 10.2.2 Examples

### Getting Started in AMICI

This notebook is a brief tutorial for new users that explains the first steps necessary for model simulation in AMICI, including pointers to documentation and more advanced notebooks.

### Model Compilation

Before simulations can be run, the model must be imported and compiled. In this process, AMICI performs all symbolic manipulations that later enable scalable simulations and efficient sensitivity computation. The first towards model compilation is the creation of an [SbmlImporter](#) instance, which requires an SBML Document that specifies the model using the [Systems Biology Markup Language \(SBML\)](#).

For the purpose of this tutorial, we will use `model_steadystate_scaled.xml`, which is contained in the same directory as this notebook.

```
[1]: import amici
sbml_importer = amici.SbmlImporter('model_steadystate_scaled.xml')
```

Next, we will compile the model as python extension using the `amici.SbmlImporter.sbml2amici` method. The first two arguments of this method are the name of the model, which will also be the name of the generated python module, and the model directory, which defines the directory in which the model module will be placed. Compilation will take a couple of seconds.

```
[2]: model_name = 'model_steadystate'
model_dir = 'model_dir'
sbml_importer.sbml2amici(model_name, model_dir)
```

### Loading the model module

To run simulations, we need to instantiate [amici.Model](#) and [amici.Solver](#) instances. As simulations requires instances matching the imported model, they have to be imported from the generated model module.

```
[3]: # load the model module
model_module = amici.import_model_module(model_name, model_dir)
# instantiate model
model = model_module.getModel()
# instantiate solver
solver = model.getSolver()
```



The model allows the user to manipulate model related properties of simulations. This includes the values of model parameters that can be set by using `amici.Model.setParameterByName`. Here, we set the model parameter `p1` to a value of  $1e-3$ .

```
[4]: model.setParameterByName('p1', 1e-3)
```

In contrast, the solver instance allows the specification of simulation related properties. This includes setting options for the SUNDIALS solver such as absolute tolerances via `amici.Solver.setAbsoluteTolerance`. Here we set the absolute integration tolerances to  $1e-10$ .

```
[5]: solver.setAbsoluteTolerance(1e-10)
```

## Running Model Simulations

Model simulations can be executed using the `amici.runAmiciSimulations` routine. By default the model does not contain any timepoints for which the model is to be simulated. Here we define a simulation timecourse with two timepoints at 0 and 1 and then run the simulation.

```
[6]: # set timepoints
model.setTimepoints([0,1])
rdata = amici.runAmiciSimulation(model, solver)
```

Simulation results are returned as `ReturnData` instance. The simulated SBML species are stored as `x` attribute, where rows correspond to the different timepoints and columns correspond to different species.

```
[7]: rdata.x
[7]: array([[0.1      , 0.4      , 0.7      ],
          [0.98208413, 0.51167992, 0.10633388]])
```

All results attributes are always ordered according to the model. For species, this means that the columns of `rdata.x` match the ordering of species in the model, which can be accessed as `amici.Model.getStateNames`

```
[8]: model.getStateNames()
[8]: ('x1', 'x2', 'x3')
```

This notebook only explains the basics of AMICI simulations. In general, AMICI simulations are highly customizable and can also be used to simulate sensitivities. The [ExampleSteadystate](#) notebook in this folder gives more detail about the model employed here and goes into the basics of sensitivity analysis. The [ExampleEquilibrationLogic](#) notebook, builds on this by using a modified version of this model to give detailed insights into the methods and options to compute steady states before and after simulations, as well as respective sensitivities. The [ExampleExperimentalConditions](#) notebook, goes into the details of how even more complex experimental setups, such as addition of drugs at predefined timepoints, can be simulated in AMICI. Finally, the [petab](#) notebook explains how standardized definitions of experimental data and conditions in the [PEtab](#) format can be imported in AMICI.

## AMICI Python example “steadystate”

This is an example using the [model\_steadystate\_scaled.sbml] model to demonstrate and test SBML import and AMICI Python interface.

```
[1]: # SBML model we want to import
sbml_file = 'model_steadystate_scaled_without_observables.xml'
# Name of the model that will also be the name of the python module
model_name = 'model_steadystate_scaled'
# Directory to which the generated model code is written
model_output_dir = model_name

import libsbml
import importlib
import amici
import os
import sys
import numpy as np
import matplotlib.pyplot as plt
```

### The example model

Here we use libsbml to show the reactions and species described by the model (this is independent of AMICI).

```
[2]: sbml_reader = libsbml.SBMLReader()
sbml_doc = sbml_reader.readSBML(sbml_file)
sbml_model = sbml_doc.getModel()
dir(sbml_doc)

print('Species: ', [s.getId() for s in sbml_model.getListOfSpecies()])

print('\nReactions:')
for reaction in sbml_model.getListOfReactions():
    reactants = ' + '.join(['%s %s'%(int(r.getStoichiometry()) if r.getStoichiometry() > 1
→1 else '', r.getSpecies()) for r in reaction.getListOfReactants()])
    products = ' + '.join(['%s %s'%(int(r.getStoichiometry()) if r.getStoichiometry() > 1
→1 else '', r.getSpecies()) for r in reaction.getListOfProducts()])
    reversible = '<' if reaction.getReversible() else ''
    print('%3s: %10s %1s->%10s\t\t[%s]' % (reaction.getId(),
        reactants,
        reversible,
        products,
        libsbml.formulaToL3String(reaction.getKineticLaw().getMath())))
```

Species: ['x1', 'x2', 'x3']

Reactions:

|     |         |    |         |                |
|-----|---------|----|---------|----------------|
| r1: | 2 x1    | -> | x2      | [p1 * x1^2]    |
| r2: | x1 + x2 | -> | x3      | [p2 * x1 * x2] |
| r3: | x2      | -> | 2 x1    | [p3 * x2]      |
| r4: | x3      | -> | x1 + x2 | [p4 * x3]      |

(continues on next page)

(continued from previous page)

```

r5:      x3  ->      [k0 * x3]
r6:      ->      x1    [p5]

```

## Importing an SBML model, compiling and generating an AMICI module

Before we can use AMICI to simulate our model, the SBML model needs to be translated to C++ code. This is done by `amici.SbmlImporter`.

```
[3]: # Create an SbmlImporter instance for our SBML model
sbml_importer = amici.SbmlImporter(sbml_file)
```

In this example, we want to specify fixed parameters, observables and a  $\sigma$  parameter. Unfortunately, the latter two are not part of the [SBML standard](#). However, they can be provided to `amici.SbmlImporter.sbml2amici` as demonstrated in the following.

### Constant parameters

Constant parameters, i.e. parameters with respect to which no sensitivities are to be computed (these are often parameters specifying a certain experimental condition) are provided as a list of parameter names.

```
[4]: constantParameters = ['k0']
```

### Observables

Specifying observables is beyond the scope of SBML. Here we define them manually.

If you are looking for a more scalable way for defining observables, then checkout [PEtab](#). Another possibility is using SBML's `AssignmentRules` [https://sbml.org/software/libsbml/5.18.0/docs/formatted/python-api/classlibsbml\\_1\\_1\\_assignment\\_rule.html](https://sbml.org/software/libsbml/5.18.0/docs/formatted/python-api/classlibsbml_1_1_assignment_rule.html) to specify model outputs within the SBML file.

```
[5]: # Define observables
observables = {
    'observable_x1': {'name': '', 'formula': 'x1'},
    'observable_x2': {'name': '', 'formula': 'x2'},
    'observable_x3': {'name': '', 'formula': 'x3'},
    'observable_x1_scaled': {'name': '', 'formula': 'scaling_x1 * x1'},
    'observable_x2_offsetted': {'name': '', 'formula': 'offset_x2 + x2'},
    'observable_x1withsigma': {'name': '', 'formula': 'x1'}
}
```

## $\sigma$ parameters

To specify measurement noise as a parameter, we simply provide a dictionary with (preexisting) parameter names as keys and a list of observable names as values to indicate which sigma parameter is to be used for which observable.

```
[6]: sigmas = {'observable_x1withsigma': 'observable_x1withsigma_sigma'}
```

## Generating the module

Now we can generate the python module for our model. `amici.SbmlImporter.sbml2amici` will symbolically derive the sensitivity equations, generate C++ code for model simulation, and assemble the python module. Standard logging verbosity levels can be passed to this function to see timestamped progression during code generation.

```
[7]: import logging
      sbml_importer.sbml2amici(model_name,
                              model_output_dir,
                              verbose=logging.INFO,
                              observables=observables,
                              constant_parameters=constantParameters,
                              sigmas=sigmas)
```

```
2021-11-30 16:57:57.997 - amici.sbml_import - INFO - Finished gathering local SBML
↳ symbols + (8.05E-03s)
2021-11-30 16:57:58.047 - amici.sbml_import - INFO - Finished processing SBML parameters
↳ + (4.64E-02s)
2021-11-30 16:57:58.054 - amici.sbml_import - INFO - Finished processing SBML
↳ compartments + (2.69E-04s)
2021-11-30 16:57:58.063 - amici.sbml_import - INFO - Finished processing SBML species
↳ initials ++ (1.47E-03s)
2021-11-30 16:57:58.067 - amici.sbml_import - INFO - Finished processing SBML rate rules
↳ ++ (7.65E-05s)
2021-11-30 16:57:58.068 - amici.sbml_import - INFO - Finished processing SBML species
↳ + (9.09E-03s)
2021-11-30 16:57:58.076 - amici.sbml_import - INFO - Finished processing SBML reactions
↳ + (4.32E-03s)
2021-11-30 16:57:58.086 - amici.sbml_import - INFO - Finished processing SBML rules
↳ + (6.88E-03s)
2021-11-30 16:57:58.093 - amici.sbml_import - INFO - Finished processing SBML initial
↳ assignments + (5.51E-05s)
2021-11-30 16:57:58.097 - amici.sbml_import - INFO - Finished processing SBML species
↳ references + (8.19E-04s)
2021-11-30 16:57:58.105 - amici.sbml_import - INFO - Finished processing SBML events
↳ + (1.00E-04s)
2021-11-30 16:57:58.105 - amici.sbml_import - INFO - Finished importing SBML
↳ (1.19E-01s)
2021-11-30 16:57:58.180 - amici.sbml_import - INFO - Finished processing SBML
↳ observables (6.99E-02s)
2021-11-30 16:57:58.202 - amici.ode_export - INFO - Finished running smart_multiply
↳ + (3.40E-03s)
2021-11-30 16:57:58.210 - amici.ode_export - INFO - Finished importing SbmlImporter
↳ (1.42E-02s)
2021-11-30 16:57:58.286 - amici.ode_export - INFO - Finished simplifying Jy
↳ +++ (6.10E-02s)
```

(continues on next page)

(continued from previous page)

```

2021-11-30 16:57:58.288 - amici.ode_export - INFO - Finished computing Jy
↳      ++ (6.69E-02s)
2021-11-30 16:57:58.299 - amici.ode_export - INFO - Finished simplifying y
↳      +++ (6.08E-04s)
2021-11-30 16:57:58.300 - amici.ode_export - INFO - Finished computing y
↳      ++ (5.38E-03s)
2021-11-30 16:57:58.308 - amici.ode_export - INFO - Finished simplifying sigmay
↳      +++ (1.19E-04s)
2021-11-30 16:57:58.310 - amici.ode_export - INFO - Finished computing sigmay
↳      ++ (5.58E-03s)
2021-11-30 16:57:58.351 - amici.ode_export - INFO - Finished writing Jy.cpp
↳      + (1.33E-01s)
2021-11-30 16:57:58.421 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (5.81E-02s)
2021-11-30 16:57:58.452 - amici.ode_export - INFO - Finished simplifying dJydsigma
↳      +++ (2.69E-02s)
2021-11-30 16:57:58.453 - amici.ode_export - INFO - Finished computing dJydsigma
↳      ++ (9.43E-02s)
2021-11-30 16:57:58.466 - amici.ode_export - INFO - Finished writing dJydsigma.cpp
↳      + (1.09E-01s)
2021-11-30 16:57:58.505 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (2.48E-02s)
2021-11-30 16:57:58.559 - amici.ode_export - INFO - Finished simplifying dJydy
↳      +++ (4.86E-02s)
2021-11-30 16:57:58.560 - amici.ode_export - INFO - Finished computing dJydy
↳      ++ (8.27E-02s)
2021-11-30 16:57:58.586 - amici.ode_export - INFO - Finished writing dJydy.cpp
↳      + (1.12E-01s)
2021-11-30 16:57:58.599 - amici.ode_export - INFO - Finished simplifying root
↳      +++ (5.50E-05s)
2021-11-30 16:57:58.600 - amici.ode_export - INFO - Finished computing root
↳      ++ (4.63E-03s)
2021-11-30 16:57:58.601 - amici.ode_export - INFO - Finished writing root.cpp
↳      + (8.96E-03s)
2021-11-30 16:57:58.624 - amici.ode_export - INFO - Finished simplifying w
↳      ++++ (7.65E-03s)
2021-11-30 16:57:58.626 - amici.ode_export - INFO - Finished computing w
↳      +++ (1.21E-02s)
2021-11-30 16:57:58.641 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (1.04E-02s)
2021-11-30 16:57:58.647 - amici.ode_export - INFO - Finished simplifying dwdp
↳      +++ (1.45E-03s)
2021-11-30 16:57:58.648 - amici.ode_export - INFO - Finished computing dwdp
↳      ++ (3.77E-02s)
2021-11-30 16:57:58.658 - amici.ode_export - INFO - Finished writing dwdp.cpp
↳      + (5.28E-02s)
2021-11-30 16:57:58.680 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (1.15E-02s)
2021-11-30 16:57:58.687 - amici.ode_export - INFO - Finished simplifying dwdx
↳      +++ (1.95E-03s)
2021-11-30 16:57:58.687 - amici.ode_export - INFO - Finished computing dwdx
↳      ++ (2.17E-02s)

```

(continues on next page)

(continued from previous page)

```

2021-11-30 16:57:58.696 - amici.ode_export - INFO - Finished writing dwdx.cpp
↳      + (3.37E-02s)
2021-11-30 16:57:58.705 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (1.05E-04s)
2021-11-30 16:57:58.710 - amici.ode_export - INFO - Finished simplifying dwdw
↳      +++ (6.07E-04s)
2021-11-30 16:57:58.711 - amici.ode_export - INFO - Finished computing dwdw
↳      ++ (8.67E-03s)
2021-11-30 16:57:58.713 - amici.ode_export - INFO - Finished writing dwdw.cpp
↳      + (1.25E-02s)
2021-11-30 16:57:58.729 - amici.ode_export - INFO - Finished simplifying xdot
↳      ++++ (5.40E-03s)
2021-11-30 16:57:58.729 - amici.ode_export - INFO - Finished computing xdot
↳      +++ (8.78E-03s)
2021-11-30 16:57:58.746 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (1.30E-02s)
2021-11-30 16:57:58.752 - amici.ode_export - INFO - Finished simplifying dxdotdw
↳      +++ (2.97E-04s)
2021-11-30 16:57:58.753 - amici.ode_export - INFO - Finished computing dxdotdw
↳      ++ (3.42E-02s)
2021-11-30 16:57:58.765 - amici.ode_export - INFO - Finished writing dxdotdw.cpp
↳      + (4.89E-02s)
2021-11-30 16:57:58.777 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (9.65E-05s)
2021-11-30 16:57:58.780 - amici.ode_export - INFO - Finished simplifying dxdotdx_
↳ explicit      +++ (7.85E-05s)
2021-11-30 16:57:58.781 - amici.ode_export - INFO - Finished computing dxdotdx_explicit
↳      ++ (8.68E-03s)
2021-11-30 16:57:58.782 - amici.ode_export - INFO - Finished writing dxdotdx_explicit.
↳ cpp      + (1.24E-02s)
2021-11-30 16:57:58.793 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (9.18E-05s)
2021-11-30 16:57:58.797 - amici.ode_export - INFO - Finished simplifying dxdotdp_
↳ explicit      +++ (1.22E-04s)
2021-11-30 16:57:58.798 - amici.ode_export - INFO - Finished computing dxdotdp_explicit
↳      ++ (8.08E-03s)
2021-11-30 16:57:58.799 - amici.ode_export - INFO - Finished writing dxdotdp_explicit.
↳ cpp      + (1.36E-02s)
2021-11-30 16:57:58.816 - amici.ode_export - INFO - Finished running smart_jacobian
↳      ++++ (1.92E-03s)
2021-11-30 16:57:58.821 - amici.ode_export - INFO - Finished simplifying dydx
↳      ++++ (1.55E-04s)
2021-11-30 16:57:58.822 - amici.ode_export - INFO - Finished computing dydx
↳      +++ (1.20E-02s)
2021-11-30 16:57:58.832 - amici.ode_export - INFO - Finished running smart_jacobian
↳      ++++ (1.11E-04s)
2021-11-30 16:57:58.837 - amici.ode_export - INFO - Finished simplifying dydw
↳      ++++ (4.09E-04s)
2021-11-30 16:57:58.837 - amici.ode_export - INFO - Finished computing dydw
↳      +++ (9.68E-03s)
2021-11-30 16:57:58.844 - amici.ode_export - INFO - Finished simplifying dydx
↳      +++ (1.97E-04s)

```

(continues on next page)

(continued from previous page)

```

2021-11-30 16:57:58.845 - amici.ode_export - INFO - Finished computing dydx
↳ ++ (3.77E-02s)
2021-11-30 16:57:58.849 - amici.ode_export - INFO - Finished writing dydx.cpp
↳ + (4.51E-02s)
2021-11-30 16:57:58.862 - amici.ode_export - INFO - Finished running smart_jacobian
↳ ++++ (1.74E-03s)
2021-11-30 16:57:58.866 - amici.ode_export - INFO - Finished simplifying dydp
↳ ++++ (3.88E-04s)
2021-11-30 16:57:58.867 - amici.ode_export - INFO - Finished computing dydp
↳ +++ (9.93E-03s)
2021-11-30 16:57:58.872 - amici.ode_export - INFO - Finished simplifying dydp
↳ +++ (1.78E-04s)
2021-11-30 16:57:58.873 - amici.ode_export - INFO - Finished computing dydp
↳ ++ (1.84E-02s)
2021-11-30 16:57:58.876 - amici.ode_export - INFO - Finished writing dydp.cpp
↳ + (2.33E-02s)
2021-11-30 16:57:58.887 - amici.ode_export - INFO - Finished running smart_jacobian
↳ +++ (1.58E-03s)
2021-11-30 16:57:58.892 - amici.ode_export - INFO - Finished simplifying dsigmaydp
↳ +++ (2.41E-04s)
2021-11-30 16:57:58.893 - amici.ode_export - INFO - Finished computing dsigmaydp
↳ ++ (1.08E-02s)
2021-11-30 16:57:58.894 - amici.ode_export - INFO - Finished writing dsigmaydp.cpp
↳ + (1.50E-02s)
2021-11-30 16:57:58.901 - amici.ode_export - INFO - Finished writing sigmay.cpp
↳ + (2.68E-03s)
2021-11-30 16:57:58.909 - amici.ode_export - INFO - Finished computing stau
↳ ++ (1.35E-04s)
2021-11-30 16:57:58.910 - amici.ode_export - INFO - Finished writing stau.cpp
↳ + (4.10E-03s)
2021-11-30 16:57:58.916 - amici.ode_export - INFO - Finished computing deltax
↳ ++ (1.34E-04s)
2021-11-30 16:57:58.916 - amici.ode_export - INFO - Finished writing deltax.cpp
↳ + (3.34E-03s)
2021-11-30 16:57:58.924 - amici.ode_export - INFO - Finished computing deltasx
↳ ++ (1.99E-04s)
2021-11-30 16:57:58.925 - amici.ode_export - INFO - Finished writing deltasx.cpp
↳ + (3.88E-03s)
2021-11-30 16:57:58.934 - amici.ode_export - INFO - Finished writing w.cpp
↳ + (5.23E-03s)
2021-11-30 16:57:58.945 - amici.ode_export - INFO - Finished simplifying x0
↳ +++ (7.68E-05s)
2021-11-30 16:57:58.946 - amici.ode_export - INFO - Finished computing x0
↳ ++ (4.22E-03s)
2021-11-30 16:57:58.949 - amici.ode_export - INFO - Finished writing x0.cpp
↳ + (1.04E-02s)
2021-11-30 16:57:58.961 - amici.ode_export - INFO - Finished simplifying x0_
↳fixedParameters +++ (4.96E-05s)
2021-11-30 16:57:58.962 - amici.ode_export - INFO - Finished computing x0_
↳fixedParameters ++ (4.51E-03s)
2021-11-30 16:57:58.963 - amici.ode_export - INFO - Finished writing x0_fixedParameters.
↳cpp + (8.84E-03s)

```

(continues on next page)



(continued from previous page)

```

2021-11-30 16:57:58.982 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (2.15E-04s)
2021-11-30 16:57:58.987 - amici.ode_export - INFO - Finished simplifying sx0
↳      +++ (1.20E-04s)
2021-11-30 16:57:58.988 - amici.ode_export - INFO - Finished computing sx0
↳      ++ (9.27E-03s)
2021-11-30 16:57:58.989 - amici.ode_export - INFO - Finished writing sx0.cpp
↳      + (2.26E-02s)
2021-11-30 16:57:58.999 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (3.06E-05s)
2021-11-30 16:57:59.003 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (2.44E-05s)
2021-11-30 16:57:59.008 - amici.ode_export - INFO - Finished simplifying sx0_
↳fixedParameters      +++ (6.08E-05s)
2021-11-30 16:57:59.009 - amici.ode_export - INFO - Finished computing sx0_
↳fixedParameters      ++ (1.28E-02s)
2021-11-30 16:57:59.009 - amici.ode_export - INFO - Finished writing sx0_fixedParameters.
↳cpp      + (1.59E-02s)
2021-11-30 16:57:59.021 - amici.ode_export - INFO - Finished writing xdot.cpp
↳      + (7.26E-03s)
2021-11-30 16:57:59.028 - amici.ode_export - INFO - Finished writing y.cpp
↳      + (2.13E-03s)
2021-11-30 16:57:59.036 - amici.ode_export - INFO - Finished simplifying x_rdata
↳      +++ (5.62E-05s)
2021-11-30 16:57:59.038 - amici.ode_export - INFO - Finished computing x_rdata
↳      ++ (5.16E-03s)
2021-11-30 16:57:59.041 - amici.ode_export - INFO - Finished writing x_rdata.cpp
↳      + (9.60E-03s)
2021-11-30 16:57:59.050 - amici.ode_export - INFO - Finished simplifying total_cl
↳      +++ (4.08E-05s)
2021-11-30 16:57:59.051 - amici.ode_export - INFO - Finished computing total_cl
↳      ++ (3.64E-03s)
2021-11-30 16:57:59.052 - amici.ode_export - INFO - Finished writing total_cl.cpp
↳      + (7.19E-03s)
2021-11-30 16:57:59.064 - amici.ode_export - INFO - Finished simplifying x_solver
↳      +++ (7.69E-05s)
2021-11-30 16:57:59.065 - amici.ode_export - INFO - Finished computing x_solver
↳      ++ (4.62E-03s)
2021-11-30 16:57:59.068 - amici.ode_export - INFO - Finished writing x_solver.cpp
↳      + (1.13E-02s)
2021-11-30 16:57:59.079 - amici.ode_export - INFO - Finished generating cpp code
↳      (8.66E-01s)
2021-11-30 16:58:07.834 - amici.ode_export - INFO - Finished compiling cpp code
↳      (8.75E+00s)

```



## Importing the module and loading the model

If everything went well, we need to add the previously selected model output directory to our PYTHON\_PATH and are then ready to load newly generated model:

```
[8]: sys.path.insert(0, os.path.abspath(model_output_dir))
model_module = importlib.import_module(model_name)
```

And get an instance of our model from which we can retrieve information such as parameter names:

```
[9]: model = model_module.getModel()

print("Model name:", model.getName())
print("Model parameters:", model.getParameterIds())
print("Model outputs:  ", model.getObservableIds())
print("Model states:   ", model.getStateIds())

Model name: model_steadystate_scaled
Model parameters: ('p1', 'p2', 'p3', 'p4', 'p5', 'scaling_x1', 'offset_x2', 'observable_
↪ x1withsigma_sigma')
Model outputs:    ('observable_x1', 'observable_x2', 'observable_x3', 'observable_x1_
↪ scaled', 'observable_x2_offsetted', 'observable_x1withsigma')
Model states:     ('x1', 'x2', 'x3')
```

## Running simulations and analyzing results

After importing the model, we can run simulations using `amici.runAmiciSimulation`. This requires a `Model` instance and a `Solver` instance. Optionally you can provide measurements inside an `ExpData` instance, as shown later in this notebook.

```
[10]: # Create Model instance
model = model_module.getModel()

# set timepoints for which we want to simulate the model
model.setTimepoints(np.linspace(0, 60, 60))

# Create solver instance
solver = model.getSolver()

# Run simulation using default model parameters and solver options
rdata = amici.runAmiciSimulation(model, solver)

[11]: print('Simulation was run using model default parameters as specified in the SBML model:
↪ ')
print(model.getParameters())

Simulation was run using model default parameters as specified in the SBML model:
(1.0, 0.5, 0.4, 2.0, 0.1, 2.0, 3.0, 0.2)
```

Simulation results are provided as `numpy.ndarrays` in the returned dictionary:

```
[12]: #np.set_printoptions(threshold=8, edgeitems=2)
for key, value in rdata.items():
    print('%12s: ' % key, value)

        ts: [ 0.          1.01694915  2.03389831  3.05084746  4.06779661  5.08474576
  6.10169492  7.11864407  8.13559322  9.15254237 10.16949153 11.18644068
 12.20338983 13.22033898 14.23728814 15.25423729 16.27118644 17.28813559
 18.30508475 19.3220339  20.33898305 21.3559322  22.37288136 23.38983051
 24.40677966 25.42372881 26.44067797 27.45762712 28.47457627 29.49152542
 30.50847458 31.52542373 32.54237288 33.55932203 34.57627119 35.59322034
 36.61016949 37.62711864 38.6440678  39.66101695 40.6779661  41.69491525
 42.71186441 43.72881356 44.74576271 45.76271186 46.77966102 47.79661017
 48.81355932 49.83050847 50.84745763 51.86440678 52.88135593 53.89830508
 54.91525424 55.93220339 56.94915254 57.96610169 58.98305085 60.          ]
        x: [[0.1          0.4          0.7          ]
 [0.57995052 0.73365809 0.0951589 ]
 [0.55996496 0.71470091 0.0694127 ]
 [0.5462855  0.68030366 0.06349394]
 [0.53561883 0.64937432 0.05923555]
 [0.52636487 0.62259567 0.05568686]
 [0.51822013 0.59943346 0.05268079]
 [0.51103767 0.57935661 0.05012037]
 [0.5047003  0.56191592 0.04793052]
 [0.49910666 0.54673518 0.0460508 ]
 [0.49416809 0.53349812 0.04443205]
 [0.48980687 0.52193767 0.04303399]
 [0.48595476 0.51182731 0.04182339]
 [0.48255176 0.50297412 0.04077267]
 [0.47954511 0.49521318 0.03985882]
 [0.47688833 0.48840304 0.03906254]
 [0.47454049 0.48242198 0.03836756]
 [0.47246548 0.47716502 0.0377601 ]
 [0.47063147 0.47254128 0.03722844]
 [0.46901037 0.46847202 0.03676259]
 [0.46757739 0.46488881 0.03635397]
 [0.46631065 0.46173207 0.03599523]
 [0.46519082 0.45894987 0.03568002]
 [0.46420083 0.45649684 0.03540285]
 [0.4633256  0.45433332 0.03515899]
 [0.4625518  0.45242457 0.03494429]
 [0.46186768 0.45074016 0.03475519]
 [0.46126282 0.44925337 0.03458856]
 [0.46072804 0.44794075 0.03444166]
 [0.46025521 0.44678168 0.03431212]
 [0.45983714 0.44575804 0.03419784]
 [0.45946749 0.44485388 0.03409701]
 [0.45914065 0.44405514 0.03400802]
 [0.45885167 0.44334947 0.03392946]
 [0.45859615 0.44272595 0.03386009]
 [0.45837021 0.44217497 0.03379883]
 [0.45817043 0.44168805 0.03374473]
 [0.45799379 0.44125772 0.03369693]
 [0.4578376  0.44087738 0.03365471]
```

(continues on next page)

(continued from previous page)

```

[0.45769949 0.44054121 0.0336174 ]
[0.45757737 0.44024405 0.03358444]
[0.45746939 0.43998137 0.03355531]
[0.45737391 0.43974917 0.03352956]
[0.45728948 0.43954389 0.03350681]
[0.45721483 0.43936242 0.0334867 ]
[0.45714882 0.43920198 0.03346892]
[0.45709045 0.43906014 0.03345321]
[0.45703884 0.43893474 0.03343932]
[0.4569932 0.43882387 0.03342704]
[0.45695285 0.43872584 0.03341618]
[0.45691717 0.43863917 0.03340658]
[0.45688561 0.43856254 0.0333981 ]
[0.45685771 0.43849478 0.0333906 ]
[0.45683304 0.43843488 0.03338397]
[0.45681123 0.4383819 0.0333781 ]
[0.45679194 0.43833507 0.03337292]
[0.45677488 0.43829365 0.03336833]
[0.4567598 0.43825703 0.03336428]
[0.45674646 0.43822466 0.0333607 ]
[0.45673467 0.43819603 0.03335753]]
    x0: [0.1 0.4 0.7]
    x_ss: [nan nan nan]
    sx: None
    sx0: None
    sx_ss: None
    y: [[0.1      0.4      0.7      0.2      3.4      0.1      ]
[0.57995052 0.73365809 0.0951589 1.15990103 3.73365809 0.57995052]
[0.55996496 0.71470091 0.0694127 1.11992992 3.71470091 0.55996496]
[0.5462855 0.68030366 0.06349394 1.092571 3.68030366 0.5462855 ]
[0.53561883 0.64937432 0.05923555 1.07123766 3.64937432 0.53561883]
[0.52636487 0.62259567 0.05568686 1.05272975 3.62259567 0.52636487]
[0.51822013 0.59943346 0.05268079 1.03644027 3.59943346 0.51822013]
[0.51103767 0.57935661 0.05012037 1.02207533 3.57935661 0.51103767]
[0.5047003 0.56191592 0.04793052 1.00940059 3.56191592 0.5047003 ]
[0.49910666 0.54673518 0.0460508 0.99821331 3.54673518 0.49910666]
[0.49416809 0.53349812 0.04443205 0.98833618 3.53349812 0.49416809]
[0.48980687 0.52193767 0.04303399 0.97961374 3.52193767 0.48980687]
[0.48595476 0.51182731 0.04182339 0.97190952 3.51182731 0.48595476]
[0.48255176 0.50297412 0.04077267 0.96510352 3.50297412 0.48255176]
[0.47954511 0.49521318 0.03985882 0.95909022 3.49521318 0.47954511]
[0.47688833 0.48840304 0.03906254 0.95377667 3.48840304 0.47688833]
[0.47454049 0.48242198 0.03836756 0.94908097 3.48242198 0.47454049]
[0.47246548 0.47716502 0.0377601 0.94493095 3.47716502 0.47246548]
[0.47063147 0.47254128 0.03722844 0.94126293 3.47254128 0.47063147]
[0.46901037 0.46847202 0.03676259 0.93802074 3.46847202 0.46901037]
[0.46757739 0.46488881 0.03635397 0.93515478 3.46488881 0.46757739]
[0.46631065 0.46173207 0.03599523 0.9326213 3.46173207 0.46631065]
[0.46519082 0.45894987 0.03568002 0.93038164 3.45894987 0.46519082]
[0.46420083 0.45649684 0.03540285 0.92840166 3.45649684 0.46420083]
[0.4633256 0.45433332 0.03515899 0.92665119 3.45433332 0.4633256 ]
[0.4625518 0.45242457 0.03494429 0.9251036 3.45242457 0.4625518 ]

```

(continues on next page)

(continued from previous page)

[illegible]

(continues on next page)

```
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]]
```

sy: None  
ssigmay: None  
z: None  
rz: None  
sigmaz: None  
sz: None  
srz: None  
ssigmaz: None  
sllh: None  
s2llh: None

(continues on next page)

(continued from previous page)

```

[3.49521318 0.47954511 0.95909022 0.49521318 0.47954511 0.03985882
 0.22996351 0.11873853 0.19808527 0.07971763 0.03985882 0.1      ]
[3.48840304 0.47688833 0.95377667 0.48840304 0.47688833 0.03906254
 0.22742248 0.11645686 0.19536122 0.07812507 0.03906254 0.1      ]
[3.48242198 0.47454049 0.94908097 0.48242198 0.47454049 0.03836756
 0.22518867 0.11446438 0.19296879 0.07673511 0.03836756 0.1      ]
[3.47716502 0.47246548 0.94493095 0.47716502 0.47246548 0.0377601
 0.22322363 0.112722  0.19086601 0.0755202  0.0377601  0.1      ]
[3.47254128 0.47063147 0.94126293 0.47254128 0.47063147 0.03722844
 0.22149398 0.1111964 0.18901651 0.07445688 0.03722844 0.1      ]
[3.46847202 0.46901037 0.93802074 0.46847202 0.46901037 0.03676259
 0.21997073 0.10985912 0.18738881 0.07352518 0.03676259 0.1      ]
[3.46488881 0.46757739 0.93515478 0.46488881 0.46757739 0.03635397
 0.21862862 0.10868575 0.18595552 0.07270794 0.03635397 0.1      ]
[3.46173207 0.46631065 0.9326213  0.46173207 0.46631065 0.03599523
 0.21744562 0.10765529 0.18469283 0.07199046 0.03599523 0.1      ]
[3.45894987 0.46519082 0.93038164 0.45894987 0.46519082 0.03568002
 0.2164025  0.10674963 0.18357995 0.07136003 0.03568002 0.1      ]
[3.45649684 0.46420083 0.92840166 0.45649684 0.46420083 0.03540285
 0.21548241 0.10595311 0.18259874 0.0708057  0.03540285 0.1      ]
[3.45433332 0.4633256  0.92665119 0.45433332 0.4633256  0.03515899
 0.21467061 0.10525213 0.18173333 0.07031797 0.03515899 0.1      ]
[3.45242457 0.4625518  0.9251036  0.45242457 0.4625518  0.03494429
 0.21395417 0.1046349  0.18096983 0.06988859 0.03494429 0.1      ]
[3.45074016 0.46186768 0.92373536 0.45074016 0.46186768 0.03475519
 0.21332175 0.10409116 0.18029606 0.06951039 0.03475519 0.1      ]
[3.44925337 0.46126282 0.92252564 0.44925337 0.46126282 0.03458856
 0.21276339 0.10361194 0.17970135 0.06917712 0.03458856 0.1      ]
[3.44794075 0.46072804 0.92145608 0.44794075 0.46072804 0.03444166
 0.21227033 0.10318943 0.1791763  0.06888332 0.03444166 0.1      ]
[3.44678168 0.46025521 0.92051041 0.44678168 0.46025521 0.03431212
 0.21183485 0.1028168  0.17871267 0.06862424 0.03431212 0.1      ]
[3.44575804 0.45983714 0.91967427 0.44575804 0.45983714 0.03419784
 0.21145019 0.10248805 0.17830322 0.06839569 0.03419784 0.1      ]
[3.44485388 0.45946749 0.91893498 0.44485388 0.45946749 0.03409701
 0.21111037 0.10219795 0.17794155 0.06819402 0.03409701 0.1      ]
[3.44405514 0.45914065 0.91828131 0.44405514 0.45914065 0.03400802
 0.21081014 0.10194188 0.17762206 0.06801603 0.03400802 0.1      ]
[3.44334947 0.45885167 0.91770333 0.44334947 0.45885167 0.03392946
 0.21054485 0.10171582 0.17733979 0.06785891 0.03392946 0.1      ]
[3.44272595 0.45859615 0.91719229 0.44272595 0.45859615 0.03386009
 0.21031042 0.10151621 0.17709038 0.06772018 0.03386009 0.1      ]
[3.44217497 0.45837021 0.91674042 0.44217497 0.45837021 0.03379883
 0.21010325 0.10133992 0.17686999 0.06759766 0.03379883 0.1      ]
[3.44168805 0.45817043 0.91634087 0.44168805 0.45817043 0.03374473
 0.20992015 0.1011842  0.17667522 0.06748945 0.03374473 0.1      ]
[3.44125772 0.45799379 0.91598758 0.44125772 0.45799379 0.03369693
 0.20975831 0.10104665 0.17650309 0.06739386 0.03369693 0.1      ]
[3.44087738 0.4578376  0.9156752  0.44087738 0.4578376  0.03365471
 0.20961527 0.10092512 0.17635095 0.06730942 0.03365471 0.1      ]
[3.44054121 0.45769949 0.91539898 0.44054121 0.45769949 0.0336174
 0.20948882 0.10081774 0.17621648 0.0672348  0.0336174  0.1      ]

```

(continues on next page)

(continued from previous page)

```

[3.44024405 0.45757737 0.91515474 0.44024405 0.45757737 0.03358444
 0.20937705 0.10072286 0.17609762 0.06716887 0.03358444 0.1      ]
[3.43998137 0.45746939 0.91493878 0.43998137 0.45746939 0.03355531
 0.20927824 0.10063901 0.17599255 0.06711061 0.03355531 0.1      ]
[3.43974917 0.45737391 0.91474782 0.43974917 0.45737391 0.03352956
 0.20919089 0.1005649 0.17589967 0.06705912 0.03352956 0.1      ]
[3.43954389 0.45728948 0.91457897 0.43954389 0.45728948 0.03350681
 0.20911367 0.1004994 0.17581756 0.06701361 0.03350681 0.1      ]
[3.43936242 0.45721483 0.91442966 0.43936242 0.45721483 0.0334867
 0.2090454 0.10044151 0.17574497 0.06697339 0.0334867 0.1      ]
[3.43920198 0.45714882 0.91429764 0.43920198 0.45714882 0.03346892
 0.20898505 0.10039033 0.17568079 0.06693784 0.03346892 0.1      ]
[3.43906014 0.45709045 0.91418091 0.43906014 0.45709045 0.03345321
 0.20893168 0.1003451 0.17562406 0.06690641 0.03345321 0.1      ]
[3.43893474 0.45703884 0.91407768 0.43893474 0.45703884 0.03343932
 0.2088845 0.10030511 0.1755739 0.06687863 0.03343932 0.1      ]
[3.43882387 0.4569932 0.91398641 0.43882387 0.4569932 0.03342704
 0.20884279 0.10026976 0.17552955 0.06685407 0.03342704 0.1      ]
[3.43872584 0.45695285 0.9139057 0.43872584 0.45695285 0.03341618
 0.20880591 0.10023851 0.17549034 0.06683236 0.03341618 0.1      ]
[3.43863917 0.45691717 0.91383433 0.43863917 0.45691717 0.03340658
 0.2087733 0.10021088 0.17545567 0.06681317 0.03340658 0.1      ]
[3.43856254 0.45688561 0.91377123 0.43856254 0.45688561 0.0333981
 0.20874446 0.10018646 0.17542502 0.0667962 0.0333981 0.1      ]
[3.43849478 0.45685771 0.91371543 0.43849478 0.45685771 0.0333906
 0.20871897 0.10016486 0.17539791 0.0667812 0.0333906 0.1      ]
[3.43843488 0.45683304 0.91366609 0.43843488 0.45683304 0.03338397
 0.20869643 0.10014577 0.17537395 0.06676793 0.03338397 0.1      ]
[3.4383819 0.45681123 0.91362246 0.4383819 0.45681123 0.0333781
 0.2086765 0.10012889 0.17535276 0.0667562 0.0333781 0.1      ]
[3.43833507 0.45679194 0.91358388 0.43833507 0.45679194 0.03337292
 0.20865887 0.10011396 0.17533403 0.06674583 0.03337292 0.1      ]
[3.43829365 0.45677488 0.91354976 0.43829365 0.45677488 0.03336833
 0.20864329 0.10010077 0.17531746 0.06673667 0.03336833 0.1      ]
[3.43825703 0.4567598 0.9135196 0.43825703 0.4567598 0.03336428
 0.20862951 0.1000891 0.17530281 0.06672856 0.03336428 0.1      ]
[3.43822466 0.45674646 0.91349292 0.43822466 0.45674646 0.0333607
 0.20861733 0.10007878 0.17528986 0.06672139 0.0333607 0.1      ]
[3.43819603 0.45673467 0.91346934 0.43819603 0.45673467 0.03335753
 0.20860656 0.10006966 0.17527841 0.06671506 0.03335753 0.1      ]]
preeq_wrms: nan
preeq_t: nan
preeq_numlinsteps: None
preeq_numsteps: [[0 0 0]]
preeq_numstepsB: 0.0
preeq_status: [[0 0 0]]
preeq_cpu_time: 0.0
preeq_cpu_timeB: 0.0
posteq_wrms: nan
posteq_t: nan
posteq_numlinsteps: None
posteq_numsteps: [[0 0 0]]

```

(continues on next page)




[illegible]

```
print(model.getParameters())
```

```
(1.0, 0.5, 0.4, 2.0, 0.1, 2.0, 3.0, 0.2)
```

```
import amici.plotting
amici.plotting.plotStateTrajectories(rdata, model = None)
amici.plotting.plotObservableTrajectories(rdata, model = None)
```

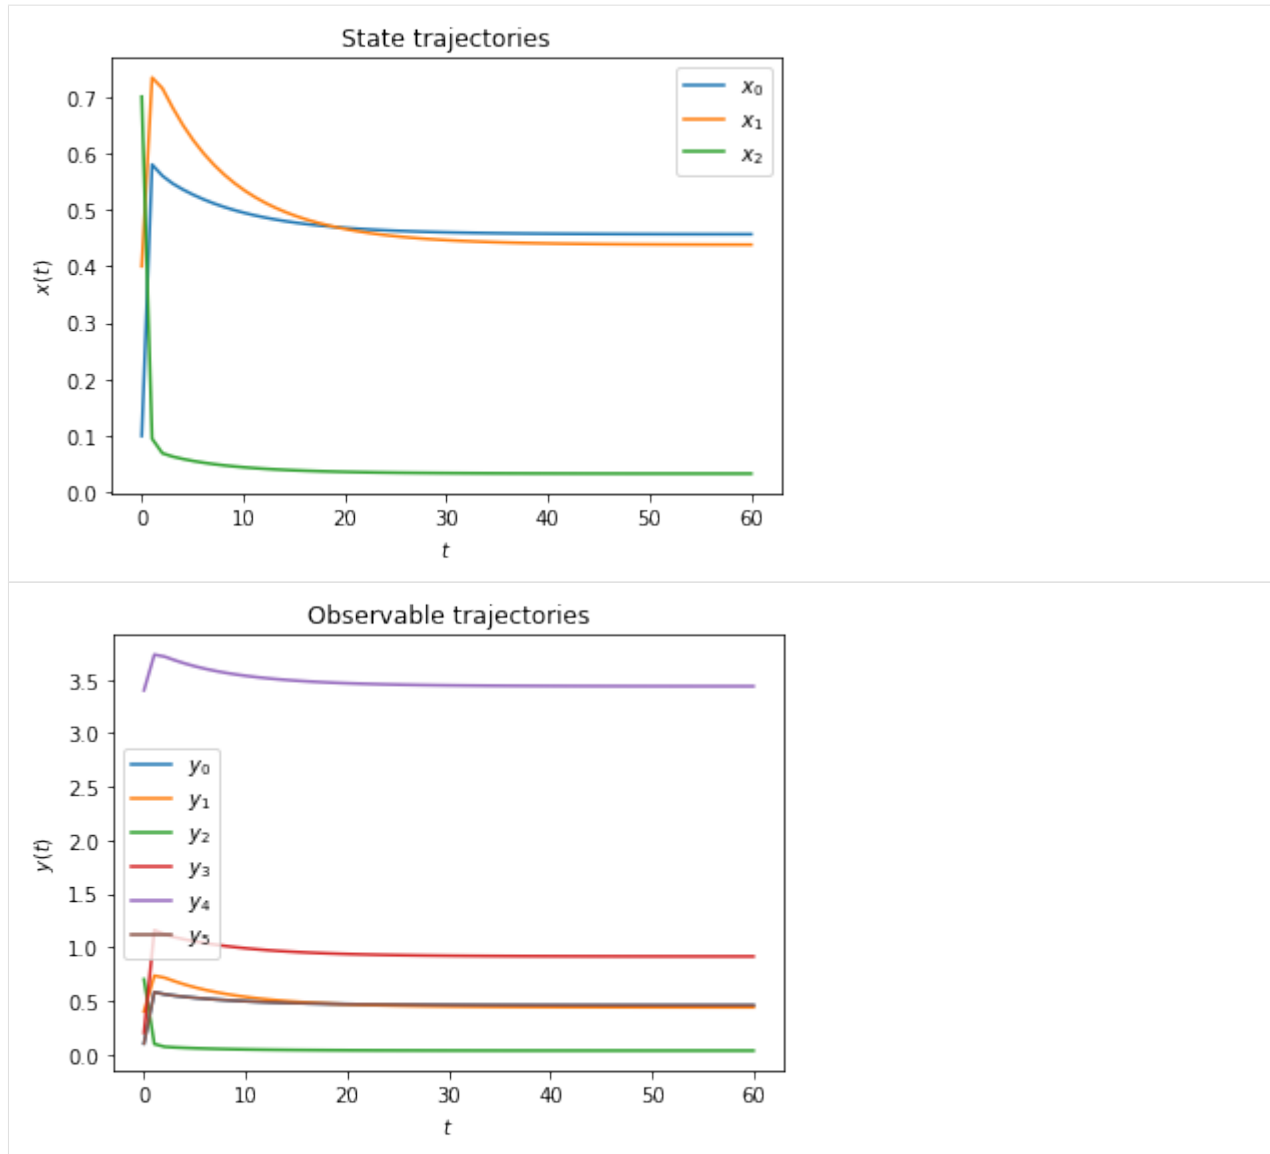

## Computing likelihood

Often model parameters need to be inferred from experimental data. This is commonly done by maximizing the likelihood of observing the data given to current model parameters. AMICI will compute this likelihood if experimental data is provided to `amici.runAmiciSimulation` as optional third argument. Measurements along with their standard deviations are provided through an `amici.ExpData` instance.

```
[15]: # Create model instance and set time points for simulation
model = model_module.getModel()
model.setTimepoints(np.linspace(0, 10, 11))

# Create solver instance, keep default options
solver = model.getSolver()

# Run simulation without experimental data
```

(continues on next page)

(continued from previous page)

```

rdata = amici.runAmiciSimulation(model, solver)

# Create ExpData instance from simulation results
edata = amici.ExpData(rdata, 1.0, 0.0)

# Re-run simulation, this time passing "experimental data"
rdata = amici.runAmiciSimulation(model, solver, edata)

print('Log-likelihood %f' % rdata['llh'])
Log-likelihood -97.118555

```

## Simulation tolerances

Numerical error tolerances are often critical to get accurate results. For the state variables, integration errors can be controlled using `setRelativeTolerance` and `setAbsoluteTolerance`. Similar functions exist for sensitivities, steadystates and quadratures. We initially compute a reference solution using extremely low tolerances and then assess the influence on integration error for different levels of absolute and relative tolerance.

```

[16]: solver.setRelativeTolerance(1e-16)
solver.setAbsoluteTolerance(1e-16)
solver.setSensitivityOrder(amici.SensitivityOrder.none)
rdata_ref = amici.runAmiciSimulation(model, solver, edata)

def get_simulation_error(solver):
    rdata = amici.runAmiciSimulation(model, solver, edata)
    return np.mean(np.abs(rdata['x']-rdata_ref['x'])), np.mean(np.abs(rdata['llh']-rdata_ref['llh']))

def get_errors(tolfun, tols):
    solver.setRelativeTolerance(1e-16)
    solver.setAbsoluteTolerance(1e-16)
    x_errs = []
    llh_errs = []
    for tol in tols:
        getattr(solver, tolfun)(tol)
        x_err, llh_err = get_simulation_error(solver)
        x_errs.append(x_err)
        llh_errs.append(llh_err)
    return x_errs, llh_errs

atols = np.logspace(-5, -15, 100)
atol_x_errs, atol_llh_errs = get_errors('setAbsoluteTolerance', atols)

rtols = np.logspace(-5, -15, 100)
rtol_x_errs, rtol_llh_errs = get_errors('setRelativeTolerance', rtols)

fig, axes = plt.subplots(1, 2, figsize=(15, 5))

def plot_error(tols, x_errs, llh_errs, tolname, ax):
    ax.plot(tols, x_errs, 'r-', label='x')

```

(continues on next page)

(continued from previous page)



```

ax.plot(tols, llh_errs, 'b-', label='llh')
ax.set_xscale('log')
ax.set_yscale('log')
ax.set_xlabel(f'{tolname} tolerance')
ax.set_ylabel('average numerical error')
ax.legend()

plot_error(atols, atol_x_errs, atol_llh_errs, 'absolute', axes[0])
plot_error(rtols, rtol_x_errs, rtol_llh_errs, 'relative', axes[1])

# reset relative tolerance to default value
solver.setRelativeTolerance(1e-8)
solver.setRelativeTolerance(1e-16)

```

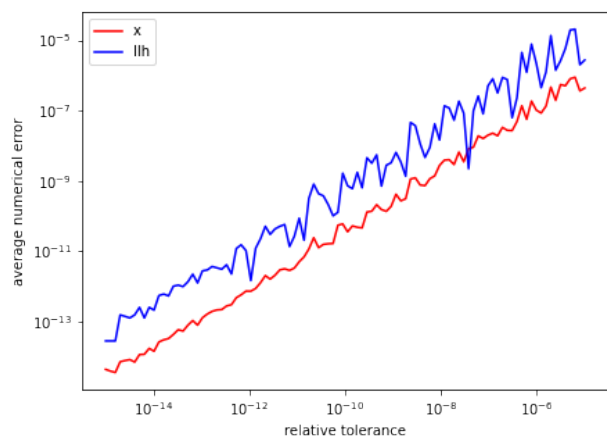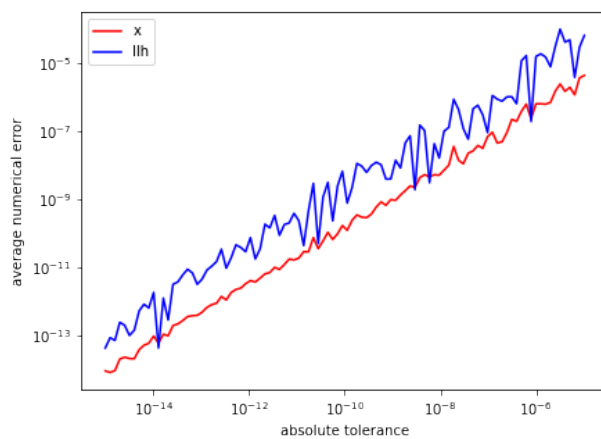

## Sensitivity analysis

AMICI can provide first- and second-order sensitivities using the forward- or adjoint-method. The respective options are set on the Model and Solver objects.

### Forward sensitivity analysis

```

[17]: model = model_module.getModel()
model.setTimepoints(np.linspace(0, 10, 11))
model.requireSensitivitiesForAllParameters()           # sensitivities w.r.t. all_
↳ parameters
# model.setParameterList([1, 2])                       # sensitivities
# w.r.t. the specified parameters
model.setParameterScale(amici.ParameterScaling.none)   # parameters are used as-is_
↳ (not log-transformed)

solver = model.getSolver()
solver.setSensitivityMethod(amici.SensitivityMethod.forward) # forward_
↳ sensitivity analysis
solver.setSensitivityOrder(amici.SensitivityOrder.first) # first-order sensitivities

```

(continues on next page)

(continued from previous page)

```

rdata = amici.runAmiciSimulation(model, solver)

# print sensitivity-related results
for key, value in rdata.items():
    if key.startswith('s'):
        print('%12s: ' % key, value)

        sx: [[[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]]

        [[-2.00747250e-01  1.19873139e-01 -9.44167985e-03]
 [-1.02561396e-01 -1.88820454e-01  1.01855972e-01]
 [ 4.66193077e-01 -2.86365372e-01  2.39662449e-02]
 [ 4.52560294e-02  1.14631370e-01 -3.34067919e-02]
 [ 4.00672911e-01  1.92564093e-01  4.98877759e-02]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]]

        [[-2.23007240e-01  1.53979022e-01 -1.26885280e-02]
 [-1.33426939e-01 -3.15955239e-01  9.49575030e-02]
 [ 5.03470377e-01 -3.52731535e-01  2.81567412e-02]
 [ 3.93630714e-02  1.10770683e-01 -1.05673869e-02]
 [ 5.09580304e-01  4.65255489e-01  9.24843702e-02]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]]

        [[-2.14278104e-01  1.63465064e-01 -1.03268418e-02]
 [-1.60981967e-01 -4.00490452e-01  7.54810648e-02]
 [ 4.87746419e-01 -3.76014315e-01  2.30919334e-02]
 [ 4.28733680e-02  1.15473583e-01 -6.63571687e-03]
 [ 6.05168647e-01  7.07226039e-01  1.23870914e-01]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]]

        [[-2.05888038e-01  1.69308689e-01 -7.93085660e-03]
 [-1.84663809e-01 -4.65451966e-01  5.95026117e-02]
 [ 4.66407064e-01 -3.87612079e-01  1.76410128e-02]
 [ 4.52451104e-02  1.19865712e-01 -4.73313094e-03]
 [ 6.90798449e-01  9.20396633e-01  1.49475827e-01]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]]

```

(continues on next page)

(continued from previous page)

```

[[-1.98803165e-01  1.73327268e-01 -6.03008179e-03]
 [-2.04303740e-01 -5.16111388e-01  4.68785776e-02]
 [ 4.47070326e-01 -3.94304029e-01  1.32107437e-02]
 [ 4.69732048e-02  1.22961727e-01 -3.35899442e-03]
 [ 7.68998995e-01  1.10844286e+00  1.70889328e-01]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]

[[-1.92789113e-01  1.75978657e-01 -4.54517629e-03]
 [-2.20500138e-01 -5.55540705e-01  3.68776526e-02]
 [ 4.30424855e-01 -3.97907706e-01  9.75257113e-03]
 [ 4.82793652e-02  1.24952071e-01 -2.30991637e-03]
 [ 8.40805131e-01  1.27504628e+00  1.89020151e-01]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]

[[-1.87672774e-01  1.77588334e-01 -3.38318222e-03]
 [-2.33807210e-01 -5.86081383e-01  2.89236334e-02]
 [ 4.16201399e-01 -3.99295277e-01  7.06598588e-03]
 [ 4.92546648e-02  1.26089711e-01 -1.50412006e-03]
 [ 9.06806543e-01  1.42334018e+00  2.04522708e-01]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]

[[-1.83320440e-01  1.78410042e-01 -2.47240692e-03]
 [-2.44690164e-01 -6.09568485e-01  2.25774266e-02]
 [ 4.04061655e-01 -3.99063012e-01  4.97908386e-03]
 [ 4.99612484e-02  1.26581014e-01 -8.85891342e-04]
 [ 9.67473970e-01  1.55589415e+00  2.17895305e-01]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]

[[-1.79620591e-01  1.78640114e-01 -1.75822439e-03]
 [-2.53540123e-01 -6.27448857e-01  1.75019839e-02]
 [ 3.93704970e-01 -3.97656641e-01  3.35895484e-03]
 [ 5.04492282e-02  1.26586733e-01 -4.13401240e-04]
 [ 1.02322336e+00  1.67481439e+00  2.29524046e-01]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]

[[-1.76478441e-01  1.78430281e-01 -1.19867662e-03]
 [-2.60686971e-01 -6.40868686e-01  1.34365068e-02]
 [ 3.84873835e-01 -3.95414931e-01  2.10369522e-03]
 [ 5.07601805e-02  1.26231631e-01 -5.46465317e-05]
 [ 1.07443160e+00  1.78183962e+00  2.39710937e-01]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]

```

(continues on next page)

(continued from previous page)

```

[ 0.00000000e+00 0.00000000e+00 0.00000000e+00]]]
      sx0: [[0. 0. 0.]
[0. 0. 0.]
[0. 0. 0.]
[0. 0. 0.]
[0. 0. 0.]
[0. 0. 0.]
[0. 0. 0.]]
      sx_ss: [[nan nan nan]
[nan nan nan]
[nan nan nan]
[nan nan nan]
[nan nan nan]
[nan nan nan]
[nan nan nan]]
      sigmay: [[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]]
      sy: [[[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 1.00000000e-01
0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
0.00000000e+00 0.00000000e+00]]]

[[-2.00747250e-01 1.19873139e-01 -9.44167985e-03 -4.01494500e-01
1.19873139e-01 -2.00747250e-01]
[-1.02561396e-01 -1.88820454e-01 1.01855972e-01 -2.05122791e-01
-1.88820454e-01 -1.02561396e-01]
[ 4.66193077e-01 -2.86365372e-01 2.39662449e-02 9.32386154e-01
-2.86365372e-01 4.66193077e-01]
[ 4.52560294e-02 1.14631370e-01 -3.34067919e-02 9.05120589e-02

```

(continues on next page)

(continued from previous page)

```

1.14631370e-01 4.52560294e-02]
[ 4.00672911e-01 1.92564093e-01 4.98877759e-02 8.01345822e-01
 1.92564093e-01 4.00672911e-01]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 5.80072436e-01
 0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 0.00000000e+00 0.00000000e+00]]

[[-2.23007240e-01 1.53979022e-01 -1.26885280e-02 -4.46014480e-01
 1.53979022e-01 -2.23007240e-01]
[-1.33426939e-01 -3.15955239e-01 9.49575030e-02 -2.66853878e-01
 -3.15955239e-01 -1.33426939e-01]
[ 5.03470377e-01 -3.52731535e-01 2.81567412e-02 1.00694075e+00
 -3.52731535e-01 5.03470377e-01]
[ 3.93630714e-02 1.10770683e-01 -1.05673869e-02 7.87261427e-02
 1.10770683e-01 3.93630714e-02]
[ 5.09580304e-01 4.65255489e-01 9.24843702e-02 1.01916061e+00
 4.65255489e-01 5.09580304e-01]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 5.60534516e-01
 0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 0.00000000e+00 0.00000000e+00]]

[[-2.14278104e-01 1.63465064e-01 -1.03268418e-02 -4.28556209e-01
 1.63465064e-01 -2.14278104e-01]
[-1.60981967e-01 -4.00490452e-01 7.54810648e-02 -3.21963935e-01
 -4.00490452e-01 -1.60981967e-01]
[ 4.87746419e-01 -3.76014315e-01 2.30919334e-02 9.75492839e-01
 -3.76014315e-01 4.87746419e-01]
[ 4.28733680e-02 1.15473583e-01 -6.63571687e-03 8.57467361e-02
 1.15473583e-01 4.28733680e-02]
[ 6.05168647e-01 7.07226039e-01 1.23870914e-01 1.21033729e+00
 7.07226039e-01 6.05168647e-01]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 5.46870655e-01
 0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 0.00000000e+00 0.00000000e+00]]

[[-2.05888038e-01 1.69308689e-01 -7.93085660e-03 -4.11776077e-01
 1.69308689e-01 -2.05888038e-01]
[-1.84663809e-01 -4.65451966e-01 5.95026117e-02 -3.69327617e-01
 -4.65451966e-01 -1.84663809e-01]
[ 4.66407064e-01 -3.87612079e-01 1.76410128e-02 9.32814128e-01
 -3.87612079e-01 4.66407064e-01]
[ 4.52451104e-02 1.19865712e-01 -4.73313094e-03 9.04902208e-02
 1.19865712e-01 4.52451104e-02]]

```

(continues on next page)



(continued from previous page)

```

[ 6.90798449e-01  9.20396633e-01  1.49475827e-01  1.38159690e+00
  9.20396633e-01  6.90798449e-01]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  5.36280366e-01
  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
  1.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
  0.00000000e+00  0.00000000e+00]]

[[-1.98803165e-01  1.73327268e-01 -6.03008179e-03 -3.97606330e-01
  1.73327268e-01 -1.98803165e-01]
[-2.04303740e-01 -5.16111388e-01  4.68785776e-02 -4.08607480e-01
 -5.16111388e-01 -2.04303740e-01]
[ 4.47070326e-01 -3.94304029e-01  1.32107437e-02  8.94140651e-01
 -3.94304029e-01  4.47070326e-01]
[ 4.69732048e-02  1.22961727e-01 -3.35899442e-03  9.39464097e-02
  1.22961727e-01  4.69732048e-02]
[ 7.68998995e-01  1.10844286e+00  1.70889328e-01  1.53799799e+00
  1.10844286e+00  7.68998995e-01]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  5.27091252e-01
  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
  1.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
  0.00000000e+00  0.00000000e+00]]

[[-1.92789113e-01  1.75978657e-01 -4.54517629e-03 -3.85578227e-01
  1.75978657e-01 -1.92789113e-01]
[-2.20500138e-01 -5.55540705e-01  3.68776526e-02 -4.41000277e-01
 -5.55540705e-01 -2.20500138e-01]
[ 4.30424855e-01 -3.97907706e-01  9.75257113e-03  8.60849709e-01
 -3.97907706e-01  4.30424855e-01]
[ 4.82793652e-02  1.24952071e-01 -2.30991637e-03  9.65587304e-02
  1.24952071e-01  4.82793652e-02]
[ 8.40805131e-01  1.27504628e+00  1.89020151e-01  1.68161026e+00
  1.27504628e+00  8.40805131e-01]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  5.18989205e-01
  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
  1.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
  0.00000000e+00  0.00000000e+00]]

[[-1.87672774e-01  1.77588334e-01 -3.38318222e-03 -3.75345548e-01
  1.77588334e-01 -1.87672774e-01]
[-2.33807210e-01 -5.86081383e-01  2.89236334e-02 -4.67614420e-01
 -5.86081383e-01 -2.33807210e-01]
[ 4.16201399e-01 -3.99295277e-01  7.06598588e-03  8.32402797e-01
 -3.99295277e-01  4.16201399e-01]
[ 4.92546648e-02  1.26089711e-01 -1.50412006e-03  9.85093296e-02
  1.26089711e-01  4.92546648e-02]
[ 9.06806543e-01  1.42334018e+00  2.04522708e-01  1.81361309e+00

```

(continues on next page)

(continued from previous page)

```

1.42334018e+00 9.06806543e-01]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 5.11829985e-01
 0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 0.00000000e+00 0.00000000e+00]]

[[-1.83320440e-01 1.78410042e-01 -2.47240692e-03 -3.66640879e-01
 1.78410042e-01 -1.83320440e-01]
[-2.44690164e-01 -6.09568485e-01 2.25774266e-02 -4.89380329e-01
 -6.09568485e-01 -2.44690164e-01]
[ 4.04061655e-01 -3.99063012e-01 4.97908386e-03 8.08123310e-01
 -3.99063012e-01 4.04061655e-01]
[ 4.99612484e-02 1.26581014e-01 -8.85891342e-04 9.99224969e-02
 1.26581014e-01 4.99612484e-02]
[ 9.67473970e-01 1.55589415e+00 2.17895305e-01 1.93494794e+00
 1.55589415e+00 9.67473970e-01]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 5.05500234e-01
 0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 0.00000000e+00 0.00000000e+00]]

[[-1.79620591e-01 1.78640114e-01 -1.75822439e-03 -3.59241183e-01
 1.78640114e-01 -1.79620591e-01]
[-2.53540123e-01 -6.27448857e-01 1.75019839e-02 -5.07080247e-01
 -6.27448857e-01 -2.53540123e-01]
[ 3.93704970e-01 -3.97656641e-01 3.35895484e-03 7.87409940e-01
 -3.97656641e-01 3.93704970e-01]
[ 5.04492282e-02 1.26586733e-01 -4.13401240e-04 1.00898456e-01
 1.26586733e-01 5.04492282e-02]
[ 1.02322336e+00 1.67481439e+00 2.29524046e-01 2.04644672e+00
 1.67481439e+00 1.02322336e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 4.99901907e-01
 0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 0.00000000e+00 0.00000000e+00]]

[[-1.76478441e-01 1.78430281e-01 -1.19867662e-03 -3.52956882e-01
 1.78430281e-01 -1.76478441e-01]
[-2.60686971e-01 -6.40868686e-01 1.34365068e-02 -5.21373942e-01
 -6.40868686e-01 -2.60686971e-01]
[ 3.84873835e-01 -3.95414931e-01 2.10369522e-03 7.69747670e-01
 -3.95414931e-01 3.84873835e-01]
[ 5.07601805e-02 1.26231631e-01 -5.46465317e-05 1.01520361e-01
 1.26231631e-01 5.07601805e-02]
[ 1.07443160e+00 1.78183962e+00 2.39710937e-01 2.14886320e+00
 1.78183962e+00 1.07443160e+00]

```

(continues on next page)

(continued from previous page)

```

[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 4.94949118e-01
 0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 0.00000000e+00 0.00000000e+00]]
ssigmay: [[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 1.]]

[[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 1.]]

[[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 1.]]

[[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 1.]]

[[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 1.]]

[[0. 0. 0. 0. 0. 0.]

```

(continues on next page)

(continued from previous page)

```
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 1.]
```

```
[[0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 1.]]
```

```
[[0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 1.]]
```

```
[[0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 1.]]
```

```
[[0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 1.]]
```

```
[[0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 0.]
 [0. 0. 0. 0. 0. 1.]]]
```

(continues on next page)

[illegible]

(continued from previous page)

```
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0. 0. 0. 0.]
```

## Adjoint sensitivity analysis

```
[18]: # Set model options
model = model_module.getModel()
p_orig = np.array(model.getParameters())
p_orig[list(model.getParameterIds()).index('observable_x1withsigma_sigma')] = 0.1 #_
↳ Change default parameter
model.setParameters(p_orig)
model.setParameterScale(amici.ParameterScaling.none)
model.setTimepoints(np.linspace(0, 10, 21))

solver = model.getSolver()
solver.setMaxSteps(10**4) # Set maximum number of steps for the solver

# simulate time-course to get artificial data
rdata = amici.runAmiciSimulation(model, solver)
edata = amici.ExpData(rdata, 1.0, 0)
edata.fixedParameters = model.getFixedParameters()
# set sigma to 1.0 except for observable 5, so that p[7] is used instead
# (if we have sigma parameterized, the corresponding ExpData entries must NaN, otherwise_
↳ they will override the parameter)
edata.setObservedDataStdDev(rdata['t']*0+np.nan,
                             list(model.getObservableIds()).index('observable_x1withsigma
↳ '))

# enable sensitivities
solver.setSensitivityOrder(amici.SensitivityOrder.first) # First-order ...
solver.setSensitivityMethod(amici.SensitivityMethod.adjoint) # ... adjoint_
↳ sensitivities
```

(continues on next page)

(continued from previous page)

```

model.requireSensitivitiesForAllParameters()           # ... w.r.t. all parameters

# compute adjoint sensitivities
rdata = amici.runAmiciSimulation(model, solver, edata)
#print(rdata['sigmay'])
print('Log-likelihood: %f\nGradient: %s' % (rdata['llh'], rdata['sllh']))

Log-likelihood: -1190.452734
Gradient: [-8.18063367e+01 -7.40378749e+01  1.87640047e+02  2.07890554e+01
 2.62573207e+02  1.77402064e-01  1.15646253e+01  2.11221869e+04]

```

## Finite differences gradient check

Compare AMICI-computed gradient with finite differences

```

[19]: from scipy.optimize import check_grad

def func(x0, symbol='llh', x0full=None, plist=[], verbose=False):
    p = x0[:]
    if len(plist):
        p = x0full[:]
        p[plist] = x0
    verbose and print('f: p=%s' % p)

    old_parameters = model.getParameters()
    solver.setSensitivityOrder(amici.SensitivityOrder.none)
    model.setParameters(p)
    rdata = amici.runAmiciSimulation(model, solver, edata)

    model.setParameters(old_parameters)

    res = np.sum(rdata[symbol])
    verbose and print(res)
    return res

def grad(x0, symbol='llh', x0full=None, plist=[], verbose=False):
    p = x0[:]
    if len(plist):
        model.setParameterList(plist)
        p = x0full[:]
        p[plist] = x0
    else:
        model.requireSensitivitiesForAllParameters()
    verbose and print('g: p=%s' % p)

    old_parameters = model.getParameters()
    solver.setSensitivityMethod(amici.SensitivityMethod.forward)
    solver.setSensitivityOrder(amici.SensitivityOrder.first)
    model.setParameters(p)
    rdata = amici.runAmiciSimulation(model, solver, edata)

```

(continues on next page)

(continued from previous page)

```

model.setParameters(old_parameters)

res = rdata['s%s' % symbol]
if not isinstance(res, float):
    if len(res.shape) == 3:
        res = np.sum(res, axis=(0, 2))
verbose and print(res)
return res

epsilon = 1e-4
err_norm = check_grad(func, grad, p_orig, 'llh', epsilon=epsilon)
print('sllh: |error|_2: %f' % err_norm)
# assert err_norm < 1e-6
print()

for ip in range(model.np()):
    plist = [ip]
    p = p_orig.copy()
    err_norm = check_grad(func, grad, p[plist], 'llh', p, [ip], epsilon=epsilon)
    print('sllh: p[%d]: |error|_2: %f' % (ip, err_norm))

print()
for ip in range(model.np()):
    plist = [ip]
    p = p_orig.copy()
    err_norm = check_grad(func, grad, p[plist], 'y', p, [ip], epsilon=epsilon)
    print('sy: p[%d]: |error|_2: %f' % (ip, err_norm))

print()
for ip in range(model.np()):
    plist = [ip]
    p = p_orig.copy()
    err_norm = check_grad(func, grad, p[plist], 'x', p, [ip], epsilon=epsilon)
    print('sx: p[%d]: |error|_2: %f' % (ip, err_norm))

print()
for ip in range(model.np()):
    plist = [ip]
    p = p_orig.copy()
    err_norm = check_grad(func, grad, p[plist], 'sigmay', p, [ip], epsilon=epsilon)
    print('ssigmay: p[%d]: |error|_2: %f' % (ip, err_norm))

sllh: |error|_2: 31.850873

sllh: p[0]: |error|_2: 0.006287
sllh: p[1]: |error|_2: 0.016510
sllh: p[2]: |error|_2: 0.017028
sllh: p[3]: |error|_2: 0.009608
sllh: p[4]: |error|_2: 0.083404
sllh: p[5]: |error|_2: 0.000280

```

(continues on next page)



(continued from previous page)

```

sllh: p[6]: |error|_2: 0.001050
sllh: p[7]: |error|_2: 31.850739

sy: p[0]: |error|_2: 0.002974
sy: p[1]: |error|_2: 0.002717
sy: p[2]: |error|_2: 0.001308
sy: p[3]: |error|_2: 0.000939
sy: p[4]: |error|_2: 0.006106
sy: p[5]: |error|_2: 0.000000
sy: p[6]: |error|_2: 0.000000
sy: p[7]: |error|_2: 0.000000

sx: p[0]: |error|_2: 0.001033
sx: p[1]: |error|_2: 0.001076
sx: p[2]: |error|_2: 0.000121
sx: p[3]: |error|_2: 0.000439
sx: p[4]: |error|_2: 0.001569
sx: p[5]: |error|_2: 0.000000
sx: p[6]: |error|_2: 0.000000
sx: p[7]: |error|_2: 0.000000

ssigmay: p[0]: |error|_2: 0.000000
ssigmay: p[1]: |error|_2: 0.000000
ssigmay: p[2]: |error|_2: 0.000000
ssigmay: p[3]: |error|_2: 0.000000
ssigmay: p[4]: |error|_2: 0.000000
ssigmay: p[5]: |error|_2: 0.000000
ssigmay: p[6]: |error|_2: 0.000000
ssigmay: p[7]: |error|_2: 0.000000

```

```

[20]: eps=1e-4
op=model.getParameters()

solver.setSensitivityMethod(amici.SensitivityMethod.forward) # forward sensitivity_
↪analysis
solver.setSensitivityOrder(amici.SensitivityOrder.first) # first-order sensitivities
model.requireSensitivitiesForAllParameters()
solver.setRelativeTolerance(1e-12)
rdata = amici.runAmiciSimulation(model, solver, edata)

def fd(x0, ip, eps, symbol='llh'):
    p = list(x0[:])
    old_parameters = model.getParameters()
    solver.setSensitivityOrder(amici.SensitivityOrder.none)
    p[ip]+=eps
    model.setParameters(p)
    rdata_f = amici.runAmiciSimulation(model, solver, edata)
    p[ip]-=2*eps
    model.setParameters(p)
    rdata_b = amici.runAmiciSimulation(model, solver, edata)

```

(continues on next page)

(continued from previous page)

```

model.setParameters(old_parameters)
return (rdata_f[symbol]-rdata_b[symbol])/(2*eps)

def plot_sensitivities(symbol, eps):
    fig, axes = plt.subplots(4,2, figsize=(15,10))
    for ip in range(4):
        fd_approx = fd(model.getParameters(), ip, eps, symbol=symbol)


        axes[ip,0].plot(edata.getTimepoints(), rdata[f's{symbol}'][:,ip,:], 'r-')
        axes[ip,0].plot(edata.getTimepoints(), fd_approx, 'k--')
        axes[ip,0].set_ylabel(f'sensitivity {symbol}')
        axes[ip,0].set_xlabel('time')

        axes[ip,1].plot(edata.getTimepoints(), np.abs(rdata[f's{symbol}'][:,ip,:]-fd_
→approx), 'k-')
        axes[ip,1].set_ylabel('difference to fd')
        axes[ip,1].set_xlabel('time')
        axes[ip,1].set_yscale('log')


    plt.tight_layout()
    plt.show()

```

[21]: plot\_sensitivities('x', eps)

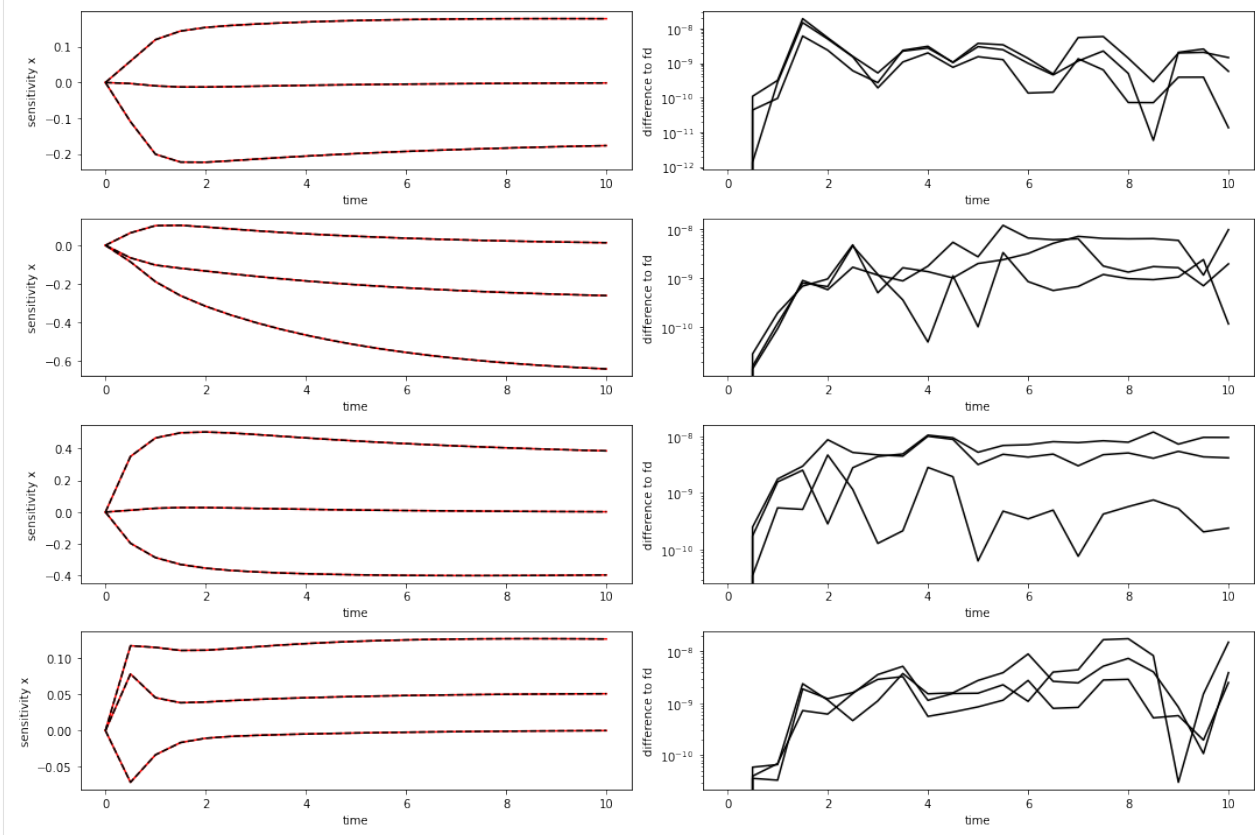

```
[22]: plot_sensitivities('y', eps)
```

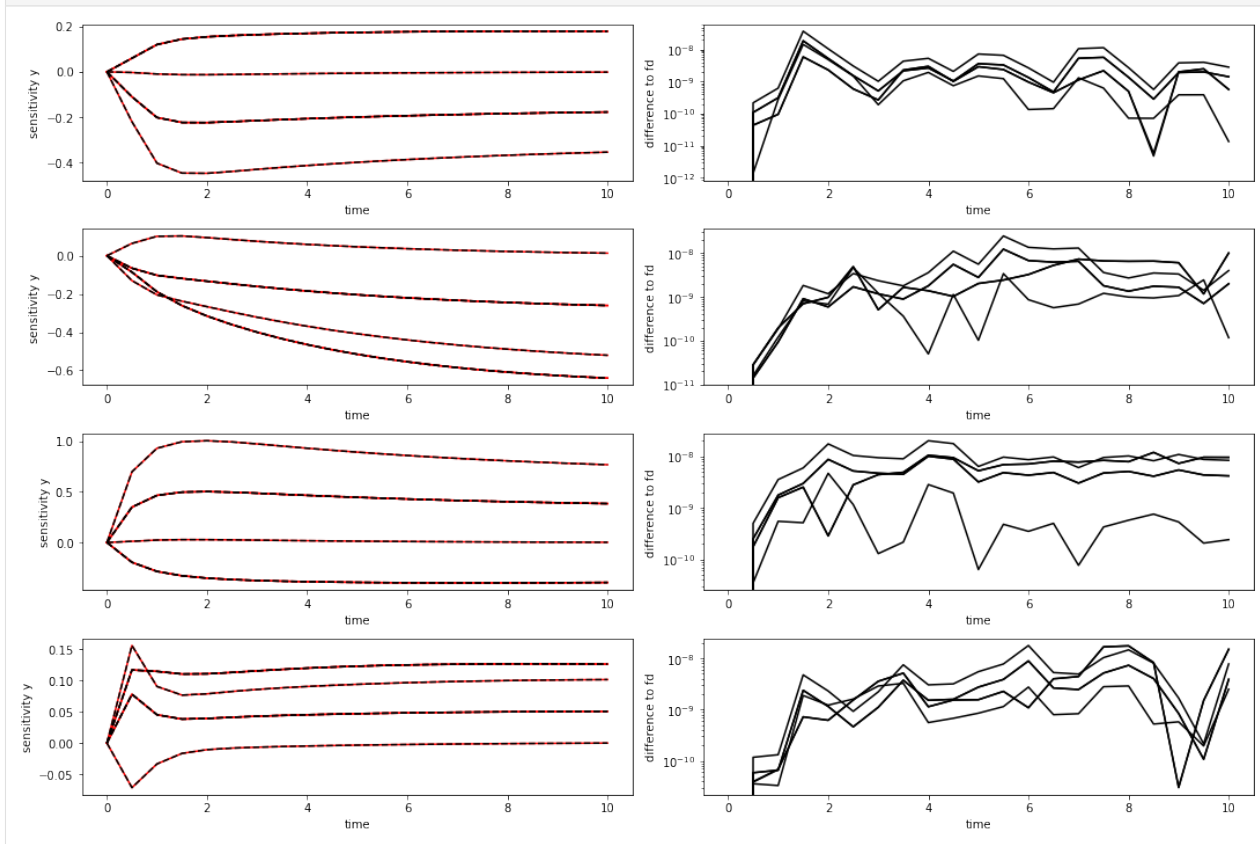

## Export as DataFrame

Experimental data and simulation results can both be exported as pandas DataFrame to allow for an easier inspection of numeric values

```
[23]: # run the simulation
rdata = amici.runAmiciSimulation(model, solver, edata)
```

```
[24]: # look at the ExpData as DataFrame
df = amici.getDataObservablesAsDataFrame(model, [edata])
df
```

```
[24]:
```

|   | time | datatype | t_presim | k0  | k0_preeq | k0_presim | observable_x1 \ |
|---|------|----------|----------|-----|----------|-----------|-----------------|
| 0 | 0.0  | data     | 0.0      | 1.0 | NaN      | NaN       | -1.191094       |
| 1 | 0.5  | data     | 0.0      | 1.0 | NaN      | NaN       | -1.599410       |
| 2 | 1.0  | data     | 0.0      | 1.0 | NaN      | NaN       | 1.522095        |
| 3 | 1.5  | data     | 0.0      | 1.0 | NaN      | NaN       | 2.455856        |
| 4 | 2.0  | data     | 0.0      | 1.0 | NaN      | NaN       | -0.600864       |
| 5 | 2.5  | data     | 0.0      | 1.0 | NaN      | NaN       | 1.422341        |
| 6 | 3.0  | data     | 0.0      | 1.0 | NaN      | NaN       | -0.672523       |
| 7 | 3.5  | data     | 0.0      | 1.0 | NaN      | NaN       | 2.278515        |
| 8 | 4.0  | data     | 0.0      | 1.0 | NaN      | NaN       | 0.078411        |
| 9 | 4.5  | data     | 0.0      | 1.0 | NaN      | NaN       | 0.074017        |

(continues on next page)

(continued from previous page)

|    |                         |                        |                      |     |     |     |           |
|----|-------------------------|------------------------|----------------------|-----|-----|-----|-----------|
| 10 | 5.0                     | data                   | 0.0                  | 1.0 | NaN | NaN | 0.537820  |
| 11 | 5.5                     | data                   | 0.0                  | 1.0 | NaN | NaN | 0.498204  |
| 12 | 6.0                     | data                   | 0.0                  | 1.0 | NaN | NaN | 2.345616  |
| 13 | 6.5                     | data                   | 0.0                  | 1.0 | NaN | NaN | 0.995109  |
| 14 | 7.0                     | data                   | 0.0                  | 1.0 | NaN | NaN | 1.363276  |
| 15 | 7.5                     | data                   | 0.0                  | 1.0 | NaN | NaN | 0.190180  |
| 16 | 8.0                     | data                   | 0.0                  | 1.0 | NaN | NaN | -0.362771 |
| 17 | 8.5                     | data                   | 0.0                  | 1.0 | NaN | NaN | 0.884408  |
| 18 | 9.0                     | data                   | 0.0                  | 1.0 | NaN | NaN | -1.554260 |
| 19 | 9.5                     | data                   | 0.0                  | 1.0 | NaN | NaN | 0.492781  |
| 20 | 10.0                    | data                   | 0.0                  | 1.0 | NaN | NaN | -0.964663 |
|    |                         |                        |                      |     |     |     |           |
|    | observable_x2           | observable_x3          | observable_x1_scaled |     | \   |     |           |
| 0  | 0.281469                | 0.033354               | 1.645144             |     |     |     |           |
| 1  | 1.140165                | 1.368902               | 1.535490             |     |     |     |           |
| 2  | 2.020846                | 1.109229               | 0.594295             |     |     |     |           |
| 3  | 0.961785                | 0.052925               | 1.839501             |     |     |     |           |
| 4  | 0.021845                | 0.220294               | -0.110990            |     |     |     |           |
| 5  | 0.045064                | 1.361070               | 0.945899             |     |     |     |           |
| 6  | 0.873615                | 1.560601               | 2.677974             |     |     |     |           |
| 7  | -0.005105               | 0.799689               | 1.240916             |     |     |     |           |
| 8  | 0.979531                | 1.745795               | 0.858134             |     |     |     |           |
| 9  | 0.226267                | 0.604246               | -0.091356            |     |     |     |           |
| 10 | 1.233766                | 0.194859               | -0.345351            |     |     |     |           |
| 11 | 3.218945                | 0.190730               | 0.462838             |     |     |     |           |
| 12 | 0.956306                | -1.770517              | 0.761754             |     |     |     |           |
| 13 | -0.151091               | 0.805937               | 2.929645             |     |     |     |           |
| 14 | 1.622225                | 0.030980               | -0.082327            |     |     |     |           |
| 15 | 0.962294                | 1.425918               | 1.106591             |     |     |     |           |
| 16 | -0.251576               | 0.540826               | 1.507657             |     |     |     |           |
| 17 | 0.930074                | 0.510605               | 2.012371             |     |     |     |           |
| 18 | 1.449906                | -1.477985              | 0.871124             |     |     |     |           |
| 19 | 0.700873                | 0.242116               | 0.279648             |     |     |     |           |
| 20 | -0.485664               | 2.087815               | 2.328707             |     |     |     |           |
|    |                         |                        |                      |     |     |     |           |
|    | observable_x2_offsetted | observable_x1withsigma | observable_x1_std    |     | \   |     |           |
| 0  | 3.900680                | -0.518642              | 1.0                  |     |     |     |           |
| 1  | 5.678167                | 0.694825               | 1.0                  |     |     |     |           |
| 2  | 3.230374                | 1.275482               | 1.0                  |     |     |     |           |
| 3  | 2.783796                | 0.085480               | 1.0                  |     |     |     |           |
| 4  | 5.003351                | 2.020780               | 1.0                  |     |     |     |           |
| 5  | 4.589646                | -0.593535              | 1.0                  |     |     |     |           |
| 6  | 2.187698                | 1.054870               | 1.0                  |     |     |     |           |
| 7  | 4.268726                | 0.491755               | 1.0                  |     |     |     |           |
| 8  | 4.609529                | 0.620844               | 1.0                  |     |     |     |           |
| 9  | 3.652345                | 0.261807               | 1.0                  |     |     |     |           |
| 10 | 4.477322                | 3.378227               | 1.0                  |     |     |     |           |
| 11 | 5.946970                | 1.310100               | 1.0                  |     |     |     |           |
| 12 | 3.894865                | 1.546055               | 1.0                  |     |     |     |           |
| 13 | 4.348557                | 0.234915               | 1.0                  |     |     |     |           |
| 14 | 3.761730                | 0.724608               | 1.0                  |     |     |     |           |
| 15 | 4.175984                | 0.245791               | 1.0                  |     |     |     |           |

(continues on next page)

(continued from previous page)

|    |          |           |     |
|----|----------|-----------|-----|
| 16 | 3.871633 | 2.260562  | 1.0 |
| 17 | 2.593086 | -0.654355 | 1.0 |
| 18 | 5.497123 | 0.232772  | 1.0 |
| 19 | 4.236658 | -0.889212 | 1.0 |
| 20 | 4.787617 | 0.395106  | 1.0 |

|    | observable_x2_std | observable_x3_std | observable_x1_scaled_std \ |
|----|-------------------|-------------------|----------------------------|
| 0  | 1.0               | 1.0               | 1.0                        |
| 1  | 1.0               | 1.0               | 1.0                        |
| 2  | 1.0               | 1.0               | 1.0                        |
| 3  | 1.0               | 1.0               | 1.0                        |
| 4  | 1.0               | 1.0               | 1.0                        |
| 5  | 1.0               | 1.0               | 1.0                        |
| 6  | 1.0               | 1.0               | 1.0                        |
| 7  | 1.0               | 1.0               | 1.0                        |
| 8  | 1.0               | 1.0               | 1.0                        |
| 9  | 1.0               | 1.0               | 1.0                        |
| 10 | 1.0               | 1.0               | 1.0                        |
| 11 | 1.0               | 1.0               | 1.0                        |
| 12 | 1.0               | 1.0               | 1.0                        |
| 13 | 1.0               | 1.0               | 1.0                        |
| 14 | 1.0               | 1.0               | 1.0                        |
| 15 | 1.0               | 1.0               | 1.0                        |
| 16 | 1.0               | 1.0               | 1.0                        |
| 17 | 1.0               | 1.0               | 1.0                        |
| 18 | 1.0               | 1.0               | 1.0                        |
| 19 | 1.0               | 1.0               | 1.0                        |
| 20 | 1.0               | 1.0               | 1.0                        |

|    | observable_x2_offsetted_std | observable_x1withsigma_std |
|----|-----------------------------|----------------------------|
| 0  | 1.0                         | NaN                        |
| 1  | 1.0                         | NaN                        |
| 2  | 1.0                         | NaN                        |
| 3  | 1.0                         | NaN                        |
| 4  | 1.0                         | NaN                        |
| 5  | 1.0                         | NaN                        |
| 6  | 1.0                         | NaN                        |
| 7  | 1.0                         | NaN                        |
| 8  | 1.0                         | NaN                        |
| 9  | 1.0                         | NaN                        |
| 10 | 1.0                         | NaN                        |
| 11 | 1.0                         | NaN                        |
| 12 | 1.0                         | NaN                        |
| 13 | 1.0                         | NaN                        |
| 14 | 1.0                         | NaN                        |
| 15 | 1.0                         | NaN                        |
| 16 | 1.0                         | NaN                        |
| 17 | 1.0                         | NaN                        |
| 18 | 1.0                         | NaN                        |
| 19 | 1.0                         | NaN                        |
| 20 | 1.0                         | NaN                        |

```
[25]: # from the exported dataframe, we can actually reconstruct a copy of the ExpData instance
reconstructed_edata = amici.getEdataFromDataFrame(model, df)
```

```
[26]: # look at the States in rdata as DataFrame
amici.getResidualsAsDataFrame(model, [edata], [rdata])
```

```
[26]:
```

|    | time | t_presim | k0  | k0_preeq | k0_presim | observable_x1 | observable_x2 | \ |
|----|------|----------|-----|----------|-----------|---------------|---------------|---|
| 0  | 0.0  | 0.0      | 1.0 | NaN      | NaN       | 1.291094      | 0.118531      |   |
| 1  | 0.5  | 0.0      | 1.0 | NaN      | NaN       | 2.138777      | 0.455486      |   |
| 2  | 1.0  | 0.0      | 1.0 | NaN      | NaN       | 0.942023      | 1.287558      |   |
| 3  | 1.5  | 0.0      | 1.0 | NaN      | NaN       | 1.885457      | 0.231133      |   |
| 4  | 2.0  | 0.0      | 1.0 | NaN      | NaN       | 1.161398      | 0.693991      |   |
| 5  | 2.5  | 0.0      | 1.0 | NaN      | NaN       | 0.869285      | 0.653687      |   |
| 6  | 3.0  | 0.0      | 1.0 | NaN      | NaN       | 1.219394      | 0.191652      |   |
| 7  | 3.5  | 0.0      | 1.0 | NaN      | NaN       | 1.737155      | 0.671214      |   |
| 8  | 4.0  | 0.0      | 1.0 | NaN      | NaN       | 0.457870      | 0.328229      |   |
| 9  | 4.5  | 0.0      | 1.0 | NaN      | NaN       | 0.457522      | 0.411248      |   |
| 10 | 5.0  | 0.0      | 1.0 | NaN      | NaN       | 0.010728      | 0.609084      |   |
| 11 | 5.5  | 0.0      | 1.0 | NaN      | NaN       | 0.024710      | 2.606212      |   |
| 12 | 6.0  | 0.0      | 1.0 | NaN      | NaN       | 1.826626      | 0.354703      |   |
| 13 | 6.5  | 0.0      | 1.0 | NaN      | NaN       | 0.479809      | 0.742320      |   |
| 14 | 7.0  | 0.0      | 1.0 | NaN      | NaN       | 0.851446      | 1.040670      |   |
| 15 | 7.5  | 0.0      | 1.0 | NaN      | NaN       | 0.318388      | 0.389765      |   |
| 16 | 8.0  | 0.0      | 1.0 | NaN      | NaN       | 0.868271      | 0.815679      |   |
| 17 | 8.5  | 0.0      | 1.0 | NaN      | NaN       | 0.381793      | 0.373840      |   |
| 18 | 9.0  | 0.0      | 1.0 | NaN      | NaN       | 2.054162      | 0.901024      |   |
| 19 | 9.5  | 0.0      | 1.0 | NaN      | NaN       | 0.004569      | 0.158864      |   |
| 20 | 10.0 | 0.0      | 1.0 | NaN      | NaN       | 1.459612      | 1.021246      |   |

|    | observable_x3 | observable_x1_scaled | observable_x2_offsetted | \ |
|----|---------------|----------------------|-------------------------|---|
| 0  | 0.666646      | 1.445144             | 0.500680                |   |
| 1  | 1.177412      | 0.456756             | 1.993488                |   |
| 2  | 1.012805      | 0.565850             | 0.502913                |   |
| 3  | 0.023151      | 0.698703             | 0.946856                |   |
| 4  | 0.150600      | 1.232059             | 1.287515                |   |
| 5  | 1.294769      | 0.160213             | 0.890895                |   |
| 6  | 1.496868      | 1.584233             | 1.494264                |   |
| 7  | 0.738182      | 0.158196             | 0.602617                |   |
| 8  | 1.686301      | 0.214427             | 0.958227                |   |
| 9  | 0.546593      | 1.154432             | 0.014831                |   |
| 10 | 0.138899      | 1.399534             | 0.852641                |   |
| 11 | 0.136330      | 0.582991             | 2.334237                |   |
| 12 | 1.823477      | 0.276225             | 0.293262                |   |
| 13 | 0.754307      | 1.899046             | 0.757328                |   |
| 14 | 0.019418      | 1.105987             | 0.180175                |   |
| 15 | 1.376658      | 0.089456             | 0.603455                |   |
| 16 | 0.492622      | 0.496656             | 0.307529                |   |
| 17 | 0.463381      | 1.007140             | 0.963148                |   |
| 18 | 1.524300      | 0.128680             | 1.948242                |   |
| 19 | 0.196646      | 0.715052             | 0.694649                |   |
| 20 | 2.043129      | 1.338809             | 1.252036                |   |

```
observable_x1withsigma
```

(continues on next page)

(continued from previous page)

```

0          6.186425
1          1.554579
2          6.954092
3          4.849190
4          14.602456
5          11.465911
6          5.079991
7          0.496051
8          0.845638
9          2.697316
10         28.511357
11          7.871853
12         10.270655
13          2.803840
14          2.127777
15          2.627767
16         17.550614
17         11.569706
18          2.671303
19         13.865618
20          0.998435

```

```

[27]: # look at the Observables in rdata as DataFrame
      amici.getSimulationObservablesAsDataFrame(model, [edata], [rdata])

```

```

[27]:   time    datatype  t_presim  k0  k0_preeq  k0_presim  observable_x1  \
0    0.0  simulation      0.0  1.0      NaN      NaN      0.100000
1    0.5  simulation      0.0  1.0      NaN      NaN      0.539367
2    1.0  simulation      0.0  1.0      NaN      NaN      0.580072
3    1.5  simulation      0.0  1.0      NaN      NaN      0.570399
4    2.0  simulation      0.0  1.0      NaN      NaN      0.560535
5    2.5  simulation      0.0  1.0      NaN      NaN      0.553056
6    3.0  simulation      0.0  1.0      NaN      NaN      0.546871
7    3.5  simulation      0.0  1.0      NaN      NaN      0.541360
8    4.0  simulation      0.0  1.0      NaN      NaN      0.536280
9    4.5  simulation      0.0  1.0      NaN      NaN      0.531538
10   5.0  simulation      0.0  1.0      NaN      NaN      0.527091
11   5.5  simulation      0.0  1.0      NaN      NaN      0.522914
12   6.0  simulation      0.0  1.0      NaN      NaN      0.518989
13   6.5  simulation      0.0  1.0      NaN      NaN      0.515299
14   7.0  simulation      0.0  1.0      NaN      NaN      0.511830
15   7.5  simulation      0.0  1.0      NaN      NaN      0.508568
16   8.0  simulation      0.0  1.0      NaN      NaN      0.505500
17   8.5  simulation      0.0  1.0      NaN      NaN      0.502615
18   9.0  simulation      0.0  1.0      NaN      NaN      0.499902
19   9.5  simulation      0.0  1.0      NaN      NaN      0.497350
20  10.0  simulation      0.0  1.0      NaN      NaN      0.494949

      observable_x2  observable_x3  observable_x1_scaled  \
0          0.400000      0.700000      0.200000
1          0.684679      0.191491      1.078734
2          0.733287      0.096424      1.160145

```

(continues on next page)

(continued from previous page)

|    |          |          |          |
|----|----------|----------|----------|
| 3  | 0.730652 | 0.076076 | 1.140799 |
| 4  | 0.715836 | 0.069694 | 1.121069 |
| 5  | 0.698751 | 0.066301 | 1.106112 |
| 6  | 0.681963 | 0.063733 | 1.093741 |
| 7  | 0.666109 | 0.061506 | 1.082720 |
| 8  | 0.651302 | 0.059495 | 1.072561 |
| 9  | 0.637515 | 0.057653 | 1.063076 |
| 10 | 0.624681 | 0.055960 | 1.054183 |
| 11 | 0.612733 | 0.054400 | 1.045829 |
| 12 | 0.601603 | 0.052960 | 1.037978 |
| 13 | 0.591229 | 0.051629 | 1.030598 |
| 14 | 0.581555 | 0.050399 | 1.023660 |
| 15 | 0.572529 | 0.049259 | 1.017136 |
| 16 | 0.564103 | 0.048203 | 1.011000 |
| 17 | 0.556234 | 0.047224 | 1.005231 |
| 18 | 0.548881 | 0.046315 | 0.999804 |
| 19 | 0.542008 | 0.045471 | 0.994700 |
| 20 | 0.535581 | 0.044686 | 0.989898 |

|    | observable_x2_offsetted | observable_x1withsigma | observable_x1_std \ |
|----|-------------------------|------------------------|---------------------|
| 0  | 3.400000                | 0.100000               | 1.0                 |
| 1  | 3.684679                | 0.539367               | 1.0                 |
| 2  | 3.733287                | 0.580072               | 1.0                 |
| 3  | 3.730652                | 0.570399               | 1.0                 |
| 4  | 3.715836                | 0.560535               | 1.0                 |
| 5  | 3.698751                | 0.553056               | 1.0                 |
| 6  | 3.681963                | 0.546871               | 1.0                 |
| 7  | 3.666109                | 0.541360               | 1.0                 |
| 8  | 3.651302                | 0.536280               | 1.0                 |
| 9  | 3.637515                | 0.531538               | 1.0                 |
| 10 | 3.624681                | 0.527091               | 1.0                 |
| 11 | 3.612733                | 0.522914               | 1.0                 |
| 12 | 3.601603                | 0.518989               | 1.0                 |
| 13 | 3.591229                | 0.515299               | 1.0                 |
| 14 | 3.581555                | 0.511830               | 1.0                 |
| 15 | 3.572529                | 0.508568               | 1.0                 |
| 16 | 3.564103                | 0.505500               | 1.0                 |
| 17 | 3.556234                | 0.502615               | 1.0                 |
| 18 | 3.548881                | 0.499902               | 1.0                 |
| 19 | 3.542008                | 0.497350               | 1.0                 |
| 20 | 3.535581                | 0.494949               | 1.0                 |

|   | observable_x2_std | observable_x3_std | observable_x1_scaled_std \ |
|---|-------------------|-------------------|----------------------------|
| 0 | 1.0               | 1.0               | 1.0                        |
| 1 | 1.0               | 1.0               | 1.0                        |
| 2 | 1.0               | 1.0               | 1.0                        |
| 3 | 1.0               | 1.0               | 1.0                        |
| 4 | 1.0               | 1.0               | 1.0                        |
| 5 | 1.0               | 1.0               | 1.0                        |
| 6 | 1.0               | 1.0               | 1.0                        |
| 7 | 1.0               | 1.0               | 1.0                        |
| 8 | 1.0               | 1.0               | 1.0                        |

(continues on next page)



(continued from previous page)

|    |     |     |     |
|----|-----|-----|-----|
| 9  | 1.0 | 1.0 | 1.0 |
| 10 | 1.0 | 1.0 | 1.0 |
| 11 | 1.0 | 1.0 | 1.0 |
| 12 | 1.0 | 1.0 | 1.0 |
| 13 | 1.0 | 1.0 | 1.0 |
| 14 | 1.0 | 1.0 | 1.0 |
| 15 | 1.0 | 1.0 | 1.0 |
| 16 | 1.0 | 1.0 | 1.0 |
| 17 | 1.0 | 1.0 | 1.0 |
| 18 | 1.0 | 1.0 | 1.0 |
| 19 | 1.0 | 1.0 | 1.0 |
| 20 | 1.0 | 1.0 | 1.0 |

|    | observable_x2_offsetted_std | observable_x1withsigma_std |
|----|-----------------------------|----------------------------|
| 0  | 1.0                         | 0.1                        |
| 1  | 1.0                         | 0.1                        |
| 2  | 1.0                         | 0.1                        |
| 3  | 1.0                         | 0.1                        |
| 4  | 1.0                         | 0.1                        |
| 5  | 1.0                         | 0.1                        |
| 6  | 1.0                         | 0.1                        |
| 7  | 1.0                         | 0.1                        |
| 8  | 1.0                         | 0.1                        |
| 9  | 1.0                         | 0.1                        |
| 10 | 1.0                         | 0.1                        |
| 11 | 1.0                         | 0.1                        |
| 12 | 1.0                         | 0.1                        |
| 13 | 1.0                         | 0.1                        |
| 14 | 1.0                         | 0.1                        |
| 15 | 1.0                         | 0.1                        |
| 16 | 1.0                         | 0.1                        |
| 17 | 1.0                         | 0.1                        |
| 18 | 1.0                         | 0.1                        |
| 19 | 1.0                         | 0.1                        |
| 20 | 1.0                         | 0.1                        |

```
[28]: # look at the States in rdata as DataFrame
      amici.getSimulationStatesAsDataFrame(model, [edata], [rdata])
```

```
[28]:
```

|    | time | t_presim | k0  | k0_preeq | k0_presim | x1       | x2       | x3       |
|----|------|----------|-----|----------|-----------|----------|----------|----------|
| 0  | 0.0  | 0.0      | 1.0 | NaN      | NaN       | 0.100000 | 0.400000 | 0.700000 |
| 1  | 0.5  | 0.0      | 1.0 | NaN      | NaN       | 0.539367 | 0.684679 | 0.191491 |
| 2  | 1.0  | 0.0      | 1.0 | NaN      | NaN       | 0.580072 | 0.733287 | 0.096424 |
| 3  | 1.5  | 0.0      | 1.0 | NaN      | NaN       | 0.570399 | 0.730652 | 0.076076 |
| 4  | 2.0  | 0.0      | 1.0 | NaN      | NaN       | 0.560535 | 0.715836 | 0.069694 |
| 5  | 2.5  | 0.0      | 1.0 | NaN      | NaN       | 0.553056 | 0.698751 | 0.066301 |
| 6  | 3.0  | 0.0      | 1.0 | NaN      | NaN       | 0.546871 | 0.681963 | 0.063733 |
| 7  | 3.5  | 0.0      | 1.0 | NaN      | NaN       | 0.541360 | 0.666109 | 0.061506 |
| 8  | 4.0  | 0.0      | 1.0 | NaN      | NaN       | 0.536280 | 0.651302 | 0.059495 |
| 9  | 4.5  | 0.0      | 1.0 | NaN      | NaN       | 0.531538 | 0.637515 | 0.057653 |
| 10 | 5.0  | 0.0      | 1.0 | NaN      | NaN       | 0.527091 | 0.624681 | 0.055960 |

(continues on next page)

(continued from previous page)

|    |      |     |     |     |     |          |          |          |
|----|------|-----|-----|-----|-----|----------|----------|----------|
| 11 | 5.5  | 0.0 | 1.0 | NaN | NaN | 0.522914 | 0.612733 | 0.054400 |
| 12 | 6.0  | 0.0 | 1.0 | NaN | NaN | 0.518989 | 0.601603 | 0.052960 |
| 13 | 6.5  | 0.0 | 1.0 | NaN | NaN | 0.515299 | 0.591229 | 0.051629 |
| 14 | 7.0  | 0.0 | 1.0 | NaN | NaN | 0.511830 | 0.581555 | 0.050399 |
| 15 | 7.5  | 0.0 | 1.0 | NaN | NaN | 0.508568 | 0.572529 | 0.049259 |
| 16 | 8.0  | 0.0 | 1.0 | NaN | NaN | 0.505500 | 0.564103 | 0.048203 |
| 17 | 8.5  | 0.0 | 1.0 | NaN | NaN | 0.502615 | 0.556234 | 0.047224 |
| 18 | 9.0  | 0.0 | 1.0 | NaN | NaN | 0.499902 | 0.548881 | 0.046315 |
| 19 | 9.5  | 0.0 | 1.0 | NaN | NaN | 0.497350 | 0.542008 | 0.045471 |
| 20 | 10.0 | 0.0 | 1.0 | NaN | NaN | 0.494949 | 0.535581 | 0.044686 |

## Using PETab

This notebook illustrates how to use [PETab](#) with AMICI.

```
[1]: from amici.petab_import import import_petab_problem
from amici.petab_objective import simulate_petab
import petab

import os
```

We use an example model from the [benchmark collection](#):

```
[2]: !git clone --depth 1 https://github.com/Benchmarking-Initiative/Benchmark-Models-PETab.
git tmp/benchmark-models || (cd tmp/benchmark-models && git pull)
```

```
Cloning into 'tmp/benchmark-models'...
remote: Enumerating objects: 142, done.
remote: Counting objects: 100% (142/142), done.
remote: Compressing objects: 100% (122/122), done.
remote: Total 142 (delta 41), reused 104 (delta 18), pack-reused 0
Receiving objects: 100% (142/142), 648.29 KiB | 1.23 MiB/s, done.
Resolving deltas: 100% (41/41), done.
```

```
[3]: folder_base = "tmp/benchmark-models/Benchmark-Models/"
!ls -l $folder_base
```

```
total 68
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Alkan_SciSignal2018
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Beer_MolBioSystems2014
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Boehm_JProteomeRes2014
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Borghans_BiophysChem1997
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Brannmark_JBC2010
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Bruno_JExpBio2016
-rwxr-xr-x 1 yannik yannik  654 Mär 17 15:27 checkBenchmarkModels.py
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Chen_MSB2009
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Crauste_CellSystems2017
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Elowitz_Nature2000
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Fiedler_BMC2016
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Fujita_SciSignal2010
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Perelson_Science1996
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Rahman_MBS2016
```

(continues on next page)

(continued from previous page)

```
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Sneyd_PNAS2002
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Weber_BMC2015
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Zheng_PNAS2012
```

We import a model to PETab from a provided yaml file:

```
[4]: model_name = "Boehm_JProteomeRes2014"
      yaml_file = os.path.join(folder_base, model_name, model_name + ".yaml")
      petab_problem = petab.Problem.from_yaml(yaml_file)
```

Next, we import the model to amici, compile it and obtain a function handle:

```
[5]: amici_model = import_petab_problem(petab_problem)

2020-03-17 15:27:27.586 - amici.petab_import - INFO - Importing model ...
2020-03-17 15:27:27.593 - amici.petab_import - INFO - Model name is 'Boehm_
↳ JProteomeRes2014'. Writing model code to '/home/yannik/amici/python/examples/amici_
↳ models/Boehm_JProteomeRes2014'.
2020-03-17 15:27:27.598 - amici.petab_import - INFO - Species: 8
2020-03-17 15:27:27.599 - amici.petab_import - INFO - Global parameters: 9
2020-03-17 15:27:27.599 - amici.petab_import - INFO - Reactions: 9
2020-03-17 15:27:27.715 - amici.petab_import - INFO - Observables: 3
2020-03-17 15:27:27.715 - amici.petab_import - INFO - Sigmas: 3
2020-03-17 15:27:27.722 - amici.petab_import - DEBUG - Adding output parameters to model:
↳ OrderedDict([('noiseParameter1_pSTAT5A_rel', None), ('noiseParameter1_pSTAT5B_rel',
↳ None), ('noiseParameter1_rSTAT5A_rel', None)])
2020-03-17 15:27:27.725 - amici.petab_import - DEBUG - Condition table: (1, 1)
2020-03-17 15:27:27.726 - amici.petab_import - DEBUG - Fixed parameters are []
2020-03-17 15:27:27.728 - amici.petab_import - INFO - Overall fixed parameters: 0
2020-03-17 15:27:27.729 - amici.petab_import - INFO - Variable parameters: 12
2020-03-17 15:27:27.735 - amici.sbml_import - INFO - Finished processing SBML parameters
↳ (1.25E-03s)
2020-03-17 15:27:27.749 - amici.sbml_import - INFO - Finished processing SBML species
↳ (1.26E-02s)
2020-03-17 15:27:27.829 - amici.sbml_import - INFO - Finished processing SBML reactions
↳ (7.41E-02s)
2020-03-17 15:27:27.833 - amici.sbml_import - INFO - Finished processing SBML
↳ compartments (4.23E-04s)
2020-03-17 15:27:27.898 - amici.sbml_import - INFO - Finished processing SBML rules
↳ (6.47E-02s)
2020-03-17 15:27:28.012 - amici.sbml_import - INFO - Finished processing SBML
↳ observables (6.77E-02s)
2020-03-17 15:27:28.139 - amici.ode_export - INFO - Finished writing J.cpp
↳ (1.14E-01s)
2020-03-17 15:27:28.160 - amici.ode_export - INFO - Finished writing JB.cpp
↳ (2.04E-02s)
2020-03-17 15:27:28.167 - amici.ode_export - INFO - Finished writing JDiag.cpp
↳ (6.41E-03s)
2020-03-17 15:27:28.187 - amici.ode_export - INFO - Finished writing JSparse.cpp
↳ (1.91E-02s)
2020-03-17 15:27:28.217 - amici.ode_export - INFO - Finished writing JSparseB.cpp
↳ (2.73E-02s)
2020-03-17 15:27:28.236 - amici.ode_export - INFO - Finished writing Jy.cpp
↳ (1.65E-02s)
```

(continues on next page)

(continued from previous page)

```

2020-03-17 15:27:28.344 - amici.ode_export - INFO - Finished writing dJydsigmay.cpp
↳ (1.07E-01s)
2020-03-17 15:27:28.389 - amici.ode_export - INFO - Finished writing dJydy.cpp
↳ (3.99E-02s)
2020-03-17 15:27:28.466 - amici.ode_export - INFO - Finished writing dwdp.cpp
↳ (7.61E-02s)
2020-03-17 15:27:28.473 - amici.ode_export - INFO - Finished writing dwdx.cpp
↳ (5.87E-03s)
2020-03-17 15:27:28.497 - amici.ode_export - INFO - Finished writing dxdotdw.cpp
↳ (2.32E-02s)
2020-03-17 15:27:28.533 - amici.ode_export - INFO - Finished writing dxdotdp_explicit.
↳ cpp (3.38E-02s)
2020-03-17 15:27:28.756 - amici.ode_export - INFO - Finished writing dydx.cpp
↳ (1.98E-01s)
2020-03-17 15:27:28.910 - amici.ode_export - INFO - Finished writing dydp.cpp
↳ (1.53E-01s)
2020-03-17 15:27:28.926 - amici.ode_export - INFO - Finished writing dsigmaydp.cpp
↳ (1.40E-02s)
2020-03-17 15:27:28.931 - amici.ode_export - INFO - Finished writing sigmay.cpp
↳ (2.46E-03s)
2020-03-17 15:27:28.950 - amici.ode_export - INFO - Finished writing w.cpp
↳ (1.55E-02s)
2020-03-17 15:27:28.967 - amici.ode_export - INFO - Finished writing x0.cpp
↳ (1.57E-02s)
2020-03-17 15:27:28.975 - amici.ode_export - INFO - Finished writing x0_fixedParameters.
↳ cpp (4.78E-03s)
2020-03-17 15:27:29.027 - amici.ode_export - INFO - Finished writing sx0.cpp
↳ (5.01E-02s)
2020-03-17 15:27:29.069 - amici.ode_export - INFO - Finished writing sx0_fixedParameters.
↳ cpp (3.14E-02s)
2020-03-17 15:27:29.104 - amici.ode_export - INFO - Finished writing xdot.cpp
↳ (3.43E-02s)
2020-03-17 15:27:29.129 - amici.ode_export - INFO - Finished writing y.cpp
↳ (2.16E-02s)
2020-03-17 15:27:29.136 - amici.ode_export - INFO - Finished writing x_rdata.cpp
↳ (4.95E-03s)
2020-03-17 15:27:29.138 - amici.ode_export - INFO - Finished writing total_cl.cpp
↳ (6.59E-04s)
2020-03-17 15:27:29.147 - amici.ode_export - INFO - Finished writing x_solver.cpp
↳ (7.72E-03s)
2020-03-17 15:27:29.166 - amici.ode_export - INFO - Finished generating cpp code
↳ (1.14E+00s)
2020-03-17 15:27:46.200 - amici.ode_export - INFO - Finished compiling cpp code
↳ (1.70E+01s)
2020-03-17 15:27:46.204 - amici.petab_import - INFO - Finished Importing PETab model
↳ (1.86E+01s)
2020-03-17 15:27:46.209 - amici.petab_import - INFO - Successfully loaded model Boehm_
↳ JProteomeRes2014 from /home/yannik/amici/python/examples/amici_models/Boehm_
↳ JProteomeRes2014.

```

```

running build_ext
building 'Boehm_JProteomeRes2014._Boehm_JProteomeRes2014' extension

```

(continues on next page)

(continued from previous page)

```

swigging swig/Boehm_JProteomeRes2014.i to swig/Boehm_JProteomeRes2014_wrap.cpp
swig -python -c++ -modern -outdir Boehm_JProteomeRes2014 -I/home/yannik/amici/python/
↳ sdist/amici/swig -I/home/yannik/amici/python/sdist/amici/include -o swig/Boehm_
↳ JProteomeRes2014_wrap.cpp swig/Boehm_JProteomeRes2014.i
creating build
creating build/temp.linux-x86_64-3.7
creating build/temp.linux-x86_64-3.7/swig
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c swig/Boehm_JProteomeRes2014_wrap.cpp -o build/temp.linux-x86_64-
↳ 3.7/swig/Boehm_JProteomeRes2014_wrap.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdw.cpp -o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_dxdotdw.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_total_cl.cpp -o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_total_cl.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_x_rdata.cpp -o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_x_rdata.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdp_implicit_colptrs.cpp -o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_implicit_colptrs.o -std=c++14

```

(continued from previous page)

```

cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dsigmaydp.cpp -o build/temp.linux-x86_64-
↳ 3.7/Boehm_JProteomeRes2014_dsigmaydp.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_y.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_y.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dydp.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dydp.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_w.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_w.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JSparseB_rowvals.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_JSparseB_rowvals.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++

```

(continues on next page)



(continued from previous page)

```

gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdw_rowvals.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_dxdotdw_rowvals.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dwdx_rowvals.cpp -o build/temp.linux-x86_
↳ 64-3.7/Boehm_JProteomeRes2014_dwdx_rowvals.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_x0.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_x0.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dwdx.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dwdx.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dJydy_colptrs.cpp -o build/temp.linux-x86_
↳ 64-3.7/Boehm_JProteomeRes2014_dJydy_colptrs.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JSparseB.cpp -o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_JSparseB.o -std=c++14

```

(continued from previous page)

```

cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JSparseB_colptrs.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_JSparseB_colptrs.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdp_explicit_colptrs.cpp -o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_explicit_colptrs.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_sx0_fixedParameters.cpp -o build/temp.
↳ linux-x86_64-3.7/Boehm_JProteomeRes2014_sx0_fixedParameters.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JSparse_rowvals.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_JSparse_rowvals.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdp_explicit.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_explicit.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++

```

(continues on next page)



(continued from previous page)

```

gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dJydy.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dJydy.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dwdp_colptrs.cpp -o build/temp.linux-x86_
↳ 64-3.7/Boehm_JProteomeRes2014_dwdp_colptrs.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_x0_fixedParameters.cpp -o build/temp.
↳ linux-x86_64-3.7/Boehm_JProteomeRes2014_x0_fixedParameters.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdw_colptrs.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_dxdotdw_colptrs.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dJydsigmay.cpp -o build/temp.linux-x86_64-
↳ 3.7/Boehm_JProteomeRes2014_dJydsigmay.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdp_implicit_rowvals.cpp -o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_implicit_rowvals.o -std=c++14

```

(continued from previous page)

```

cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dwdp.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dwdp.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_sx0.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_sx0.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JB.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_JB.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dwdx_colptrs.cpp -o build/temp.linux-x86_
↳ 64-3.7/Boehm_JProteomeRes2014_dwdx_colptrs.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c wrapfunctions.cpp -o build/temp.linux-x86_64-3.7/wrapfunctions.o
↳ -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++

```

(continues on next page)

(continued from previous page)

```

gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_x_solver.cpp -o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_x_solver.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JSparse.cpp -o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_JSparse.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_xdot.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_xdot.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dJdy_rowvals.cpp -o build/temp.linux-x86_
↳ 64-3.7/Boehm_JProteomeRes2014_dJdy_rowvals.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dwdp_rowvals.cpp -o build/temp.linux-x86_
↳ 64-3.7/Boehm_JProteomeRes2014_dwdp_rowvals.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JSparse_colptrs.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_JSparse_colptrs.o -std=c++14

```

(continued from previous page)

```

cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_J.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_J.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dydx.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dydx.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JDiag.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_JDiag.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_Jy.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_Jy.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_sigmay.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_sigmay.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++

```

(continues on next page)



(continued from previous page)

```

gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdp_explicit_rowvals.cpp -o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_explicit_rowvals.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
g++ -pthread -shared -B /home/yannik/anaconda3/compiler_compat -L/home/yannik/anaconda3/
↳ lib -Wl,-rpath=/home/yannik/anaconda3/lib -Wl,--no-as-needed -Wl,--sysroot=/ build/
↳ temp.linux-x86_64-3.7/swig/Boehm_JProteomeRes2014_wrap.o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dxdotdw.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_
↳ total_cl.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_x_rdata.o build/temp.
↳ linux-x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_implicit_colptrs.o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_dsigmaydp.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_y.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dydp.o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_w.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_JSparseB_rowvals.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_
↳ dxdotdw_rowvals.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dwdx_rowvals.o
↳ build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_x0.o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dwdx.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dJydy_
↳ colptrs.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_JSparseB.o build/temp.
↳ linux-x86_64-3.7/Boehm_JProteomeRes2014_JSparseB_colptrs.o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dxdotdp_explicit_colptrs.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_sx0_fixedParameters.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_JSparse_rowvals.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_
↳ dxdotdp_explicit.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dJydy.o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dwdp_colptrs.o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_x0_fixedParameters.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_dxdotdw_colptrs.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_
↳ dJydsigmay.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_implicit_
↳ rowvals.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dwdp.o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_sx0.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_JB.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dwdx_colptrs.
↳ o build/temp.linux-x86_64-3.7/wrapfunctions.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_x_solver.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_JSparse.
↳ o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_xdot.o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_dJydy_rowvals.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_dwdp_rowvals.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_
↳ JSparse_colptrs.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_J.o build/temp.
↳ linux-x86_64-3.7/Boehm_JProteomeRes2014_dydx.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_JDiag.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_Jy.o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_sigmay.o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dxdotdp_explicit_rowvals.o -L/usr/lib/x86_64-linux-gnu/hdf5/
↳ serial -L/home/yannik/amici/python/sdist/amici/libs -lamici -lsundials -lsuitesparse -
↳ lcbblas -lhdf5_hl_cpp -lhdf5_hl -lhdf5_cpp -lhdf5 -o /home/yannik/amici/python/examples/
↳ amici_models/Boehm_JProteomeRes2014/Boehm_JProteomeRes2014/_Boehm_JProteomeRes2014.
↳ cpython-37m-x86_64-linux-gnu.so

```

That's it. Now, we can use the model to perform simulations. For more involved purposes, consider using the objective

function provided by `pyPESTO`. For simple simulations, a function `simulate_petab` is available:

```
[6]: simulate_petab(petab_problem, amici_model)
[6]: {'llh': -138.22199570334107,
      'sllh': None,
      'rdatas': [<amici.numpy.ReturnDataView at 0x7f030e1a0fd0>]}
```

This performs a simulation at the nominal parameters. Parameters can also be directly specified, both scaled and unscaled:

```
[7]: parameters = {
      x_id: x_val for x_id, x_val in
      zip(petab_problem.x_ids, petab_problem.x_nominal_scaled)
    }
    simulate_petab(petab_problem, amici_model, problem_parameters=parameters, scaled_
    ↪ parameters=True)
[7]: {'llh': -138.22199570334107,
      'sllh': None,
      'rdatas': [<amici.numpy.ReturnDataView at 0x7f030e198590>]}
```

For further information, see the [documentation](#).

### AMICI Python example “Experimental Conditions”

In this example we will explore some more options for the initialization of experimental conditions, including how to reset initial conditions based on changing values for `fixedParameters` as well as an additional presimulation phase on top of preequilibration. This notebook is expected to run from the `python/example_presimulation` directory.

```
[1]: # SBML model we want to import
      sbml_file = 'model_presimulation.xml'
      # Name of the model that will also be the name of the python module
      model_name = 'model_presimulation'
      # Directory to which the generated model code is written
      model_output_dir = model_name

      import libsbml
      import amici
      import amici.plotting
      import os
      import sys
      import importlib
      import numpy as np
      import pandas as pd
      import matplotlib.pyplot as plt
      from pprint import pprint
```

## Model Loading

Here we load a simple model of protein phosphorylation that can be inhibited by a drug. This model was created using PySB (see `createModel.py`)

```
[2]: sbml_reader = libsbml.SBMLReader()
sbml_doc = sbml_reader.readSBML(sbml_file)
sbml_model = sbml_doc.getModel()

print('Species:')
pprint([(s.getId(),s.getName()) for s in sbml_model.getListOfSpecies()])

print('\nReactions:')
for reaction in sbml_model.getListOfReactions():
    reactants = ' + '.join(['%s %s'%(int(r.getStoichiometry()) if r.getStoichiometry() > 1
→1 else '', r.getSpecies()) for r in reaction.getListOfReactants()])
    products = ' + '.join(['%s %s'%(int(r.getStoichiometry()) if r.getStoichiometry() > 1
→1 else '', r.getSpecies()) for r in reaction.getListOfProducts()])
    reversible = '<' if reaction.getReversible() else ''
    print('%3s: %10s %1s->%10s\t\t[%s]' % (reaction.getName(),
        reactants,
        reversible,
        products,
        libsbml.formulaToL3String(reaction.getKineticLaw().getMath()))

print('Parameters:')
pprint([(p.getId(),p.getName()) for p in sbml_model.getListOfParameters()])

Species:
[('__s0', "PROT(kin=None, drug=None, phospho='u')"),
 ('__s1', 'DRUG(bound=None)'),
 ('__s2', 'KIN(bound=None)'),
 ('__s3', "DRUG(bound=1) ._br_PROT(kin=None, drug=1, phospho='u')"),
 ('__s4', "KIN(bound=1) ._br_PROT(kin=1, drug=None, phospho='u')"),
 ('__s5', "PROT(kin=None, drug=None, phospho='p')")]

Reactions:
PROT_DRUG_bind: __s0 + __s1 <-> __s3          [-(koff_prot_drug * __s3) + kon_
→prot_drug * __s0 * __s1]
PROT_KIN_bind: __s0 + __s2 -> __s4             [kon_prot_kin * __s0 * __s2]
PROT_KIN_phospho: __s4 -> __s2 + __s5          [kphospho_prot_kin * __s4]
PROT_dephospho: __s5 -> __s0                  [kdephospho_prot * __s5]

Parameters:
[('initProt', 'initProt'),
 ('initDrug', 'initDrug'),
 ('initKin', 'initKin'),
 ('pPROT_obs', 'pPROT_obs'),
 ('PROT_0', 'PROT_0'),
 ('DRUG_0', 'DRUG_0'),
 ('KIN_0', 'KIN_0'),
 ('kon_prot_drug', 'kon_prot_drug'),
 ('koff_prot_drug', 'koff_prot_drug'),
 ('kon_prot_kin', 'kon_prot_kin'),
 ('kphospho_prot_kin', 'kphospho_prot_kin'),
```

(continues on next page)

(continued from previous page)

```
( 'kdephospho_prot', 'kdephospho_prot'),
( '__obs0', 'pPROT'),
( '__obs1', 'tPROT')]
```

```
[3]: # Create an SbmlImporter instance for our SBML model
sbml_importer = amici.SbmlImporter(sbml_file)
```

For this example we want specify the initial drug and kinase concentrations as experimental conditions. Accordingly we specify them as `fixedParameters`. The meaning of `fixedParameters` is defined in the [Glossary](https://amici.readthedocs.io/en/latest/glossary.html#term-fixed-parameters), which we display here for convenience.

```
[4]: from IPython.display import IFrame
IFrame('https://amici.readthedocs.io/en/latest/glossary.html#term-fixed-parameters',
      ↪width=600, height=175)
```

```
[4]: <IPython.lib.display.IFrame at 0x10ce15b50>
```

```
[5]: fixedParameters = ['DRUG_0', 'KIN_0']
```

The SBML model specifies a single observable named `pPROT` which describes the fraction of phosphorylated Protein. We load this observable using `amici.assignmentRules2observables`.

```
[6]: # Retrieve model output names and formulae from AssignmentRules and remove the
      ↪respective rules
observables = amici.assignmentRules2observables(
    sbml_importer.sbml, # the libsbml model object
    filter_function=lambda variable: variable.getName() == 'pPROT'
)
print('Observables:')
pprint(observables)
```

```
Observables:
{'__obs0': {'formula': '__s5', 'name': 'pPROT'}}
```

Now the model is ready for compilation using `sbml2amici`. Note that we here pass `fixedParameters` as arguments to `constant_parameters`, which ensures that `amici` is aware that we want to have them as `fixedParameters`:

```
[7]: sbml_importer.sbml2amici(model_name,
                             model_output_dir,
                             verbose=False,
                             observables=observables,
                             constant_parameters=fixedParameters)
# load the generated module
model_module = amici.import_model_module(model_name, model_output_dir)
```

To simulate the model we need to create an instance via the `getModel()` method in the generated model module.


```
[8]: # Create Model instance
model = model_module.getModel()

# Create solver instance
solver = model.getSolver()
```




The only thing we need to simulate the model is a timepoint vector, which can be specified using the `setTimepoints` method. If we do not specify any additional options, the default values for `fixedParameters` and `parameters` that were specified in the SBML file will be used.

```
[9]: # Run simulation using default model parameters and solver options
model.setTimepoints(np.linspace(0, 60, 60))
rdata = amici.runAmiciSimulation(model, solver)
amici.plotting.plotObservableTrajectories(rdata)
```

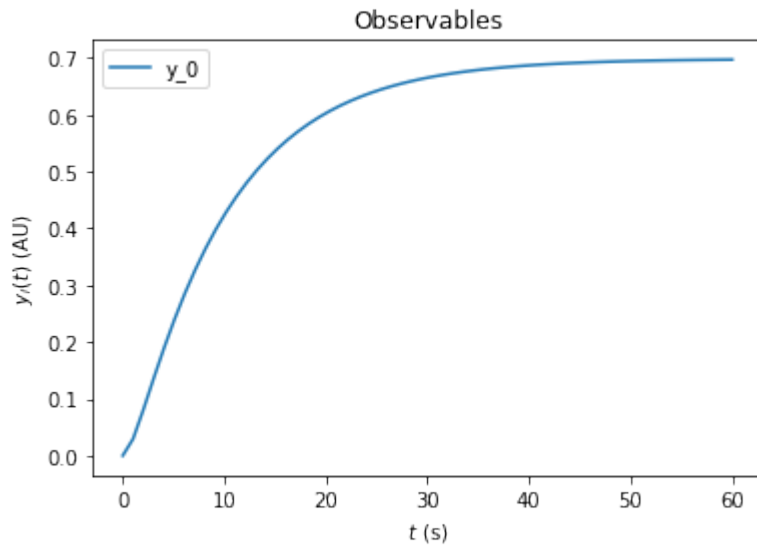


Simulation options can be specified either in the `Model` or in an `ExpData` instance. The `ExpData` instance can also carry experimental data. To initialize an `ExpData` instance from simulation results, amici offers some [convenient constructors](#). In the following we will initialize an `ExpData` object from simulation results, but add noise with standard deviation 0.1 and specify the standard deviation accordingly. Moreover, we will specify custom values for `DRUG_0=0` and `KIN_0=2`. If `fixedParameter` is specified in an `ExpData` instance, `runAmiciSimulation` will use those parameters instead of the ones specified in the `Model` instance.

```
[10]: edata = amici.ExpData(rdata, 0.1, 0.0)
edata.fixedParameters = [0,2]
rdata = amici.runAmiciSimulation(model, solver, edata)
amici.plotting.plotObservableTrajectories(rdata)
```

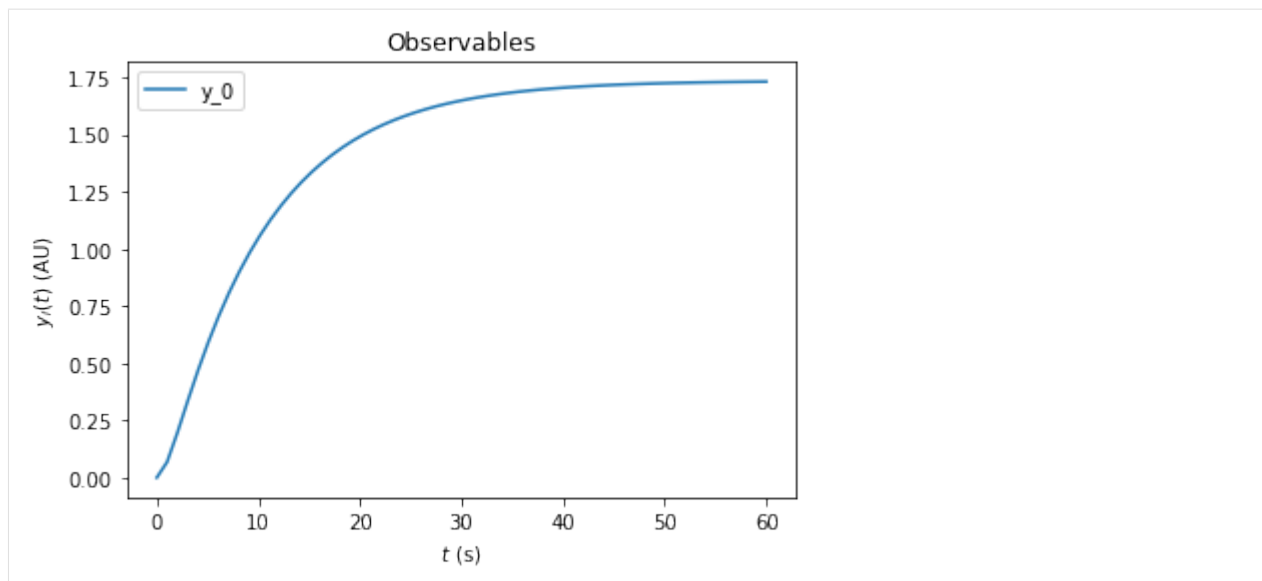

For many biological systems, it is reasonable to assume that they start in a steady state. In this example we want to specify an experiment where a pretreatment with a drug is performed *before* the kinase is added. We assume that the pretreatment is sufficiently long such that the system reaches steady state before the kinase is added. To implement this in amici, we can specify `fixedParametersPreequilibration` in the `ExpData` object. This automatically adds a preequilibration phase where the model is run to steady state, before regular simulation starts. Here we set `DRUG_0=3` and `KIN_0=0` for the preequilibration. This means that there is no kinase available in the preequilibration phase.

```
[11]: edata.fixedParametersPreequilibration = [3,0]
      rdata = amici.runAmiciSimulation(model, solver, edata)
      amici.plotting.plotObservableTrajectories(rdata)
```

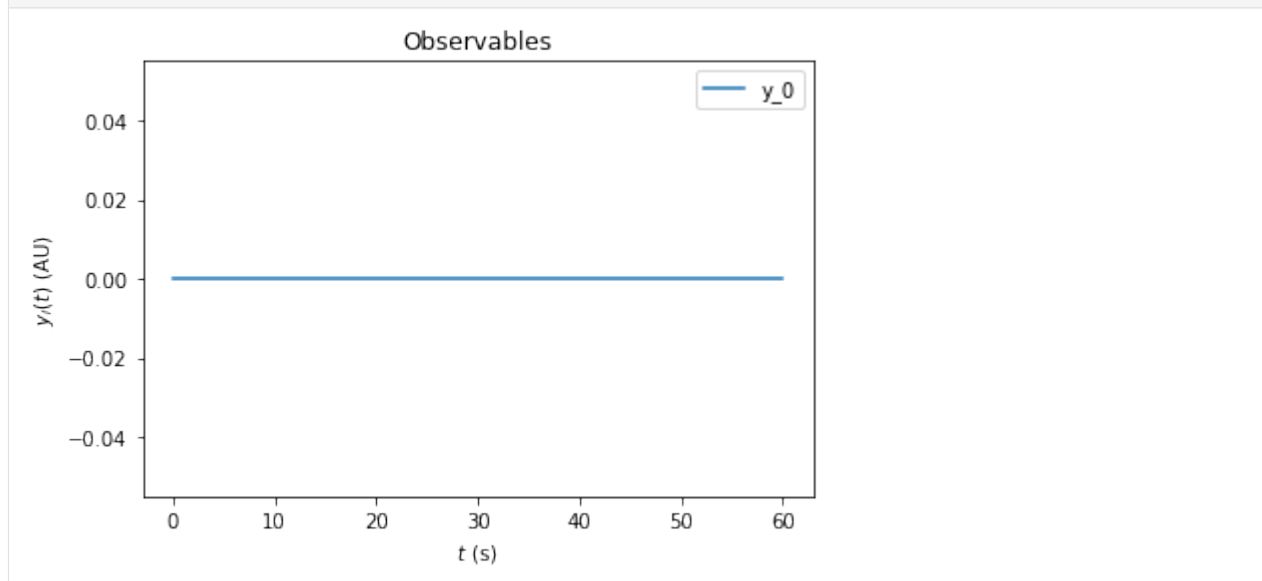


The resulting trajectory is definitely not what one may expect. The problem is that the `DRUG_0` and `KIN_0` set initial conditions for species in the model. By default these initial conditions are only applied at the very beginning of the simulation, i.e., before the preequilibration. Accordingly, the `fixedParameters` that we specified do not have any effect. To fix this, we need to set the `reinitializeFixedParameterInitialStates` attribute to `True`, to specify that AMICI reinitializes all states that have `fixedParameter`-dependent initial states.

```
[12]: edata.reinitializeFixedParameterInitialStates = True
```

With this option activated, the kinase concentration will be reinitialized after the preequilibration and we will see the expected change in fractional phosphorylation:


```
[13]: rdata = amici.runAmiciSimulation(model, solver, edata)
      amici.plotting.plotObservableTrajectories(rdata)
```

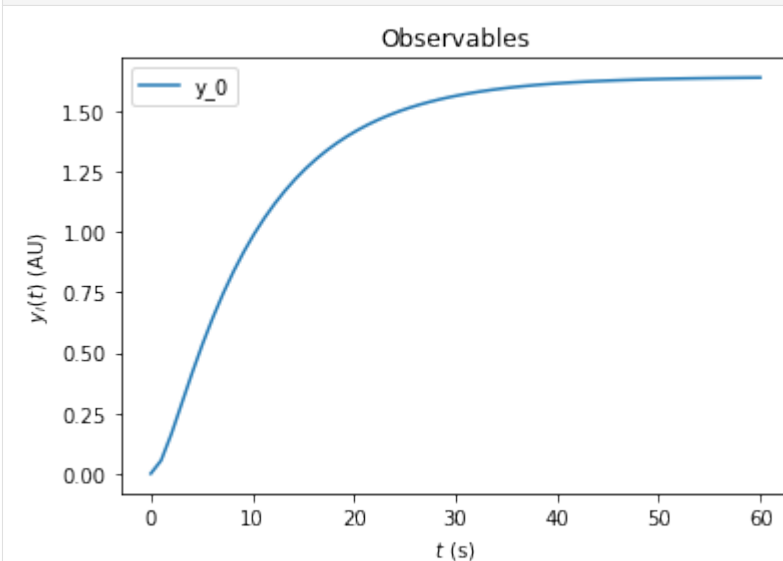

On top of preequilibration, we can also specify presimulation. This option can be used to specify pretreatments where the system is not assumed to reach steadystate. Presimulation can be activated by specifying `t_presim` and `edata.fixedParametersPresimulation`. If both `fixedParametersPresimulation` and `fixedParametersPreequilibration` are specified, preequilibration will be performed first, followed by presimulation, followed by regular simulation. For this example we specify `DRUG_0=10` and `KIN_0=0` for the presimulation and `DRUG_0=10` and `KIN_0=2` for the regular simulation. We do not overwrite the `DRUG_0=3` and `KIN_0=0` that was previously specified for preequilibration.

```
[14]: edata.t_presim = 10
      edata.fixedParametersPresimulation = [10.0, 0.0]
      edata.fixedParameters = [10.0, 2.0]
      print(edata.fixedParametersPreequilibration)
      print(edata.fixedParametersPresimulation)
      print(edata.fixedParameters)
      rdata = amici.runAmiciSimulation(model, solver, edata)
      amici.plotting.plotObservableTrajectories(rdata)
```

```
(3.0, 0.0)
(10.0, 0.0)
(10.0, 2.0)
```

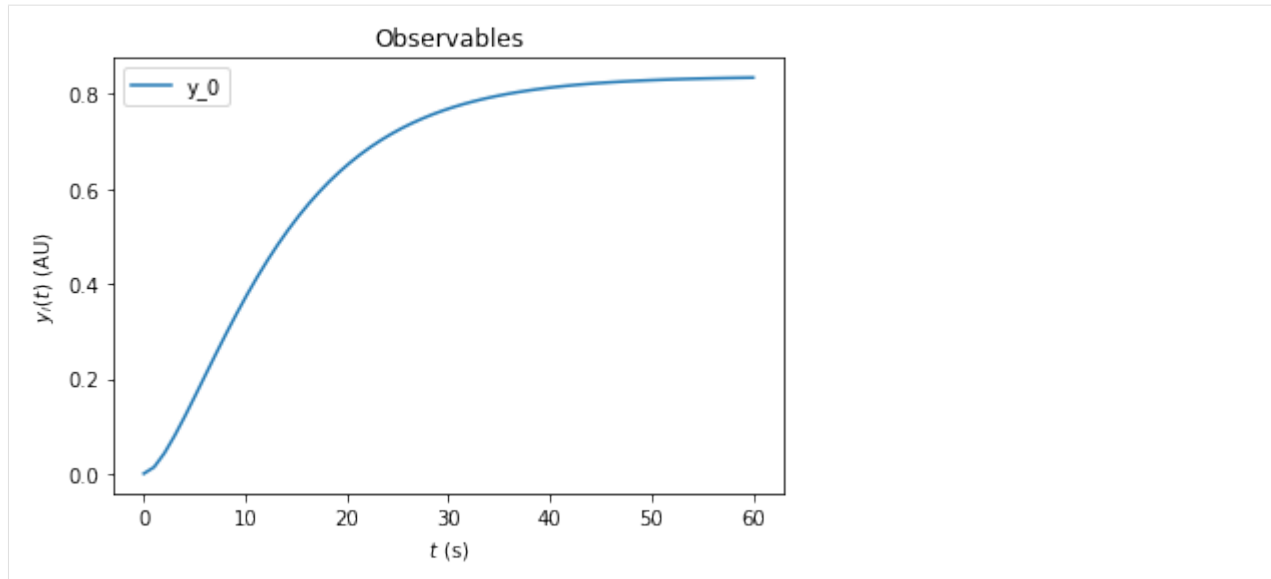

### AMICI documentation example of the steady state solver logic

This is an example to document the internal logic of the steady state solver, which is used in preequilibration and postequilibration.

#### Steady states of dynamical system

Not every dynamical system needs to run into a steady state. Instead, it may exhibit

- continuous growth, e.g.,

$$\dot{x} = x, \quad x_0 = 1$$

- a finite-time blow up, e.g.,

$$\dot{x} = x^2, \quad x_0 = 1$$

- oscillations, e.g.,

$$\ddot{x} = -x, \quad x_0 = 1$$

- chaotic behaviour, e.g., the Lorentz attractor

If the considered dynamical system has a steady state for positive times, then integrating the ODE long enough will equilibrate the system to this steady state. However, this may be computationally more demanding than other approaches and may fail, if the maximum number of integration steps is exceeded before reaching the steady state.

In general, Newton's method will find the steady state faster than forward simulation. However, it only converges if started close enough to the steady state. Moreover, it will not work, if the dynamical system has conserved quantities which were not removed prior to steady state computation: Conserved quantities will cause singularities in the Jacobian of the right hand side of the system, such that the linear problem within each step of Newton's method can not be solved.


## Logic of the steady state solver

If AMICI has to equilibrate a dynamical system, it can do this either via simulating until the right hand side of the system becomes small, or it can try to find the steady state directly by Newton's method. Amici decides automatically which approach is chosen and how forward or adjoint sensitivities are computed, if requested. However, the user can influence this behavior, if prior knowledge about the dynamical is available.

The logic which AMICI will follow to equilibrate the system works as follows:

```
[1]: from IPython.display import Image
fig = Image(filename='../documentation/gfx/steadystate_solver_workflow.png')
fig
```

[1]:

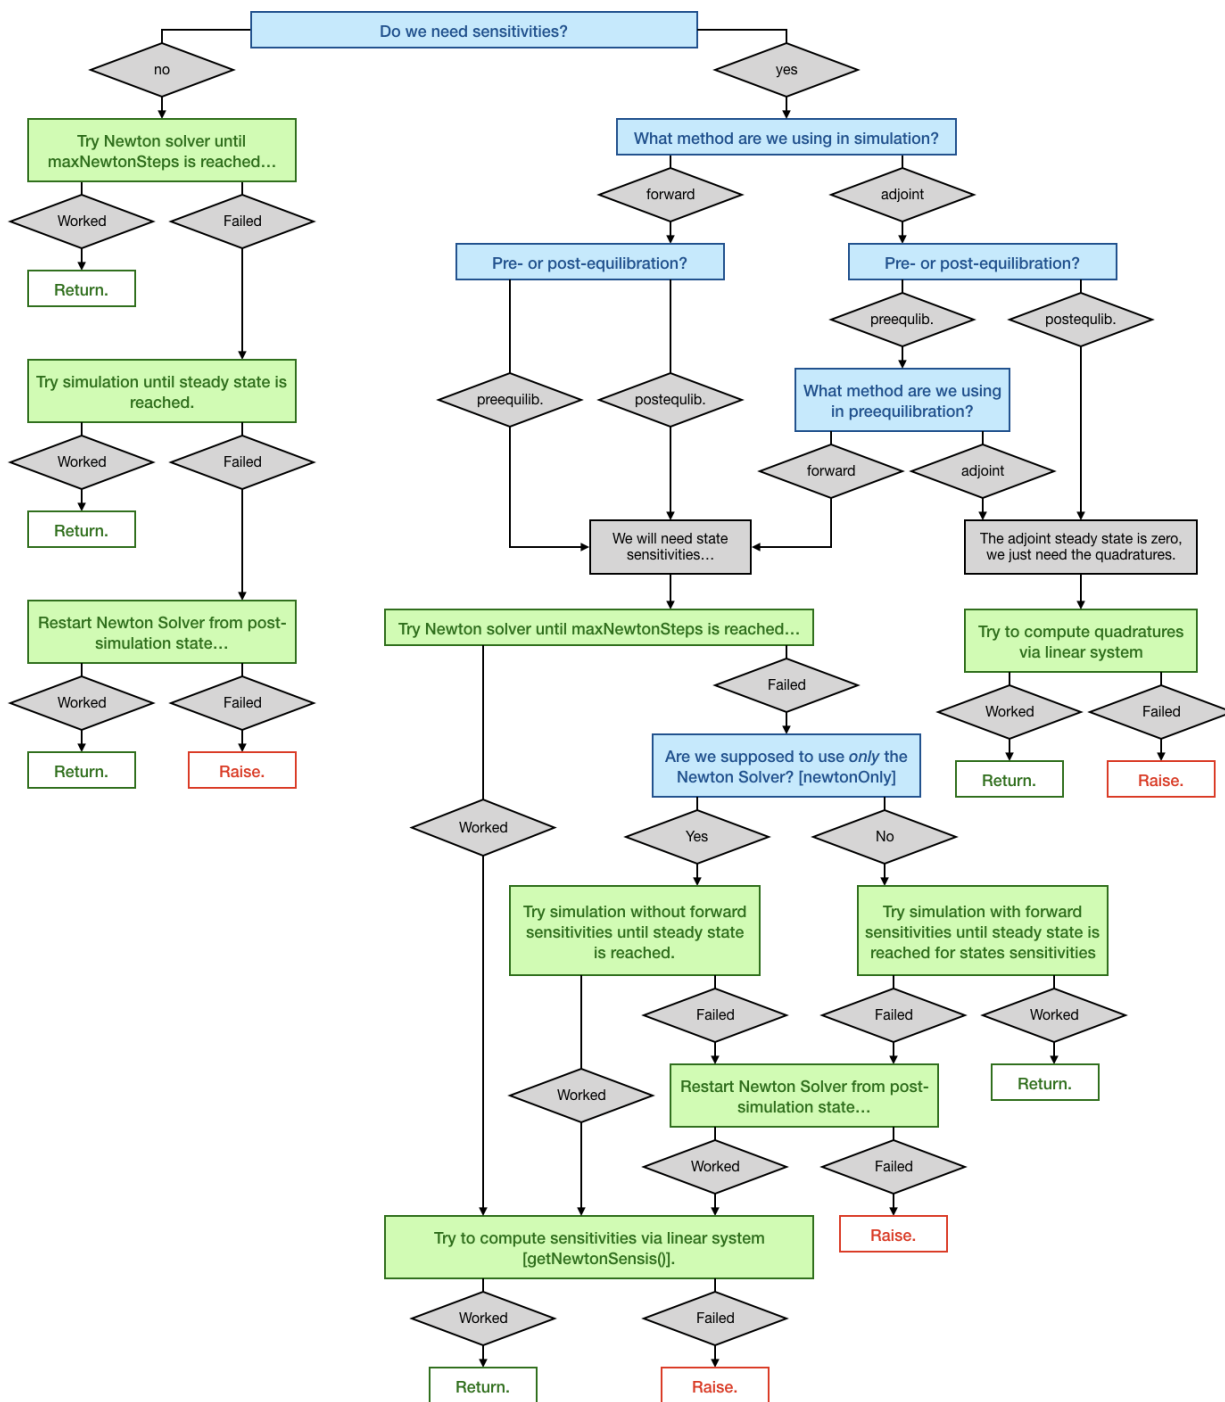

## The example model

We will use the example model `model_constant_species.xml`, which has conserved species. Those are automatically removed in the SBML import of AMICI, but they can also be kept in the model to demonstrate the failure of Newton's method due to a singular right hand side Jacobian.

```
[2]: import libsbml
import importlib
import amici
import os
import sys
import numpy as np
import matplotlib.pyplot as plt

# SBML model we want to import
sbml_file = 'model_constant_species.xml'

# Name of the models that will also be the name of the python module
model_name = 'model_constant_species'
model_reduced_name = model_name + '_reduced'

# Directories to which the generated model code is written
model_output_dir = model_name
model_reduced_output_dir = model_reduced_name

# Read the model and give some output
sbml_reader = libsbml.SBMLReader()
sbml_doc = sbml_reader.readSBML(sbml_file)
sbml_model = sbml_doc.getModel()
dir(sbml_doc)

print('Species: ', [s.getId() for s in sbml_model.getListOfSpecies()])

print('\nReactions:')
for reaction in sbml_model.getListOfReactions():
    reactants = ' + '.join(['%s %s'%(int(r.getStoichiometry()) if r.getStoichiometry() > 0
→1 else '', r.getSpecies()) for r in reaction.getListOfReactants()])
    products = ' + '.join(['%s %s'%(int(r.getStoichiometry()) if r.getStoichiometry() > 0
→1 else '', r.getSpecies()) for r in reaction.getListOfProducts()])
    reversible = '<' if reaction.getReversible() else ''
    print('%3s: %10s %1s->%10s\t\t[%s]' % (reaction.getId(),
        reactants,
        reversible,
        products,
        libsbml.formulaToL3String(reaction.getKineticLaw().getMath()))

Species:  ['substrate', 'enzyme', 'complex', 'product']

Reactions:
creation:          -> substrate          [compartment * (synthesis_substrate + k_
→create)]
binding: substrate + enzyme <-> complex          [compartment * (k_bind *
→substrate * enzyme - k_unbind * complex)]
conversion:        complex -> enzyme + product          [compartment * k_convert *
→complex]
```

(continues on next page)

(continued from previous page)

```
decay:      product  ->                [compartment * k_decay * product]
```

```
[3]: # Create an SbmlImporter instance for our SBML model
sbml_importer = amici.SbmlImporter(sbml_file)

# specify observables and constant parameters
constantParameters = ['synthesis_substrate', 'init_enzyme']
observables = {
    'observable_product': {'name': '', 'formula': 'product'},
    'observable_substrate': {'name': '', 'formula': 'substrate'},
}
sigmas = {'observable_product': 1.0, 'observable_substrate': 1.0}

# import the model
sbml_importer.sbml2amici(model_reduced_name,
                          model_reduced_output_dir,
                          observables=observables,
                          constant_parameters=constantParameters,
                          sigmas=sigmas)
sbml_importer.sbml2amici(model_name,
                          model_output_dir,
                          observables=observables,
                          constant_parameters=constantParameters,
                          sigmas=sigmas,
                          compute_conservation_laws=False)

[4]: # import the models and run some test simulations
model_reduced_module = amici.import_model_module(model_reduced_name, os.path.
↳ abspath(model_reduced_output_dir))
model_reduced = model_reduced_module.getModel()

model_module = amici.import_model_module(model_name, os.path.abspath(model_output_dir))
model = model_module.getModel()


# simulate model with conservation laws
model_reduced.setTimepoints(np.linspace(0, 2, 100))
solver_reduced = model_reduced.getSolver()
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced)


# simulate model without conservation laws
model.setTimepoints(np.linspace(0, 2, 100))
solver = model.getSolver()
rdata = amici.runAmiciSimulation(model, solver)

# plot trajectories
import amici.plotting
amici.plotting.plotStateTrajectories(rdata_reduced, model=model_reduced)
amici.plotting.plotObservableTrajectories(rdata_reduced, model=model_reduced)

amici.plotting.plotStateTrajectories(rdata, model=model)
amici.plotting.plotObservableTrajectories(rdata, model=model)
```



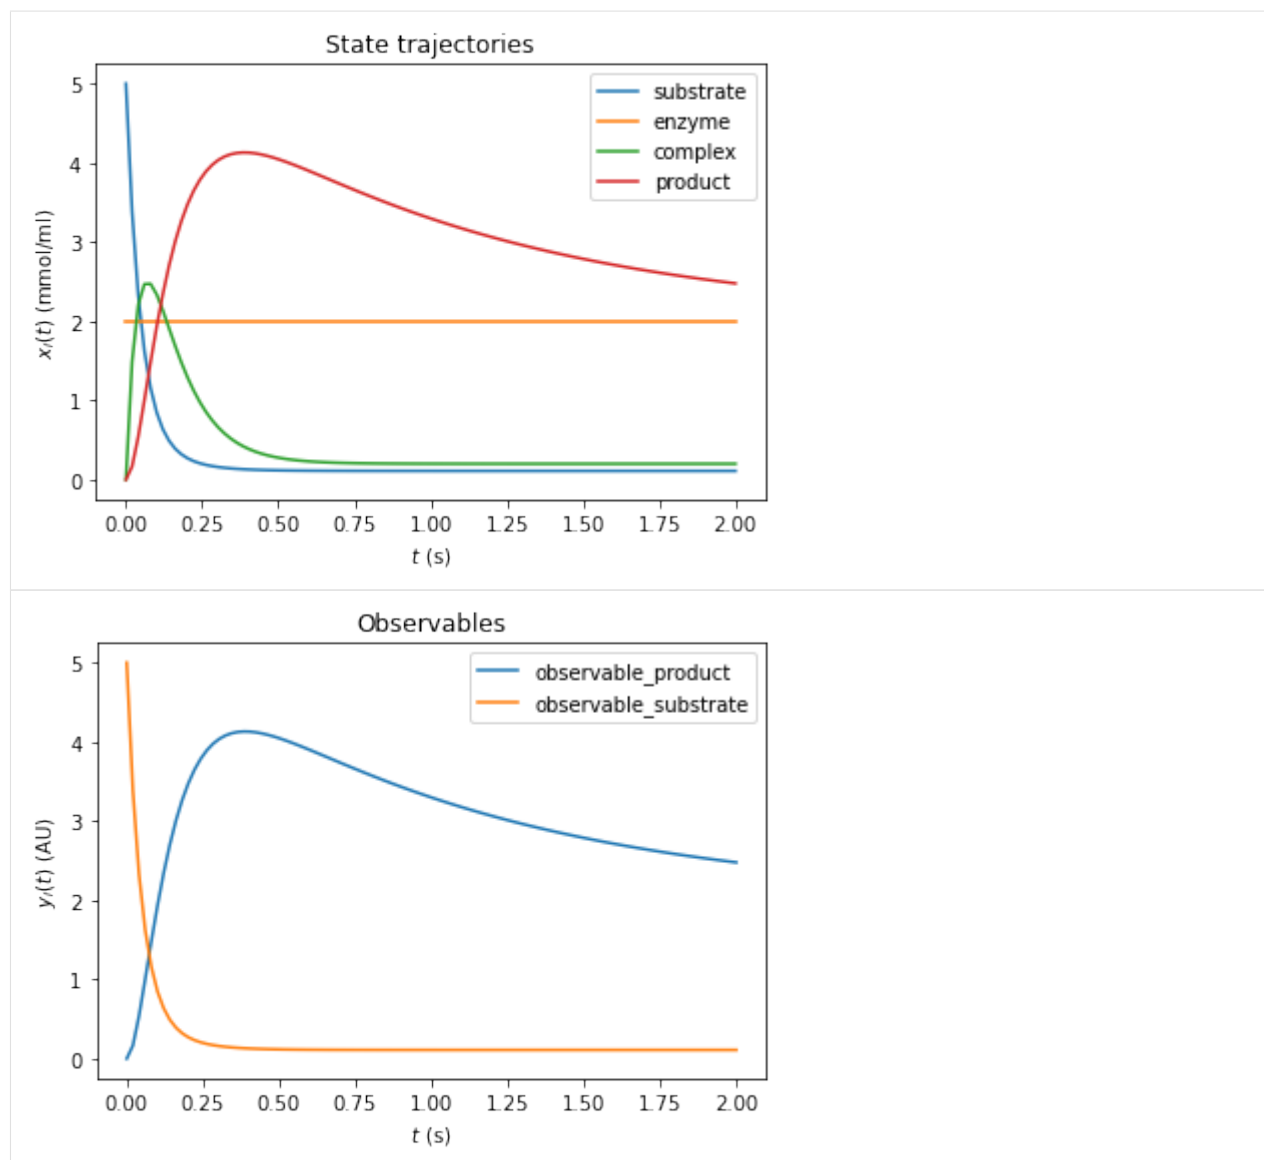

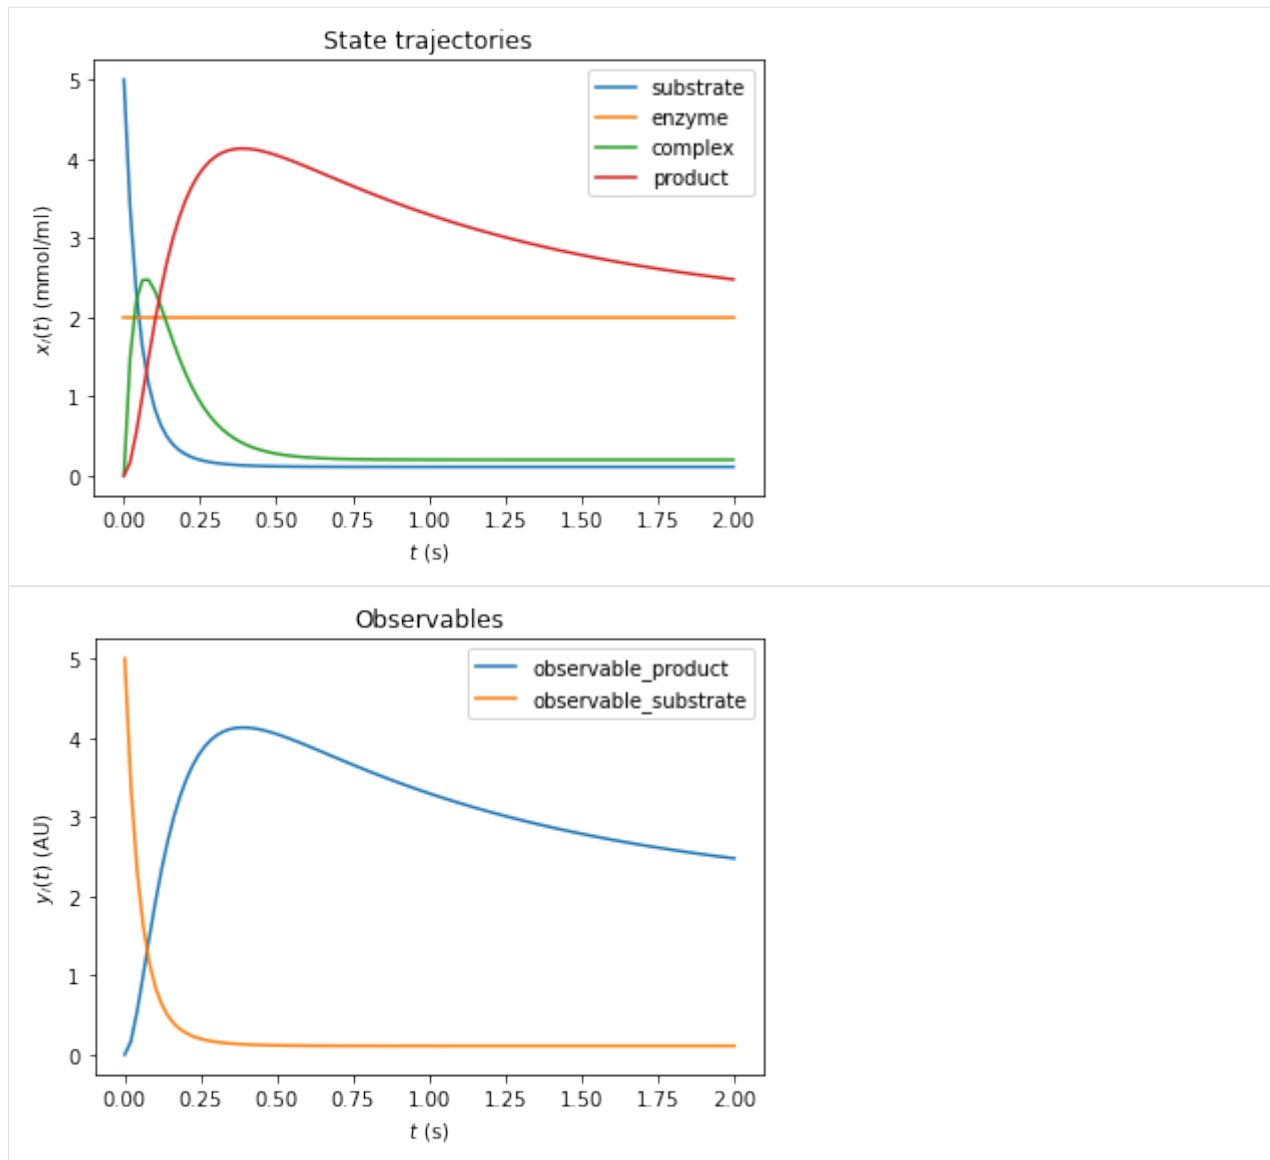

### Inferring the steady state of the system (postequilibration)

First, we want to demonstrate that Newton's method will fail with the unreduced model due to a singular right hand side Jacobian.

```
[5]: # Call postequilibration by setting an infinity timepoint
model.setTimepoints(np.full(1, np.inf))

# set the solver
solver = model.getSolver()
solver.setNewtonMaxSteps(10)
solver.setMaxSteps(1000)
rdata = amici.runAmiciSimulation(model, solver)

#np.set_printoptions(threshold=8, edgeitems=2)
```

(continues on next page)

(continued from previous page)

```

for key, value in rdata.items():
    print('%12s: ' % key, value)

    ts: [inf]
    x: [[0.11      2.          0.2          2.000000002]]
    x0: [5. 2. 0. 0.]
    x_ss: [nan nan nan nan]
    sx: None
    sx0: None
    sx_ss: None
    y: [[2.000000002 0.11      ]]
    sigmay: [[1. 1.]]
    sy: None
    ssigmay: None
    z: None
    rz: None
    sigmaz: None
    sz: None
    srz: None
    ssigmaz: None
    sllh: None
    s2llh: None
    J: [[-20.    0.   20.    0. ]
[-1.1  0.    1.1  0. ]
[ 1.    0.  -11.  10. ]
[ 0.    0.    0.  -1. ]]
    xdot: [ 0.000000000e+00  0.000000000e+00  2.22044605e-16 -2.24170307e-08]
    status: 0.0
    llh: nan
    chi2: nan
    res: [0. 0.]
    sres: None
    FIM: None
    w: [[2.          2.          2.          2.000000002]]
    preeq_wrms: nan
    preeq_t: nan
    preeq_numlinsteps: None
    preeq_numsteps: [[0 0 0]]
    preeq_numstepsB: 12.0
    preeq_status: [[0 0 0]]
    preeq_cpu_time: 0.0
    preeq_cpu_timeB: 0.0
    posteq_wrms: 0.5604257578208488
    posteq_t: 19.2252094591474
    posteq_numlinsteps: None
    posteq_numsteps: [[ 0 417  0]]
    posteq_numstepsB: 0.0
    posteq_status: [[-3 1 0]]
    posteq_cpu_time: 2.315
    posteq_cpu_timeB: 0.0
    numsteps: None
    numrhsevals: None

```

(continues on next page)

(continued from previous page)

```

numerrtestfails: None
numnonlinsolvconvfails: None
    order: None
    cpu_time: 0.0
    numstepsB: None
numrhsevalsB: None
numerrtestfailsB: None
numnonlinsolvconvfailsB: None
    cpu_timeB: 0.0

```

The fields `posteq_status` and `posteq_numsteps` in `rdata` tells us how postequilibration worked:

- the first entry informs us about the status/number of steps in Newton's method (here 0, as Newton's method did not work)
- the second entry tells us, the status/how many integration steps were taken until steady state was reached
- the third entry informs us about the status/number of Newton steps in the second launch, after simulation

The status is encoded as an Integer flag with the following meanings:

- 1: Successful run
- 0: Did not run
- -1: Error: No further specification is given, the error message should give more information.
- -2: Error: The method did not converge to a steady state within the maximum number of steps (Newton's method or simulation).
- -3: Error: The Jacobian of the right hand side is singular (only Newton's method)
- -4: Error: The damping factor in Newton's method was reduced until it met the lower bound without success (Newton's method only)
- -5: Error: The model was simulated past the timepoint  $t=1e100$  without finding a steady state. Therefore, it is likely that the model has not steady state for the given parameter vector.

Here, only the second entry of `posteq_status` contains a positive integer: The first run of Newton's method failed due to a Jacobian, which could not be factorized, but the second run (simulation) contains the entry 1 (success). The third entry is 0, thus Newton's method was not launched for a second time. More information can be found in `posteq_numsteps`: Also here, only the second entry contains a positive integer, which is smaller than the maximum number of steps taken (<1000). Hence steady state was reached via simulation, which corresponds to the simulated time written to `posteq_time`.

We want to demonstrate a complete failure if inferring the steady state by reducing the number of integration steps to a lower value:

```

[6]: # reduce maxsteps for integration
solver.setMaxSteps(100)
rdata = amici.runAmiciSimulation(model, solver)
print('Status of postequilibration:', rdata['posteq_status'])
print('Number of steps employed in postequilibration:', rdata['posteq_numsteps'])

```

```

Status of postequilibration: [[-3 -2 -3]]
Number of steps employed in postequilibration: [[ 0 100  0]]

```

```

[Warning] AMICI:simulation: AMICI simulation failed:
Steady state computation failed. First run of Newton solver failed: RHS could not be
↪factorized. Simulation to steady state failed: No convergence was achieved. Second run
↪of Newton solver failed: RHS could not be factorized.

```

(continues on next page)

(continued from previous page)

Error occurred in:

```

0      0x1060f7913 amici::SteadystateProblem::handleSteadyStateFailure(amici::Solver_
↳const*, amici::Model*) + 531
1      0x1060f6b3c amici::SteadystateProblem::findSteadyState(amici::Solver*, amici::
↳NewtonSolver*, amici::Model*, int) + 332
2      0x1060f6882 amici::SteadystateProblem::workSteadyStateProblem(amici::Solver*,
↳amici::Model*, int) + 322
3      0x1060a4615 amici::AmiciApplication::runAmiciSimulation(amici::Solver&, amici:
↳:ExpData const*, amici::Model&, bool) + 405
4

```

However, the same logic works, if we use the reduced model. For sufficiently many Newton steps, postequilibration is achieved by Newton's method in the first run. In this specific example, the steady state is found within one step.

```

[7]: # Call postequilibration by setting an infinity timepoint
model_reduced.setTimepoints(np.full(1, np.inf))

# set the solver
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
solver_reduced.setMaxSteps(100)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced)

print('Status of postequilibration:', rdata_reduced['posteq_status'])
print('Number of steps employed in postequilibration:', rdata_reduced['posteq_numsteps'])

Status of postequilibration: [[1 0 0]]
Number of steps employed in postequilibration: [[2 0 0]]

```

## Postequilibration with sensitivities

Equilibration is possible with forward and adjoint sensitivity analysis. As for the main simulation part, adjoint sensitivity analysis yields less information than forward sensitivity analysis, since no state sensitivities are computed. However, it has a better scaling behavior towards large model sizes.

## Postequilibration with forward sensitivities

If forward sensitivity analysis is used, then state sensitivities at the timepoint `np.inf` will be computed. This can be done in (currently) two different ways:

1. If the Jacobian  $\nabla_x f$  of the right hand side  $f$  is not (close to) singular, the most efficient approach will be solving the linear system of equations, which defines the steady state sensitivities:

$$0 = \dot{s}^x = (\nabla_x f) s^x + \frac{\partial f}{\partial \theta} \quad \Rightarrow \quad (\nabla_x f) s^x = -\frac{\partial f}{\partial \theta}$$

This approach will always be chosen by AMICI, if the option `model.SteadyStateSensitivityMode` is set to `SteadyStateSensitivityMode.newtonOnly`. Furthermore, it will also be chosen, if the steady state was found by Newton's method, as in this case, the Jacobian is at least not singular (but may still be poorly conditioned). A check for the condition number of the Jacobian is currently missing, but will soon be implemented.

2. If the Jacobian is poorly conditioned or singular, then the only way to obtain a reliable result will be integrating the state variables with state sensitivities until the norm of the right hand side becomes small. This

approach will be chosen by AMICI, if the steady state was found by simulation and the option `model.SteadyStateSensitivityMode` is set to `SteadyStateSensitivityMode.simulationFSA`. This approach is numerically more stable, but the computation time for large models may be substantial.

Side remark:

A possible third way may consist in a (relaxed) Richardson iteration type approach, which interprets the entries of the right hand side  $f$  as residuals and minimizes the squared residuals  $\|f\|^2$  by a Levenberg-Marquart-type algorithm. This approach would also work for poorly conditioned (and even for singular Jacobians if additional constraints are implemented as Lagrange multipliers) while being faster than a long forward simulation.

We want to demonstrate both possibilities to find the steady state sensitivities, as well as the failure of their computation if the Jacobian is singular and the `newtonOnly` setting was used.

```
[8]: # Call simulation with singular Jacobian and integrateIfNewtonFails mode
model.setTimepoints(np.full(1, np.inf))
model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.
    ↪integrateIfNewtonFails)
solver = model.getSolver()
solver.setNewtonMaxSteps(10)
solver.setSensitivityMethod(amici.SensitivityMethod.forward)
solver.setSensitivityOrder(amici.SensitivityOrder.first)
solver.setMaxSteps(10000)
rdata = amici.runAmiciSimulation(model, solver)

print('Status of postequilibration:', rdata['posteq_status'])
print('Number of steps employed in postequilibration:', rdata['posteq_numsteps'])
print('Computed state sensitivities:')
print(rdata['sx'][0,:,:])
```

```
Status of postequilibration: [[-3  1  0]]
Number of steps employed in postequilibration: [[ 0 1026  0]]
Computed state sensitivities:
[[-1.10000000e-02  0.00000000e+00 -6.70507402e-18 -1.20114408e-11]
 [ 1.00000000e-02  0.00000000e+00 -8.22965063e-19  1.20114329e-11]
 [-1.00000000e-03  0.00000000e+00 -2.00000000e-02 -2.40228711e-11]
 [ 5.50000000e-02  0.00000000e+00  1.00000000e-01  9.99999999e-01]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00 -2.00000004e+00]]
```

```
[9]: # Call simulation with singular Jacobian and newtonOnly mode (will fail)
model.setTimepoints(np.full(1, np.inf))
model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.newtonOnly)
solver = model.getSolver()
solver.setSensitivityMethod(amici.SensitivityMethod.forward)
solver.setSensitivityOrder(amici.SensitivityOrder.first)
solver.setMaxSteps(10000)
rdata = amici.runAmiciSimulation(model, solver)

print('Status of postequilibration:', rdata['posteq_status'])
print('Number of steps employed in postequilibration:', rdata['posteq_numsteps'])
print('Computed state sensitivities:')
print(rdata['sx'][0,:,:])
```

```
Status of postequilibration: [[-2 -1  1]]
Number of steps employed in postequilibration: [[ 0 543  0]]
Computed state sensitivities:
```

(continues on next page)

(continued from previous page)

```
[[0. 0. 0. 0.]
 [0. 0. 0. 0.]
 [0. 0. 0. 0.]
 [0. 0. 0. 0.]
 [0. 0. 0. 0.]]
```

```
[Warning] AMICI:simulation: AMICI simulation failed:
Steady state sensitivitiy computation failed due to unsuccessful factorization of RHS
↳ Jacobian
Error occured in:
0      0x1060f698b amici::SteadystateProblem::workSteadyStateProblem(amici::Solver*,
↳ amici::Model*, int) + 587
1      0x1060a4615 amici::AmiciApplication::runAmiciSimulation(amici::Solver&, amici:
↳ :ExpData const*, amici::Model&, bool) + 405
2      0x1060a4474 amici::runAmiciSimulation(amici::Solver&, amici::ExpData const*,
↳ amici::Model&, bool) + 36
3      0x106061005 _wrap_runAmiciSimulation(_object*, _object*) + 549
4      0x1021b2309 cfunction_call_varargs + 320
5
```

```
[10]: # Call postequilibration by setting an infinity timepoint
model_reduced.setTimepoints(np.full(1, np.inf))
model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.newtonOnly)
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.forward)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)
solver_reduced.setMaxSteps(1000)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced)

print('Status of postequilibration:', rdata_reduced['posteq_status'])
print('Number of steps employed in postequilibration:', rdata_reduced['posteq_numsteps'])
print('Computed state sensitivities:')
print(rdata_reduced['sx'][0,:,:])

Status of postequilibration: [[1 0 0]]
Number of steps employed in postequilibration: [[2 0 0]]
Computed state sensitivities:
[[-1.1e-02  0.0e+00 -0.0e+00 -0.0e+00]
 [ 1.0e-02  0.0e+00 -0.0e+00 -0.0e+00]
 [-1.0e-03  0.0e+00 -2.0e-02 -0.0e+00]
 [ 5.5e-02  0.0e+00  1.0e-01  1.0e+00]
 [-0.0e+00  0.0e+00 -0.0e+00 -2.0e+00]]
```

## Postequilibration with adjoint sensitivities

Postequilibration also works with adjoint sensitivities. In this case, it is exploited that the ODE of the adjoint state  $p$  will always have the steady state 0, since it's a linear ODE:

$$\frac{d}{dt}p(t) = J(x^*, \theta)^T p(t),$$

where  $x^*$  denotes the steady state of the system state. Since the Eigenvalues of the Jacobian are negative and since the Jacobian at steady state is a fixed matrix, this system has a simple algebraic solution:

$$p(t) = e^{tJ(x^*, \theta)^T} p_{\text{end}}.$$

As a consequence, the quadratures in adjoint computation also reduce to a matrix-vector product:

$$Q(x, \theta) = Q(x^*, \theta) = p_{\text{integral}} * \frac{\partial f}{\partial \theta}$$

with

$$p_{\text{integral}} = \int_0^\infty p(s) ds = (J(x^*, \theta)^T)^{-1} p_{\text{end}}.$$

However, this solution is given in terms of a linear system of equations defined by the transposed Jacobian of the right hand side. Hence, if the (transposed) Jacobian is singular, it is not applicable. In this case, standard integration must be carried out.

```
[11]: # Call adjoint postequilibration by setting an infinity timepoint
# and create an edata object, which is needed for adjoint computation
edata = amici.ExpData(2, 0, 0, np.array([float('inf')]))
edata.setObservedData([1.8] * 2)
edata.fixedParameters = np.array([3., 5.])

model_reduced.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.newtonOnly)
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.adjoint)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)
solver_reduced.setMaxSteps(1000)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

print('Status of postequilibration:', rdata_reduced['posteq_status'])
print('Number of steps employed in postequilibration:', rdata_reduced['posteq_numsteps'])
print('Number of backward steps employed in postequilibration:', rdata_reduced['posteq_
    ↳ numstepsB'])
print('Computed gradient:', rdata_reduced['sllh'])

Status of postequilibration: [[1 0 0]]
Number of steps employed in postequilibration: [[2 0 0]]
Number of backward steps employed in postequilibration: 0.0
Computed gradient: [-1.859000e-02  1.690000e-02 -1.690000e-03 -3.16282e+00  1.600000e+01]
```

If we carry out the same computation with a system that has a singular Jacobian, then `posteq_numstepsB` will not be 0 any more (which indicates that the linear system solve was used to compute backward postequilibration). Now, integration is carried out and hence `posteq_numstepsB > 0`



```
[12]: # Call adjoint postequilibration with model with singular Jacobian
model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.newtonOnly)
solver = model.getSolver()
solver.setNewtonMaxSteps(10)
solver.setSensitivityMethod(amici.SensitivityMethod.adjoint)
solver.setSensitivityOrder(amici.SensitivityOrder.first)
rdata = amici.runAmiciSimulation(model, solver, edata)

print('Status of postequilibration:', rdata['posteq_status'])
print('Number of steps employed in postequilibration:', rdata['posteq_numsteps'])
print('Number of backward steps employed in postequilibration:', rdata['posteq_numstepsB
↪'])
print('Computed gradient:', rdata['sllh'])

Status of postequilibration: [[-3 -1  1]]
Number of steps employed in postequilibration: [[ 0 479  0]]
Number of backward steps employed in postequilibration: 3076.0
Computed gradient: [-1.85899987e-02  1.68999988e-02 -1.69000055e-03 -3.16282001e+00
 1.60000000e+01]
```


### Preequilibrating the model

Sometimes, we want to launch a solver run from a steady state which was inferred numerically, i.e., the system was preequilibrated. In order to do this with AMICI, we need to pass an ExpData object, which contains fixed parameter for the actual simulation and for preequilibration of the model.

```
[13]: # create edata, with 3 timepoints and 2 observables:
edata = amici.ExpData(2, 0, 0,
                      np.array([0., 0.1, 1.]))
edata.setObservedData([1.8] * 6)
edata.fixedParameters = np.array([3., 5.])
edata.fixedParametersPreequilibration = np.array([0., 2.])
edata.reinitializeFixedParameterInitialStates = True
```

```
[14]: # create the solver object and run the simulation
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

amici.plotting.plotStateTrajectories(rdata_reduced, model = model_reduced)
amici.plotting.plotObservableTrajectories(rdata_reduced, model = model_reduced)
```

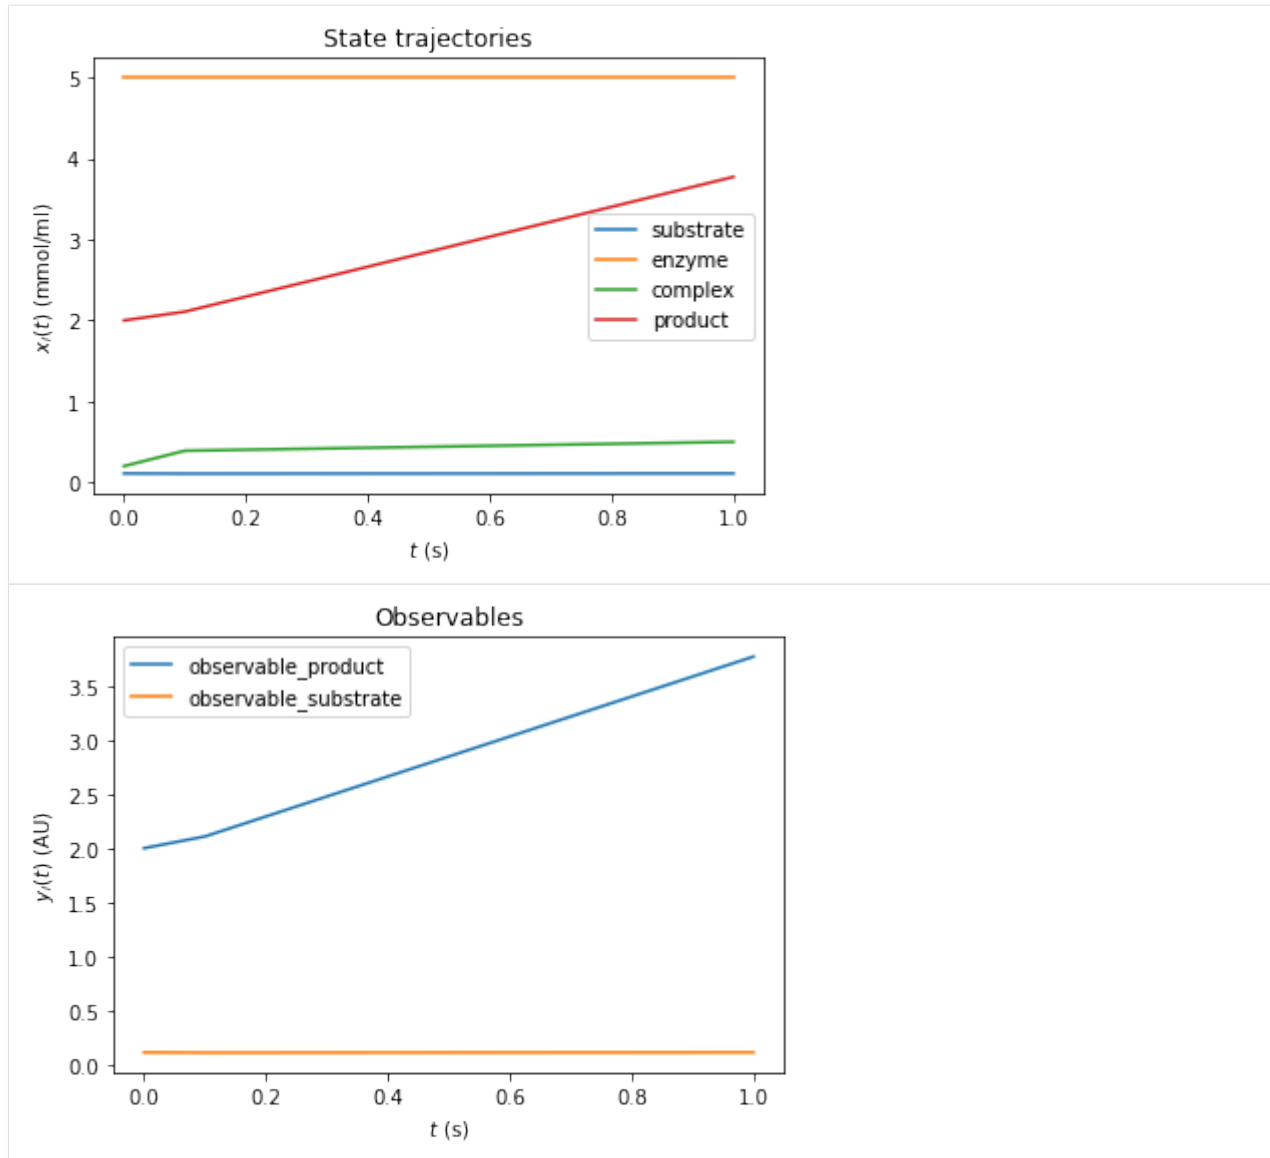

We can also combine pre- and postequilibration.

```
[15]: # Change the last timepoint to an infinity timepoint.
      edata.setTimepoints(np.array([0., 0.1, float('inf')]))

      # run the simulation
      rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)
```

## Preequilibration with sensitivities

Beyond the need for an ExpData object, the steady state solver logic in preequilibration is the same as in postequilibration, also if sensitivities are requested. The computation will fail for singular Jacobians, if SteadyStateSensitivityMode is set to newtonOnly, or if not enough steps can be taken. However, if forward simulation with steady state sensitivities is allowed, or if the Jacobian is not singular, it will work.

## Prequilibration with forward sensitivities

```
[16]: # No postquilibration this time.
edata.setTimepoints(np.array([0., 0.1, 1.]))

# create the solver object and run the simulation, singular Jacobian, enforce Newton
↳ solver for sensitivities
model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.newtonOnly)
solver = model.getSolver()
solver.setNewtonMaxSteps(10)
solver.setSensitivityMethod(amici.SensitivityMethod.forward)
solver.setSensitivityOrder(amici.SensitivityOrder.first)
rdata = amici.runAmiciSimulation(model, solver, edata)

for key, value in rdata.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)

        preeq_wrms: 0.5604257578208488
        preeq_t: 19.2252094591474
preeq_numlinsteps: None
preeq_numsteps: [[ 0 417 0]]
preeq_numstepsB: 0.0
preeq_status: [[-3 1 0]]
preeq_cpu_time: 1.723
preeq_cpu_timeB: 0.0

[Warning] AMICI:simulation: AMICI simulation failed:
Steady state sensitvitiy computation failed due to unsuccessful factorization of RHS
↳ Jacobian
Error occured in:
0      0x1060f698b amici::SteadystateProblem::workSteadyStateProblem(amici::Solver*,
↳ amici::Model*, int) + 587
1      0x1060a456f amici::AmiciApplication::runAmiciSimulation(amici::Solver&, amici:
↳ :ExpData const*, amici::Model&, bool) + 239
2      0x1060a4474 amici::runAmiciSimulation(amici::Solver&, amici::ExpData const*,
↳ amici::Model&, bool) + 36
3      0x106061005 _wrap_runAmiciSimulation(_object*, _object*) + 549
4      0x1021b2309 cfunction_call_varargs + 320
5
```

```
[17]: # Singluar Jacobian, use simulation
model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.
↳ integrateIfNewtonFails)
solver = model.getSolver()
```

(continues on next page)

(continued from previous page)

```

solver.setNewtonMaxSteps(10)
solver.setSensitivityMethod(amici.SensitivityMethod.forward)
solver.setSensitivityOrder(amici.SensitivityOrder.first)
rdata = amici.runAmiciSimulation(model, solver, edata)

```

```

for key, value in rdata.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)

```

```

        preeq_wrms: 0.9920376238481097
        preeq_t: 21.270502326483026
preeq_numlinsteps: None
        preeq_numsteps: [[ 0 1026 0]]
        preeq_numstepsB: 0.0
        preeq_status: [[-3 1 0]]
        preeq_cpu_time: 12.439
        preeq_cpu_timeB: 0.0

```

[18]: *# Non-singular Jacobian, use Newton solver*

```

solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.forward)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

```

```

for key, value in rdata_reduced.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)

```

```

        preeq_wrms: 0.0
        preeq_t: nan
preeq_numlinsteps: None
        preeq_numsteps: [[2 0 0]]
        preeq_numstepsB: 0.0
        preeq_status: [[1 0 0]]
        preeq_cpu_time: 0.036
        preeq_cpu_timeB: 0.0

```

## Preequilibration with adjoint sensitivities

When using pre-equilibration, adjoint sensitivity analysis can be used for simulation. This is a particularly interesting case: Standard adjoint sensitivity analysis requires the initial state sensitivities `sx0` to work, at least if data is given for finite (i.e., not exclusively post-equilibration) timepoints: For each parameter, a contribution to the gradient is given by the scalar product of the corresponding state sensitivity vector at timepoint  $t = 0$ , (column in `sx0`), with the adjoint state ( $p(t = 0)$ ). Hence, the matrix `sx0` is needed. This scalar product “closes the loop” from forward to adjoint simulation.

By default, if adjoint sensitivity analysis is called with pre-equilibration, the initial state sensitivities are computed in just the same way as if this way done for forward sensitivity analysis. The only difference in the internal logic is that, if the steady state gets inferred via simulation, a separate solver object is used in order to ensure that the steady state simulation does not interfere with the snapshotting of the forward trajectory from the actual time course.

However, also an adjoint version of pre-equilibration is possible: In this case, the “loop” from forward to adjoint sim-

ulation needs no closure: The simulation time is extended by preequilibration: forward from  $t = -\infty$  to  $t = 0$ , and after adjoint simulation also backward from  $t = 0$  to  $t = -\infty$ . Similar to adjoint postequilibration, the steady state of the adjoint state (at  $t = -\infty$ ) is  $p = 0$ , hence the scalar product (at  $t = -\infty$ ) for the initial state sensitivities of preequilibration with the adjoint state vanishes. Instead, this gradient contribution is covered by additional quadratures  $\int_{-\infty}^0 p(s) ds \cdot \frac{\partial f}{\partial \theta}$ . In order to compute these quadratures correctly, the adjoint state from the main adjoint simulation must be passed on to the initial adjoint state of backward preequilibration.

However, as the adjoint state must be passed on from backward computation to preequilibration, it is currently not allowed to alter (reinitialize) states of the model at  $t = 0$ , unless these states are constant, as otherwise this alteration would lead to a discontinuity in the adjoints state as well and hence to an incorrect gradient.

```
[19]: # Non-singular Jacobian, use Newton solver and adjoints with initial state sensitivities
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.adjoint)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

for key, value in rdata_reduced.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)
print('Gradient:', rdata_reduced['sllh'])
```

```

    preeq_wrms: 0.0
    preeq_t: nan
    preeq_numlinsteps: None
    preeq_numsteps: [[2 0 0]]
    preeq_numstepsB: 0.0
    preeq_status: [[1 0 0]]
    preeq_cpu_time: 0.039
    preeq_cpu_timeB: 0.0
Gradient: [-0.05528395  0.0461776 -0.03354519 -2.34602219  6.314481  ]
```

```
[20]: # Non-singular Jacobian, use simulation solver and adjoints with initial state_
      ↪sensitivities
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(0)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.adjoint)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

for key, value in rdata_reduced.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)
print('Gradient:', rdata_reduced['sllh'])
```

```

    preeq_wrms: 0.8470065245264354
    preeq_t: 19.213162474372176
    preeq_numlinsteps: None
    preeq_numsteps: [[ 0 426 0]]
    preeq_numstepsB: 0.0
    preeq_status: [[-2 1 0]]
    preeq_cpu_time: 1.753
    preeq_cpu_timeB: 0.0
Gradient: [-0.05528395  0.0461776 -0.03354519 -2.34602226  6.3144812  ]
```

```
[21]: # Non-singular Jacobian, use Newton solver and adjoints with fully adjoint_
↳preequilibration
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.adjoint)
solver_reduced.setSensitivityMethodPreequilibration(amici.SensitivityMethod.adjoint)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

for key, value in rdata_reduced.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)
print('Gradient:', rdata_reduced['sllh'])

      preeq_wrms:  0.0
      preeq_t:    nan
preeq_numlinsteps: None
      preeq_numsteps: [[2 0 0]]
      preeq_numstepsB: 0.0
      preeq_status: [[1 0 0]]
      preeq_cpu_time: 0.042
      preeq_cpu_timeB: 0.009
Gradient: [-0.05528395  0.0461776 -0.03354519 -2.34602219  6.314481  ]
```

As for postquilibration, adjoint preequilibration has an analytic solution (via the linear system), which will be preferred. If used for models with singular Jacobian, numerical integration will be carried out, which is indicated by `preeq_numstepsB`.

```
[22]: # Non-singular Jacobian, use Newton solver and adjoints with fully adjoint_
↳preequilibration
solver = model.getSolver()
solver.setNewtonMaxSteps(10)
solver.setSensitivityMethod(amici.SensitivityMethod.adjoint)
solver.setSensitivityMethodPreequilibration(amici.SensitivityMethod.adjoint)
solver.setSensitivityOrder(amici.SensitivityOrder.first)
rdata = amici.runAmiciSimulation(model, solver, edata)

for key, value in rdata.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)
print('Gradient:', rdata['sllh'])

      preeq_wrms:  0.9986067660342685
      preeq_t:    36.94272314329062
preeq_numlinsteps: None
      preeq_numsteps: [[ 0 417  0]]
      preeq_numstepsB: 1371.0
      preeq_status: [[-3 1 0]]
      preeq_cpu_time: 2.488
      preeq_cpu_timeB: 5.016
Gradient: [-0.05528395  0.04617759 -0.03354518 -2.34602224  6.3144811  ]
```

## Controlling the error tolerances in pre- and postequilibration

When solving ODEs or DAEs, AMICI uses the default logic of CVODES and IDAS to control error tolerances. This means that error weights are computed based on the absolute error tolerances and the product of current state variables of the system and their respective relative error tolerances. If this error combination is then controlled.

The respective tolerances for equilibrating a system with AMICI can be controlled by the user via the getter/setter functions `[get|set][Absolute|Relative]ToleranceSteadyState[Sensi]`:

```
[23]: # Non-singular Jacobian, use simulaiton
model_reduced.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.
↳ integrateIfNewtonFails)
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(0)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.forward)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)

# run with lax tolerances
solver_reduced.setRelativeToleranceSteadyState(1e-2)
solver_reduced.setAbsoluteToleranceSteadyState(1e-3)
solver_reduced.setRelativeToleranceSteadyStateSensi(1e-2)
solver_reduced.setAbsoluteToleranceSteadyStateSensi(1e-3)
rdata_reduced_lax = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

# run with strict tolerances
solver_reduced.setRelativeToleranceSteadyState(1e-12)
solver_reduced.setAbsoluteToleranceSteadyState(1e-16)
solver_reduced.setRelativeToleranceSteadyStateSensi(1e-12)
solver_reduced.setAbsoluteToleranceSteadyStateSensi(1e-16)
rdata_reduced_strict = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

# compare ODE outputs
print('\nODE solver steps, which were necessary to reach steady state:')
print('lax tolerances: ', rdata_reduced_lax['preeq_numsteps'])
print('strict tolerances: ', rdata_reduced_strict['preeq_numsteps'])

print('\nsimulation time corresponding to steady state:')
print(rdata_reduced_lax['preeq_t'])
print(rdata_reduced_strict['preeq_t'])

print('\ncomputation time to reach steady state:')
print(rdata_reduced_lax['preeq_cpu_time'])
print(rdata_reduced_strict['preeq_cpu_time'])
```

ODE solver steps, which were necessary to reach steady state:

lax tolerances: [[ 0 733 0]]

strict tolerances: [[ 0 1031 0]]

simulation time corresponding to steady state:

6.002011407974004

31.0689293433781

computation time to reach steady state:

(continues on next page)

(continued from previous page)

```
7.646
7.837
```

### 10.2.3 Miscellaneous

#### OpenMP support for parallelized simulation for multiple experimental conditions

AMICI can be built with OpenMP support, which allows to parallelize model simulations for multiple experimental conditions.

On Linux and OSX this is enabled by default. This can be verified using:

```
import amici
amici.compiledWithOpenMP()
```

If not already enabled by default, you can enable OpenMP support by setting the environment variables `AMICI_CXXFLAGS` and `AMICI_LDFLAGS` to the correct OpenMP flags of your compiler and linker, respectively. This has to be done for both AMICI package installation *and* model compilation. When using `gcc` on Linux, this would be:

```
# on your shell:
AMICI_CXXFLAGS=-fopenmp AMICI_LDFLAGS=-fopenmp pip3 install amici
```

```
# in python, before model compilation:
import os
os.environ['AMICI_CXXFLAGS'] = '-fopenmp'
os.environ['AMICI_LDFLAGS'] = '-fopenmp'
```

## 10.3 FAQ

**Q:** I am trying to install the AMICI Python package, but installation fails with something like

```
amici/src/cblas.cpp:16:13: fatal error: cblas.h: No such file or directory
#include <cblas.h>
          ^~~~~~
compilation terminated.
error: command 'x86_64-linux-gnu-gcc' failed with exit status 1
```

**A:** You will have to install a CBLAS-compatible BLAS library and/or set `BLAS_CFLAGS` as described in the [installation guide](#).

---

**Q:** Importing my model fails with something like `ImportError: _someModelName.cpython-37m-x86_64-linux-gnu.so: undefined symbol: omp_get_thread_num`.

**A:** You probably installed the AMICI package with OpenMP support, but did not have the relevant compiler/linker flags set when importing/building the model. See [here](#).



## 10.4 AMICI Python API

### Modules

|                                      |   |
|--------------------------------------|---|
| <code>amici</code>                   | AMICI   |
| <code>amici.amici</code>             | Core C++ bindings<br>This module encompasses the complete public C++ API of AMICI, which was exposed via swig. All functions listed here are directly accessible in the main amici package, i.e., <code>amici.amici.ExpData</code> is available as <code>amici.ExpData</code> . Usage of functions and classes from the base amici package is generally recommended as they often include convenience wrappers that avoid common pitfalls when accessing C++ types from python and implement some nonstandard type conversions. |
| <code>amici.sbml_import</code>       | SBML Import<br>This module provides all necessary functionality to import a model specified in the Systems Biology Markup Language (SBML).  |
| <code>amici.pysb_import</code>       | PySB Import<br>This module provides all necessary functionality to import a model specified in the <code>pysb.core.Model</code> format.   |
| <code>amici.bngl_import</code>       | BNGL Import<br>This module provides all necessary functionality to import a model specified in the BNGL format.   |
| <code>amici.petab_import</code>      | PETab Import<br>Import a model in the petab ( <a href="https://github.com/PETab-dev/PETab">https://github.com/PETab-dev/PETab</a> ) format into AMICI.  |
| <code>amici.petab_import_pysb</code> | PySB-PETab Import<br>Import a model in the PySB-adapted petab ( <a href="https://github.com/PETab-dev/PETab">https://github.com/PETab-dev/PETab</a> ) format into AMICI.  |
| <code>amici.petab_objective</code>   | PETab Objective<br>Functionality related to running simulations or evaluating the objective function as defined by a PETab problem  |
| <code>amici.petab_simulate</code>    | PETab Simulate<br>Functionality related to the use of AMICI for simulation with PETab's Simulator class.  |
| <code>amici.import_utils</code>      | Miscellaneous functions related to model import, independent of any specific model format   |
| <code>amici.ode_export</code>        | C++ Export<br>This module provides all necessary functionality specify an ODE model and generate executable C++ simulation code. The user generally won't have to directly call any function from this module as this will be done by <code>amici.pysb_import.pysb2amici()</code> , <code>amici.sbml_import.SbmlImporter.sbml2amici()</code> and <code>amici.petab_import.import_model()</code> .   |
| <code>amici.ode_model</code>         | Objects for AMICI's internal ODE model representation   |
| <code>amici.plotting</code>          | Plotting<br>Plotting related functions  |

continues on next page

Table 1 – continued from previous page

|  |   |
|--|---|
| <i>amici.pandas</i>                            | Pandas Wrappers<br>This module contains convenience wrappers that allow for easy interconversion between C++ objects from amici.amici and pandas DataFrames         |
| <i>amici.logging</i>                           | Logging<br>This module provides custom logging functionality for other amici modules  |
| <i>amici.gradient_check</i>                    | Finite Difference Check<br>This module provides functions to automatically check correctness of amici computed sensitivities using finite difference approximations |
| <i>amici.parameter_mapping</i>                 | Parameter mapping   |
| <i>amici.conserverved_quantities_demartino</i> |   |
| <i>amici.conserverved_quantities_rref</i>      | Find conserved quantities deterministically   |

## 10.4.1 amici

### AMICI

The AMICI Python module provides functionality for importing SBML or PySB models and turning them into C++ Python extensions.

**var amici\_path** absolute root path of the amici repository or Python package

**var amiciSwigPath** absolute path of the amici swig directory

**var amiciSrcPath** absolute path of the amici source directory

**var amiciModulePath** absolute root path of the amici module

**var hdf5\_enabled** boolean indicating if amici was compiled with hdf5 support

**var has\_clibs** boolean indicating if this is the full package with swig interface or the raw package without

### Classes

|                                      |  |
|--------------------------------------|--|
| <i>ModelModule</i> (*args, **kwargs) | Enable Python static type checking for AMICI-generated model modules |
| <i>add_path</i> (path)               | Context manager for temporarily changing PYTHON-PATH                 |

**amici.ModelModule**

```
class amici.ModelModule(*args, **kwargs)
    Enable Python static type checking for AMICI-generated model modules
    __init__(*args, **kwargs)
```

**Methods Summary**


---

```
__init__(*args, **kwargs)
```

---

```
getModel()
```

---

```
rtype amici.amici.Model
```

---

**Methods**

```
__init__(*args, **kwargs)
```

```
getModel()
```

Return type *amici.amici.Model*

**amici.add\_path**

```
class amici.add_path(path)
    Context manager for temporarily changing PYTHONPATH
    __init__(path)
```

**Methods Summary**


---

```
__init__(path)
```

---

**Methods**

```
__init__(path)
```

## Functions Summary

---

|   |      |  |
|---|------|--|
| <code>import_model_module(module_name[,<br/>ule_path])</code> | mod- | Import Python module of an AMICI model |
|---|------|--|

---

## Functions

`amici.import_model_module(module_name, module_path=None)`  
Import Python module of an AMICI model

### Parameters

- **module\_name** (`str`) – Name of the python package of the model
- **module\_path** (`typing.Union[pathlib.Path, str, None]`) – Absolute or relative path of the package directory

**Return type** `amici.ModelModule`

**Returns** The model module

## 10.4.2 amici.amici

### Core C++ bindings

This module encompasses the complete public C++ API of AMICI, which was exposed via swig. All functions listed here are directly accessible in the main amici package, i.e., `amici.amici.ExpData` is available as `amici.ExpData`. Usage of functions and classes from the base amici package is generally recommended as they often include convenience wrappers that avoid common pitfalls when accessing C++ types from python and implement some nonstandard type conversions.

### Classes

---

|   |  |
|---|--|
| <code>BoolVector(*args)</code>            | Swig-Generated class templating common python types including Iterable [ <code>bool</code> ] and <code>numpy.array</code> [ <code>bool</code> ] to facilitate interfacing with C++ bindings.                               |
| <code>DoubleVector(*args)</code>          | Swig-Generated class templating common python types including Iterable [ <code>float</code> ] and <code>numpy.array</code> [ <code>float</code> ] to facilitate interfacing with C++ bindings.                             |
| <code>ExpData(*args)</code>               | ExpData carries all information about experimental or condition-specific data  |
| <code>ExpDataPtr(*args)</code>            | Swig-Generated class that implements smart pointers to ExpData as objects.   |
| <code>ExpDataPtrVector(*args)</code>      | Swig-Generated class templating common python types including Iterable [ <code>amici.amici.ExpData</code> ] and <code>numpy.array</code> [ <code>amici.amici.ExpData</code> ] to facilitate interfacing with C++ bindings. |
| <code>FixedParameterContext(value)</code> | An enumeration.  |
| <code>IntVector(*args)</code>             | Swig-Generated class templating common python types including Iterable [ <code>int</code> ] and <code>numpy.array</code> [ <code>int</code> ] to facilitate interfacing with C++ bindings.                                 |

---

continues on next page

Table 6 – continued from previous page

|   |  |
|---|--|
| <i>InternalSensitivityMethod</i> (value)  | An enumeration.  |
| <i>InterpolationType</i> (value)          | An enumeration.  |
| <i>LinearMultistepMethod</i> (value)      | An enumeration.  |
| <i>LinearSolver</i> (value)               | An enumeration.  |
| <i>Model</i> (*args, **kwargs)            | The Model class represents an AMICI ODE/DAE model.   |
| <i>ModelDimensions</i> (*args)            | Container for model dimensions.  |
| <i>ModelPtr</i> (*args)                   | Swig-Generated class that implements smart pointers to Model as objects.   |
| <i>NewtonDampingFactorMode</i> (value)    | An enumeration.  |
| <i>NonlinearSolverIteration</i> (value)   | An enumeration.  |
| <i>ObservableScaling</i> (value)          | An enumeration.  |
| <i>ParameterScaling</i> (value)           | An enumeration.  |
| <i>ParameterScalingVector</i> (*args)     |  |
| <i>RDataReporting</i> (value)             | An enumeration.  |
| <i>ReturnData</i> (*args)                 | Stores all data to be returned by <code>amici.amici.runAmiciSimulation()</code> .  |
| <i>ReturnDataPtr</i> (*args)              | Swig-Generated class that implements smart pointers to ReturnData as objects.  |
| <i>SecondOrderMode</i> (value)            | An enumeration.  |
| <i>SensitivityMethod</i> (value)          | An enumeration.  |
| <i>SensitivityOrder</i> (value)           | An enumeration.  |
| <i>SimulationParameters</i> (*args)       | Container for various simulation parameters.   |
| <i>Solver</i> (*args, **kwargs)           | The Solver class provides a generic interface to CVODES and IDAS solvers, individual realizations are realized in the CNodeSolver and the IDASolver class.                                 |
| <i>SolverPtr</i> (*args)                  | Swig-Generated class that implements smart pointers to Solver as objects.  |
| <i>SteadyStateSensitivityMode</i> (value) | An enumeration.  |
| <i>SteadyStateStatus</i> (value)          | An enumeration.  |
| <i>SteadyStateStatusVector</i> (*args)    |  |
| <i>StringDoubleMap</i> (*args)            | Swig-Generated class templating Dict [ <code>str</code> , <code>float</code> ] to facilitate interfacing with C++ bindings.  |
| <i>StringVector</i> (*args)               | Swig-Generated class templating common python types including Iterable [ <code>str</code> ] and <code>numpy.array</code> [ <code>str</code> ] to facilitate interfacing with C++ bindings. |

**amici.amici.BoolVector**

**class** `amici.amici.BoolVector(*args)`

Swig-Generated class templating common python types including Iterable [`bool`] and `numpy.array` [`bool`] to facilitate interfacing with C++ bindings.

**amici.amici.DoubleVector**

```
class amici.amici.DoubleVector(*args)
```

Swig-Generated class templating common python types including `Iterable [float]` and `numpy.array [float]` to facilitate interfacing with C++ bindings.

**amici.amici.ExpData**

```
class amici.amici.ExpData(*args)
```

ExpData carries all information about experimental or condition-specific data

```
__init__(*args)
```

*Overload 1:*

default constructor

*Overload 2:*

Copy constructor, needs to be declared to be generated in swig

*Overload 3:*

constructor that only initializes dimensions

**Parameters**

- **nytrue** (*int*) – Number of observables
- **nztrue** (*int*) – Number of event outputs
- **nmaxevent** (*int*) – Maximal number of events to track

*Overload 4:*

constructor that initializes timepoints from vectors

**Parameters**

- **nytrue** (*int*) – Number of observables
- **nztrue** (*int*) – Number of event outputs
- **nmaxevent** (*int*) – Maximal number of events to track
- **ts** (**DoubleVector**) – Timepoints (dimension: nt)

*Overload 5:*

constructor that initializes timepoints and fixed parameters from vectors

**Parameters**

- **nytrue** (*int*) – Number of observables
- **nztrue** (*int*) – Number of event outputs
- **nmaxevent** (*int*) – Maximal number of events to track
- **ts** (*DoubleVector*) – Timepoints (dimension: nt)
- **fixedParameters** (*DoubleVector*) – Model constants (dimension: nk)

*Overload 6:*

constructor that initializes timepoints and data from vectors

**Parameters**

- **nytrue** (*int*) – Number of observables
- **nztrue** (*int*) – Number of event outputs
- **nmaxevent** (*int*) – Maximal number of events to track
- **ts** (*DoubleVector*) – Timepoints (dimension: nt)
- **observedData** (*DoubleVector*) – observed data (dimension: nt x nytrue, row-major)
- **observedDataStdDev** (*DoubleVector*) – standard deviation of observed data (dimension: nt x nytrue, row-major)
- **observedEvents** (*DoubleVector*) – observed events (dimension: nmaxevents x nztrue, row-major)
- **observedEventsStdDev** (*DoubleVector*) – standard deviation of observed events/roots (dimension: nmaxevents x nztrue, row-major)

*Overload 7:*

constructor that initializes with Model

**Parameters** **model** (*Model*) – pointer to model specification object

*Overload 8:*

constructor that initializes with returnData, adds noise according to specified sigmas

**Parameters**

- **rdata** (*ReturnData*) – return data pointer with stored simulation results
- **sigma\_y** (*float*) – scalar standard deviations for all observables
- **sigma\_z** (*float*) – scalar standard deviations for all event observables

*Overload 9:*

constructor that initializes with returnData, adds noise according to specified sigmas

#### Parameters

- **rdata** (*ReturnData*) – return data pointer with stored simulation results
- **sigma\_y** (*DoubleVector*) – vector of standard deviations for observables (dimension: nytrue or nt x nytrue, row-major)
- **sigma\_z** (*DoubleVector*) – vector of standard deviations for event observables (dimension: nztrue or nmaxevent x nztrue, row-major)

#### Methods Summary

|  |  |
|--|--|
| <code>__init__(*args)</code>                   | <i>Overload 1:</i>   |
| <code>getObservedData()</code>                 | get function that copies data from ExpData::observedData to output                                   |
| <code>getObservedDataPtr(it)</code>            | get function that returns a pointer to observed data at index  |
| <code>getObservedDataStdDev()</code>           | get function that copies data from ExpData::observedDataStdDev to output                             |
| <code>getObservedDataStdDevPtr(it)</code>      | get function that returns a pointer to standard deviation of observed data at index                  |
| <code>getObservedEvents()</code>               | get function that copies data from ExpData::mz to output   |
| <code>getObservedEventsPtr(ie)</code>          | get function that returns a pointer to observed data at ieth occurrence                              |
| <code>getObservedEventsStdDev()</code>         | get function that copies data from ExpData::observedEventsStdDev to output                           |
| <code>getObservedEventsStdDevPtr(ie)</code>    | get function that returns a pointer to standard deviation of observed event data at ie-th occurrence |
| <code>getTimepoint(it)</code>                  | get function that returns timepoint at index   |
| <code>getTimepoints()</code>                   | get function that copies data from ExpData::ts to output   |
| <code>isSetObservedData(it, iy)</code>         | get function that checks whether data at specified indices has been set                              |
| <code>isSetObservedDataStdDev(it, iy)</code>   | get function that checks whether standard deviation of data at specified indices has been set        |
| <code>isSetObservedEvents(ie, iz)</code>       | get function that checks whether event data at specified indices has been set                        |
| <code>isSetObservedEventsStdDev(ie, iz)</code> | get function that checks whether standard deviation of even data at specified indices has been set   |

continues on next page



Table 7 – continued from previous page

|  |  |
|--|--|
| <code>nmaxevent()</code>   | maximal number of events to track  |
| <code>nt()</code>  | number of timepoints   |
| <code>nytrue()</code>  | number of observables of the non-augmented model   |
| <code>nztrue()</code>  | number of event observables of the non-augmented model   |
| <code>reinitializeAllFixedParameterDependentInitialStates()</code>       | Set reinitialization of all states based on model constants for all simulation phases.   |
| <code>reinitializeAllFixedParameterDependentInitialStatesPresim()</code> | Set reinitialization of all states based on model constants for presimulation (only meaningful if preequilibration is performed).                          |
| <code>reinitializeAllFixedParameterDependentInitialStatesMain()</code>   | Set reinitialization of all states based on model constants for the 'main' simulation (only meaningful if presimulation or preequilibration is performed). |
| <code>setObservedData(*args)</code>                                      | <i>Overload 1:</i>   |
| <code>setObservedDataStdDev(*args)</code>                                | <i>Overload 1:</i>   |
| <code>setObservedEvents(*args)</code>                                    | <i>Overload 1:</i>   |
| <code>setObservedEventsStdDev(*args)</code>                              | <i>Overload 1:</i>   |
| <code>setTimepoints(ts)</code>   | Set function that copies data from input to <code>ExpData::ts</code>   |

### Attributes

|  |   |
|--|---|
| <code>fixedParameters</code>                         | Model constants   |
| <code>fixedParametersPreequilibration</code>         | Model constants for pre-equilibration   |
| <code>fixedParametersPresimulation</code>            | Model constants for pre-simulation  |
| <code>id</code>                                      | Arbitrary (not necessarily unique) identifier.  |
| <code>parameters</code>                              | Model parameters  |
| <code>plist</code>                                   | Parameter indices w.r.t.  |
| <code>pscale</code>                                  | Parameter scales  |
| <code>reinitialization_state_idxsim</code>           | Indices of states to be reinitialized based on provided presimulation constants / fixed parameters. |
| <code>reinitialization_state_idxsim</code>           | Indices of states to be reinitialized based on provided constants / fixed parameters.               |
| <code>reinitializeFixedParameterInitialStates</code> | Flag indicating whether reinitialization of states depending on fixed parameters is activated       |
| <code>sx0</code>                                     | Initial state sensitivities   |
| <code>t_presim</code>                                | Duration of pre-simulation.   |
| <code>ts_</code>                                     | Timepoints for which model state/outputs/.  |
| <code>tstart_</code>                                 | starting time   |
| <code>x0</code>                                      | Initial state   |

## Methods

**`__init__`**(*\*args*)

*Overload 1:*

default constructor

*Overload 2:*

Copy constructor, needs to be declared to be generated in swig

*Overload 3:*

constructor that only initializes dimensions

### Parameters

- **`nytrue`** (*int*) – Number of observables
- **`nztrue`** (*int*) – Number of event outputs
- **`nmaxevent`** (*int*) – Maximal number of events to track

*Overload 4:*

constructor that initializes timepoints from vectors

### Parameters

- **`nytrue`** (*int*) – Number of observables
- **`nztrue`** (*int*) – Number of event outputs
- **`nmaxevent`** (*int*) – Maximal number of events to track
- **`ts`** (*DoubleVector*) – Timepoints (dimension: nt)

*Overload 5:*

constructor that initializes timepoints and fixed parameters from vectors

### Parameters

- **`nytrue`** (*int*) – Number of observables
- **`nztrue`** (*int*) – Number of event outputs

- **nmaxevent** (*int*) – Maximal number of events to track
- **ts** (*DoubleVector*) – Timepoints (dimension: nt)
- **fixedParameters** (*DoubleVector*) – Model constants (dimension: nk)

*Overload 6:*

constructor that initializes timepoints and data from vectors

**Parameters**

- **nytrue** (*int*) – Number of observables
- **nztrue** (*int*) – Number of event outputs
- **nmaxevent** (*int*) – Maximal number of events to track
- **ts** (*DoubleVector*) – Timepoints (dimension: nt)
- **observedData** (*DoubleVector*) – observed data (dimension: nt x nytrue, row-major)
- **observedDataStdDev** (*DoubleVector*) – standard deviation of observed data (dimension: nt x nytrue, row-major)
- **observedEvents** (*DoubleVector*) – observed events (dimension: nmaxevents x nztrue, row-major)
- **observedEventsStdDev** (*DoubleVector*) – standard deviation of observed events/roots (dimension: nmaxevents x nztrue, row-major)

*Overload 7:*

constructor that initializes with Model

**Parameters** **model** (*Model*) – pointer to model specification object

*Overload 8:*

constructor that initializes with returnData, adds noise according to specified sigmas

**Parameters**

- **rdata** (*ReturnData*) – return data pointer with stored simulation results
- **sigma\_y** (*float*) – scalar standard deviations for all observables
- **sigma\_z** (*float*) – scalar standard deviations for all event observables

*Overload 9:*

constructor that initializes with returnData, adds noise according to specified sigmas

**Parameters**

- **rdata** (*ReturnData*) – return data pointer with stored simulation results
- **sigma\_y** (*DoubleVector*) – vector of standard deviations for observables (dimension: nytrue or nt x nytrue, row-major)
- **sigma\_z** (*DoubleVector*) – vector of standard deviations for event observables (dimension: nztrue or nmaxevent x nztrue, row-major)

**getObservedData()** → *amici.amici.DoubleVector*

get function that copies data from ExpData::observedData to output

**Return type** *DoubleVector*

**Returns** observed data (dimension: nt x nytrue, row-major)

**getObservedDataPtr(it: int)** → Iterable[float]

get function that returns a pointer to observed data at index

**Parameters** **it** (int) – timepoint index

**Return type** float

**Returns** pointer to observed data at index (dimension: nytrue)

**getObservedDataStdDev()** → *amici.amici.DoubleVector*

get function that copies data from ExpData::observedDataStdDev to output

**Return type** *DoubleVector*

**Returns** standard deviation of observed data

**getObservedDataStdDevPtr(it: int)** → Iterable[float]

get function that returns a pointer to standard deviation of observed data at index

**Parameters** **it** (int) – timepoint index

**Return type** float

**Returns** pointer to standard deviation of observed data at index

**getObservedEvents()** → *amici.amici.DoubleVector*

get function that copies data from ExpData::mz to output

**Return type** *DoubleVector*

**Returns** observed event data

**getObservedEventsPtr(ie: int)** → Iterable[float]

get function that returns a pointer to observed data at ieth occurrence

**Parameters** **ie** (int) – event occurrence

**Return type** float

**Returns** pointer to observed event data at ieth occurrence

**getObservedEventsStdDev()** → *amici.amici.DoubleVector*

get function that copies data from ExpData::observedEventsStdDev to output

**Return type** *DoubleVector*

**Returns** standard deviation of observed event data

**getObservedEventsStdDevPtr**(*ie*: *int*) → Iterable[float]

get function that returns a pointer to standard deviation of observed event data at ie-th occurrence

**Parameters** *ie* (*int*) – event occurrence

**Return type** float

**Returns** pointer to standard deviation of observed event data at ie-th occurrence

**getTimepoint**(*it*: *int*) → float

get function that returns timepoint at index

**Parameters** *it* (*int*) – timepoint index

**Return type** float

**Returns** timepoint timepoint at index

**getTimepoints**() → *amici.amici.DoubleVector*

get function that copies data from ExpData::ts to output

**Return type** *DoubleVector*

**Returns** ExpData::ts

**isSetObservedData**(*it*: *int*, *iy*: *int*) → bool

get function that checks whether data at specified indices has been set

**Parameters**

- *it* (*int*) – time index
- *iy* (*int*) – observable index

**Return type** boolean

**Returns** boolean specifying if data was set

**isSetObservedDataStdDev**(*it*: *int*, *iy*: *int*) → bool

get function that checks whether standard deviation of data at specified indices has been set

**Parameters**

- *it* (*int*) – time index
- *iy* (*int*) – observable index

**Return type** boolean

**Returns** boolean specifying if standard deviation of data was set

**isSetObservedEvents**(*ie*: *int*, *iz*: *int*) → bool

get function that checks whether event data at specified indices has been set

**Parameters**

- *ie* (*int*) – event index
- *iz* (*int*) – event observable index

**Return type** boolean

**Returns** boolean specifying if data was set

**isSetObservedEventsStdDev**(*ie*: *int*, *iz*: *int*) → bool

get function that checks whether standard deviation of even data at specified indices has been set

**Parameters**

- **ie** (*int*) – event index
- **iz** (*int*) – event observable index

**Return type** *boolean*

**Returns** *boolean* specifying if standard deviation of event data was set

**nmaxevent**() → *int*

maximal number of events to track

**Return type** *int*

**Returns** maximal number of events to track

**nt**() → *int*

number of timepoints

**Return type** *int*

**Returns** number of timepoints

**nytrue**() → *int*

number of observables of the non-augmented model

**Return type** *int*

**Returns** number of observables of the non-augmented model

**nztrue**() → *int*

number of event observables of the non-augmented model

**Return type** *int*

**Returns** number of event observables of the non-augmented model

**reinitializeAllFixedParameterDependentInitialStates**(*nx\_rdata: int*) → *None*

Set reinitialization of all states based on model constants for all simulation phases.

Convenience function to populate *reinitialization\_state\_idxes\_presim* and *reinitialization\_state\_idxes\_sim*

**Parameters** *nx\_rdata* (*int*) – Number of states (Model::nx\_rdata)

**Return type** *None*

**reinitializeAllFixedParameterDependentInitialStatesForPresimulation**(*nx\_rdata: int*) → *None*

Set reinitialization of all states based on model constants for presimulation (only meaningful if preequilibration is performed).

Convenience function to populate *reinitialization\_state\_idxes\_presim* and *reinitialization\_state\_idxes\_sim*

**Parameters** *nx\_rdata* (*int*) – Number of states (Model::nx\_rdata)

**Return type** *None*

**reinitializeAllFixedParameterDependentInitialStatesForSimulation**(*nx\_rdata: int*) → *None*

Set reinitialization of all states based on model constants for the ‘main’ simulation (only meaningful if presimulation or preequilibration is performed).

Convenience function to populate *reinitialization\_state\_idxes\_presim* and *reinitialization\_state\_idxes\_sim*

**Parameters** *nx\_rdata* (*int*) – Number of states (Model::nx\_rdata)

**Return type** *None*

**setObservedData**(\*args) → `None`

*Overload 1:*

set function that copies data from input to `ExpData::my`

**Parameters** **observedData** (`DoubleVector`) – observed data (dimension: `nt` x `nytrue`, row-major)

*Overload 2:*

set function that copies observed data for specific observable

**Parameters**

- **observedData** (`DoubleVector`) – observed data (dimension: `nt`)
- **iy** (`int`) – observed data index

**Return type** `None`

**setObservedDataStdDev**(\*args) → `None`

*Overload 1:*

set function that copies data from input to `ExpData::observedDataStdDev`

**Parameters** **observedDataStdDev** (`DoubleVector`) – standard deviation of observed data (dimension: `nt` x `nytrue`, row-major)

*Overload 2:*

set function that sets all `ExpData::observedDataStdDev` to the input value

**Parameters** **stdDev** (`float`) – standard deviation (dimension: scalar)

*Overload 3:*

set function that copies standard deviation of observed data for specific observable

**Parameters**

- **observedDataStdDev** (`DoubleVector`) – standard deviation of observed data (dimension: `nt`)
- **iy** (`int`) – observed data index

*Overload 4:*

set function that sets all standard deviation of a specific observable to the input value

**Parameters**

- **stdDev** (*float*) – standard deviation (dimension: scalar)
- **iy** (*int*) – observed data index

**Return type** *None*

**setObservedEvents**(\*args) → *None*

*Overload 1:*

set function that copies observed event data from input to ExpData::observedEvents

**Parameters** **observedEvents** (*DoubleVector*) – observed data (dimension: nmaxevent x nztrue, row-major)

*Overload 2:*

set function that copies observed event data for specific event observable

**Parameters**

- **observedEvents** (*DoubleVector*) – observed data (dimension: nmaxevent)
- **iz** (*int*) – observed event data index

**Return type** *None*

**setObservedEventsStdDev**(\*args) → *None*

*Overload 1:*

set function that copies data from input to ExpData::observedEventsStdDev

**Parameters** **observedEventsStdDev** (*DoubleVector*) – standard deviation of observed event data

*Overload 2:*

set function that sets all ExpData::observedDataStdDev to the input value

**Parameters** **stdDev** (*float*) – standard deviation (dimension: scalar)

*Overload 3:*

set function that copies standard deviation of observed data for specific observable

**Parameters**



- **observedEventsStdDev** ([DoubleVector](#)) – standard deviation of observed data (dimension: nmaxevent)
- **iz** ([int](#)) – observed data index

*Overload 4:*

set function that sets all standard deviation of a specific observable to the input value

#### Parameters

- **stdDev** ([float](#)) – standard deviation (dimension: scalar)
- **iz** ([int](#)) – observed data index

**Return type** [None](#)

**setTimepoints**(*ts*: [amici.amici.DoubleVector](#)) → [None](#)

Set function that copies data from input to ExpData::ts

**Parameters** *ts* ([amici.amici.DoubleVector](#)) – timepoints

**Return type** [None](#)

## amici.amici.ExpDataPtr

**class** `amici.amici.ExpDataPtr(*args)`

Swig-Generated class that implements smart pointers to ExpData as objects.

### Attributes

|  |   |
|--|---|
| <code>fixedParameters</code>                         | Model constants   |
| <code>fixedParametersPreequilibration</code>         | Model constants for pre-equilibration   |
| <code>fixedParametersPresimulation</code>            | Model constants for pre-simulation  |
| <code>id</code>                                      | Arbitrary (not necessarily unique) identifier.  |
| <code>parameters</code>                              | Model parameters  |
| <code>plist</code>                                   | Parameter indices w.r.t.  |
| <code>pscale</code>                                  | Parameter scales  |
| <code>reinitialization_state_idxes_presim</code>     | Indices of states to be reinitialized based on provided presimulation constants / fixed parameters. |
| <code>reinitialization_state_idxes_sim</code>        | Indices of states to be reinitialized based on provided constants / fixed parameters.               |
| <code>reinitializeFixedParameterInitialStates</code> | Flag indicating whether reinitialization of states depending on fixed parameters is activated       |
| <code>sx0</code>                                     | Initial state sensitivities   |
| <code>t_presim</code>                                | Duration of pre-simulation.   |
| <code>ts_</code>                                     | Timepoints for which model state/outputs/.  |
| <code>tstart_</code>                                 | starting time   |
| <code>x0</code>                                      | Initial state   |

### **amici.amici.ExpDataPtrVector**

**class** amici.amici.**ExpDataPtrVector**(\*args)

Swig-Generated class templating common python types including Iterable [[amici.amici.ExpData](#)] and `numpy.array` [[amici.amici.ExpData](#)] to facilitate interfacing with C++ bindings.

### **amici.amici.FixedParameterContext**

**class** amici.amici.**FixedParameterContext**(value)

An enumeration.

#### **Attributes**

---

simulation

---

preequilibration

---

presimulation

---

### **amici.amici.IntVector**

**class** amici.amici.**IntVector**(\*args)

Swig-Generated class templating common python types including Iterable [[int](#)] and `numpy.array` [[int](#)] to facilitate interfacing with C++ bindings.

### **amici.amici.InternalSensitivityMethod**

**class** amici.amici.**InternalSensitivityMethod**(value)

An enumeration.

#### **Attributes**

---

simultaneous

---

staggered

---

staggered1

---

**amici.amici.InterpolationType**

**class** amici.amici.**InterpolationType**(*value*)  
An enumeration.

**Attributes**

---

hermite

---

polynomial

---

**amici.amici.LinearMultistepMethod**

**class** amici.amici.**LinearMultistepMethod**(*value*)  
An enumeration.

**Attributes**

---

adams

---

BDF

---

**amici.amici.LinearSolver**

**class** amici.amici.**LinearSolver**(*value*)  
An enumeration.

**Attributes**

---

dense

---

band

---

LAPACKDense

---

LAPACKBand

---

diag

---

SPGMR

---

SPBCG

---

continues on next page

Table 14 – continued from previous page

---

|           |
|-----------|
| SPTFQMR   |
| KLU       |
| SuperLUMT |

---

## amici.amici.Model

**class** amici.amici.**Model**(\*args, \*\*kwargs)

The Model class represents an AMICI ODE/DAE model.

The model can compute various model related quantities based on symbolically generated code.

**\_\_init\_\_**(\*args, \*\*kwargs)

*Overload 1:* Default ctor

*Overload 2:*

Constructor with model dimensions

### Parameters

- **nx\_rdata** (*int*) – Number of state variables
- **nxtrue\_rdata** (*int*) – Number of state variables of the non-augmented model
- **nx\_solver** (*int*) – Number of state variables with conservation laws applied
- **nxtrue\_solver** (*int*) – Number of state variables of the non-augmented model with conservation laws applied
- **nx\_solver\_reinit** (*int*) – Number of state variables with conservation laws subject to reinitialization
- **np** (*int*) – Number of parameters
- **nk** (*int*) – Number of constants
- **ny** (*int*) – Number of observables
- **nytrue** (*int*) – Number of observables of the non-augmented model
- **nz** (*int*) – Number of event observables
- **nztrue** (*int*) – Number of event observables of the non-augmented model
- **ne** (*int*) – Number of events
- **nJ** (*int*) – Number of objective functions
- **nw** (*int*) – Number of repeating elements
- **ndwdx** (*int*) – Number of nonzero elements in the  $x$  derivative of the repeating elements
- **ndwdp** (*int*) – Number of nonzero elements in the  $p$  derivative of the repeating elements

- **ndwdw** (*int*) – Number of nonzero elements in the  $w$  derivative of the repeating elements
- **ndxdotdw** (*int*) – Number of nonzero elements in the  $w$  derivative of  $x_{dot}$
- **ndJydy** (*IntVector*) – Number of nonzero elements in the  $y$  derivative of  $dJy$  (shape *nytrue*)
- **ndxrdatadxsolver** (*int*) – Number of nonzero elements in the  $x$  derivative of  $x_rdata$
- **ndxrdatadtcl** (*int*) – Number of nonzero elements in the  $tcl$  derivative of  $x_rdata$
- **ndtotal\_cldx\_rdata** (*int*) – Number of nonzero elements in the  $x_rdata$  derivative of  $total_{cl}$
- **nnz** (*int*) – Number of nonzero elements in Jacobian
- **ubw** (*int*) – Upper matrix bandwidth in the Jacobian
- **lbw** (*int*) – Lower matrix bandwidth in the Jacobian

## Methods Summary

|  |   |
|--|---|
| <code>__init__(*args, **kwargs)</code>                     | <i>Overload 1:</i>  |
| <code>clone()</code>                                       | Clone this instance.  |
| <code>fdsigmaydy(dsigmaydy, t, p, k, y)</code>             | Model-specific implementation of fsigmay  |
| <code>fdtotal_cldp(dttotal_cldp, x_rdata, p, k, ip)</code> | Compute $dtotal_{cl} / dp$  |
| <code>fdtotal_cldx_rdata(dttotal_cldx_rdata, ...)</code>   | Compute $dtotal_{cl} / dx_rdata$  |
| <code>fdx_rdatadp(dx_rdatadp, x, tcl, p, k, ip)</code>     | Compute $dx_rdata / dp$   |
| <code>fdx_rdatadtcl(dx_rdatadtcl, x, tcl, p, k)</code>     | Compute $dx_rdata / dtcl$   |
| <code>fdx_rdatadx_solver(dx_rdatadx_solver, x, ...)</code> | Compute $dx_rdata / dx_{solver}$  |
| <code>getAddSigmaResiduals()</code>                        | Checks whether residuals should be added to account for parameter dependent sigma.                    |
| <code>getAlwaysCheckFinite()</code>                        | Get setting of whether the result of every call to <i>Model::f*</i> should be checked for finiteness. |
| <code>getAmiciCommit()</code>                              | Returns the AMICI commit that was used to generate the model  |
| <code>getAmiciVersion()</code>                             | Returns the AMICI version that was used to generate the model   |
| <code>getExpressionIds()</code>                            | Get IDs of the expression.  |
| <code>getExpressionNames()</code>                          | Get names of the expressions.   |
| <code>getFixedParameterById(par_id)</code>                 | Get value of fixed parameter with the specified ID.   |
| <code>getFixedParameterByName(par_name)</code>             | Get value of fixed parameter with the specified name.   |
| <code>getFixedParameterIds()</code>                        | Get IDs of the fixed model parameters.  |
| <code>getFixedParameterNames()</code>                      | Get names of the fixed model parameters.  |
| <code>getFixedParameters()</code>                          | Get values of fixed parameters.   |
| <code>getInitialStateSensitivities()</code>                | Get the initial states sensitivities.   |
| <code>getInitialStates()</code>                            | Get the initial states.   |
| <code>getMinimumSigmaResiduals()</code>                    | Gets the specified estimated lower boundary for $\sigma_y$ .  |
| <code>getName()</code>                                     | Get the model name.   |
| <code>getObservableIds()</code>                            | Get IDs of the observables.   |
| <code>getObservableNames()</code>                          | Get names of the observables.   |
| <code>getObservableScaling(iy)</code>                      | Get scaling type for observable   |
| <code>getParameterById(par_id)</code>                      | Get value of first model parameter with the specified ID.   |

continues on next page

Table 15 – continued from previous page

|   |  |
|---|--|
| <code>getParameterByName(par_name)</code>                   | Get value of first model parameter with the specified name.  |
| <code>getParameterIds()</code>                              | Get IDs of the model parameters.   |
| <code>getParameterList()</code>                             | Get the list of parameters for which sensitivities are computed.   |
| <code>getParameterNames()</code>                            | Get names of the model parameters.   |
| <code>getParameterScale()</code>                            | Get parameter scale for each parameter.  |
| <code>getParameters()</code>                                | Get parameter vector.  |
| <code>getReinitializationStateIdxs()</code>                 | Return indices of states to be reinitialized based on provided constants / fixed parameters                                |
| <code>getReinitializeFixedParameterInitialStates()</code>   | Get whether initial states depending on fixed parameters are to be reinitialized after preequilibration and presimulation. |
| <code>getSolver()</code>                                    | Retrieves the solver object  |
| <code>getStateIds()</code>                                  | Get IDs of the model states.   |
| <code>getStateIdsSolver()</code>                            | Get IDs of the solver states.  |
| <code>getStateIsNonNegative()</code>                        | Get flags indicating whether states should be treated as non-negative.   |
| <code>getStateNames()</code>                                | Get names of the model states.   |
| <code>getStateNamesSolver()</code>                          | Get names of the solver states.  |
| <code>getSteadyStateSensitivityMode()</code>                | Gets the mode how sensitivities are computed in the steadystate simulation.  |
| <code>getTimepoint(it)</code>                               | Get simulation timepoint for time index <i>it</i> .  |
| <code>getTimepoints()</code>                                | Get the timepoint vector.  |
| <code>getUnscaledParameters()</code>                        | Get parameters with transformation according to parameter scale applied.   |
| <code>hasCustomInitialStateSensitivities()</code>           | Return whether custom initial state sensitivities have been set.   |
| <code>hasCustomInitialStates()</code>                       | Return whether custom initial states have been set.  |
| <code>hasExpressionIds()</code>                             | Report whether the model has expression IDs set.   |
| <code>hasExpressionNames()</code>                           | Report whether the model has expression names set.   |
| <code>hasFixedParameterIds()</code>                         | Report whether the model has fixed parameter IDs set.  |
| <code>hasFixedParameterNames()</code>                       | Report whether the model has fixed parameter names set.  |
| <code>hasObservableIds()</code>                             | Report whether the model has observable IDs set.   |
| <code>hasObservableNames()</code>                           | Report whether the model has observable names set.   |
| <code>hasParameterIds()</code>                              | Report whether the model has parameter IDs set.  |
| <code>hasParameterNames()</code>                            | Report whether the model has parameter names set.  |
| <code>hasQuadraticLLH()</code>                              | Checks whether the defined noise model is gaussian, i.e., the nllh is quadratic  |
| <code>hasStateIds()</code>                                  | Report whether the model has state IDs set.  |
| <code>hasStateNames()</code>                                | Report whether the model has state names set.  |
| <code>isFixedParameterStateReinitializationAllowed()</code> | Function indicating whether reinitialization of states depending on fixed parameters is permissible                        |
| <code>k()</code>  | Get fixed parameters.  |
| <code>nMaxEvent()</code>                                    | Get maximum number of events that may occur for each type.   |
| <code>ncl()</code>  | Get number of conservation laws.   |
| <code>nk()</code>   | Get number of constants  |
| <code>np()</code>   | Get total number of model parameters.  |

continues on next page

Table 15 – continued from previous page

|   |  |
|---|--|
| <code>nplist()</code>   | Get number of parameters wrt to which sensitivities are computed.  |
| <code>nt()</code>   | Get number of timepoints.  |
| <code>nx_reinit()</code>                                      | Get number of solver states subject to reinitialization.   |
| <code>plist(pos)</code>                                       | Get entry in parameter list by index.  |
| <code>requireSensitivitiesForAllParameters()</code>           | Require computation of sensitivities for all parameters $p$ $[0..np[$ in natural order.                                    |
| <code>setAddSigmaResiduals(sigma_res)</code>                  | Specifies whether residuals should be added to account for parameter dependent sigma.                                      |
| <code>setAllStatesNonNegative()</code>                        | Set flags indicating that all states should be treated as non-negative.  |
| <code>setAlwaysCheckFinite(alwaysCheck)</code>                | Set whether the result of every call to <i>Model::f*</i> should be checked for finiteness.                                 |
| <code>setFixedParameterById(par_id, value)</code>             | Set value of first fixed parameter with the specified ID.  |
| <code>setFixedParameterByName(par_name, value)</code>         | Set value of first fixed parameter with the specified name.  |
| <code>setFixedParameters(k)</code>                            | Set values for constants.  |
| <code>setFixedParametersByIdRegex(par_id_regex, value)</code> | Set values of all fixed parameters with the ID matching the specified regex.   |
| <code>setFixedParametersByNameRegex(...)</code>               | Set value of all fixed parameters with name matching the specified regex.  |
| <code>setInitialStateSensitivities(sx0)</code>                | Set the initial state sensitivities.   |
| <code>setInitialStates(x0)</code>                             | Set the initial states.  |
| <code>setMinimumSigmaResiduals(min_sigma)</code>              | Sets the estimated lower boundary for sigma_y.   |
| <code>setNMaxEvent(nmaxevent)</code>                          | Set maximum number of events that may occur for each type.   |
| <code>setParameterById(*args)</code>                          | <i>Overload 1:</i>   |
| <code>setParameterByName(*args)</code>                        | <i>Overload 1:</i>   |
| <code>setParameterList(plist)</code>                          | Set the list of parameters for which sensitivities are to be computed.   |
| <code>setParameterScale(*args)</code>                         | <b>rtype</b> <code>None</code>   |
| <code>setParameters(p)</code>                                 | Set the parameter vector.  |
| <code>setParametersByIdRegex(par_id_regex, value)</code>      | Set all values of model parameters with IDs matching the specified regular expression.                                     |
| <code>setParametersByNameRegex(par_name_regex, value)</code>  | Set all values of all model parameters with names matching the specified regex.  |
| <code>setReinitializationStateIdxs(idxs)</code>               | Set indices of states to be reinitialized based on provided constants / fixed parameters                                   |
| <code>setReinitializeFixedParameterInitialStates(flag)</code> | Set whether initial states depending on fixed parameters are to be reinitialized after preequilibration and presimulation. |
| <code>setStateIsNonNegative(stateIsNonNegative)</code>        | Set flags indicating whether states should be treated as non-negative.   |
| <code>setSteadyStateSensitivityMode(mode)</code>              | Set the mode how sensitivities are computed in the steadystate simulation.   |
| <code>setT0(t0)</code>  | Set simulation start time.   |
| <code>setTimepoints(ts)</code>                                | Set the timepoint vector.  |
| <code>setUnscaledInitialStateSensitivities(sx0)</code>        | Set the initial state sensitivities.   |

continues on next page

Table 15 – continued from previous page

|                                 |  |
|---------------------------------|--|
| <code>t0()</code>               | Get simulation start time.   |
| <b>Attributes</b>               |  |
| <code>app</code>                | AMICI application context  |
| <code>idlist</code>             | Flag array for DAE equations   |
| <code>lbw</code>                | Lower bandwidth of the Jacobian  |
| <code>nJ</code>                 | Dimension of the augmented objective function for 2nd order ASA  |
| <code>ndJydy</code>             | Number of nonzero elements in the $y$ derivative of $dJy$ (dimension <i>nytrue</i> )   |
| <code>ndtotal_cldx_rdata</code> | Number of nonzero elements in the $x_rdata$ derivative of $total_{cl}$   |
| <code>ndwdp</code>              | Number of nonzero elements in the $p$ derivative of the repeating elements   |
| <code>ndwdw</code>              | Number of nonzero elements in the $w$ derivative of the repeating elements   |
| <code>ndwdx</code>              | Number of nonzero elements in the $x$ derivative of the repeating elements   |
| <code>ndxdotdw</code>           | Number of nonzero elements in the $w$ derivative of $xdot$   |
| <code>ndxrdatadtcl</code>       | Number of nonzero elements in the $tcl$ derivative of $x_rdata$  |
| <code>ndxrdatadxsolver</code>   | Number of nonzero elements in the $x$ derivative of $x_rdata$  |
| <code>ne</code>                 | Number of events   |
| <code>nnz</code>                | Number of nonzero entries in Jacobian  |
| <code>nw</code>                 | Number of common expressions   |
| <code>nx_rdata</code>           | Number of states   |
| <code>nx_solver</code>          | Number of states with conservation laws applied  |
| <code>nx_solver_reinit</code>   | Number of solver states subject to reinitialization  |
| <code>nxtrue_rdata</code>       | Number of states in the unaugmented system   |
| <code>nxtrue_solver</code>      | Number of states in the unaugmented system with conservation laws applied  |
| <code>ny</code>                 | Number of observables  |
| <code>nytrue</code>             | Number of observables in the unaugmented system  |
| <code>nz</code>                 | Number of event outputs  |
| <code>nztrue</code>             | Number of event outputs in the unaugmented system  |
| <code>o2mode</code>             | Flag indicating whether for <code>amici::Solver::sensi_ == amici::SensitivityOrder::second</code> directional or full second order derivative will be computed |
| <code>pythonGenerated</code>    | Flag indicating Matlab- or Python-based model generation   |
| <code>ubw</code>                | Upper bandwidth of the Jacobian  |



## Methods

`__init__(*args, **kwargs)`

*Overload 1:* Default ctor

*Overload 2:*

Constructor with model dimensions

### Parameters

- **nx\_rdata** (*int*) – Number of state variables
- **nxtrue\_rdata** (*int*) – Number of state variables of the non-augmented model
- **nx\_solver** (*int*) – Number of state variables with conservation laws applied
- **nxtrue\_solver** (*int*) – Number of state variables of the non-augmented model with conservation laws applied
- **nx\_solver\_reinit** (*int*) – Number of state variables with conservation laws subject to reinitialization
- **np** (*int*) – Number of parameters
- **nk** (*int*) – Number of constants
- **ny** (*int*) – Number of observables
- **nytrue** (*int*) – Number of observables of the non-augmented model
- **nz** (*int*) – Number of event observables
- **nztrue** (*int*) – Number of event observables of the non-augmented model
- **ne** (*int*) – Number of events
- **nJ** (*int*) – Number of objective functions
- **nw** (*int*) – Number of repeating elements
- **ndwdx** (*int*) – Number of nonzero elements in the  $x$  derivative of the repeating elements
- **ndwdp** (*int*) – Number of nonzero elements in the  $p$  derivative of the repeating elements
- **ndwdw** (*int*) – Number of nonzero elements in the  $w$  derivative of the repeating elements
- **ndxdotdw** (*int*) – Number of nonzero elements in the  $w$  derivative of  $x\dot{d}ot$
- **ndJydy** (*IntVector*) – Number of nonzero elements in the  $y$  derivative of  $dJy$  (shape *nytrue*)
- **ndxrdatadxsolver** (*int*) – Number of nonzero elements in the  $x$  derivative of  $x_rdata$
- **ndxrdatadtcl** (*int*) – Number of nonzero elements in the  $tcl$  derivative of  $x_rdata$
- **ndtotal\_cldx\_rdata** (*int*) – Number of nonzero elements in the  $x_rdata$  derivative of  $total_{cl}$
- **nnz** (*int*) – Number of nonzero elements in Jacobian

- **ubw** (*int*) – Upper matrix bandwidth in the Jacobian
- **lbw** (*int*) – Lower matrix bandwidth in the Jacobian

**clone()** → Iterable[*amici.amici.Model*]

Clone this instance.

**Return type** *amici.Model*

**Returns** The clone

**fdsigmaydy**(*dsigmaydy: Iterable[float], t: float, p: Iterable[float], k: Iterable[float], y: Iterable[float]*) → *None*

Model-specific implementation of fsigmay

**Parameters**

- **dsigmaydy** (*typing.Iterable[float]*) – partial derivative of standard deviation of measurements w.r.t. model outputs
- **t** (*float*) – current time
- **p** (*typing.Iterable[float]*) – parameter vector
- **k** (*typing.Iterable[float]*) – constant vector
- **y** (*typing.Iterable[float]*) – model output at timepoint t

**Return type** *None*

**fdtotal\_cldp**(*dtotal\_cldp: Iterable[float], x\_rdata: Iterable[float], p: Iterable[float], k: Iterable[float], ip: int*) → *None*

Compute dtotal\_cl / dp

**Parameters**

- **dtotal\_cldp** (*typing.Iterable[float]*) – dtotal\_cl / dp
- **x\_rdata** (*typing.Iterable[float]*) – State variables with conservation laws applied
- **p** (*typing.Iterable[float]*) – parameter vector
- **k** (*typing.Iterable[float]*) – constant vector
- **ip** (*int*) – Sensitivity index

**Return type** *None*

**fdtotal\_cldx\_rdata**(*dtotal\_cldx\_rdata: Iterable[float], x\_rdata: Iterable[float], p: Iterable[float], k: Iterable[float], tcl: Iterable[float]*) → *None*

Compute dtotal\_cl / dx\_rdata

**Parameters**

- **dtotal\_cldx\_rdata** (*typing.Iterable[float]*) – dtotal\_cl / dx\_rdata
- **x\_rdata** (*typing.Iterable[float]*) – State variables with conservation laws applied
- **p** (*typing.Iterable[float]*) – parameter vector
- **k** (*typing.Iterable[float]*) – constant vector
- **tcl** (*typing.Iterable[float]*) – Total abundances for conservation laws

**Return type** *None*

**fdx\_rdatadp**(*dx\_rdatadp: Iterable[float], x: Iterable[float], tcl: Iterable[float], p: Iterable[float], k: Iterable[float], ip: int*) → *None*

Compute  $dx\_rdata / dp$

**Parameters**

- **dx\_rdatadp** (*typing.Iterable[float]*) –  $dx\_rdata / dp$
- **p** (*typing.Iterable[float]*) – parameter vector
- **k** (*typing.Iterable[float]*) – constant vector
- **x** (*typing.Iterable[float]*) – State variables with conservation laws applied
- **tcl** (*typing.Iterable[float]*) – Total abundances for conservation laws
- **ip** (*int*) – Sensitivity index

**Return type** *None*

**fdx\_rdatadtcl**(*dx\_rdatadtcl: Iterable[float], x: Iterable[float], tcl: Iterable[float], p: Iterable[float], k: Iterable[float]*) → *None*

Compute  $dx\_rdata / dtcl$

**Parameters**

- **dx\_rdatadtcl** (*typing.Iterable[float]*) –  $dx\_rdata / dtcl$
- **p** (*typing.Iterable[float]*) – parameter vector
- **k** (*typing.Iterable[float]*) – constant vector
- **x** (*typing.Iterable[float]*) – State variables with conservation laws applied
- **tcl** (*typing.Iterable[float]*) – Total abundances for conservation laws

**Return type** *None*

**fdx\_rdatadx\_solver**(*dx\_rdatadx\_solver: Iterable[float], x: Iterable[float], tcl: Iterable[float], p: Iterable[float], k: Iterable[float]*) → *None*

Compute  $dx\_rdata / dx\_solver$

**Parameters**

- **dx\_rdatadx\_solver** (*typing.Iterable[float]*) –  $dx\_rdata / dx\_solver$
- **p** (*typing.Iterable[float]*) – parameter vector
- **k** (*typing.Iterable[float]*) – constant vector
- **x** (*typing.Iterable[float]*) – State variables with conservation laws applied
- **tcl** (*typing.Iterable[float]*) – Total abundances for conservation laws

**Return type** *None*

**getAddSigmaResiduals**() → *bool*

Checks whether residuals should be added to account for parameter dependent sigma.

**Return type** *boolean*

**Returns** *sigma\_res*

**getAlwaysCheckFinite**() → *bool*

Get setting of whether the result of every call to *Model::f\** should be checked for finiteness.

**Return type** *boolean*

**Returns** *that*

**getAmiciCommit()** → *str*

Returns the AMICI commit that was used to generate the model

**Return type** *str*

**Returns** AMICI commit string

**getAmiciVersion()** → *str*

Returns the AMICI version that was used to generate the model

**Return type** *str*

**Returns** AMICI version string

**getExpressionIds()** → *amici.amici.StringVector*

Get IDs of the expression.

**Return type** *StringVector*

**Returns** Expression IDs

**getExpressionNames()** → *amici.amici.StringVector*

Get names of the expressions.

**Return type** *StringVector*

**Returns** Expression names

**getFixedParameterById(*par\_id: str*)** → *float*

Get value of fixed parameter with the specified ID.

**Parameters** *par\_id* (*str*) – Parameter ID

**Return type** *float*

**Returns** Parameter value

**getFixedParameterByName(*par\_name: str*)** → *float*

Get value of fixed parameter with the specified name.

If multiple parameters have the same name, the first parameter with matching name is returned.

**Parameters** *par\_name* (*str*) – Parameter name

**Return type** *float*

**Returns** Parameter value

**getFixedParameterIds()** → *amici.amici.StringVector*

Get IDs of the fixed model parameters.

**Return type** *StringVector*

**Returns** Fixed parameter IDs

**getFixedParameterNames()** → *amici.amici.StringVector*

Get names of the fixed model parameters.

**Return type** *StringVector*

**Returns** Fixed parameter names

**getFixedParameters()** → *amici.amici.DoubleVector*

Get values of fixed parameters.

**Return type** *DoubleVector*

**Returns** Vector of fixed parameters with same ordering as in `Model::getFixedParameterIds`

**getInitialStateSensitivities()** → *amici.amici.DoubleVector*

Get the initial states sensitivities.

**Return type** *DoubleVector*

**Returns** vector of initial state sensitivities

**getInitialStates()** → *amici.amici.DoubleVector*

Get the initial states.

**Return type** *DoubleVector*

**Returns** Initial state vector

**getMinimumSigmaResiduals()** → *float*

Gets the specified estimated lower boundary for sigma\_y.

**Return type** *float*

**Returns** lower boundary

**getName()** → *str*

Get the model name.

**Return type** *str*

**Returns** Model name

**getObservableIds()** → *amici.amici.StringVector*

Get IDs of the observables.

**Return type** *StringVector*

**Returns** Observable IDs

**getObservableNames()** → *amici.amici.StringVector*

Get names of the observables.

**Return type** *StringVector*

**Returns** Observable names

**getObservableScaling(iy: int)** → *amici.amici.ObservableScaling*

Get scaling type for observable

**Parameters** *iy* (*int*) – observable index

**Return type** *int*

**Returns** scaling type

**getParameterById(par\_id: str)** → *float*

Get value of first model parameter with the specified ID.

**Parameters** *par\_id* (*str*) – Parameter ID

**Return type** *float*

**Returns** Parameter value

**getParameterByName(par\_name: str)** → *float*

Get value of first model parameter with the specified name.

**Parameters** *par\_name* (*str*) – Parameter name

**Return type** *float*

**Returns** Parameter value

**getParameterIds()** → *amici.amici.StringVector*

Get IDs of the model parameters.

**Return type** *StringVector*

**Returns** Parameter IDs

**getParameterList()** → *amici.amici.IntVector*

Get the list of parameters for which sensitivities are computed.

**Return type** *IntVector*

**Returns** List of parameter indices

**getParameterNames()** → *amici.amici.StringVector*

Get names of the model parameters.

**Return type** *StringVector*

**Returns** The parameter names

**getParameterScale()** → *amici.amici.ParameterScalingVector*

Get parameter scale for each parameter.

**Return type** *ParameterScalingVector*

**Returns** Vector of parameter scales

**getParameters()** → *amici.amici.DoubleVector*

Get parameter vector.

**Return type** *DoubleVector*

**Returns** The user-set parameters (see also *Model::getUnscaledParameters*)

**getReinitializationStateIdxs()** → *amici.amici.IntVector*

Return indices of states to be reinitialized based on provided constants / fixed parameters

**Return type** *IntVector*

**Returns** Those indices.

**getReinitializeFixedParameterInitialStates()** → *bool*

Get whether initial states depending on fixedParameters are to be reinitialized after preequilibration and presimulation.

**Return type** *boolean*

**Returns** flag *true* / *false*

**getSolver()** → *amici.amici.Solver*

Retrieves the solver object

**Return type** *amici.Solver*

**Returns** The Solver instance

**getStateIds()** → *amici.amici.StringVector*

Get IDs of the model states.

**Return type** *StringVector*

**Returns** State IDs

**getStateIdsSolver()** → *amici.amici.StringVector*

Get IDs of the solver states.

**Return type** *StringVector*

**Returns** State IDs

**getStateIsNonNegative()** → *amici.amici.BoolVector*

Get flags indicating whether states should be treated as non-negative.

**Return type** *BoolVector*

**Returns** Vector of flags

**getStateNames()** → *amici.amici.StringVector*

Get names of the model states.

**Return type** *StringVector*

**Returns** State names

**getStateNamesSolver()** → *amici.amici.StringVector*

Get names of the solver states.

**Return type** *StringVector*

**Returns** State names

**getSteadyStateSensitivityMode()** → *amici.amici.SteadyStateSensitivityMode*

Gets the mode how sensitivities are computed in the steadystate simulation.

**Return type** *amici.SteadyStateSensitivityMode*

**Returns** Mode

**getTimepoint(it: int)** → float

Get simulation timepoint for time index *it*.

**Parameters** *it* (int) – Time index

**Return type** float

**Returns** Timepoint

**getTimepoints()** → *amici.amici.DoubleVector*

Get the timepoint vector.

**Return type** *DoubleVector*

**Returns** Timepoint vector

**getUnscaledParameters()** → *amici.amici.DoubleVector*

Get parameters with transformation according to parameter scale applied.

**Return type** *DoubleVector*

**Returns** Unscaled parameters

**hasCustomInitialStateSensitivities()** → bool

Return whether custom initial state sensitivities have been set.

**Return type** boolean

**Returns** *true* if has custom initial state sensitivities, otherwise *false*.

**hasCustomInitialStates()** → bool

Return whether custom initial states have been set.

**Return type** boolean

**Returns** *true* if has custom initial states, otherwise *false*

**hasExpressionIds()** → `bool`

Report whether the model has expression IDs set.

**Return type** `boolean`

**Returns** Boolean indicating whether expression ids were set. Also returns *true* if the number of corresponding variables is just zero.

**hasExpressionNames()** → `bool`

Report whether the model has expression names set.

**Return type** `boolean`

**Returns** Boolean indicating whether expression names were set. Also returns *true* if the number of corresponding variables is just zero.

**hasFixedParameterIds()** → `bool`

Report whether the model has fixed parameter IDs set.

**Return type** `boolean`

**Returns** Boolean indicating whether fixed parameter IDs were set. Also returns *true* if the number of corresponding variables is just zero.

**hasFixedParameterNames()** → `bool`

Report whether the model has fixed parameter names set.

**Return type** `boolean`

**Returns** Boolean indicating whether fixed parameter names were set. Also returns *true* if the number of corresponding variables is just zero.

**hasObservableIds()** → `bool`

Report whether the model has observable IDs set.

**Return type** `boolean`

**Returns** Boolean indicating whether observable ids were set. Also returns *true* if the number of corresponding variables is just zero.

**hasObservableNames()** → `bool`

Report whether the model has observable names set.

**Return type** `boolean`

**Returns** Boolean indicating whether observable names were set. Also returns *true* if the number of corresponding variables is just zero.

**hasParameterIds()** → `bool`

Report whether the model has parameter IDs set.

**Return type** `boolean`

**Returns** Boolean indicating whether parameter IDs were set. Also returns *true* if the number of corresponding variables is just zero.

**hasParameterNames()** → `bool`

Report whether the model has parameter names set.

**Return type** `boolean`

**Returns** Boolean indicating whether parameter names were set. Also returns *true* if the number of corresponding variables is just zero.

**hasQuadraticLLH()** → `bool`

Checks whether the defined noise model is gaussian, i.e., the nllh is quadratic



**Return type** boolean

**Returns** boolean flag

**hasStateIds()** → bool

Report whether the model has state IDs set.

**Return type** boolean

**Returns** Boolean indicating whether state IDs were set. Also returns *true* if the number of corresponding variables is just zero.

**hasStateNames()** → bool

Report whether the model has state names set.

**Return type** boolean

**Returns** Boolean indicating whether state names were set. Also returns *true* if the number of corresponding variables is just zero.

**isFixedParameterStateReinitializationAllowed()** → bool

Function indicating whether reinitialization of states depending on fixed parameters is permissible

**Return type** boolean

**Returns** flag indicating whether reinitialization of states depending on fixed parameters is permissible

**k()** → Iterable[float]

Get fixed parameters.

**Return type** float

**Returns** Pointer to constants array

**nMaxEvent()** → int

Get maximum number of events that may occur for each type.

**Return type** int

**Returns** Maximum number of events that may occur for each type

**ncl()** → int

Get number of conservation laws.

**Return type** int

**Returns** Number of conservation laws (i.e., difference between *nx\_rdata* and *nx\_solver*).

**nk()** → int

Get number of constants

**Return type** int

**Returns** Length of constant vector

**np()** → int

Get total number of model parameters.

**Return type** int

**Returns** Length of parameter vector

**nplist()** → int

Get number of parameters wrt to which sensitivities are computed.

**Return type** int

**Returns** Length of sensitivity index vector

**nt()** → *int*

Get number of timepoints.

**Return type** *int*

**Returns** Number of timepoints

**nx\_reinit()** → *int*

Get number of solver states subject to reinitialization.

**Return type** *int*

**Returns** Model member *nx\_solver\_reinit*

**plist(pos: *int*)** → *int*

Get entry in parameter list by index.

**Parameters** **pos** (*int*) – Index in sensitivity parameter list

**Return type** *int*

**Returns** Index in parameter list

**requireSensitivitiesForAllParameters()** → *None*

Require computation of sensitivities for all parameters *p* [0..np[ in natural order.

NOTE: Resets initial state sensitivities.

**Return type** *None*

**setAddSigmaResiduals(sigma\_res: *bool*)** → *None*

Specifies whether residuals should be added to account for parameter dependent sigma.

If set to true, additional residuals of the form  $\sqrt{\log(\sigma) + C}$  will be added. This enables least-squares optimization for variables with Gaussian noise assumption and parameter dependent standard deviation sigma. The constant *C* can be set via [setMinimumSigmaResiduals\(\)](#).

**Parameters** **sigma\_res** (*bool*) – if true, additional residuals are added

**Return type** *None*

**setAllStatesNonNegative()** → *None*

Set flags indicating that all states should be treated as non-negative.

**Return type** *None*

**setAlwaysCheckFinite(alwaysCheck: *bool*)** → *None*

Set whether the result of every call to *Model::f\** should be checked for finiteness.

**Parameters** **alwaysCheck** (*bool*) –

**Return type** *None*

**setFixedParameterById(par\_id: *str*, value: *float*)** → *None*

Set value of first fixed parameter with the specified ID.

**Parameters**

- **par\_id** (*str*) – Fixed parameter id
- **value** (*float*) – Fixed parameter value

**Return type** *None*

**setFixedParameterByName(par\_name: *str*, value: *float*)** → *None*

Set value of first fixed parameter with the specified name.

**Parameters**

- **par\_name** (*str*) – Fixed parameter ID
- **value** (*float*) – Fixed parameter value

**Return type** *None***setFixedParameters**(*k*: *amici.amici.DoubleVector*) → *None*

Set values for constants.

**Parameters** **k** (*amici.amici.DoubleVector*) – Vector of fixed parameters**Return type** *None***setFixedParametersByIdRegex**(*par\_id\_regex*: *str*, *value*: *float*) → *int*

Set values of all fixed parameters with the ID matching the specified regex.

**Parameters**

- **par\_id\_regex** (*str*) – Fixed parameter name regex
- **value** (*float*) – Fixed parameter value

**Return type** *int***Returns** Number of fixed parameter IDs that matched the regex**setFixedParametersByNameRegex**(*par\_name\_regex*: *str*, *value*: *float*) → *int*

Set value of all fixed parameters with name matching the specified regex.

**Parameters**

- **par\_name\_regex** (*str*) – Fixed parameter name regex
- **value** (*float*) – Fixed parameter value

**Return type** *int***Returns** Number of fixed parameter names that matched the regex**setInitialStateSensitivities**(*sx0*: *amici.amici.DoubleVector*) → *None*

Set the initial state sensitivities.

**Parameters** **sx0** (*amici.amici.DoubleVector*) – vector of initial state sensitivities with chainrule applied. This could be a slice of *ReturnData::sx* or *ReturnData::sx0***Return type** *None***setInitialStates**(*x0*: *amici.amici.DoubleVector*) → *None*

Set the initial states.

**Parameters** **x0** (*amici.amici.DoubleVector*) – Initial state vector**Return type** *None***setMinimumSigmaResiduals**(*min\_sigma*: *float*) → *None*Sets the estimated lower boundary for *sigma\_y*. When *setAddSigmaResiduals()* is activated, this lower boundary must ensure that  $\log(\text{sigma}) + \text{min\_sigma} > 0$ .**Parameters** **min\_sigma** (*float*) – lower boundary**Return type** *None***setMaxEvent**(*nmaxevent*: *int*) → *None*

Set maximum number of events that may occur for each type.

**Parameters** **nmaxevent** (*int*) – Maximum number of events that may occur for each type

Return type `None`

**setParameterById**(\*args) → `None`

*Overload 1:*

Set model parameters according to the parameter IDs and mapped values.

**Parameters**

- **p** (`StringDoubleMap`) – Map of parameters IDs and values
- **ignoreErrors** (`boolean`, *optional*) – Ignore errors such as parameter IDs in p which are not model parameters

*Overload 2:*

Set value of first model parameter with the specified ID.

**Parameters**

- **par\_id** (`str`) – Parameter ID
- **value** (`float`) – Parameter value

Return type `None`

**setParameterByName**(\*args) → `None`

*Overload 1:*

Set value of first model parameter with the specified name.

**Parameters**

- **par\_name** (`str`) – Parameter name
- **value** (`float`) – Parameter value

*Overload 2:*

Set model parameters according to the parameter name and mapped values.

**Parameters**

- **p** (`StringDoubleMap`) – Map of parameters names and values
- **ignoreErrors** (`boolean`, *optional*) – Ignore errors such as parameter names in p which are not model parameters

*Overload 3:*

Set model parameters according to the parameter name and mapped values.

**Parameters**

- **p** (`StringDoubleMap`) – Map of parameters names and values
- **ignoreErrors** – Ignore errors such as parameter names in p which are not model parameters

**Return type** `None`**setParameterList** (*plist*: `amici.amici.IntVector`) → `None`

Set the list of parameters for which sensitivities are to be computed.

NOTE: Resets initial state sensitivities.

**Parameters** **plist** (`amici.amici.IntVector`) – List of parameter indices**Return type** `None`**setParameterScale** (\*args) → `None`**Return type** `None`**setParameters** (*p*: `amici.amici.DoubleVector`) → `None`

Set the parameter vector.

**Parameters** **p** (`amici.amici.DoubleVector`) – Vector of parameters**Return type** `None`**setParametersByIdRegex** (*par\_id\_regex*: `str`, *value*: `float`) → `int`

Set all values of model parameters with IDs matching the specified regular expression.

**Parameters**

- **par\_id\_regex** (`str`) – Parameter ID regex
- **value** (`float`) – Parameter value

**Return type** `int`**Returns** Number of parameter IDs that matched the regex**setParametersByNameRegex** (*par\_name\_regex*: `str`, *value*: `float`) → `int`

Set all values of all model parameters with names matching the specified regex.

**Parameters**

- **par\_name\_regex** (`str`) – Parameter name regex
- **value** (`float`) – Parameter value

**Return type** `int`**Returns** Number of fixed parameter names that matched the regex**setReinitializationStateIdxs** (*idxs*: `amici.amici.IntVector`) → `None`

Set indices of states to be reinitialized based on provided constants / fixed parameters

**Parameters** **idxs** (`amici.amici.IntVector`) – Array of state indices**Return type** `None`**setReinitializeFixedParameterInitialStates** (*flag*: `bool`) → `None`

Set whether initial states depending on fixed parameters are to be reinitialized after preequilibration and presimulation.

**Parameters** **flag** (`bool`) – Fixed parameters reinitialized?

**Return type** `None`

**setStateIsNonNegative**(*stateIsNonNegative*: `amici.amici.BoolVector`) → `None`

Set flags indicating whether states should be treated as non-negative.

**Parameters** **stateIsNonNegative** (`amici.amici.BoolVector`) – Vector of flags

**Return type** `None`

**setSteadyStateSensitivityMode**(*mode*: `amici.amici.SteadyStateSensitivityMode`) → `None`

Set the mode how sensitivities are computed in the steadystate simulation.

**Parameters** **mode** (`amici.amici.SteadyStateSensitivityMode`) – Steadystate sensitivity mode

**Return type** `None`

**setT0**(*t0*: `float`) → `None`

Set simulation start time.

**Parameters** **t0** (`float`) – Simulation start time

**Return type** `None`

**setTimepoints**(*ts*: `amici.amici.DoubleVector`) → `None`

Set the timepoint vector.

**Parameters** **ts** (`amici.amici.DoubleVector`) – New timepoint vector

**Return type** `None`

**setUnscaledInitialStateSensitivities**(*sx0*: `amici.amici.DoubleVector`) → `None`

Set the initial state sensitivities.

**Parameters** **sx0** (`amici.amici.DoubleVector`) – Vector of initial state sensitivities without chainrule applied. This could be the readin from a *model.sx0data* saved to HDF5.

**Return type** `None`

**t0**() → `float`

Get simulation start time.

**Return type** `float`

**Returns** Simulation start time

## **amici.amici.ModelDimensions**

**class** `amici.amici.ModelDimensions(*args)`

Container for model dimensions.

Holds number of states, observables, etc.

**\_\_init\_\_**(\*args)

*Overload 1:* Default ctor

*Overload 2:*

Constructor with model dimensions

### Parameters

- **nx\_rdata** (*int*) – Number of state variables
- **nxtrue\_rdata** (*int*) – Number of state variables of the non-augmented model
- **nx\_solver** (*int*) – Number of state variables with conservation laws applied
- **nxtrue\_solver** (*int*) – Number of state variables of the non-augmented model with conservation laws applied
- **nx\_solver\_reinit** (*int*) – Number of state variables with conservation laws subject to reinitialization
- **np** (*int*) – Number of parameters
- **nk** (*int*) – Number of constants
- **ny** (*int*) – Number of observables
- **nytrue** (*int*) – Number of observables of the non-augmented model
- **nz** (*int*) – Number of event observables
- **nztrue** (*int*) – Number of event observables of the non-augmented model
- **ne** (*int*) – Number of events
- **nJ** (*int*) – Number of objective functions
- **nw** (*int*) – Number of repeating elements
- **ndwdx** (*int*) – Number of nonzero elements in the  $x$  derivative of the repeating elements
- **ndwdp** (*int*) – Number of nonzero elements in the  $p$  derivative of the repeating elements
- **ndwdw** (*int*) – Number of nonzero elements in the  $w$  derivative of the repeating elements
- **ndxdotdw** (*int*) – Number of nonzero elements in the  $w$  derivative of  $x\dot{d}ot$
- **ndJydy** (*IntVector*) – Number of nonzero elements in the  $y$  derivative of  $dJy$  (shape *nytrue*)
- **ndxrdatadxsolver** (*int*) – Number of nonzero elements in the  $x$  derivative of  $x_rdata$
- **ndxrdatadtcl** (*int*) – Number of nonzero elements in the  $tcl$  derivative of  $x_rdata$
- **ndtotal\_cldx\_rdata** (*int*) – Number of nonzero elements in the  $x_rdata$  derivative of  $total_{cl}$
- **nnz** (*int*) – Number of nonzero elements in Jacobian
- **ubw** (*int*) – Upper matrix bandwidth in the Jacobian
- **lbw** (*int*) – Lower matrix bandwidth in the Jacobian

## Methods Summary

`__init__`(\*args)

*Overload 1:*

## Attributes

|                                 |  |
|---------------------------------|--|
| <code>lbw</code>                | Lower bandwidth of the Jacobian  |
| <code>nJ</code>                 | Dimension of the augmented objective function for 2nd order ASA                      |
| <code>ndJydy</code>             | Number of nonzero elements in the $y$ derivative of $dJy$ (dimension <i>nytrue</i> ) |
| <code>ndtotal_cldx_rdata</code> | Number of nonzero elements in the $x_rdata$ derivative of $total_{cl}$               |
| <code>ndwdp</code>              | Number of nonzero elements in the $p$ derivative of the repeating elements           |
| <code>ndwdw</code>              | Number of nonzero elements in the $w$ derivative of the repeating elements           |
| <code>ndwdx</code>              | Number of nonzero elements in the $x$ derivative of the repeating elements           |
| <code>ndxdotdw</code>           | Number of nonzero elements in the $w$ derivative of $xdot$                           |
| <code>ndxrdatadtcl</code>       | Number of nonzero elements in the $tcl$ derivative of $x_rdata$                      |
| <code>ndxrdatadxsolver</code>   | Number of nonzero elements in the $x$ derivative of $x_rdata$                        |
| <code>ne</code>                 | Number of events   |
| <code>nk</code>                 | Number of constants  |
| <code>nnz</code>                | Number of nonzero entries in Jacobian  |
| <code>np</code>                 | Number of parameters   |
| <code>nw</code>                 | Number of common expressions   |
| <code>nx_rdata</code>           | Number of states   |
| <code>nx_solver</code>          | Number of states with conservation laws applied                                      |
| <code>nx_solver_reinit</code>   | Number of solver states subject to reinitialization                                  |
| <code>nxtrue_rdata</code>       | Number of states in the unaugmented system   |
| <code>nxtrue_solver</code>      | Number of states in the unaugmented system with conservation laws applied            |
| <code>ny</code>                 | Number of observables  |
| <code>nytrue</code>             | Number of observables in the unaugmented system                                      |
| <code>nz</code>                 | Number of event outputs  |
| <code>nztrue</code>             | Number of event outputs in the unaugmented system                                    |
| <code>ubw</code>                | Upper bandwidth of the Jacobian  |



## Methods

`__init__(*args)`

*Overload 1:* Default ctor

*Overload 2:*

Constructor with model dimensions

### Parameters

- **`nx_rdata`** (*int*) – Number of state variables
- **`nxtrue_rdata`** (*int*) – Number of state variables of the non-augmented model
- **`nx_solver`** (*int*) – Number of state variables with conservation laws applied
- **`nxtrue_solver`** (*int*) – Number of state variables of the non-augmented model with conservation laws applied
- **`nx_solver_reinit`** (*int*) – Number of state variables with conservation laws subject to reinitialization
- **`np`** (*int*) – Number of parameters
- **`nk`** (*int*) – Number of constants
- **`ny`** (*int*) – Number of observables
- **`nytrue`** (*int*) – Number of observables of the non-augmented model
- **`nz`** (*int*) – Number of event observables
- **`nztrue`** (*int*) – Number of event observables of the non-augmented model
- **`ne`** (*int*) – Number of events
- **`nJ`** (*int*) – Number of objective functions
- **`nw`** (*int*) – Number of repeating elements
- **`ndwdx`** (*int*) – Number of nonzero elements in the  $x$  derivative of the repeating elements
- **`ndwdp`** (*int*) – Number of nonzero elements in the  $p$  derivative of the repeating elements
- **`ndwdw`** (*int*) – Number of nonzero elements in the  $w$  derivative of the repeating elements
- **`ndxdotdw`** (*int*) – Number of nonzero elements in the  $w$  derivative of  $x\dot{d}ot$
- **`ndJydy`** (*IntVector*) – Number of nonzero elements in the  $y$  derivative of  $dJy$  (shape *nytrue*)
- **`ndxrdatadxsolver`** (*int*) – Number of nonzero elements in the  $x$  derivative of  $x_rdata$
- **`ndxrdatadtcl`** (*int*) – Number of nonzero elements in the  $tcl$  derivative of  $x_rdata$
- **`ndtotal_cldx_rdata`** (*int*) – Number of nonzero elements in the  $x_rdata$  derivative of  $total_{cl}$
- **`nnz`** (*int*) – Number of nonzero elements in Jacobian

- **ubw** (*int*) – Upper matrix bandwidth in the Jacobian
- **lbw** (*int*) – Lower matrix bandwidth in the Jacobian

### amici.amici.ModelPtr

**class** amici.amici.**ModelPtr**(\*args)

Swig-Generated class that implements smart pointers to Model as objects.

#### Attributes

|                    |  |
|--------------------|--|
| app                | AMICI application context  |
| idlist             | Flag array for DAE equations   |
| lbw                | Lower bandwidth of the Jacobian  |
| nJ                 | Dimension of the augmented objective function for 2nd order ASA  |
| ndJydy             | Number of nonzero elements in the $y$ derivative of $dJy$ (dimension <i>nytrue</i> )   |
| ndtotal_cldx_rdata | Number of nonzero elements in the $x_rdata$ derivative of $total_{cl}$   |
| ndwdp              | Number of nonzero elements in the $p$ derivative of the repeating elements   |
| ndwdw              | Number of nonzero elements in the $w$ derivative of the repeating elements   |
| ndwdx              | Number of nonzero elements in the $x$ derivative of the repeating elements   |
| ndxdotdw           | Number of nonzero elements in the $w$ derivative of $xdot$   |
| ndxrdatadtcl       | Number of nonzero elements in the $tcl$ derivative of $x_rdata$  |
| ndxrdatadxsolver   | Number of nonzero elements in the $x$ derivative of $x_rdata$  |
| ne                 | Number of events   |
| nnz                | Number of nonzero entries in Jacobian  |
| nw                 | Number of common expressions   |
| nx_rdata           | Number of states   |
| nx_solver          | Number of states with conservation laws applied  |
| nx_solver_reinit   | Number of solver states subject to reinitialization  |
| nxtrue_rdata       | Number of states in the unaugmented system   |
| nxtrue_solver      | Number of states in the unaugmented system with conservation laws applied  |
| ny                 | Number of observables  |
| nytrue             | Number of observables in the unaugmented system  |
| nz                 | Number of event outputs  |
| nztrue             | Number of event outputs in the unaugmented system  |
| o2mode             | Flag indicating whether for <code>amici::Solver::sensi_ == amici::SensitivityOrder::second</code> directional or full second order derivative will be computed |
| pythonGenerated    | Flag indicating Matlab- or Python-based model generation   |

continues on next page

Table 19 – continued from previous page

|     |                                 |
|-----|---------------------------------|
| ubw | Upper bandwidth of the Jacobian |
|-----|---------------------------------|

### amici.amici.NewtonDampingFactorMode

**class** amici.amici.**NewtonDampingFactorMode**(*value*)  
An enumeration.

#### Attributes

off

on

### amici.amici.NonlinearSolverIteration

**class** amici.amici.**NonlinearSolverIteration**(*value*)  
An enumeration.

#### Attributes

functional

fixedpoint

newton

### amici.amici.ObservableScaling

**class** amici.amici.**ObservableScaling**(*value*)  
An enumeration.

#### Attributes

lin

log

log10

**amici.amici.ParameterScaling**

**class** amici.amici.**ParameterScaling**(value)  
An enumeration.

**Attributes**

---

none

---

---

ln

---

---

log10

---

**amici.amici.ParameterScalingVector**

**class** amici.amici.**ParameterScalingVector**(\*args)

**amici.amici.RDataReporting**

**class** amici.amici.**RDataReporting**(value)  
An enumeration.

**Attributes**

---

full

---

---

residuals

---

---

likelihood

---

**amici.amici.ReturnData**

**class** amici.amici.**ReturnData**(\*args)  
Stores all data to be returned by `amici.amici.runAmiciSimulation()`.

NOTE: multi-dimensional arrays are stored in row-major order (C-style)

**\_\_init\_\_**(\*args)

*Overload 1:*

Default constructor

*Overload 2:*

## Constructor

### Parameters

- **ts** ([DoubleVector](#)) – see amici::SimulationParameters::ts
- **model\_dimensions** ([ModelDimensions](#)) – Model dimensions
- **nplist** ([int](#)) – see amici::ModelDimensions::nplist
- **nmaxevent** ([int](#)) – see amici::ModelDimensions::nmaxevent
- **nt** ([int](#)) – see amici::ModelDimensions::nt
- **newton\_maxsteps** ([int](#)) – see amici::Solver::newton\_maxsteps
- **pscale** ([ParameterScalingVector](#)) – see amici::SimulationParameters::pscale
- **o2mode** ([int](#)) – see amici::SimulationParameters::o2mode
- **sensi** ([amici.SensitivityOrder](#)) – see amici::Solver::sensi
- **sensi\_meth** ([amici.SensitivityMethod](#)) – see amici::Solver::sensi\_meth
- **rdrn** ([amici.RDataReporting](#)) – see amici::Solver::rdata\_reporting
- **quadratic\_llh** ([boolean](#)) – whether model defines a quadratic nllh and computing res, sres and FIM makes sense
- **sigma\_res** ([boolean](#)) – indicates whether additional residuals are to be added for each sigma
- **sigma\_offset** ([float](#)) – offset to ensure real-valuedness of sigma residuals

## Overload 3:

constructor that uses information from model and solver to appropriately initialize fields

### Parameters

- **solver** ([Solver](#)) – solver instance
- **model** ([Model](#)) – model instance

## Methods Summary

---

[\\_\\_init\\_\\_](#)(\*args)

*Overload 1:*

---

## Attributes

|                         |  |
|-------------------------|--|
| FIM                     | fisher information matrix (shape $nplist \times nplist$ , row-major)                 |
| J                       | Jacobian of differential equation right hand side (shape $nx \times nx$ , row-major) |
| chi2                    | $\chi^2$ value   |
| cpu_time                | computation time of forward solve [ms]   |
| cpu_timeB               | computation time of backward solve [ms]  |
| cpu_time_total          | total CPU time from entering runAmiciSimulation until exiting [ms]                   |
| id                      | Arbitrary (not necessarily unique) identifier.                                       |
| lbw                     | Lower bandwidth of the Jacobian  |
| llh                     | log-likelihood value   |
| nJ                      | Dimension of the augmented objective function for 2nd order ASA                      |
| ndJydy                  | Number of nonzero elements in the $y$ derivative of $dJy$ (dimension $nytrue$ )      |
| ndtotal_cldx_rdata      | Number of nonzero elements in the $x_rdata$ derivative of $total_{cl}$               |
| ndwdp                   | Number of nonzero elements in the $p$ derivative of the repeating elements           |
| ndwdw                   | Number of nonzero elements in the $w$ derivative of the repeating elements           |
| ndwdx                   | Number of nonzero elements in the $x$ derivative of the repeating elements           |
| ndxdotdw                | Number of nonzero elements in the $w$ derivative of $xdot$                           |
| ndxrdadatctl            | Number of nonzero elements in the $ctl$ derivative of $x_rdata$                      |
| ndxrdatadxsolver        | Number of nonzero elements in the $x$ derivative of $x_rdata$                        |
| ne                      | Number of events   |
| newton_maxsteps         | maximal number of newton iterations for steady state calculation                     |
| nk                      | Number of constants  |
| nmaxevent               | maximal number of occurring events (for every event type)                            |
| nnz                     | Number of nonzero entries in Jacobian  |
| np                      | Number of parameters   |
| nplist                  | number of parameter for which sensitivities were requested                           |
| nt                      | number of considered timepoints  |
| numerrtestfails         | number of error test failures forward problem (shape $nt$ )                          |
| numerrtestfailsB        | number of error test failures backward problem (shape $nt$ )                         |
| numnonlinsolvconvfails  | number of linear solver convergence failures forward problem (shape $nt$ )           |
| numnonlinsolvconvfailsB | number of linear solver convergence failures backward problem (shape $nt$ )          |

continues on next page

Table 26 – continued from previous page

|                  |   |
|------------------|---|
| numrhsevals      | number of right hand side evaluations forward problem (shape <i>nt</i> )  |
| numrhsevalsB     | number of right hand side evaluations backward problem (shape <i>nt</i> )   |
| numsteps         | number of integration steps forward problem (shape <i>nt</i> )  |
| numstepsB        | number of integration steps backward problem (shape <i>nt</i> )   |
| nw               | Number of common expressions  |
| nx               | number of states (alias <i>nx_rdata</i> , kept for backward compatibility)  |
| nx_rdata         | Number of states  |
| nx_solver        | Number of states with conservation laws applied   |
| nx_solver_reinit | Number of solver states subject to reinitialization   |
| nxtrue           | number of states in the unaugmented system (alias <i>nxtrue_rdata</i> , kept for backward compatibility)                            |
| nxtrue_rdata     | Number of states in the unaugmented system  |
| nxtrue_solver    | Number of states in the unaugmented system with conservation laws applied   |
| ny               | Number of observables   |
| nytrue           | Number of observables in the unaugmented system   |
| nz               | Number of event outputs   |
| nztrue           | Number of event outputs in the unaugmented system   |
| o2mode           | flag indicating whether second-order sensitivities were requested   |
| order            | employed order forward problem (shape <i>nt</i> )   |
| posteq_cpu_time  | computation time of the steady state solver [ms] (postequilibration)  |
| posteq_cpu_timeB | computation time of the steady state solver of the backward problem [ms] (postequilibration)  |
| posteq_numsteps  | number of Newton steps for steady state problem (preequilibration) [newton, simulation, newton] (shape 3) (postequilibration)       |
| posteq_numstepsB | number of simulation steps for adjoint steady state problem (postequilibration) [== 0 if analytical solution worked, > 0 otherwise] |
| posteq_status    | flags indicating success of steady state solver (postequilibration)   |
| posteq_t         | time when steadystate was reached via simulation (postequilibration)  |
| posteq_wrms      | weighted root-mean-square of the rhs when steadystate was reached (postequilibration)   |
| preeq_cpu_time   | computation time of the steady state solver [ms] (preequilibration)   |
| preeq_cpu_timeB  | computation time of the steady state solver of the backward problem [ms] (preequilibration)   |
| preeq_numsteps   | number of Newton steps for steady state problem (preequilibration) [newton, simulation, newton] (length = 3)                        |

continues on next page

Table 26 – continued from previous page

|                 |   |
|-----------------|---|
| preeq_numstepsB | number of simulation steps for adjoint steady state problem (preequilibration) [== 0 if analytical solution worked, > 0 otherwise]                                    |
| preeq_status    | flags indicating success of steady state solver (preequilibration)  |
| preeq_t         | time when steadystate was reached via simulation (preequilibration)   |
| preeq_wrms      | weighted root-mean-square of the rhs when steadystate was reached (preequilibration)  |
| pscale          | scaling of parameterization   |
| rdata_reporting | reporting mode  |
| res             | observable (shape $nt*ny$ , row-major)  |
| rz              | event trigger output (shape $nmaxevent \times nz$ , row-major)  |
| s2llh           | second-order parameter derivative of log-likelihood (shape $nJ-1 \times nplist$ , row-major)  |
| s2rz            | second-order parameter derivative of event trigger output (shape $nmaxevent \times nztrue \times nplist \times nplist$ , row-major)                                   |
| sensi           | sensitivity order   |
| sensi_meth      | sensitivity method  |
| sigma_res       | boolean indicating whether residuals for standard deviations have been added  |
| sigmay          | observable standard deviation (shape $nt \times ny$ , row-major)  |
| sigmaz          | event output sigma standard deviation (shape $nmaxevent \times nz$ , row-major)   |
| sllh            | parameter derivative of log-likelihood (shape $nplist$ )  |
| sres            | parameter derivative of residual (shape $nt*ny \times nplist$ , row-major)  |
| srz             | parameter derivative of event trigger output (shape $nmaxevent \times nplist \times nz$ , row-major)  |
| ssigmay         | parameter derivative of observable standard deviation (shape $nt \times nplist \times ny$ , row-major)  |
| ssigmaz         | parameter derivative of event output standard deviation (shape $nmaxevent \times nplist \times nz$ , row-major)   |
| status          | status code   |
| sx              | parameter derivative of state (shape $nt \times nplist \times nx$ , row-major)  |
| sx0             | initial sensitivities (shape $nplist \times nx$ , row-major)  |
| sx_ss           | preequilibration sensitivities found by Newton solver (shape $nplist \times nx$ , row-major)  |
| sy              | parameter derivative of observable (shape $nt \times nplist \times ny$ , row-major)   |
| sz              | parameter derivative of event output (shape $nmaxevent \times nplist \times nz$ , row-major)  |
| ts              | timepoints (shape $nt$ )  |
| ubw             | Upper bandwidth of the Jacobian   |
| w               | w data from the model (recurring terms in <code>xdot</code> , for imported SBML models from python, this contains the flux vector) (shape $nt \times nw$ , row major) |

continues on next page



Table 26 – continued from previous page

|             |  |
|-------------|--|
| <b>x</b>    | state (shape $nt \times nx$ , row-major)                           |
| <b>x0</b>   | initial state (shape $nx$ )  |
| <b>x_ss</b> | preequilibration steady state found by Newton solver (shape $nx$ ) |
| <b>xdot</b> | time derivative (shape $nx$ )                                      |
| <b>y</b>    | observable (shape $nt \times ny$ , row-major)                      |
| <b>z</b>    | event output (shape $nmaxevent \times nz$ , row-major)             |

## Methods

**\_\_init\_\_**(\*args)

*Overload 1:*

Default constructor

*Overload 2:*

Constructor

### Parameters

- **ts** ([DoubleVector](#)) – see amici::SimulationParameters::ts
- **model\_dimensions** ([ModelDimensions](#)) – Model dimensions
- **nplist** (*int*) – see amici::ModelDimensions::nplist
- **nmaxevent** (*int*) – see amici::ModelDimensions::nmaxevent
- **nt** (*int*) – see amici::ModelDimensions::nt
- **newton\_maxsteps** (*int*) – see amici::Solver::newton\_maxsteps
- **pscale** ([ParameterScalingVector](#)) – see amici::SimulationParameters::pscale
- **o2mode** (*int*) – see amici::SimulationParameters::o2mode
- **sensi** ([amici.SensitivityOrder](#)) – see amici::Solver::sensi
- **sensi\_meth** ([amici.SensitivityMethod](#)) – see amici::Solver::sensi\_meth
- **rdrm** ([amici.RDataReporting](#)) – see amici::Solver::rdata\_reporting
- **quadratic\_llh** (*boolean*) – whether model defines a quadratic nllh and computing res, sres and FIM makes sense
- **sigma\_res** (*boolean*) – indicates whether additional residuals are to be added for each sigma
- **sigma\_offset** (*float*) – offset to ensure real-valuedness of sigma residuals

*Overload 3:*

constructor that uses information from model and solver to appropriately initialize fields

#### Parameters

- **solver** (*Solver*) – solver instance
- **model** (*Model*) – model instance

### amici.amici.ReturnDataPtr

**class** amici.amici.ReturnDataPtr(\*args)

Swig-Generated class that implements smart pointers to ReturnData as objects.

#### Attributes

|                    |  |
|--------------------|--|
| FIM                | fisher information matrix (shape <i>nplist</i> x <i>nplist</i> , row-major)                                  |
| J                  | Jacobian of differential equation right hand side (shape <i>nx</i> x <i>nx</i> , row-major)                  |
| chi2               | $\chi^2$ value   |
| cpu_time           | computation time of forward solve [ms]   |
| cpu_timeB          | computation time of backward solve [ms]  |
| cpu_time_total     | total CPU time from entering runAmiciSimulation until exiting [ms]   |
| id                 | Arbitrary (not necessarily unique) identifier.   |
| lbw                | Lower bandwidth of the Jacobian  |
| llh                | log-likelihood value   |
| nJ                 | Dimension of the augmented objective function for 2nd order ASA  |
| ndJydy             | Number of nonzero elements in the <i>y</i> derivative of <i>dJy</i> (dimension <i>nytrue</i> )               |
| ndtotal_cldx_rdata | Number of nonzero elements in the <i>x<sub>r</sub></i> , <i>data</i> derivative of <i>total<sub>cl</sub></i> |
| ndwdp              | Number of nonzero elements in the <i>p</i> derivative of the repeating elements                              |
| ndwdw              | Number of nonzero elements in the <i>w</i> derivative of the repeating elements                              |
| ndwdx              | Number of nonzero elements in the <i>x</i> derivative of the repeating elements                              |
| ndxdotdw           | Number of nonzero elements in the <i>w</i> derivative of <i>x<sub>dot</sub></i>                              |
| ndxrdatadtcl       | Number of nonzero elements in the <i>tcl</i> derivative of <i>x<sub>r</sub></i> , <i>data</i>                |
| ndxrdatadxsolver   | Number of nonzero elements in the <i>x</i> derivative of <i>x<sub>r</sub></i> , <i>data</i>                  |
| ne                 | Number of events   |
| newton_maxsteps    | maximal number of newton iterations for steady state calculation   |
| nk                 | Number of constants  |
| nmaxevent          | maximal number of occurring events (for every event type)  |

continues on next page

Table 27 – continued from previous page

|                                      |   |
|--------------------------------------|---|
| <code>nnz</code>                     | Number of nonzero entries in Jacobian   |
| <code>np</code>                      | Number of parameters  |
| <code>nplist</code>                  | number of parameter for which sensitivities were requested  |
| <code>nt</code>                      | number of considered timepoints   |
| <code>numerrtestfails</code>         | number of error test failures forward problem (shape <i>nt</i> )  |
| <code>numerrtestfailsB</code>        | number of error test failures backward problem (shape <i>nt</i> )   |
| <code>numnonlinsolvconvfails</code>  | number of linear solver convergence failures forward problem (shape <i>nt</i> )   |
| <code>numnonlinsolvconvfailsB</code> | number of linear solver convergence failures backward problem (shape <i>nt</i> )  |
| <code>numrhsevals</code>             | number of right hand side evaluations forward problem (shape <i>nt</i> )  |
| <code>numrhsevalsB</code>            | number of right hand side evaluations backward problem (shape <i>nt</i> )   |
| <code>numsteps</code>                | number of integration steps forward problem (shape <i>nt</i> )  |
| <code>numstepsB</code>               | number of integration steps backward problem (shape <i>nt</i> )   |
| <code>nw</code>                      | Number of common expressions  |
| <code>nx</code>                      | number of states (alias <i>nx_rdata</i> , kept for backward compatibility)  |
| <code>nx_rdata</code>                | Number of states  |
| <code>nx_solver</code>               | Number of states with conservation laws applied   |
| <code>nx_solver_reinit</code>        | Number of solver states subject to reinitialization   |
| <code>nxtrue</code>                  | number of states in the unaugmented system (alias <i>nxtrue_rdata</i> , kept for backward compatibility)                            |
| <code>nxtrue_rdata</code>            | Number of states in the unaugmented system  |
| <code>nxtrue_solver</code>           | Number of states in the unaugmented system with conservation laws applied   |
| <code>ny</code>                      | Number of observables   |
| <code>nytrue</code>                  | Number of observables in the unaugmented system   |
| <code>nz</code>                      | Number of event outputs   |
| <code>nztrue</code>                  | Number of event outputs in the unaugmented system   |
| <code>o2mode</code>                  | flag indicating whether second-order sensitivities were requested   |
| <code>order</code>                   | employed order forward problem (shape <i>nt</i> )   |
| <code>posteq_cpu_time</code>         | computation time of the steady state solver [ms] (postequilibration)  |
| <code>posteq_cpu_timeB</code>        | computation time of the steady state solver of the backward problem [ms] (postequilibration)  |
| <code>posteq_numsteps</code>         | number of Newton steps for steady state problem (preequilibration) [newton, simulation, newton] (shape 3) (postequilibration)       |
| <code>posteq_numstepsB</code>        | number of simulation steps for adjoint steady state problem (postequilibration) [== 0 if analytical solution worked, > 0 otherwise] |
| <code>posteq_status</code>           | flags indicating success of steady state solver (postequilibration)   |

continues on next page

Table 27 – continued from previous page

|                 |   |
|-----------------|---|
| posteq_t        | time when steadystate was reached via simulation (postequilibration)  |
| posteq_wrms     | weighted root-mean-square of the rhs when steadystate was reached (postequilibration)   |
| preeq_cpu_time  | computation time of the steady state solver [ms] (preequilibration)   |
| preeq_cpu_timeB | computation time of the steady state solver of the backward problem [ms] (preequilibration)   |
| preeq_numsteps  | number of Newton steps for steady state problem (preequilibration) [newton, simulation, newton] (length = 3)                        |
| preeq_numstepsB | number of simulation steps for adjoint steady state problem (preequilibration) [== 0 if analytical solution worked, > 0 otherwise]  |
| preeq_status    | flags indicating success of steady state solver (preequilibration)  |
| preeq_t         | time when steadystate was reached via simulation (preequilibration)   |
| preeq_wrms      | weighted root-mean-square of the rhs when steadystate was reached (preequilibration)  |
| pscale          | scaling of parameterization   |
| rdata_reporting | reporting mode  |
| res             | observable (shape $nt*ny$ , row-major)  |
| rz              | event trigger output (shape $nmaxevent \times nz$ , row-major)  |
| s2llh           | second-order parameter derivative of log-likelihood (shape $nJ-1 \times nplist$ , row-major)  |
| s2rz            | second-order parameter derivative of event trigger output (shape $nmaxevent \times nztrue \times nplist \times nplist$ , row-major) |
| sensi           | sensitivity order   |
| sensi_meth      | sensitivity method  |
| sigma_res       | boolean indicating whether residuals for standard deviations have been added  |
| sigmay          | observable standard deviation (shape $nt \times ny$ , row-major)  |
| sigmaz          | event output sigma standard deviation (shape $nmaxevent \times nz$ , row-major)   |
| sllh            | parameter derivative of log-likelihood (shape $nplist$ )  |
| sres            | parameter derivative of residual (shape $nt*ny \times nplist$ , row-major)  |
| srz             | parameter derivative of event trigger output (shape $nmaxevent \times nplist \times nz$ , row-major)                                |
| ssigmay         | parameter derivative of observable standard deviation (shape $nt \times nplist \times ny$ , row-major)                              |
| ssigmaz         | parameter derivative of event output standard deviation (shape $nmaxevent \times nplist \times nz$ , row-major)                     |
| status          | status code   |
| sx              | parameter derivative of state (shape $nt \times nplist \times nx$ , row-major)  |
| sx0             | initial sensitivities (shape $nplist \times nx$ , row-major)  |

continues on next page

Table 27 – continued from previous page

|                    |  |
|--------------------|--|
| <code>sx_ss</code> | preequilibration sensitivities found by Newton solver (shape <i>nplist</i> x <i>nx</i> , row-major)  |
| <code>sy</code>    | parameter derivative of observable (shape <i>nt</i> x <i>nplist</i> x <i>ny</i> , row-major)   |
| <code>sz</code>    | parameter derivative of event output (shape <i>nmax-event</i> x <i>nplist</i> x <i>nz</i> , row-major)   |
| <code>ts</code>    | timepoints (shape <i>nt</i> )  |
| <code>ubw</code>   | Upper bandwidth of the Jacobian  |
| <code>w</code>     | w data from the model (recurring terms in <code>xdot</code> , for imported SBML models from python, this contains the flux vector) (shape <i>nt</i> x <i>nw</i> , row major) |
| <code>x</code>     | state (shape <i>nt</i> x <i>nx</i> , row-major)  |
| <code>x0</code>    | initial state (shape <i>nx</i> )   |
| <code>x_ss</code>  | preequilibration steady state found by Newton solver (shape <i>nx</i> )  |
| <code>xdot</code>  | time derivative (shape <i>nx</i> )   |
| <code>y</code>     | observable (shape <i>nt</i> x <i>ny</i> , row-major)   |
| <code>z</code>     | event output (shape <i>nmaxevent</i> x <i>nz</i> , row-major)  |

**amici.amici.SecondOrderMode**

**class** amici.amici.**SecondOrderMode**(*value*)  
 An enumeration.

**Attributes**


---

 none
 

---



---

 full
 

---



---

 directional
 

---

**amici.amici.SensitivityMethod**

**class** amici.amici.**SensitivityMethod**(*value*)  
 An enumeration.

**Attributes**


---

 none
 

---



---

 forward
 

---



---

 adjoint
 

---

**amici.amici.SensitivityOrder**

**class** amici.amici.**SensitivityOrder**(*value*)  
An enumeration.

**Attributes**

---

none

---

first

---

second

---

**amici.amici.SimulationParameters**

**class** amici.amici.**SimulationParameters**(\*args)  
Container for various simulation parameters.

**\_\_init\_\_**(\*args)  
*Overload 1:*

Constructor

**Parameters** **timepoints** (**DoubleVector**) – Timepoints for which simulation results are requested

*Overload 2:*

Constructor

**Parameters**

- **fixedParameters** (**DoubleVector**) – Model constants
- **parameters** (**DoubleVector**) – Model parameters

*Overload 3:*

Constructor

**Parameters**

- **fixedParameters** (**DoubleVector**) – Model constants
- **parameters** (**DoubleVector**) – Model parameters
- **plist** (**IntVector**) – Model parameter indices w.r.t. which sensitivities are to be computed

Overload 4:

Constructor

#### Parameters

- **timepoints** (`DoubleVector`) – Timepoints for which simulation results are requested
- **fixedParameters** (`DoubleVector`) – Model constants
- **parameters** (`DoubleVector`) – Model parameters

### Methods Summary

|  |   |
|--|---|
| <code>__init__(*args)</code>   | Overload 1:   |
| <code>reinitializeAllFixedParameterDependentInitialStates()</code>       | Self initialization of all states based on model constants for all simulation phases.   |
| <code>reinitializeAllFixedParameterDependentInitialStatesPresim()</code> | Self initialization of all states based on model constants for presimulation (only meaningful if preequilibration is performed).                          |
| <code>reinitializeAllFixedParameterDependentInitialStatesSim()</code>    | Self initialization of all states based on model constants for the 'main' simulation (only meaningful if presimulation or preequilibration is performed). |

### Attributes

|  |   |
|--|---|
| <code>fixedParameters</code>                         | Model constants   |
| <code>fixedParametersPreequilibration</code>         | Model constants for pre-equilibration   |
| <code>fixedParametersPresimulation</code>            | Model constants for pre-simulation  |
| <code>parameters</code>                              | Model parameters  |
| <code>plist</code>                                   | Parameter indices w.r.t.  |
| <code>pscale</code>                                  | Parameter scales  |
| <code>reinitialization_state_idxes_presim</code>     | Indices of states to be reinitialized based on provided presimulation constants / fixed parameters. |
| <code>reinitialization_state_idxes_sim</code>        | Indices of states to be reinitialized based on provided constants / fixed parameters.               |
| <code>reinitializeFixedParameterInitialStates</code> | Flag indicating whether reinitialization of states depending on fixed parameters is activated       |
| <code>sx0</code>                                     | Initial state sensitivities   |
| <code>t_presim</code>                                | Duration of pre-simulation.   |
| <code>ts_</code>                                     | Timepoints for which model state/outputs/.  |
| <code>tstart_</code>                                 | starting time   |
| <code>x0</code>                                      | Initial state   |

## Methods

**`__init__`**(*\*args*)

*Overload 1:*

Constructor

**Parameters** **timepoints** (`DoubleVector`) – Timepoints for which simulation results are requested

*Overload 2:*

Constructor

**Parameters**

- **fixedParameters** (`DoubleVector`) – Model constants
- **parameters** (`DoubleVector`) – Model parameters

*Overload 3:*

Constructor

**Parameters**

- **fixedParameters** (`DoubleVector`) – Model constants
- **parameters** (`DoubleVector`) – Model parameters
- **plist** (`IntVector`) – Model parameter indices w.r.t. which sensitivities are to be computed

*Overload 4:*

Constructor

**Parameters**

- **timepoints** (`DoubleVector`) – Timepoints for which simulation results are requested
- **fixedParameters** (`DoubleVector`) – Model constants
- **parameters** (`DoubleVector`) – Model parameters

**`reinitializeAllFixedParameterDependentInitialStates`**(*nx\_rdata: int*) → `None`

Set reinitialization of all states based on model constants for all simulation phases.

Convenience function to populate *reinitialization\_state\_idxsim* and *reinitialization\_state\_idxsim*

**Parameters** **nx\_rdata** (`int`) – Number of states (Model::nx\_rdata)



Return type `None`

**reinitializeAllFixedParameterDependentInitialStatesForPresimulation**(*nx\_rdata*: `int`) → `None`

Set reinitialization of all states based on model constants for presimulation (only meaningful if preequilibration is performed).

Convenience function to populate *reinitialization\_state\_idxes\_presim* and *reinitialization\_state\_idxes\_sim*

**Parameters** *nx\_rdata* (`int`) – Number of states (Model::nx\_rdata)

Return type `None`

**reinitializeAllFixedParameterDependentInitialStatesForSimulation**(*nx\_rdata*: `int`) → `None`

Set reinitialization of all states based on model constants for the ‘main’ simulation (only meaningful if presimulation or preequilibration is performed).

Convenience function to populate *reinitialization\_state\_idxes\_presim* and *reinitialization\_state\_idxes\_sim*

**Parameters** *nx\_rdata* (`int`) – Number of states (Model::nx\_rdata)

Return type `None`

## amici.amici.Solver

**class** amici.amici.Solver(\*args, \*\*kwargs)

The Solver class provides a generic interface to CVODES and IDAS solvers, individual realizations are realized in the CNodeSolver and the IDASolver class. All transient private/protected members (CVODES/IDAS memory, interface variables and status flags) are specified as mutable and not included in serialization or equality checks. No solver setting parameter should be marked mutable.

NOTE: Any changes in data members here must be propagated to copy ctor, equality operator, serialization functions in serialization.h, and amici::hdf5::(read/write)SolverSettings(From/To)HDF5 in hdf5.cpp.

**\_\_init\_\_**(\*args, \*\*kwargs)

## Methods Summary

|   |   |
|---|---|
| <code>__init__(*args, **kwargs)</code>              |   |
| <code>clone()</code>                                | Clone this instance   |
| <code>computingASA()</code>                         | check if ASA is being computed  |
| <code>computingFSA()</code>                         | check if FSA is being computed  |
| <code>getAbsoluteTolerance()</code>                 | Get the absolute tolerances for the forward problem                                       |
| <code>getAbsoluteToleranceB()</code>                | Returns the absolute tolerances for the backward problem for adjoint sensitivity analysis |
| <code>getAbsoluteToleranceFSA()</code>              | Returns the absolute tolerances for the forward sensitivity problem                       |
| <code>getAbsoluteToleranceQuadratures()</code>      | returns the absolute tolerance for the quadrature problem                                 |
| <code>getAbsoluteToleranceSteadyState()</code>      | returns the absolute tolerance for the steady state problem                               |
| <code>getAbsoluteToleranceSteadyStateSensi()</code> | returns the absolute tolerance for the sensitivities of the steady state problem          |
| <code>getCpuTime()</code>                           | Reads out the CPU time needed for forward solve   |

continues on next page

Table 33 – continued from previous page

|   |  |
|---|--|
| <code>getCpuTimeB()</code>                          | Reads out the CPU time needed for backward solve                                 |
| <code>getInternalSensitivityMethod()</code>         | returns the internal sensitivity method  |
| <code>getInterpolationType()</code>                 | <b>rtype</b> amici.InterpolationType   |
| <code>getLastOrder()</code>                         | Accessor order   |
| <code>getLinearMultistepMethod()</code>             | returns the linear system multistep method                                       |
| <code>getLinearSolver()</code>                      | <b>rtype</b> amici.LinearSolver  |
| <code>getMaxSteps()</code>                          | returns the maximum number of solver steps for the forward problem               |
| <code>getMaxStepsBackwardProblem()</code>           | returns the maximum number of solver steps for the backward problem              |
| <code>getMaxTime()</code>                           | Returns the maximum time allowed for integration                                 |
| <code>getNewtonDampingFactorLowerBound()</code>     | Get a lower bound of the damping factor used in the Newton solver                |
| <code>getNewtonDampingFactorMode()</code>           | Get a state of the damping factor used in the Newton solver                      |
| <code>getNewtonMaxSteps()</code>                    | Get maximum number of allowed Newton steps for steady state computation          |
| <code>getNewtonStepSteadyStateCheck()</code>        | Returns how convergence checks for steadystate computation are performed.        |
| <code>getNonlinearSolverIteration()</code>          | returns the nonlinear system solution method                                     |
| <code>getNumErrTestFails()</code>                   | Accessor netf  |
| <code>getNumErrTestFailsB()</code>                  | Accessor netfB   |
| <code>getNumNonlinSolvConvFails()</code>            | Accessor nnlscf  |
| <code>getNumNonlinSolvConvFailsB()</code>           | Accessor nnlscfB   |
| <code>getNumRhsEvals()</code>                       | Accessor nrhs  |
| <code>getNumRhsEvalsB()</code>                      | Accessor nrhsB   |
| <code>getNumSteps()</code>                          | Accessor ns  |
| <code>getNumStepsB()</code>                         | Accessor nsB   |
| <code>getRelativeTolerance()</code>                 | Get the relative tolerances for the forward problem                              |
| <code>getRelativeToleranceB()</code>                | Returns the relative tolerances for the adjoint sensitivity problem              |
| <code>getRelativeToleranceFSA()</code>              | Returns the relative tolerances for the forward sensitivity problem              |
| <code>getRelativeToleranceQuadratures()</code>      | Returns the relative tolerance for the quadrature problem                        |
| <code>getRelativeToleranceSteadyState()</code>      | returns the relative tolerance for the steady state problem                      |
| <code>getRelativeToleranceSteadyStateSensi()</code> | returns the relative tolerance for the sensitivities of the steady state problem |
| <code>getReturnDataReportingMode()</code>           | returns the ReturnData reporting mode  |
| <code>getSensiSteadyStateCheck()</code>             | Returns how convergence checks for steadystate computation are performed.        |
| <code>getSensitivityMethod()</code>                 | Return current sensitivity method  |
| <code>getSensitivityMethodPreequilibration()</code> | Return current sensitivity method during preequilibration                        |
| <code>getSensitivityOrder()</code>                  | Get sensitivity order  |
| <code>getStabilityLimitFlag()</code>                | returns stability limit detection mode   |

continues on next page

Table 33 – continued from previous page

|  |  |
|--|--|
| <code>getStateOrdering()</code>                            | Gets KLU / SuperLUMT state ordering mode   |
| <code>getSteadyStateSensiToleranceFactor()</code>          | returns the steady state sensitivity simulation tolerance factor.                      |
| <code>getSteadyStateToleranceFactor()</code>               | returns the steady state simulation tolerance factor.                                  |
| <code>gett()</code>  | current solver timepoint   |
| <code>nplist()</code>                                      | number of parameters with which the solver was initialized                             |
| <code>nquad()</code>                                       | number of quadratures with which the solver was initialized                            |
| <code>nx()</code>  | number of states with which the solver was initialized                                 |
| <code>setAbsoluteTolerance(atol)</code>                    | Sets the absolute tolerances for the forward problem                                   |
| <code>setAbsoluteToleranceB(atol)</code>                   | Sets the absolute tolerances for the backward problem for adjoint sensitivity analysis |
| <code>setAbsoluteToleranceFSA(atol)</code>                 | Sets the absolute tolerances for the forward sensitivity problem                       |
| <code>setAbsoluteToleranceQuadratures(atol)</code>         | sets the absolute tolerance for the quadrature problem                                 |
| <code>setAbsoluteToleranceSteadyState(atol)</code>         | sets the absolute tolerance for the steady state problem                               |
| <code>setAbsoluteToleranceSteadyStateSensi(atol)</code>    | sets the absolute tolerance for the sensitivities of the steady state problem          |
| <code>setInternalSensitivityMethod(ism)</code>             | sets the internal sensitivity method   |
| <code>setInterpolationType(interpType)</code>              | sets the interpolation of the forward solution that is used for the backwards problem  |
| <code>setLinearMultistepMethod(lmm)</code>                 | sets the linear system multistep method  |
| <code>setLinearSolver(linsol)</code>                       |  |
| <b>type linsol</b> amici.LinearSolver                      |  |
| <code>setMaxSteps(maxsteps)</code>                         | sets the maximum number of solver steps for the forward problem                        |
| <code>setMaxStepsBackwardProblem(maxsteps)</code>          | sets the maximum number of solver steps for the backward problem                       |
| <code>setMaxTime(maxtime)</code>                           | Set the maximum time allowed for integration   |
| <code>setNewtonDampingFactorLowerBound(...)</code>         | Set a lower bound of the damping factor in the Newton solver                           |
| <code>setNewtonDampingFactorMode(dampingFactorMode)</code> | Turn on/off a damping factor in the Newton method                                      |
| <code>setNewtonMaxSteps(newton_maxsteps)</code>            | Set maximum number of allowed Newton steps for steady state computation                |
| <code>setNewtonStepSteadyStateCheck(flag)</code>           | Sets how convergence checks for steadystate computation are performed.                 |
| <code>setNonlinearSolverIteration(iter)</code>             | sets the nonlinear system solution method  |
| <code>setRelativeTolerance(rtol)</code>                    | Sets the relative tolerances for the forward problem                                   |
| <code>setRelativeToleranceB(rtol)</code>                   | Sets the relative tolerances for the adjoint sensitivity problem                       |
| <code>setRelativeToleranceFSA(rtol)</code>                 | Sets the relative tolerances for the forward sensitivity problem                       |
| <code>setRelativeToleranceQuadratures(rtol)</code>         | sets the relative tolerance for the quadrature problem                                 |
| <code>setRelativeToleranceSteadyState(rtol)</code>         | sets the relative tolerance for the steady state problem                               |
| <code>setRelativeToleranceSteadyStateSensi(rtol)</code>    | sets the relative tolerance for the sensitivities of the steady state problem          |
| <code>setReturnDataReportingMode(rdrm)</code>              | sets the ReturnData reporting mode   |

continues on next page

Table 33 – continued from previous page

|   |  |
|---|--|
| <code>setSensiSteadyStateCheck(flag)</code>             | Sets for which variables convergence checks for steadystate computation are performed. |
| <code>setSensitivityMethod(sensi_meth)</code>           | Set sensitivity method   |
| <code>setSensitivityMethodPreequilibration(...)</code>  | Set sensitivity method for preequilibration  |
| <code>setSensitivityOrder(sensi)</code>                 | Set the sensitivity order  |
| <code>setStabilityLimitFlag(stldet)</code>              | set stability limit detection mode   |
| <code>setStateOrdering(ordering)</code>                 | Sets KLU / SuperLUMT state ordering mode   |
| <code>setSteadyStateSensiToleranceFactor(factor)</code> | set the steady state sensitivity simulation tolerance factor.                          |
| <code>setSteadyStateToleranceFactor(factor)</code>      | set the steady state simulation tolerance factor.                                      |
| <code>startTimer()</code>                               | Start timer for tracking integration time  |
| <code>switchForwardSensisOff()</code>                   | Disable forward sensitivity integration (used in steady state sim)                     |
| <code>timeExceeded()</code>                             | Check whether maximum integration time was exceeded                                    |

## Attributes

|                  |               |
|------------------|---------------|
| <code>app</code> | AMICI context |
|------------------|---------------|

## Methods

`__init__(*args, **kwargs)`

`clone()` → Iterable[[\*amici.amici.Solver\*](#)]  
Clone this instance

**Return type** [\*amici.Solver\*](#)

**Returns** The clone

`computingASA()` → [\*bool\*](#)  
check if ASA is being computed

**Return type** boolean

**Returns** flag

`computingFSA()` → [\*bool\*](#)  
check if FSA is being computed

**Return type** boolean

**Returns** flag

`getAbsoluteTolerance()` → [\*float\*](#)  
Get the absolute tolerances for the forward problem

Same tolerance is used for the backward problem if not specified differently via `setAbsoluteToleranceASA`.

**Return type** [\*float\*](#)

**Returns** absolute tolerances

`getAbsoluteToleranceB()` → [\*float\*](#)  
Returns the absolute tolerances for the backward problem for adjoint sensitivity analysis

**Return type** `float`

**Returns** absolute tolerances

**getAbsoluteToleranceFSA()** → `float`

Returns the absolute tolerances for the forward sensitivity problem

**Return type** `float`

**Returns** absolute tolerances

**getAbsoluteToleranceQuadratures()** → `float`

returns the absolute tolerance for the quadrature problem

**Return type** `float`

**Returns** absolute tolerance

**getAbsoluteToleranceSteadyState()** → `float`

returns the absolute tolerance for the steady state problem

**Return type** `float`

**Returns** absolute tolerance

**getAbsoluteToleranceSteadyStateSensi()** → `float`

returns the absolute tolerance for the sensitivities of the steady state problem

**Return type** `float`

**Returns** absolute tolerance

**getCpuTime()** → `float`

Reads out the CPU time needed for forward solve

**Return type** `float`

**Returns** `cpu_time`

**getCpuTimeB()** → `float`

Reads out the CPU time needed for backward solve

**Return type** `float`

**Returns** `cpu_timeB`

**getInternalSensitivityMethod()** → *amici.amici.InternalSensitivityMethod*

returns the internal sensitivity method

**Return type** *amici.InternalSensitivityMethod*

**Returns** internal sensitivity method

**getInterpolationType()** → *amici.amici.InterpolationType*

**Return type** *amici.InterpolationType*

**Returns**

**getLastOrder()** → *amici.amici.IntVector*

Accessor order

**Return type** *IntVector*

**Returns** order

**getLinearMultistepMethod()** → *amici.amici.LinearMultistepMethod*  
returns the linear system multistep method

**Return type** *amici.LinearMultistepMethod*

**Returns** linear system multistep method

**getLinearSolver()** → *amici.amici.LinearSolver*

**Return type** *amici.LinearSolver*

**Returns**

**getMaxSteps()** → *int*  
returns the maximum number of solver steps for the forward problem

**Return type** *int*

**Returns** maximum number of solver steps

**getMaxStepsBackwardProblem()** → *int*  
returns the maximum number of solver steps for the backward problem

**Return type** *int*

**Returns** maximum number of solver steps

**getMaxTime()** → *float*  
Returns the maximum time allowed for integration

**Return type** *float*

**Returns** Time in seconds

**getNewtonDampingFactorLowerBound()** → *float*  
Get a lower bound of the damping factor used in the Newton solver

**Return type** *float*

**Returns**

**getNewtonDampingFactorMode()** → *amici.amici.NewtonDampingFactorMode*  
Get a state of the damping factor used in the Newton solver

**Return type** *amici.NewtonDampingFactorMode*

**Returns**

**getNewtonMaxSteps()** → *int*  
Get maximum number of allowed Newton steps for steady state computation

**Return type** *int*

**Returns**

**getNewtonStepSteadyStateCheck()** → *bool*  
Returns how convergence checks for steadystate computation are performed. If activated, convergence checks are limited to every 25 steps in the simulation solver to limit performance impact.

**Return type** *boolean*

**Returns** boolean flag indicating newton step (true) or the right hand side (false)

**getNonlinearSolverIteration()** → *amici.amici.NonlinearSolverIteration*  
returns the nonlinear system solution method

**Return type** *amici.NonlinearSolverIteration*

**Returns****getNumErrTestFails()** → *amici.amici.IntVector*

Accessor netf

**Return type** *IntVector***Returns** netf**getNumErrTestFailsB()** → *amici.amici.IntVector*

Accessor netfB

**Return type** *IntVector***Returns** netfB**getNumNonlinSolvConvFails()** → *amici.amici.IntVector*

Accessor nnlsf

**Return type** *IntVector***Returns** nnlsf**getNumNonlinSolvConvFailsB()** → *amici.amici.IntVector*

Accessor nnlsfB

**Return type** *IntVector***Returns** nnlsfB**getNumRhsEvals()** → *amici.amici.IntVector*

Accessor nrhs

**Return type** *IntVector***Returns** nrhs**getNumRhsEvalsB()** → *amici.amici.IntVector*

Accessor nrhsB

**Return type** *IntVector***Returns** nrhsB**getNumSteps()** → *amici.amici.IntVector*

Accessor ns

**Return type** *IntVector***Returns** ns**getNumStepsB()** → *amici.amici.IntVector*

Accessor nsB

**Return type** *IntVector***Returns** nsB**getRelativeTolerance()** → *float*

Get the relative tolerances for the forward problem

Same tolerance is used for the backward problem if not specified differently via setRelativeToleranceASA.

**Return type** *float***Returns** relative tolerances

**getRelativeToleranceB()** → float

Returns the relative tolerances for the adjoint sensitivity problem

**Return type** float

**Returns** relative tolerances

**getRelativeToleranceFSA()** → float

Returns the relative tolerances for the forward sensitivity problem

**Return type** float

**Returns** relative tolerances

**getRelativeToleranceQuadratures()** → float

Returns the relative tolerance for the quadrature problem

**Return type** float

**Returns** relative tolerance

**getRelativeToleranceSteadyState()** → float

returns the relative tolerance for the steady state problem

**Return type** float

**Returns** relative tolerance

**getRelativeToleranceSteadyStateSensi()** → float

returns the relative tolerance for the sensitivities of the steady state problem

**Return type** float

**Returns** relative tolerance

**getReturnDataReportingMode()** → *amici.amici.RDataReporting*

returns the ReturnData reporting mode

**Return type** *amici.RDataReporting*

**Returns** ReturnData reporting mode

**getSensiSteadyStateCheck()** → bool

Returns how convergence checks for steadystate computation are performed.

**Return type** boolean

**Returns** boolean flag indicating state and sensitivity equations (true) or only state variables (false).

**getSensitivityMethod()** → *amici.amici.SensitivityMethod*

Return current sensitivity method

**Return type** *amici.SensitivityMethod*

**Returns** method enum

**getSensitivityMethodPreequilibration()** → *amici.amici.SensitivityMethod*

Return current sensitivity method during preequilibration

**Return type** *amici.SensitivityMethod*

**Returns** method enum

**getSensitivityOrder()** → *amici.amici.SensitivityOrder*

Get sensitivity order

**Return type** *amici.SensitivityOrder*



**Returns** sensitivity order

**getStabilityLimitFlag()** → bool

returns stability limit detection mode

**Return type** boolean

**Returns** stldet can be false (deactivated) or true (activated)

**getStateOrdering()** → int

Gets KLU / SuperLUMT state ordering mode

**Return type** int

**Returns** State-ordering as integer according to SUNLinSolKLU::StateOrdering or SUNLinSol-SuperLUMT::StateOrdering (which differ).

**getSteadyStateSensiToleranceFactor()** → float

returns the steady state sensitivity simulation tolerance factor.

Steady state sensitivity simulation tolerances are the product of the sensitivity simulation tolerances and this factor, unless manually set with *set(Absolute/Relative)ToleranceSteadyStateSensi()*.

**Return type** float

**Returns** steady state simulation tolerance factor

**getSteadyStateToleranceFactor()** → float

returns the steady state simulation tolerance factor.

Steady state simulation tolerances are the product of the simulation tolerances and this factor, unless manually set with *set(Absolute/Relative)ToleranceSteadyState()*.

**Return type** float

**Returns** steady state simulation tolerance factor

**gett()** → float

current solver timepoint

**Return type** float

**Returns** t

**npplist()** → int

number of parameters with which the solver was initialized

**Return type** int

**Returns** sx.getLength()

**nquad()** → int

number of quadratures with which the solver was initialized

**Return type** int

**Returns** xQB.getLength()

**nx()** → int

number of states with which the solver was initialized

**Return type** int

**Returns** x.getLength()

**setAbsoluteTolerance**(*atol*: *float*) → *None*

Sets the absolute tolerances for the forward problem

Same tolerance is used for the backward problem if not specified differently via `setAbsoluteToleranceASA`.

**Parameters** *atol* (*float*) – absolute tolerance (non-negative number)

**Return type** *None*

**setAbsoluteToleranceB**(*atol*: *float*) → *None*

Sets the absolute tolerances for the backward problem for adjoint sensitivity analysis

**Parameters** *atol* (*float*) – absolute tolerance (non-negative number)

**Return type** *None*

**setAbsoluteToleranceFSA**(*atol*: *float*) → *None*

Sets the absolute tolerances for the forward sensitivity problem

**Parameters** *atol* (*float*) – absolute tolerance (non-negative number)

**Return type** *None*

**setAbsoluteToleranceQuadratures**(*atol*: *float*) → *None*

sets the absolute tolerance for the quadrature problem

**Parameters** *atol* (*float*) – absolute tolerance (non-negative number)

**Return type** *None*

**setAbsoluteToleranceSteadyState**(*atol*: *float*) → *None*

sets the absolute tolerance for the steady state problem

**Parameters** *atol* (*float*) – absolute tolerance (non-negative number)

**Return type** *None*

**setAbsoluteToleranceSteadyStateSensi**(*atol*: *float*) → *None*

sets the absolute tolerance for the sensitivities of the steady state problem

**Parameters** *atol* (*float*) – absolute tolerance (non-negative number)

**Return type** *None*

**setInternalSensitivityMethod**(*ism*: *amici.amici.InternalSensitivityMethod*) → *None*

sets the internal sensitivity method

**Parameters** *ism* (*amici.amici.InternalSensitivityMethod*) – internal sensitivity method

**Return type** *None*

**setInterpolationType**(*interpType*: *amici.amici.InterpolationType*) → *None*

sets the interpolation of the forward solution that is used for the backwards problem

**Parameters** *interpType* (*amici.amici.InterpolationType*) – interpolation type

**Return type** *None*

**setLinearMultistepMethod**(*lmm*: *amici.amici.LinearMultistepMethod*) → *None*

sets the linear system multistep method

**Parameters** *lmm* (*amici.amici.LinearMultistepMethod*) – linear system multistep method

**Return type** *None*

**setLinearSolver**(*linsol*: *amici.amici.LinearSolver*) → *None*

Parameters **linsol** (*amici.amici.LinearSolver*) –

Return type *None*

**setMaxSteps**(*maxsteps: int*) → *None*

sets the maximum number of solver steps for the forward problem

Parameters **maxsteps** (*int*) – maximum number of solver steps (positive number)

Return type *None*

**setMaxStepsBackwardProblem**(*maxsteps: int*) → *None*

sets the maximum number of solver steps for the backward problem

Parameters **maxsteps** (*int*) – maximum number of solver steps (non-negative number)

Notes: default behaviour (100 times the value for the forward problem) can be restored by passing `maxsteps=0`

Return type *None*

**setMaxTime**(*maxtime: float*) → *None*

Set the maximum time allowed for integration

Parameters **maxtime** (*float*) – Time in seconds

Return type *None*

**setNewtonDampingFactorLowerBound**(*dampingFactorLowerBound: float*) → *None*

Set a lower bound of the damping factor in the Newton solver

Parameters **dampingFactorLowerBound** (*float*) –

Return type *None*

**setNewtonDampingFactorMode**(*dampingFactorMode: amici.amici.NewtonDampingFactorMode*) → *None*

Turn on/off a damping factor in the Newton method

Parameters **dampingFactorMode** (*amici.amici.NewtonDampingFactorMode*) –

Return type *None*

**setNewtonMaxSteps**(*newton\_maxsteps: int*) → *None*

Set maximum number of allowed Newton steps for steady state computation

Parameters **newton\_maxsteps** (*int*) –

Return type *None*

**setNewtonStepSteadyStateCheck**(*flag: bool*) → *None*

Sets how convergence checks for steadystate computation are performed.

Parameters **flag** (*bool*) – boolean flag to pick newton step (true) or the right hand side (false, default)

Return type *None*

**setNonlinearSolverIteration**(*iter: amici.amici.NonlinearSolverIteration*) → *None*

sets the nonlinear system solution method

Parameters **iter** (*amici.amici.NonlinearSolverIteration*) – nonlinear system solution method

Return type *None*

**setRelativeTolerance**(*rtol*: *float*) → *None*

Sets the relative tolerances for the forward problem

Same tolerance is used for the backward problem if not specified differently via `setRelativeToleranceASA`.

**Parameters** *rtol* (*float*) – relative tolerance (non-negative number)

**Return type** *None*

**setRelativeToleranceB**(*rtol*: *float*) → *None*

Sets the relative tolerances for the adjoint sensitivity problem

**Parameters** *rtol* (*float*) – relative tolerance (non-negative number)

**Return type** *None*

**setRelativeToleranceFSA**(*rtol*: *float*) → *None*

Sets the relative tolerances for the forward sensitivity problem

**Parameters** *rtol* (*float*) – relative tolerance (non-negative number)

**Return type** *None*

**setRelativeToleranceQuadratures**(*rtol*: *float*) → *None*

sets the relative tolerance for the quadrature problem

**Parameters** *rtol* (*float*) – relative tolerance (non-negative number)

**Return type** *None*

**setRelativeToleranceSteadyState**(*rtol*: *float*) → *None*

sets the relative tolerance for the steady state problem

**Parameters** *rtol* (*float*) – relative tolerance (non-negative number)

**Return type** *None*

**setRelativeToleranceSteadyStateSensi**(*rtol*: *float*) → *None*

sets the relative tolerance for the sensitivities of the steady state problem

**Parameters** *rtol* (*float*) – relative tolerance (non-negative number)

**Return type** *None*

**setReturnDataReportingMode**(*rdrm*: *amici.amici.RDataReporting*) → *None*

sets the ReturnData reporting mode

**Parameters** *rdrm* (*amici.amici.RDataReporting*) – ReturnData reporting mode

**Return type** *None*

**setSensiSteadyStateCheck**(*flag*: *bool*) → *None*

Sets for which variables convergence checks for steadystate computation are performed.

**Parameters** *flag* (*bool*) – boolean flag to pick state and sensitivity equations (true, default) or only state variables (false).

**Return type** *None*

**setSensitivityMethod**(*sensi\_meth*: *amici.amici.SensitivityMethod*) → *None*

Set sensitivity method

**Parameters** *sensi\_meth* (*amici.amici.SensitivityMethod*) –

**Return type** *None*

**setSensitivityMethodPreequilibration**(*sensi\_meth\_preeq*: *amici.amici.SensitivityMethod*) → *None*

Set sensitivity method for preequilibration

**Parameters** `sensi_meth_preeq` (`amici.amici.SensitivityMethod`) –

**Return type** `None`

**setSensitivityOrder**(`sensi`: `amici.amici.SensitivityOrder`) → `None`

Set the sensitivity order

**Parameters** `sensi` (`amici.amici.SensitivityOrder`) – sensitivity order

**Return type** `None`

**setStabilityLimitFlag**(`stldet`: `bool`) → `None`

set stability limit detection mode

**Parameters** `stldet` (`bool`) – can be false (deactivated) or true (activated)

**Return type** `None`

**setStateOrdering**(`ordering`: `int`) → `None`

Sets KLU / SuperLUMT state ordering mode

This only applies when `linsol` is set to `LinearSolver::KLU` or `LinearSolver::SuperLUMT`. Mind the difference between `SUNLinSolKLU::StateOrdering` and `SUNLinSolSuperLUMT::StateOrdering`.

**Parameters** `ordering` (`int`) – state ordering

**Return type** `None`

**setSteadyStateSensiToleranceFactor**(`factor`: `float`) → `None`

set the steady state sensitivity simulation tolerance factor.

Steady state sensitivity simulation tolerances are the product of the sensitivity simulation tolerances and this factor, unless manually set with `set(Absolute/Relative)ToleranceSteadyStateSensi()`.

**Parameters** `factor` (`float`) – tolerance factor (non-negative number)

**Return type** `None`

**setSteadyStateToleranceFactor**(`factor`: `float`) → `None`

set the steady state simulation tolerance factor.

Steady state simulation tolerances are the product of the simulation tolerances and this factor, unless manually set with `set(Absolute/Relative)ToleranceSteadyState()`.

**Parameters** `factor` (`float`) – tolerance factor (non-negative number)

**Return type** `None`

**startTimer**() → `None`

Start timer for tracking integration time

**Return type** `None`

**switchForwardSensisOff**() → `None`

Disable forward sensitivity integration (used in steady state sim)

**Return type** `None`

**timeExceeded**() → `bool`

Check whether maximum integration time was exceeded

**Return type** `boolean`

**Returns** True if the maximum integration time was exceeded, false otherwise.

**amici.amici.SolverPtr**

**class** amici.amici.**SolverPtr**(\*args)  
Swig-Generated class that implements smart pointers to Solver as objects.

**Attributes**

---

|     |               |
|-----|---------------|
| app | AMICI context |
|-----|---------------|

---

**amici.amici.SteadyStateSensitivityMode**

**class** amici.amici.**SteadyStateSensitivityMode**(value)  
An enumeration.

**Attributes**

---

|            |
|------------|
| newtonOnly |
|------------|

---

|                 |
|-----------------|
| integrationOnly |
|-----------------|

---

|                        |
|------------------------|
| integrateIfNewtonFails |
|------------------------|

---

**amici.amici.SteadyStateStatus**

**class** amici.amici.**SteadyStateStatus**(value)  
An enumeration.

**Attributes**

---

|                            |
|----------------------------|
| failed_too_long_simulation |
|----------------------------|

---

|                |
|----------------|
| failed_damping |
|----------------|

---

|                      |
|----------------------|
| failed_factorization |
|----------------------|

---

|                    |
|--------------------|
| failed_convergence |
|--------------------|

---

|        |
|--------|
| failed |
|--------|

---

|         |
|---------|
| not_run |
|---------|

---

|         |
|---------|
| success |
|---------|

---

**amici.amici.SteadyStateStatusVector**

```
class amici.amici.SteadyStateStatusVector(*args)
```

**amici.amici.StringDoubleMap**

```
class amici.amici.StringDoubleMap(*args)
```

Swig-Generated class templating Dict [str, float] to facilitate interfacing with C++ bindings.

**amici.amici.StringVector**

```
class amici.amici.StringVector(*args)
```

Swig-Generated class templating common python types including Iterable [str] and numpy.array [str] to facilitate interfacing with C++ bindings.

**Functions Summary**

|  |   |
|--|---|
| <code>backtraceString(maxFrames)</code>                      | Returns the current backtrace as std::string  |
| <code>compiledWithOpenMP()</code>                            | AMICI extension was compiled with OpenMP?   |
| <code>enum(prefix)</code>                                    |   |
| <code>getScaledParameter(unscaledParameter, scaling)</code>  | Apply parameter scaling according to <i>scaling</i>   |
| <code>getUnscaledParameter(scaledParameter, scaling)</code>  | Remove parameter scaling according to <i>scaling</i>  |
| <code>parameterScalingFromIntVector(intVec)</code>           | Swig-Generated class, which, in contrast to other Vector classes, does not allow for simple interoperability with common Python types, but must be created using <code>amici.amici.parameterScalingFromIntVector()</code> |
| <code>runAmiciSimulation(solver, edata, model[, ...])</code> | Core integration routine.   |
| <code>runAmiciSimulations(solver, edatas, model, ...)</code> | Same as runAmiciSimulation, but for multiple ExpData instances.   |
| <code>scaleParameters(bufferUnscaled, pscale, ...)</code>    | Apply parameter scaling according to <i>scaling</i>   |
| <code>unscaleParameters(bufferScaled, pscale, ...)</code>    | Remove parameter scaling according to the parameter scaling in pscale   |

**Functions**

```
amici.amici.backtraceString(maxFrames: int) → str
```

Returns the current backtrace as std::string

**Parameters** `maxFrames` (int) – Number of frames to include

**Return type** str

**Returns** Backtrace

```
amici.amici.compiledWithOpenMP() → bool
```

AMICI extension was compiled with OpenMP?

**Return type** bool

```
amici.amici.enum(prefix)
```

`amici.amici.getScaledParameter(unscaledParameter: float, scaling: amici.amici.ParameterScaling) → float`  
Apply parameter scaling according to *scaling*

**Parameters**

- **unscaledParameter** (`float`) –
- **scaling** (`amici.amici.ParameterScaling`) – parameter scaling

**Return type** `float`

**Returns** Scaled parameter

`amici.amici.getUnscaledParameter(scaledParameter: float, scaling: amici.amici.ParameterScaling) → float`  
Remove parameter scaling according to *scaling*

**Parameters**

- **scaledParameter** (`float`) – scaled parameter
- **scaling** (`amici.amici.ParameterScaling`) – parameter scaling

**Return type** `float`

**Returns** Unscaled parameter

`amici.amici.parameterScalingFromIntVector(intVec: amici.amici.IntVector) →`  
`amici.amici.ParameterScalingVector`

Swig-Generated class, which, in contrast to other Vector classes, does not allow for simple interoperability with common Python types, but must be created using `amici.amici.parameterScalingFromIntVector()`

**Return type** `amici.amici.ParameterScalingVector`

`amici.amici.runAmiciSimulation(solver: amici.amici.Solver, edata: amici.amici.ExpData, model:`  
`amici.amici.Model, rethrow: bool = False) → amici.amici.ReturnData`

Core integration routine. Initializes the solver and runs the forward and backward problem.

**Parameters**

- **solver** (`amici.amici.Solver`) – Solver instance
- **edata** (`amici.amici.ExpData`) – pointer to experimental data object
- **model** (`amici.amici.Model`) – model specification object
- **rethrow** (`bool`) – rethrow integration exceptions?

**Return type** `amici.ReturnData`

**Returns** rdata pointer to return data object

`amici.amici.runAmiciSimulations(solver: amici.amici.Solver, edatas: amici.amici.ExpDataPtrVector, model:`  
`amici.amici.Model, failfast: bool, num_threads: int) →`  
`Iterable[amici.amici.ReturnData]`

Same as `runAmiciSimulation`, but for multiple `ExpData` instances. When compiled with OpenMP support, this function runs multi-threaded.

**Parameters**

- **solver** (`amici.amici.Solver`) – Solver instance
- **edatas** (`amici.amici.ExpDataPtrVector`) – experimental data objects
- **model** (`amici.amici.Model`) – model specification object
- **failfast** (`bool`) – flag to allow early termination
- **num\_threads** (`int`) – number of threads for parallel execution



**Return type** `Iterable[ReturnData]`

**Returns** vector of pointers to return data objects

`amici.amici.scaleParameters(bufferUnscaled: Iterable[float], pscale: Iterable[amici.amici.ParameterScaling], bufferScaled: Iterable[float]) → None`

Apply parameter scaling according to *scaling*

**Parameters**

- **bufferUnscaled** (`typing.Iterable[float]`) –
- **pscale** (`typing.Iterable[amici.amici.ParameterScaling]`) – parameter scaling
- **bufferScaled** (`typing.Iterable[float]`) – destination

**Return type** `None`

`amici.amici.unscaleParameters(bufferScaled: Iterable[float], pscale: Iterable[amici.amici.ParameterScaling], bufferUnscaled: Iterable[float]) → None`

Remove parameter scaling according to the parameter scaling in *pscale*

All vectors must be of same length.

**Parameters**

- **bufferScaled** (`typing.Iterable[float]`) – scaled parameters
- **pscale** (`typing.Iterable[amici.amici.ParameterScaling]`) – parameter scaling
- **bufferUnscaled** (`typing.Iterable[float]`) – unscaled parameters are written to the array

**Return type** `None`

### 10.4.3 amici.sbml\_import

#### SBML Import

This module provides all necessary functionality to import a model specified in the [Systems Biology Markup Language \(SBML\)](#).

#### Classes

|   |   |
|---|---|
| <code>SbmlImporter(sbml_source[, ...])</code> | Class to generate AMICI C++ files for a model provided in the Systems Biology Markup Language (SBML). |
|---|---|

#### amici.sbml\_import.SbmlImporter

**class** `amici.sbml_import.SbmlImporter(sbml_source, show_sbml_warnings=False, from_file=True)`  
 Class to generate AMICI C++ files for a model provided in the Systems Biology Markup Language (SBML).

**Variables**

- **show\_sbml\_warnings** – indicates whether libSBML warnings should be displayed
- **symbols** – dict carrying symbolic definitions
- **sbml\_reader** – The libSBML sbml reader

**Warning:** Not storing this may result in a segfault.

- **sbml\_doc** – document carrying the sbml definition

**Warning:** Not storing this may result in a segfault.

- **sbml** – SBML model to import
- **compartments** – dict of compartment ids and compartment volumes
- **stoichiometric\_matrix** – stoichiometric matrix of the model
- **flux\_vector** – reaction kinetic laws
- **flux\_ids** – identifiers for elements of flux\_vector
- **\_local\_symbols** – model symbols for sympy to consider during sympification see *locals`argument in `sympy.sympify`*
- **species\_assignment\_rules** – Assignment rules for species. Key is symbolic identifier and value is assignment value
- **compartment\_assignment\_rules** – Assignment rules for compartments. Key is symbolic identifier and value is assignment value
- **parameter\_assignment\_rules** – assignment rules for parameters, these parameters are not permissible for sensitivity analysis
- **initial\_assignments** – initial assignments for parameters, these parameters are not permissible for sensitivity analysis
- **sbml\_parser\_settings** – sets behaviour of SBML Formula parsing

**\_\_init\_\_**(*sbml\_source*, *show\_sbml\_warnings=False*, *from\_file=True*)

Create a new Model instance.

#### Parameters

- **sbml\_source** (`typing.Union[str, pathlib.Path, libsbml.Model]`) – Either a path to SBML file where the model is specified, or a model string as created by `sbml.sbmlWriter().writeSBMLToString()` or an instance of `libsbml.Model`.
- **show\_sbml\_warnings** (`bool`) – Indicates whether libSBML warnings should be displayed.
- **from\_file** (`bool`) – Whether *sbml\_source* is a file name (True, default), or an SBML string

#### Methods Summary

|   |   |
|---|---|
| <code>__init__(sbml_source[, show_sbml_warnings, ...])</code> | Create a new Model instance.  |
| <code>add_d_dt(d_dt, variable, variable0, name)</code>        | Creates or modifies species, to implement rate rules for compartments and species, respectively.  |
| <code>add_local_symbol(key, value)</code>                     | Add local symbols with some sanity checking for duplication which would indicate redefinition of internals, which SBML permits, but we don't. |

continues on next page

Table 40 – continued from previous page

|  |   |
|--|---|
| <code>check_event_support()</code>                     | Check possible events in the model, as AMICI does currently not support         |
| <code>check_support()</code>                           | Check whether all required SBML features are supported.                         |
| <code>is_assignment_rule_target(element)</code>        | Checks if an element has a valid assignment rule in the specified model.        |
| <code>is_rate_rule_target(element)</code>              | Checks if an element has a valid assignment rule in the specified model.        |
| <code>process_conservation_laws(ode_model)</code>      | Find conservation laws in reactions and species.                                |
| <code>sbml2amici(model_name[, output_dir, ...])</code> | Generate and compile AMICI C++ files for the model provided to the constructor. |

## Methods

**\_\_init\_\_**(*sbml\_source*, *show\_sbml\_warnings=False*, *from\_file=True*)

Create a new Model instance.

### Parameters

- **sbml\_source** (`typing.Union[str, pathlib.Path, libsbml.Model]`) – Either a path to SBML file where the model is specified, or a model string as created by `sbml.sbmlWriter().writeSBMLToString()` or an instance of `libsbml.Model`.
- **show\_sbml\_warnings** (`bool`) – Indicates whether libSBML warnings should be displayed.
- **from\_file** (`bool`) – Whether *sbml\_source* is a file name (True, default), or an SBML string

**add\_d\_dt**(*d\_dt*, *variable*, *variable0*, *name*)

Creates or modifies species, to implement rate rules for compartments and species, respectively.

### Parameters

- **d\_dt** (`sympy.core.expr.Expr`) – The rate rule (or, right-hand side of an ODE).
- **variable** (`sympy.core.symbol.Symbol`) – The subject of the rate rule.
- **variable0** (`typing.Union[float, sympy.core.expr.Expr]`) – The initial value of the variable.
- **name** (`str`) – Species name, only applicable if this function generates a new species

**Return type** `None`

**add\_local\_symbol**(*key*, *value*)

Add local symbols with some sanity checking for duplication which would indicate redefinition of internals, which SBML permits, but we don't.

### Parameters

- **key** (`str`) – local symbol key
- **value** (`sympy.core.expr.Expr`) – local symbol value

**check\_event\_support()**

Check possible events in the model, as AMICI does currently not support

- delays in events
- priorities of events

- events fired at initial time

Furthermore, event triggers are optional (e.g., if an event is fired at initial time, no trigger function is necessary). In this case, warn that this event will have no effect.

**Return type** `None`

**check\_support()**

Check whether all required SBML features are supported. Also ensures that the SBML contains at least one reaction, or rate rule, or assignment rule, to produce change in the system over time.

**Return type** `None`

**is\_assignment\_rule\_target(*element*)**

Checks if an element has a valid assignment rule in the specified model.

**Parameters** *element* (`libsbml.SBase`) – SBML variable

**Return type** `bool`

**Returns** boolean indicating truth of function name

**is\_rate\_rule\_target(*element*)**

Checks if an element has a valid assignment rule in the specified model.

**Parameters** *element* (`libsbml.SBase`) – SBML variable

**Return type** `bool`

**Returns** boolean indicating truth of function name

**process\_conservation\_laws(*ode\_model*)**

Find conservation laws in reactions and species.

**Parameters** *ode\_model* – ODEModel object with basic definitions

**Return type** `None`

**sbml2amici(*model\_name*, *output\_dir*=None, *observables*=None, *constant\_parameters*=None, *sigmas*=None, *noise\_distributions*=None, *verbose*=40, *assume\_pow\_positivity*=False, *compiler*=None, *allow\_reinit\_fixpar\_initcond*=True, *compile*=True, *compute\_conservation\_laws*=True, *simplify*=<function SbmlImporter.<lambda>>, *cache\_simplify*=False, *log\_as\_log10*=True, *generate\_sensitivity\_code*=True)**

Generate and compile AMICI C++ files for the model provided to the constructor.

The resulting model can be imported as a regular Python module (if *compile*=True), or used from Matlab or C++ as described in the documentation of the respective AMICI interface.

Note that this generates model ODEs for changes in concentrations, not amounts unless the *hasOnlySubstanceUnits* attribute has been defined for a particular species.

Sensitivity analysis for local parameters is enabled by creating global parameters `_reactionId_{localParameterName}`.

**Parameters**

- **model\_name** (`str`) – name of the model/model directory
- **output\_dir** (`typing.Union[pathlib.Path, str, None]`) – see `amici.ode_export.ODEExporter.set_paths()`
- **observables** (`typing.Optional[typing.Dict[str, typing.Dict[str, str]]]`) – dictionary( `observableId`:{ 'name':observableName (optional), 'formula':formulaString}) to be added to the model

- **constant\_parameters** (`typing.Optional[typing.Iterable[str]]`) – list of SBML Ids identifying constant parameters
- **sigmas** (`typing.Optional[typing.Dict[str, typing.Union[str, float]]]`) – dictionary(observableId: sigma value or (existing) parameter name)
- **noise\_distributions** (`typing.Optional[typing.Dict[str, typing.Union[str, typing.Callable]]]`) – dictionary(observableId: noise type). If nothing is passed for some observable id, a normal model is assumed as default. Either pass a noise type identifier, or a callable generating a custom noise string.
- **verbose** (`typing.Union[int, bool]`) – verbosity level for logging, True/False default to logging.Error/logging.DEBUG
- **assume\_pow\_positivity** (`bool`) – if set to True, a special pow function is used to avoid problems with state variables that may become negative due to numerical errors
- **compiler** (`typing.Optional[str]`) – distutils/setuptools compiler selection to build the python extension
- **allow\_reinit\_fixpar\_initcond** (`bool`) – see `amici.ode_export.ODEExporter`
- **compile** (`bool`) – If True, compile the generated Python package, if False, just generate code.
- **compute\_conservation\_laws** (`bool`) – if set to True, conservation laws are automatically computed and applied such that the state-jacobian of the ODE right-hand-side has full rank. This option should be set to True when using the Newton algorithm to compute steadystate sensitivities. Conservation laws for constant species are enabled by default. Support for conservation laws for non-constant species is experimental and may be enabled by setting an environment variable `AMICI_EXPERIMENTAL_SBML_NONCONST_CLS` to either `demartino` to use the algorithm proposed by De Martino et al. (2014) <https://doi.org/10.1371/journal.pone.0100750>, or to any other value to use the deterministic algorithm implemented in `conserved_moieties2.py`. In some cases, the `demartino` may run for a very long time. This has been observed for example in the case of stoichiometric coefficients with many significant digits.
- **simplify** (`typing.Callable`) – see `ODEModel._simplify`
- **cache\_simplify** (`bool`) – see `amici.ODEModel.__init__()`
- **log\_as\_log10** (`bool`) – If True, log in the SBML model will be parsed as `log10` (default), if False, log will be parsed as natural logarithm `ln`
- **generate\_sensitivity\_code** (`bool`) – If False, the code required for sensitivity computation will not be generated

Return type `None`

## Functions Summary

|   |  |
|---|--|
| <code>assignmentRules2observables(sbml_model[, ...])</code> | Turn assignment rules into observables.  |
| <code>get_species_initial(species)</code>                   | Extract the initial concentration from a given species                                     |
| <code>replace_logx(math_str)</code>                         | Replace <code>logX(.)</code> by <code>log(., X)</code> since sympy cannot parse the former |

## Functions

`amici.sbml_import.assignmentRules2observables(sbml_model, filter_function=<function <lambda>>)`  
Turn assignment rules into observables.

### Parameters

- **sbml\_model** (`libsbml.Model`) – Model to operate on
- **filter\_function** (`typing.Callable`) – Callback function taking assignment variable as input and returning True/False to indicate if the respective rule should be turned into an observable.

**Returns** A dictionary(observableId: { 'name': observableName, 'formula': formulaString })

`amici.sbml_import.get_species_initial(species)`  
Extract the initial concentration from a given species

**Parameters** **species** (`libsbml.Species`) – species index

**Return type** `sympy.core.expr.Expr`

**Returns** initial species concentration

`amici.sbml_import.replace_logx(math_str)`  
Replace logX(.) by log(., X) since sympy cannot parse the former

**Parameters** **math\_str** (`typing.Union[str, float, None]`) – string for sympification

**Return type** `typing.Union[str, float, None]`

**Returns** sympifiable string

## 10.4.4 amici.pysb\_import

### PySB Import

This module provides all necessary functionality to import a model specified in the `pysb.core.Model` format.

### Functions Summary

|  |  |
|--|--|
| <code>extract_monomers(complex_patterns)</code>                | Constructs a list of monomer names contained in complex patterns.  |
| <code>has_fixed_parameter_ic(specie, pysb_model, ...)</code>   | Wrapper to interface <code>ode_export.ODEModel.state_has_fixed_parameter_initial_condition()</code> from a pysb specie/model arguments |
| <code>ode_model_from_pysb_importer(model[, ...])</code>        | Creates an <code>amici.ODEModel</code> instance from a <code>pysb.Model</code> instance.   |
| <code>pysb2amici(model[, output_dir, observables, ...])</code> | Generate AMICI C++ files for the provided model.   |
| <code>pysb_model_from_path(pysb_model_file)</code>             | Load a pysb model module and return the <code>pysb.Model</code> instance   |

## Functions

`amici.pysb_import.extract_monomers(complex_patterns)`

Constructs a list of monomer names contained in complex patterns. Multiplicity of names corresponds to the stoichiometry in the complex.

**Parameters** `complex_patterns` (`typing.Union[pysb.core.ComplexPattern, typing.List[pysb.core.ComplexPattern]]`) – (list of) complex pattern(s)

**Return type** `typing.List[str]`

**Returns** list of monomer names

`amici.pysb_import.has_fixed_parameter_ic(specie, pysb_model, ode_model)`

Wrapper to interface `ode_export.ODEModel.state_has_fixed_parameter_initial_condition()` from a pysb specie/model arguments

**Parameters**

- **specie** (`pysb.core.ComplexPattern`) – pysb species
- **pysb\_model** (`pysb.core.Model`) – pysb model
- **ode\_model** (`amici.ode_export.ODEModel`) – ODE model

**Return type** `bool`

**Returns** False if the species does not have an initial condition at all. Otherwise the return value of `ode_export.ODEModel.state_has_fixed_parameter_initial_condition()`

`amici.pysb_import.ode_model_from_pysb_importer(model, constant_parameters=None, observables=None, sigmas=None, noise_distributions=None, compute_conservation_laws=True, simplify=<function powsimp>, cache_simplify=False, verbose=False)`

Creates an `amici.ODEModel` instance from a `pysb.Model` instance.

**Parameters**

- **model** (`pysb.core.Model`) – see `amici.pysb_import.pysb2amici()`
- **constant\_parameters** (`typing.Optional[typing.List[str]]`) – see `amici.pysb_import.pysb2amici()`
- **observables** (`typing.Optional[typing.List[str]]`) – see `amici.pysb_import.pysb2amici()`
- **sigmas** (`typing.Optional[typing.Dict[str, str]]`) – dict with names of observable Expressions as keys and names of sigma Expressions as value sigma
- **noise\_distributions** (`typing.Optional[typing.Dict[str, typing.Union[str, typing.Callable]]]`) – see `amici.pysb_import.pysb2amici()`
- **compute\_conservation\_laws** (`bool`) – see `amici.pysb_import.pysb2amici()`
- **simplify** (`typing.Callable`) – see `amici.ODEModel._simplify`
- **cache\_simplify** (`bool`) – see `amici.ODEModel.__init__()` Note that there are possible issues with PySB models: <https://github.com/AMICI-dev/AMICI/pull/1672>
- **verbose** (`typing.Union[int, bool]`) – verbosity level for logging, True/False default to logging.DEBUG/logging.ERROR

**Return type** `amici.ode_export.ODEModel`

**Returns** New ODEModel instance according to pysbModel

```
amici.pysb_import.pysb2amici(model, output_dir=None, observables=None, constant_parameters=None,
                             sigmas=None, noise_distributions=None, verbose=False,
                             assume_pow_positivity=False, compiler=None,
                             compute_conservation_laws=True, compile=True, simplify=<function
                             <lambda>>, cache_simplify=False, generate_sensitivity_code=True)
```

Generate AMICI C++ files for the provided model.

#### **Warning: PySB models with Compartments**

When importing a PySB model with `pysb.Compartments`, BioNetGen scales reaction fluxes with the compartment size. Instead of using the respective symbols, the compartment size Parameter or Expression is evaluated when generating equations. This may lead to unexpected results if the compartment size parameter is changed for AMICI simulations.

#### **Parameters**

- **model** (`pysb.core.Model`) – pysb model, `pysb.Model.name` will determine the name of the generated module
- **output\_dir** (`typing.Union[pathlib.Path, str, None]`) – see `amici.ode_export.ODEExporter.set_paths()`
- **observables** (`typing.Optional[typing.List[str]]`) – list of `pysb.core.Expression` or `pysb.core.Observable` names in the provided model that should be mapped to observables
- **sigmas** (`typing.Optional[typing.Dict[str, str]]`) – dict of `pysb.core.Expression` names that should be mapped to sigmas
- **noise\_distributions** (`typing.Optional[typing.Dict[str, typing.Union[str, typing.Callable]]]`) – dict with names of observable Expressions as keys and a noise type identifier, or a callable generating a custom noise formula string (see `amici.import_utils.noise_distribution_to_cost_function()`). If nothing is passed for some observable id, a normal model is assumed as default.
- **constant\_parameters** (`typing.Optional[typing.List[str]]`) – list of `pysb.core.Parameter` names that should be mapped as fixed parameters
- **verbose** (`typing.Union[int, bool]`) – verbosity level for logging, True/False default to `logging.DEBUG`/`logging.ERROR`
- **assume\_pow\_positivity** (`bool`) – if set to True, a special pow function is used to avoid problems with state variables that may become negative due to numerical errors
- **compiler** (`typing.Optional[str]`) – distutils/setuptools compiler selection to build the python extension
- **compute\_conservation\_laws** (`bool`) – if set to True, conservation laws are automatically computed and applied such that the state-jacobian of the ODE right-hand-side has full rank. This option should be set to True when using the Newton algorithm to compute steadystates
- **compile** (`bool`) – If True, build the python module for the generated model. If false, just generate the source code.
- **simplify** (`typing.Callable`) – see `amici.ODEModel._simplify`
- **cache\_simplify** (`bool`) – see `amici.ODEModel.__init__()` Note that there are possible issues with PySB models: <https://github.com/AMICI-dev/AMICI/pull/1672>



- **generate\_sensitivity\_code** (`bool`) – if set to `False`, code for sensitivity computation will not be generated

`amici.pysb_import.pysb_model_from_path(pysb_model_file)`

Load a pysb model module and return the `pysb.Model` instance

**Parameters** `pysb_model_file` (`typing.Union[str, pathlib.Path]`) – Full or relative path to the PySB model module

**Return type** `pysb.core.Model`

**Returns** The pysb Model instance

### 10.4.5 amici.bngl\_import

#### BNGL Import

This module provides all necessary functionality to import a model specified in the *BNGL* format.

#### Functions Summary

|  |  |
|--|--|
| <code>bngl2amici(bngl_model, *args, **kwargs)</code> | Generate AMICI C++ files for the provided model. |
|--|--|

#### Functions

`amici.bngl_import.bngl2amici(bngl_model, *args, **kwargs)`

Generate AMICI C++ files for the provided model.

##### Parameters

- **bngl\_model** (`str`) – bngl model file, model name will determine the name of the generated module
- **args** – see `amici.pysb_import.pysb2amici()` for additional arguments
- **kwargs** – see `amici.pysb_import.pysb2amici()` for additional arguments

**Return type** `None`

### 10.4.6 amici.petab\_import

#### PEtab Import

Import a model in the petab (<https://github.com/PEtab-dev/PEtab>) format into AMICI.

## Functions Summary

|  |  |
|--|--|
| <code>constant_species_to_parameters(sbml_model)</code>        | Convert constant species in the SBML model to constant parameters.   |
| <code>element_is_state(sbml_model, sbml_id)</code>             | Does the element with ID <i>sbml_id</i> correspond to a state variable?  |
| <code>get_fixed_parameters(sbml_model[, ...])</code>           | Determine, set and return fixed model parameters.  |
| <code>get_observation_model(observable_df)</code>              | Get observables, sigmas, and noise distributions from PETab observation table in a format suitable for <i>amici.sbml_import.SbmlImporter.sbml2amici()</i> .        |
| <code>import_model(sbml_model[, condition_table, ...])</code>  | Create AMICI model from PETab problem  |
| <code>import_model_sbml(sbml_model[, ...])</code>              | Create AMICI model from PETab problem  |
| <code>import_petab_problem(petab_problem[, ...])</code>        | Import model from petab problem.   |
| <code>main()</code>  | Command line interface to import a model in the PETab ( <a href="https://github.com/PETab-dev/PETab/">https://github.com/PETab-dev/PETab/</a> ) format into AMICI. |
| <code>petab_noise_distributions_to_amici(observable_df)</code> | Map from the petab to the amici format of noise distribution identifiers.  |
| <code>petab_scale_to_amici_scale(scale_str)</code>             | Convert PETab parameter scaling string to AMICI scaling integer  |
| <code>show_model_info(sbml_model)</code>                       | Log some model quantities  |
| <code>species_to_parameters(species_ids, sbml_model)</code>    | Turn a SBML species into parameters and replace species references inside the model instance.  |

## Functions

`amici.petab_import.constant_species_to_parameters(sbml_model)`

Convert constant species in the SBML model to constant parameters.

This can be used e.g. for setting up models with condition-specific constant species for PETab, since there it is not possible to specify constant species in the condition table.

**Parameters** `sbml_model` (`libsbml.Model`) – SBML Model

**Return type** `typing.List[str]`

**Returns** List of IDs of SBML species that have been turned into constants

`amici.petab_import.element_is_state(sbml_model, sbml_id)`

Does the element with ID *sbml\_id* correspond to a state variable?

**Return type** `bool`

`amici.petab_import.get_fixed_parameters(sbml_model, condition_df=None,  
const_species_to_parameters=False)`

Determine, set and return fixed model parameters.

Parameters specified in *condition\_df* are turned into constants. Only global SBML parameters are considered. Local parameters are ignored.

**Parameters**

- **condition\_df** (`typing.Optional[pandas.core.frame.DataFrame]`) – PETab condition table. If provided, the respective parameters will be turned into AMICI constant parameters.
- **sbml\_model** (`libsbml.Model`) – `libsbml.Model` instance

- **const\_species\_to\_parameters** (`bool`) – If *True*, species which are marked constant within the SBML model will be turned into constant parameters *within* the given *sbml\_model*.

**Return type** `typing.List[str]`

**Returns** List of IDs of parameters which are to be considered constant.

`amici.petab_import.get_observation_model(observable_df)`

Get observables, sigmas, and noise distributions from PETab observation table in a format suitable for `amici.sbml_import.SbmlImporter.sbml2amici()`.

**Parameters** `observable_df` (`pandas.core.frame.DataFrame`) – PETab observables table

**Return type** `typing.Tuple[typing.Dict[str, typing.Dict[str, str]], typing.Dict[str, str], typing.Dict[str, typing.Union[str, float]]]`

**Returns** Tuple of dicts with observables, noise distributions, and sigmas.

`amici.petab_import.import_model(sbml_model, condition_table=None, observable_table=None, measurement_table=None, model_name=None, model_output_dir=None, verbose=True, allow_reinit_fixpar_initcond=True, **kwargs)`

Create AMICI model from PETab problem

**Parameters**

- **sbml\_model** (`typing.Union[str, pathlib.Path, libsbml.Model]`) – PETab SBML model or SBML file name.
- **condition\_table** (`typing.Union[str, pathlib.Path, pandas.core.frame.DataFrame, None]`) – PETab condition table. If provided, parameters from there will be turned into AMICI constant parameters (i.e. parameters w.r.t. which no sensitivities will be computed).
- **observable\_table** (`typing.Union[str, pathlib.Path, pandas.core.frame.DataFrame, None]`) – PETab observable table.
- **measurement\_table** (`typing.Union[str, pathlib.Path, pandas.core.frame.DataFrame, None]`) – PETab measurement table.
- **model\_name** (`typing.Optional[str]`) – Name of the generated model. If model file name was provided, this defaults to the file name without extension, otherwise the SBML model ID will be used.
- **model\_output\_dir** (`typing.Union[pathlib.Path, str, None]`) – Directory to write the model code to. Will be created if doesn't exist. Defaults to current directory.
- **verbose** (`typing.Union[bool, int, None]`) – Print/log extra information.
- **allow\_reinit\_fixpar\_initcond** (`bool`) – See `amici.ode_export.ODEExporter`. Must be enabled if initial states are to be reset after preequilibration.
- **kwargs** – Additional keyword arguments to be passed to `amici.sbml_import.SbmlImporter.sbml2amici()`.

**Return type** `amici.sbml_import.SbmlImporter`

**Returns** The created `amici.sbml_import.SbmlImporter` instance.

`amici.petab_import.import_model_sbml(sbml_model, condition_table=None, observable_table=None, measurement_table=None, model_name=None, model_output_dir=None, verbose=True, allow_reinit_fixpar_initcond=True, **kwargs)`

Create AMICI model from PETab problem

**Parameters**

- **sbml\_model** (`typing.Union[str, pathlib.Path, libsbml.Model]`) – PETab SBML model or SBML file name.
- **condition\_table** (`typing.Union[str, pathlib.Path, pandas.core.frame.DataFrame, None]`) – PETab condition table. If provided, parameters from there will be turned into AMICI constant parameters (i.e. parameters w.r.t. which no sensitivities will be computed).
- **observable\_table** (`typing.Union[str, pathlib.Path, pandas.core.frame.DataFrame, None]`) – PETab observable table.
- **measurement\_table** (`typing.Union[str, pathlib.Path, pandas.core.frame.DataFrame, None]`) – PETab measurement table.
- **model\_name** (`typing.Optional[str]`) – Name of the generated model. If model file name was provided, this defaults to the file name without extension, otherwise the SBML model ID will be used.
- **model\_output\_dir** (`typing.Union[pathlib.Path, str, None]`) – Directory to write the model code to. Will be created if doesn't exist. Defaults to current directory.
- **verbose** (`typing.Union[bool, int, None]`) – Print/log extra information.
- **allow\_reinit\_fixpar\_initcond** (`bool`) – See `amici.ode_export.ODEExporter`. Must be enabled if initial states are to be reset after preequilibration.
- **kwargs** – Additional keyword arguments to be passed to `amici.sbml_import.SbmlImporter.sbml2amici()`.

**Return type** `amici.sbml_import.SbmlImporter`

**Returns** The created `amici.sbml_import.SbmlImporter` instance.

`amici.petab_import.import_petab_problem(petab_problem, model_output_dir=None, model_name=None, force_compile=False, **kwargs)`

Import model from petab problem.

**Parameters**

- **petab\_problem** (`petab.problem.Problem`) – A petab problem containing all relevant information on the model.
- **model\_output\_dir** (`typing.Union[pathlib.Path, str, None]`) – Directory to write the model code to. Will be created if doesn't exist. Defaults to current directory.
- **model\_name** (`typing.Optional[str]`) – Name of the generated model. If model file name was provided, this defaults to the file name without extension, otherwise the SBML model ID will be used.
- **force\_compile** (`bool`) – Whether to compile the model even if the target folder is not empty, or the model exists already.
- **kwargs** – Additional keyword arguments to be passed to `amici.sbml_import.SbmlImporter.sbml2amici()`.

**Return type** `amici.amici.Model`

**Returns** The imported model.

`amici.petab_import.main()`

Command line interface to import a model in the PETab (<https://github.com/PETab-dev/PETab/>) format into AMICI.

`amici.petab_import.petab_noise_distributions_to_amici(observable_df)`

Map from the petab to the amici format of noise distribution identifiers.

**Parameters** `observable_df` (`pandas.core.frame.DataFrame`) – PETab observable table

**Return type** `typing.Dict[str, str]`

**Returns** Dictionary of observable\_id => AMICI noise-distributions

`amici.petab_import.petab_scale_to_amici_scale(scale_str)`

Convert PETab parameter scaling string to AMICI scaling integer

**Return type** `int`

`amici.petab_import.show_model_info(sbml_model)`

Log some model quantities

`amici.petab_import.species_to_parameters(species_ids, sbml_model)`

Turn a SBML species into parameters and replace species references inside the model instance.

**Parameters**

- **species\_ids** (`typing.List[str]`) – List of SBML species ID to convert to parameters with the same ID as the replaced species.
- **sbml\_model** (`libsbml.Model`) – SBML model to modify

**Return type** `typing.List[str]`

**Returns** List of IDs of species which have been converted to parameters

## 10.4.7 amici.petab\_import\_pysb

### PySB-PETab Import

Import a model in the PySB-adapted petab (<https://github.com/PETab-dev/PETab>) format into AMICI.

### Classes

---

`PysbPetabProblem([pysb_model])`

Representation of a PySB-model-based PETab problem

---

### amici.petab\_import\_pysb.PysbPetabProblem

**class** `amici.petab_import_pysb.PysbPetabProblem(pysb_model=None, *args, **kwargs)`

Representation of a PySB-model-based PETab problem

This class extends `petab.Problem` with a PySB model. The model is augmented with the observation model based on the PETab observable table. For now, a dummy SBML model is created which allows used the existing SBML-PETab API.

**Variables** `pysb_model` – PySB model instance from of this PETab problem.

**\_\_init\_\_** (`pysb_model=None, *args, **kwargs`)

Constructor

**Parameters**

- **pysb\_model** (`typing.Optional[pysb.core.Model]`) – PySB model instance for this PETab problem

- **args** – See `petab.Problem.__init__()`
- **kwargs** – See `petab.Problem.__init__()`

## Methods Summary

|   |   |
|---|---|
| <code>__init__([pysb_model])</code>                                     | Constructor   |
| <code>create_parameter_df(*args, **kwargs)</code>                       | Create a new PETab parameter table  |
| <code>from_combine(filename)</code>                                     | Read PETab COMBINE archive ( <a href="http://co.mbine.org/documents/archive">http://co.mbine.org/documents/archive</a> ). |
| <code>from_files([condition_file, ...])</code>                          | Factory method to load model and tables from files.   |
| <code>from_folder(folder[, model_name])</code>                          | Factory method to use the standard folder structure and file names, i.e.  |
| <code>from_yaml(yaml_config[, flatten])</code>                          | Factory method to load model and tables as specified by YAML file.  |
| <code>get_lb([free, fixed, scaled])</code>                              | Generic function to get lower parameter bounds.   |
| <code>get_model_parameters()</code>                                     | See <code>petab.sbml.get_model_parameters()</code>  |
| <code>get_noise_distributions()</code>                                  | See <code>petab.get_noise_distributions()</code> .  |
| <code>get_observable_ids()</code>                                       | Returns dictionary of observable ids.   |
| <code>get_observables([remove])</code>                                  | Returns dictionary of observables definitions.  |
| <code>get_optimization_parameter_scales()</code>                        | Return list of optimization parameter scaling strings.  |
| <code>get_optimization_parameters()</code>                              | Return list of optimization parameter IDs.  |
| <code>get_optimization_to_simulation_parameter_mapping([remove])</code> | See <code>petab.get_optimization_to_simulation_parameter_mapping()</code> .   |
| <code>get_sigmas([remove])</code>                                       | Return dictionary of observableId => sigma as defined in the SBML model.  |
| <code>get_simulation_conditions_from_measurement_df()</code>            | See <code>petab.get_simulation_conditions</code>  |
| <code>get_ub([free, fixed, scaled])</code>                              | Generic function to get upper parameter bounds.   |
| <code>get_x_ids([free, fixed])</code>                                   | Generic function to get parameter ids.  |
| <code>get_x_nominal([free, fixed, scaled])</code>                       | Generic function to get parameter nominal values.   |
| <code>sample_parameter_startpoints([n_starts])</code>                   | Create starting points for optimization   |
| <code>scale_parameters(x_dict)</code>                                   | Scale parameter values.   |
| <code>to_files([sbml_file, condition_file, ...])</code>                 | Write PETab tables to files for this problem  |
| <code>to_files_generic(prefix_path)</code>                              | Save a PETab problem to generic file names.   |
| <code>unscale_parameters(x_dict)</code>                                 | Unscale parameter values.   |

## Attributes

|                              |   |
|------------------------------|---|
| <code>lb</code>              | Parameter table lower bounds.                               |
| <code>lb_scaled</code>       | Parameter table lower bounds with applied parameter scaling |
| <code>ub</code>              | Parameter table upper bounds                                |
| <code>ub_scaled</code>       | Parameter table upper bounds with applied parameter scaling |
| <code>x_fixed_ids</code>     | Parameter table parameter IDs, for fixed parameters.        |
| <code>x_fixed_indices</code> | Parameter table non-estimated parameter indices.            |
| <code>x_free_ids</code>      | Parameter table parameter IDs, for free parameters.         |
| <code>x_free_indices</code>  | Parameter table estimated parameter indices.                |
| <code>x_ids</code>           | Parameter table parameter IDs                               |
| <code>x_nominal</code>       | Parameter table nominal values                              |

continues on next page

Table 47 – continued from previous page

|                                     |  |
|-------------------------------------|--|
| <code>x_nominal_fixed</code>        | Parameter table nominal values, for fixed parameters.                                |
| <code>x_nominal_fixed_scaled</code> | Parameter table nominal values with applied parameter scaling, for fixed parameters. |
| <code>x_nominal_free</code>         | Parameter table nominal values, for free parameters.                                 |
| <code>x_nominal_free_scaled</code>  | Parameter table nominal values with applied parameter scaling, for free parameters.  |
| <code>x_nominal_scaled</code>       | Parameter table nominal values with applied parameter scaling                        |

## Methods

**`__init__`**(*pysb\_model=None, \*args, \*\*kwargs*)

Constructor

### Parameters

- **`pysb_model`** (`typing.Optional[pysb.core.Model]`) – PySB model instance for this PETab problem
- **`args`** – See `petab.Problem.__init__()`
- **`kwargs`** – See `petab.Problem.__init__()`

**`create_parameter_df`**(*\*args, \*\*kwargs*)

Create a new PETab parameter table

See `create_parameter_df()`.

**`static from_combine`**(*filename*)

Read PETab COMBINE archive (<http://co.mbine.org/documents/archive>).

See also `petab.create_combine_archive()`.

**Parameters** **`filename`** (`typing.Union[pathlib.Path, str]`) – Path to the PETab-COMBINE archive

**Return type** `petab.problem.Problem`

**Returns** A `petab.Problem` instance.

**`static from_files`**(*condition\_file=None, measurement\_file=None, parameter\_file=None, visualization\_files=None, observable\_files=None, pysb\_model\_file=None, flatten=False*)

Factory method to load model and tables from files.

### Parameters

- **`condition_file`** (`typing.Union[str, pathlib.Path, typing.Iterable[typing.Union[str, pathlib.Path]], None]`) – PETab condition table
- **`measurement_file`** (`typing.Union[str, pathlib.Path, typing.Iterable[typing.Union[str, pathlib.Path]], None]`) – PETab measurement table
- **`parameter_file`** (`typing.Union[str, pathlib.Path, typing.Iterable[typing.Union[str, pathlib.Path]], None]`) – PETab parameter table
- **`visualization_files`** (`typing.Union[str, pathlib.Path, typing.Iterable[typing.Union[str, pathlib.Path]], None]`) – PETab visualization tables

- **observable\_files** (`typing.Union[str, pathlib.Path, typing.Iterable[typing.Union[str, pathlib.Path]], None]`) – PETab observables tables
- **pysb\_model\_file** (`typing.Union[pathlib.Path, str, None]`) – PySB model file
- **flatten** (`bool`) – Flatten the petab problem

**Return type** `amici.petab_import_pysb.PysbPetabProblem`

**Returns** Petab Problem

**static from\_folder**(*folder*, *model\_name=None*)

Factory method to use the standard folder structure and file names, i.e.

```
${model_name}/
+-- experimentalCondition_${model_name}.tsv
+-- measurementData_${model_name}.tsv
+-- model_${model_name}.xml
+-- parameters_${model_name}.tsv
```

#### Parameters

- **folder** (`str`) – Path to the directory in which the files are located.
- **model\_name** (`typing.Optional[str]`) – If specified, overrides the model component in the file names. Defaults to the last component of `folder`.

**Return type** `petab.problem.Problem`

**static from\_yaml**(*yaml\_config*, *flatten=False*)

Factory method to load model and tables as specified by YAML file.

NOTE: The PySB model is currently expected in the YAML file under `sbml_files`.

#### Parameters

- **yaml\_config** (`typing.Union[typing.Dict, pathlib.Path, str]`) – PETab configuration as dictionary or YAML file name
- **flatten** (`bool`) – Flatten the petab problem

**Return type** `amici.petab_import_pysb.PysbPetabProblem`

**Returns** Petab Problem

**get\_lb**(*free=True*, *fixed=True*, *scaled=False*)

Generic function to get lower parameter bounds.

#### Parameters

- **free** (`bool`) – Whether to return free parameters, i.e. parameters to estimate.
- **fixed** (`bool`) – Whether to return fixed parameters, i.e. parameters not to estimate.
- **scaled** (`bool`) – Whether to scale the values according to the parameter scale, or return them on linear scale.

#### Returns

**Return type** The lower parameter bounds.

**get\_model\_parameters**()

See `petab.sbml.get_model_parameters()`



**get\_noise\_distributions()**

See `petab.get_noise_distributions()`.

**get\_observable\_ids()**

Returns dictionary of observable ids.

**get\_observables(*remove=False*)**

Returns dictionary of observables definitions.

See `petab.assignment_rules_to_dict()` for details.

**get\_optimization\_parameter\_scales()**

Return list of optimization parameter scaling strings.

See `petab.parameters.get_optimization_parameters()`.

**get\_optimization\_parameters()**

Return list of optimization parameter IDs.

See `petab.parameters.get_optimization_parameters()`.

**get\_optimization\_to\_simulation\_parameter\_mapping(*warn\_unmapped=True*,  
*scaled\_parameters=False*, *al-*  
*low\_timepoint\_specific\_numeric\_noise\_parameters=False*)**

See `get_simulation_to_optimization_parameter_mapping`.

**get\_sigmas(*remove=False*)**

Return dictionary of `observableId => sigma` as defined in the SBML model.

This does not include parameter mappings defined in the measurement table.

**get\_simulation\_conditions\_from\_measurement\_df()**

See `petab.get_simulation_conditions`

**get\_ub(*free=True*, *fixed=True*, *scaled=False*)**

Generic function to get upper parameter bounds.

#### Parameters

- **free** (*bool*) – Whether to return free parameters, i.e. parameters to estimate.
- **fixed** (*bool*) – Whether to return fixed parameters, i.e. parameters not to estimate.
- **scaled** (*bool*) – Whether to scale the values according to the parameter scale, or return them on linear scale.

#### Returns

**Return type** The upper parameter bounds.

**get\_x\_ids(*free=True*, *fixed=True*)**

Generic function to get parameter ids.

#### Parameters

- **free** (*bool*) – Whether to return free parameters, i.e. parameters to estimate.
- **fixed** (*bool*) – Whether to return fixed parameters, i.e. parameters not to estimate.

#### Returns

**Return type** The parameter IDs.

**get\_x\_nominal(*free=True*, *fixed=True*, *scaled=False*)**

Generic function to get parameter nominal values.

#### Parameters

- **free** (*bool*) – Whether to return free parameters, i.e. parameters to estimate.
- **fixed** (*bool*) – Whether to return fixed parameters, i.e. parameters not to estimate.
- **scaled** (*bool*) – Whether to scale the values according to the parameter scale, or return them on linear scale.

#### Returns

**Return type** The parameter nominal values.

**sample\_parameter\_startpoints**(*n\_starts=100*)

Create starting points for optimization

See `petab.sample_parameter_startpoints()`.

**scale\_parameters**(*x\_dict*)

Scale parameter values.

**Parameters** *x\_dict* (`typing.Dict[str, float]`) – Keys are parameter IDs in the PETab problem, values are unscaled parameter values.

#### Returns

**Return type** The scaled parameter values.

**to\_files**(*sbml\_file=None, condition\_file=None, measurement\_file=None, parameter\_file=None, visualization\_file=None, observable\_file=None, yaml\_file=None, prefix\_path=None, relative\_paths=True*)

Write PETab tables to files for this problem

Writes PETab files for those entities for which a destination was passed.

NOTE: If this instance was created from multiple measurement or visualization tables, they will be merged and written to a single file.

#### Parameters

- **sbml\_file** (`typing.Union[pathlib.Path, str, None]`) – SBML model destination
- **condition\_file** (`typing.Union[pathlib.Path, str, None]`) – Condition table destination
- **measurement\_file** (`typing.Union[pathlib.Path, str, None]`) – Measurement table destination
- **parameter\_file** (`typing.Union[pathlib.Path, str, None]`) – Parameter table destination
- **visualization\_file** (`typing.Union[pathlib.Path, str, None]`) – Visualization table destination
- **observable\_file** (`typing.Union[pathlib.Path, str, None]`) – Observables table destination
- **yaml\_file** (`typing.Union[pathlib.Path, str, None]`) – YAML file destination
- **prefix\_path** (`typing.Union[pathlib.Path, str, None]`) – Specify a prefix to all paths, to avoid specifying the prefix for all paths individually. NB: the prefix is added to paths before *relative\_paths* is handled.
- **relative\_paths** (*bool*) – whether all paths in the YAML file should be relative to the location of the YAML file. If *False*, then paths are left unchanged.

**Raises** `ValueError` – If a destination was provided for a non-existing entity.

**Return type** `None`

**to\_files\_generic**(*prefix\_path*)

Save a PETab problem to generic file names.

The PETab problem YAML file is always created. PETab data files are only created if the PETab problem contains corresponding data (e.g. a PETab visualization TSV file is only created if the PETab problem has one).

**Parameters** **prefix\_path** (`typing.Union[str, pathlib.Path]`) – Specify a prefix to all paths, to avoid specifying the prefix for all paths individually. NB: the prefix is added to paths before *relative\_paths* is handled downstream in *petab.yaml.create\_problem\_yaml*.

**Return type** `str`

**Returns** The path to the PETab problem YAML file.

**unscale\_parameters**(*x\_dict*)

Unscale parameter values.

**Parameters** **x\_dict** (`typing.Dict[str, float]`) – Keys are parameter IDs in the PETab problem, values are scaled parameter values.

**Returns**

**Return type** The unscaled parameter values.

## Functions Summary

|  |  |
|--|--|
| <code>create_dummy_sbml</code> ( <i>pysb_model</i> [, <i>observable_ids</i> ]) | Create SBML dummy model for to use PySB models with PETab. |
| <code>import_model_pysb</code> ( <i>petab_problem</i> [, ...])                 | Create AMICI model from PySB-PETab problem                 |

## Functions

`amici.petab_import_pysb.create_dummy_sbml`(*pysb\_model*, *observable\_ids=None*)

Create SBML dummy model for to use PySB models with PETab.

Model must at least contain PETab problem parameter and noise parameters for observables.

**Parameters**

- **pysb\_model** (`pysb.core.Model`) – PySB model
- **observable\_ids** (`typing.Optional[typing.Iterable[str]]`) – Observable IDs

**Return type** `typing.Tuple[libsbml.Model, libsbml.SBMLDocument]`

**Returns** A dummy SBML model and document.

`amici.petab_import_pysb.import_model_pysb`(*petab\_problem*, *model\_output\_dir=None*, *verbose=True*, *\*\*kwargs*)

Create AMICI model from PySB-PETab problem

**Parameters**

- **petab\_problem** (`amici.petab_import_pysb.PysbPetabProblem`) – PySB PETab problem
- **model\_output\_dir** (`typing.Union[pathlib.Path, str, None]`) – Directory to write the model code to. Will be created if doesn't exist. Defaults to current directory.

- **verbose** (`typing.Union[bool, int, None]`) – Print/log extra information.
- **kwargs** – Additional keyword arguments to be passed to `amici.pysb_import.pysb2amici()`.

**Return type** `None`

## 10.4.8 amici.petab\_objective

### PEtab Objective

Functionality related to running simulations or evaluating the objective function as defined by a PEPab problem

### Functions Summary

|  |   |
|--|---|
| <code>create_edata_for_condition(condition, ...)</code>        | Get <code>amici.amici.ExpData</code> for the given PEPab condition.   |
| <code>create_edatas(amici_model, petab_problem[, ...])</code>  | Create list of <code>amici.amici.ExpData</code> objects for PEPab problem.                                  |
| <code>create_parameter_mapping(petab_problem, ...)</code>      | Generate AMICI specific parameter mapping.  |
| <code>create_parameter_mapping_for_condition(...)</code>       | Generate AMICI specific parameter mapping for condition.  |
| <code>create_parameterized_edatas(amici_model, ...)</code>     | Create list of <code>:class:amici.ExpData</code> objects with parameters filled in.                         |
| <code>rdatas_to_measurement_df(rdatas, model, ...)</code>      | Create a measurement dataframe in the PEPab format from the passed <code>rdatas</code> and own information. |
| <code>rdatas_to_simulation_df(rdatas, model, ...)</code>       | Create a PEPab simulation dataframe from <code>amici.ReturnDatas</code> .                                   |
| <code>simulate_petab(petab_problem, amici_model[, ...])</code> | Simulate PEPab model.   |
| <code>subset_dict(full, *args)</code>                          | Get subset of dictionary based on provided keys   |

### Functions

`amici.petab_objective.create_edata_for_condition(condition, measurement_df, amici_model, petab_problem, observable_ids)`

Get `amici.amici.ExpData` for the given PEPab condition.

Sets timepoints, observed data and sigmas.

#### Parameters

- **condition** (`typing.Union[typing.Dict, pandas.core.series.Series]`) – `pandas.DataFrame` row with `preequilibrationConditionId` and `simulationConditionId`.
- **measurement\_df** (`pandas.core.frame.DataFrame`) – `pandas.DataFrame` with measurements for the given condition.
- **amici\_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI model
- **petab\_problem** (`petab.problem.Problem`) – Underlying PEPab problem
- **observable\_ids** (`typing.List[str]`) – List of observable IDs

**Return type** `amici.swig_wrappers.ExpData`

**Returns** ExpData instance.

`amici.petab_objective.create_edatas(amici_model, petab_problem, simulation_conditions=None)`  
 Create list of `amici.amici.ExpData` objects for PETab problem.

**Parameters**

- **amici\_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AM-ICI model.
- **petab\_problem** (`petab.problem.Problem`) – Underlying PETab problem.
- **simulation\_conditions** (`typing.Union[pandas.core.frame.DataFrame, typing.Dict, None]`) – Result of `petab.get_simulation_conditions`. Can be provided to save time if this has been obtained before.

**Return type** `typing.List[amici.swig_wrappers.ExpData]`

**Returns** List with one `amici.amici.ExpData` per simulation condition, with filled in timepoints and data.

`amici.petab_objective.create_parameter_mapping(petab_problem, simulation_conditions, scaled_parameters, amici_model)`

Generate AMICI specific parameter mapping.

**Parameters**

- **petab\_problem** (`petab.problem.Problem`) – PETab problem
- **simulation\_conditions** (`typing.Union[pandas.core.frame.DataFrame, typing.List[typing.Dict]]`) – Result of `petab.get_simulation_conditions`. Can be provided to save time if this has been obtained before.
- **scaled\_parameters** (`bool`) – If True, problem\_parameters are assumed to be on the scale provided in the PETab parameter table and will be unscaled. If False, they are assumed to be in linear scale.
- **amici\_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AM-ICI model.

**Return type** `amici.parameter_mapping.ParameterMapping`

**Returns** List of the parameter mappings.

`amici.petab_objective.create_parameter_mapping_for_condition(parameter_mapping_for_condition, condition, petab_problem, amici_model)`

Generate AMICI specific parameter mapping for condition.

**Parameters**

- **parameter\_mapping\_for\_condition** (`typing.Tuple[typing.Dict[str, typing.Union[str, numbers.Number]], typing.Dict[str, typing.Union[str, numbers.Number]], typing.Dict[str, str], typing.Dict[str, str]]`) – Preliminary parameter mapping for condition.
- **condition** (`typing.Union[pandas.core.series.Series, typing.Dict]`) – pandas.DataFrame row with `preequilibrationConditionId` and `simulationConditionId`.
- **petab\_problem** (`petab.problem.Problem`) – Underlying PETab problem.
- **amici\_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AM-ICI model.

**Return type** `amici.parameter_mapping.ParameterMappingForCondition`

**Returns** The parameter and parameter scale mappings, for fixed preequilibration, fixed simulation, and variable simulation parameters, and then the respective scalings.

`amici.petab_objective.create_parameterized_edatas(amici_model, petab_problem, problem_parameters, scaled_parameters=False, parameter_mapping=None, simulation_conditions=None)`

Create list of :class:amici.ExpData objects with parameters filled in.

#### Parameters

- **amici\_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI Model assumed to be compatible with `petab_problem`.
- **petab\_problem** (`petab.problem.Problem`) – PETab problem to work on.
- **problem\_parameters** (`typing.Dict[str, numbers.Number]`) – Run simulation with these parameters. If None, PETab *nominalValues* will be used). To be provided as dict, mapping PETab problem parameters to SBML IDs.
- **scaled\_parameters** (`bool`) – If True, problem\_parameters are assumed to be on the scale provided in the PETab parameter table and will be unscaled. If False, they are assumed to be in linear scale.
- **parameter\_mapping** (`typing.Optional[amici.parameter_mapping.ParameterMapping]`) – Optional precomputed PETab parameter mapping for efficiency, as generated by `create_parameter_mapping`.
- **simulation\_conditions** (`typing.Union[pandas.core.frame.DataFrame, typing.Dict, None]`) – Result of `petab.get_simulation_conditions`. Can be provided to save time if this has been obtained before.

**Return type** `typing.List[amici.swig_wrappers.ExpData]`

**Returns** List with one `amici.amici.ExpData` per simulation condition, with filled in timepoints, data and parameters.

`amici.petab_objective.rdatas_to_measurement_df(rdatas, model, measurement_df)`

Create a measurement dataframe in the PETab format from the passed *rdatas* and own information.

#### Parameters

- **rdatas** (`typing.Sequence[amici.amici.ReturnData]`) – A sequence of *rdatas* with the ordering of `petab.get_simulation_conditions`.
- **model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI model used to generate *rdatas*.
- **measurement\_df** (`pandas.core.frame.DataFrame`) – PETab measurement table used to generate *rdatas*.

**Return type** `pandas.core.frame.DataFrame`

**Returns** A dataframe built from the *rdatas* in the format of *measurement\_df*.

`amici.petab_objective.rdatas_to_simulation_df(rdatas, model, measurement_df)`

Create a PETab simulation dataframe from `amici.ReturnDatas`.

See `rdatas_to_measurement_df` for details, only that model outputs will appear in column “simulation” instead of “measurement”.

**Return type** `pandas.core.frame.DataFrame`

```
amici.petab_objective.simulate_petab(petab_problem, amici_model, solver=None,
                                     problem_parameters=None, simulation_conditions=None,
                                     edatas=None, parameter_mapping=None,
                                     scaled_parameters=False, log_level=30, num_threads=1,
                                     failfast=True)
```

Simulate PETab model.

#### Parameters

- **petab\_problem** (`petab.problem.Problem`) – PETab problem to work on.
- **amici\_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI Model assumed to be compatible with `petab_problem`.
- **solver** (`typing.Optional[amici.amici.Solver]`) – An AMICI solver. Will use default options if `None`.
- **problem\_parameters** (`typing.Optional[typing.Dict[str, float]]`) – Run simulation with these parameters. If `None`, PETab *nominalValues* will be used). To be provided as dict, mapping PETab problem parameters to SBML IDs.
- **simulation\_conditions** (`typing.Union[pandas.core.frame.DataFrame, typing.Dict, None]`) – Result of `petab.get_simulation_conditions`. Can be provided to save time if this has been obtained before. Not required if `edatas` and `parameter_mapping` are provided.
- **edatas** (`typing.Optional[typing.List[typing.Union[amici.swig_wrappers.ExpData, amici.amici.ExpDataPtr]]]`) – Experimental data. Parameters are inserted in-place for simulation.
- **parameter\_mapping** (`typing.Optional[amici.parameter_mapping.ParameterMapping]`) – Optional precomputed PETab parameter mapping for efficiency, as generated by `create_parameter_mapping`.
- **scaled\_parameters** (`typing.Optional[bool]`) – If `True`, `problem_parameters` are assumed to be on the scale provided in the PETab parameter table and will be unscaled. If `False`, they are assumed to be in linear scale.
- **log\_level** (`int`) – Log level, see `amici.logging` module.
- **num\_threads** (`int`) – Number of threads to use for simulating multiple conditions (only used if compiled with OpenMP).
- **failfast** (`bool`) – Returns as soon as an integration failure is encountered, skipping any remaining simulations.

**Return type** `typing.Dict[str, typing.Any]`

#### Returns

Dictionary of

- cost function value (LLH),
- cost function sensitivity w.r.t. parameters (SLLH), (**NOTE**: Sensitivities are computed for the scaled parameters)
- list of *ReturnData* (RDATAS),

corresponding to the different simulation conditions. For ordering of simulation conditions, see `petab.Problem.get_simulation_conditions_from_measurement_df()`.

```
amici.petab_objective.subset_dict(full, *args)
```

Get subset of dictionary based on provided keys

**Parameters**

- **full** (`typing.Dict[typing.Any, typing.Any]`) – Dictionary to subset
- **args** (`typing.Collection[typing.Any]`) – Collections of keys to be contained in the different subsets

**Return type** `typing.Iterator[typing.Dict[typing.Any, typing.Any]]`

**Returns** subsetted dictionary

## 10.4.9 amici.petab\_simulate

### PEtab Simulate

Functionality related to the use of AMICI for simulation with PEPetab's Simulator class.

Use cases:

- generate data for use with PEPetab's plotting methods
- generate synthetic data

### Classes

---

|   |   |
|---|---|
| <code>PetabSimulator(*args[, amici_model])</code> | Implementation of the PEPetab <i>Simulator</i> class that uses AMICI. |
|---|---|

---

### amici.petab\_simulate.PetabSimulator

**class** `amici.petab_simulate.PetabSimulator(*args, amici_model=None, **kwargs)`

Implementation of the PEPetab *Simulator* class that uses AMICI.

**\_\_init\_\_** (`*args, amici_model=None, **kwargs`)

Initialize the simulator.

Initialize the simulator with sufficient information to perform a simulation. If no working directory is specified, a temporary one is created.

**Parameters**

- **petab\_problem** – A PEPetab problem.
- **working\_dir** – All simulator-specific output files will be saved here. This directory and its contents may be modified and deleted, and should be considered ephemeral.



## Methods Summary

|   |   |
|---|---|
| <code>__init__(*args[, amici_model])</code>                   | Initialize the simulator.                                       |
| <code>add_noise(simulation_df[, noise_scaling_factor])</code> | Add noise to simulated data.                                    |
| <code>remove_working_dir([force])</code>                      | Remove the simulator working directory, and all files within.   |
| <code>simulate([noise, noise_scaling_factor])</code>          | Simulate a PETab problem, optionally with noise.                |
| <code>simulate_without_noise(**kwargs)</code>                 | See <code>petab.simulate.Simulator.simulate()</code> docstring. |

## Methods

**`__init__(*args, amici_model=None, **kwargs)`**

Initialize the simulator.

Initialize the simulator with sufficient information to perform a simulation. If no working directory is specified, a temporary one is created.

### Parameters

- **`petab_problem`** – A PETab problem.
- **`working_dir`** – All simulator-specific output files will be saved here. This directory and its contents may be modified and deleted, and should be considered ephemeral.

**`add_noise(simulation_df, noise_scaling_factor=1, **kwargs)`**

Add noise to simulated data.

### Parameters

- **`simulation_df`** (`pandas.core.frame.DataFrame`) – A PETab measurements table that contains simulated data.
- **`noise_scaling_factor`** (`float`) – A multiplier of the scale of the noise distribution.
- **`**kwargs`** – Additional keyword arguments are passed to `sample_noise`.

**Return type** `pandas.core.frame.DataFrame`

**Returns** Simulated data with noise, as a PETab measurements table.

**`remove_working_dir(force=False, **kwargs)`**

Remove the simulator working directory, and all files within.

See the `__init__` method arguments.

### Parameters

- **`force`** (`bool`) – If True, the working directory is removed regardless of whether it is a temporary directory.
- **`**kwargs`** – Additional keyword arguments are passed to `shutil.rmtree`.

**Return type** `None`

**`simulate(noise=False, noise_scaling_factor=1, **kwargs)`**

Simulate a PETab problem, optionally with noise.

### Parameters

- **`noise`** (`bool`) – If True, noise is added to simulated data.

- **noise\_scaling\_factor** (`float`) – A multiplier of the scale of the noise distribution.
- **\*\*kwargs** – Additional keyword arguments are passed to `simulate_without_noise`.

**Return type** `pandas.core.frame.DataFrame`

**Returns** Simulated data, as a PETab measurements table.

**simulate\_without\_noise**(*\*\*kwargs*)

See `petab.simulate.Simulator.simulate()` docstring.

Additional keyword arguments can be supplied to specify arguments for the AMICI PETab import, simulate, and export methods. See the docstrings for the respective methods for argument options: - `amici.petab_import.import_petab_problem()`, and - `amici.petab_objective.simulate_petab()`.

Note that some arguments are expected to have already been specified in the Simulator constructor (including the PETab problem).

**Return type** `pandas.core.frame.DataFrame`

## Functions Summary

|   |   |
|---|---|
| <code>subset_call</code> (method, kwargs) | Helper function to call a method with the intersection of arguments in the method signature and the supplied arguments. |
|---|---|

## Functions

`amici.petab_simulate.subset_call`(method, kwargs)

Helper function to call a method with the intersection of arguments in the method signature and the supplied arguments.

### Parameters

- **method** (`typing.Callable`) – The method to be called.
- **kwargs** (`dict`) – The argument superset as a dictionary, similar to *\*\*kwargs* in method signatures.

**Returns** The output of *method*, called with the applicable arguments in *kwargs*.

## 10.4.10 amici.import\_utils

Miscellaneous functions related to model import, independent of any specific model format

## Classes

|   |   |
|---|---|
| <code>ObservableTransformation</code> (value) | Different modes of observable transformation. |
|---|---|

**amici.import\_utils.ObservableTransformation**

**class** amici.import\_utils.**ObservableTransformation**(*value*)

Different modes of observable transformation.

**Attributes**


---

LOG10

---

LOG

---

LIN

---

**Functions Summary**

|   |  |
|---|--|
| <code>cast_to_sym(value, input_name)</code>                       | Typecasts the value to <code>sympy.Float</code> if possible, and ensures the value is a symbolic expression. |
| <code>generate_flux_symbol(reaction_index[, name])</code>         | Generate identifier symbol for a reaction flux.  |
| <code>generate_measurement_symbol(observable_id)</code>           | Generates the appropriate measurement symbol for the provided observable                                     |
| <code>grouper(iterable, n[, fillvalue])</code>                    | Collect data into fixed-length chunks or blocks  |
| <code>noise_distribution_to_cost_function(...)</code>             | Parse noise distribution string to a cost function definition amici can work with.                           |
| <code>noise_distribution_to_observable_transformation(...)</code> | Parse noise distribution string and extract observable transformation  |
| <code>smart_subs(element, old, new)</code>                        | Optimized substitution that checks whether anything needs to be done first                                   |
| <code>smart_subs_dict(sym, subs[, field, reverse])</code>         | Substitutes expressions completely flattening them out.  |
| <code>strip_pysb(symbol)</code>                                   | Strips pysb info from a <code>pysb.Component</code> object   |
| <code>symbol_with_assumptions(name)</code>                        | Central function to create symbols with consistent, canonical assumptions                                    |
| <code>toposort_symbols(symbols[, field])</code>                   | Topologically sort symbol definitions according to their interdependency                                     |

**Functions**

amici.import\_utils.**cast\_to\_sym**(*value*, *input\_name*)

Typecasts the value to `sympy.Float` if possible, and ensures the value is a symbolic expression.

**Parameters**

- **value** (`typing.Union[typing.SupportsFloat, sympy.core.expr.Expr, sympy.logic.boolalg.BooleanAtom]`) – value to be cast
- **input\_name** (`str`) – name of input variable

**Return type** `sympy.core.expr.Expr`

**Returns** typecast value

`amici.import_utils.generate_flux_symbol(reaction_index, name=None)`

Generate identifier symbol for a reaction flux. This function will always return the same unique python object for a given entity.

**Parameters**

- **reaction\_index** (`int`) – index of the reaction to which the flux corresponds
- **name** (`typing.Optional[str]`) – an optional identifier of the reaction to which the flux corresponds

**Return type** `sympy.core.symbol.Symbol`

**Returns** identifier symbol

`amici.import_utils.generate_measurement_symbol(observable_id)`

Generates the appropriate measurement symbol for the provided observable

**Parameters** **observable\_id** (`typing.Union[str, sympy.core.symbol.Symbol]`) – symbol (or string representation) of the observable

**Returns** symbol for the corresponding measurement

`amici.import_utils.grouper(iterable, n, fillvalue=None)`

Collect data into fixed-length chunks or blocks

`grouper('ABCDEFGF', 3, 'x') -> ABC DEF Gxx`

**Parameters**

- **iterable** (`typing.Iterable`) – any iterable
- **n** (`int`) – chunk length
- **fillvalue** (`typing.Optional[typing.Any]`) – padding for last chunk if length < n

**Return type** `typing.Iterable[typing.Tuple[typing.Any]]`

**Returns** `itertools.zip_longest` of requested chunks

`amici.import_utils.noise_distribution_to_cost_function(noise_distribution)`

Parse noise distribution string to a cost function definition amici can work with.

The noise distributions listed in the following are supported.  $m$  denotes the measurement,  $y$  the simulation, and  $\sigma$  a distribution scale parameter (currently, AMICI only supports a single distribution parameter).

- *'normal'*, *'lin-normal'*: A normal distribution:

$$\pi(m|y, \sigma) = \frac{1}{\sqrt{2\pi}\sigma} \exp\left(-\frac{(m-y)^2}{2\sigma^2}\right)$$

- *'log-normal'*: A log-normal distribution (i.e.  $\log(m)$  is normally distributed):

$$\pi(m|y, \sigma) = \frac{1}{\sqrt{2\pi}\sigma m} \exp\left(-\frac{(\log m - \log y)^2}{2\sigma^2}\right)$$

- *'log10-normal'*: A log10-normal distribution (i.e.  $\log_{10}(m)$  is normally distributed):

$$\pi(m|y, \sigma) = \frac{1}{\sqrt{2\pi}\sigma m \log(10)} \exp\left(-\frac{(\log_{10} m - \log_{10} y)^2}{2\sigma^2}\right)$$

- *'laplace'*, *'lin-laplace'*: A laplace distribution:

$$\pi(m|y, \sigma) = \frac{1}{2\sigma} \exp\left(-\frac{|m-y|}{\sigma}\right)$$

- ‘log-laplace’: A log-Laplace distribution (i.e.  $\log(m)$  is Laplace distributed):

$$\pi(m|y, \sigma) = \frac{1}{2\sigma m} \exp\left(-\frac{|\log m - \log y|}{\sigma}\right)$$

- ‘log10-laplace’: A log10-Laplace distribution (i.e.  $\log_{10}(m)$  is Laplace distributed):

$$\pi(m|y, \sigma) = \frac{1}{2\sigma m \log(10)} \exp\left(-\frac{|\log_{10} m - \log_{10} y|}{\sigma}\right)$$

- ‘binomial’, ‘lin-binomial’: A (continuation of a discrete) binomial distribution, parameterized via the success probability  $p = \sigma$ :

$$\pi(m|y, \sigma) = \text{Heaviside}(y - m) \cdot \frac{\Gamma(y + 1)}{\Gamma(m + 1)\Gamma(y - m + 1)} \sigma^m (1 - \sigma)^{(y-m)}$$

- ‘negative-binomial’, ‘lin-negative-binomial’: A (continuation of a discrete) negative binomial distribution, with  $\text{mean} = y$ , parameterized via success probability  $p$ :

$$\pi(m|y, \sigma) = \frac{\Gamma(m + r)}{\Gamma(m + 1)\Gamma(r)} (1 - \sigma)^m \sigma^r$$

where

$$r = \frac{1 - \sigma}{\sigma} y$$

The distributions above are for a single data point. For a collection  $D = \{m_i\}_i$  of data points and corresponding simulations  $Y = \{y_i\}_i$  and noise parameters  $\Sigma = \{\sigma_i\}_i$ , AMICI assumes independence, i.e. the full distributions is

$$\pi(D|Y, \Sigma) = \prod_i \pi(m_i|y_i, \sigma_i)$$

AMICI uses the logarithm  $\log(\pi(m|y, \sigma))$ .

In addition to the above mentioned distributions, it is also possible to pass a function taking a symbol string and returning a log-distribution string with variables ‘{str\_symbol}’, ‘m{str\_symbol}’, ‘sigma{str\_symbol}’ for  $y$ ,  $m$ ,  $\sigma$ , respectively.

**Parameters** `noise_distribution` (`typing.Union[str, typing.Callable]`) – An identifier specifying a noise model. Possible values are

{‘normal’, ‘lin-normal’, ‘log-normal’, ‘log10-normal’, ‘laplace’, ‘lin-laplace’, ‘log-laplace’, ‘log10-laplace’, ‘binomial’, ‘lin-binomial’, ‘negative-binomial’, ‘lin-negative-binomial’, <Callable>}

For the meaning of the values see above.

**Return type** `typing.Callable[[str], str]`

**Returns** A function that takes a `strSymbol` and then creates a cost function string (negative log-likelihood) from it, which can be sympified.

`amici.import_utils.noise_distribution_to_observable_transformation(noise_distribution)`  
Parse noise distribution string and extract observable transformation

**Parameters** `noise_distribution` (`typing.Union[str, typing.Callable]`) – see `noise_distribution_to_cost_function()`

**Return type** `amici.import_utils.ObservableTransformation`

**Returns** observable transformation

`amici.import_utils.smart_subs(element, old, new)`

Optimized substitution that checks whether anything needs to be done first

**Parameters**

- **element** (`sympy.core.expr.Expr`) – substitution target
- **old** (`sympy.core.symbol.Symbol`) – to be substituted
- **new** (`sympy.core.expr.Expr`) – substitution value

**Return type** `sympy.core.expr.Expr`

**Returns** substituted expression

`amici.import_utils.smart_subs_dict(sym, subs, field=None, reverse=True)`

Substitutes expressions completely flattening them out. Requires sorting of expressions with toposort.

**Parameters**

- **sym** (`sympy.core.expr.Expr`) – Symbolic expression in which expressions will be substituted
- **subs** (`typing.Dict[sympy.core.symbol.Symbol, typing.Union[typing.Dict[str, sympy.core.expr.Expr], sympy.core.expr.Expr]]`) – Substitutions
- **field** (`typing.Optional[str]`) – Field of substitution expressions in subs.values(), if applicable
- **reverse** (`bool`) – Whether ordering in subs should be reversed. Note that substitution requires the reverse order of what is required for evaluation.

**Return type** `sympy.core.expr.Expr`

**Returns** Substituted symbolic expression

`amici.import_utils.strip_pysb(symbol)`

Strips pysb info from a pysb.Component object

**Parameters** **symbol** (`sympy.core.basic.Basic`) – symbolic expression

**Return type** `sympy.core.basic.Basic`

**Returns** stripped expression

`amici.import_utils.symbol_with_assumptions(name)`

Central function to create symbols with consistent, canonical assumptions

**Parameters** **name** (`str`) – name of the symbol

**Returns** symbol with canonical assumptions

`amici.import_utils.toposort_symbols(symbols, field=None)`

Topologically sort symbol definitions according to their interdependency

**Parameters**

- **symbols** (`typing.Dict[sympy.core.symbol.Symbol, typing.Union[typing.Dict[str, sympy.core.expr.Expr], sympy.core.expr.Expr]]`) – symbol definitions
- **field** (`typing.Optional[str]`) – field of definition.values() that is used to compute interdependency

**Return type** `typing.Dict[sympy.core.symbol.Symbol, typing.Union[typing.Dict[str, sympy.core.expr.Expr], sympy.core.expr.Expr]]`

**Returns** ordered symbol definitions

### 10.4.11 amici.ode\_export

#### C++ Export

This module provides all necessary functionality specify an ODE model and generate executable C++ simulation code. The user generally won't have to directly call any function from this module as this will be done by `amici.pysb_import.pysb2amici()`, `amici.sbml_import.SbmlImporter.sbml2amici()` and `amici.petab_import.import_model()`.

#### Classes

|   |   |
|---|---|
| <code>ODEExporter(ode_model[, outdir, verbose, ...])</code> | The ODEExporter class generates AMICI C++ files for ODE model as defined in symbolic expressions. |
| <code>ODEModel([verbose, simplify, cache_simplify])</code>  | Defines an Ordinary Differential Equation as set of ModelQuantities.                              |
| <code>TemplateAmici(template)</code>                        | Template format used in AMICI (see <code>string.Template</code> for more details).                |

#### amici.ode\_export.ODEExporter

```
class amici.ode_export.ODEExporter(ode_model, outdir=None, verbose=False,
                                   assume_pow_positivity=False, compiler=None,
                                   allow_reinit_fixpar_initcond=True, generate_sensitivity_code=True,
                                   model_name='model')
```

The ODEExporter class generates AMICI C++ files for ODE model as defined in symbolic expressions.

#### Variables

- **model** – ODE definition
- **verbose** – more verbose output if True
- **assume\_pow\_positivity** – if set to true, a special pow function is used to avoid problems with state variables that may become negative due to numerical errors
- **compiler** – distutils/setuptools compiler selection to build the Python extension
- **functions** – carries C++ function signatures and other specifications
- **model\_name** – name of the model that will be used for compilation
- **model\_path** – path to the generated model specific files
- **model\_swig\_path** – path to the generated swig files
- **allow\_reinit\_fixpar\_initcond** – indicates whether reinitialization of initial states depending on fixedParameters is allowed for this model
- **\_build\_hints** – If the given model uses special functions, this set contains hints for model building.

- **generate\_sensitivity\_code** – Specifies whether code for sensitivity computation is to be generated

`__init__(ode_model, outdir=None, verbose=False, assume_pow_positivity=False, compiler=None, allow_reinit_fixpar_initcond=True, generate_sensitivity_code=True, model_name='model')`

Generate AMICI C++ files for the ODE provided to the constructor.

#### Parameters

- **ode\_model** (`amici.ode_export.ODEModel`) – ODE definition
- **outdir** (`typing.Union[pathlib.Path, str, None]`) – see `amici.ode_export.ODEExporter.set_paths()`
- **verbose** (`typing.Union[bool, int, None]`) – verbosity level for logging, True/False default to logging.Error/logging.DEBUG
- **assume\_pow\_positivity** (`typing.Optional[bool]`) – if set to true, a special pow function is used to avoid problems with state variables that may become negative due to numerical errors
- **compiler** (`typing.Optional[str]`) – distutils/setuptools compiler selection to build the python extension
- **allow\_reinit\_fixpar\_initcond** (`typing.Optional[bool]`) – see `amici.ode_export.ODEExporter`
- **generate\_sensitivity\_code** (`typing.Optional[bool]`) – specifies whether code required for sensitivity computation will be generated
- **model\_name** (`typing.Optional[str]`) – name of the model to be used during code generation

#### Methods Summary

|  |  |
|--|--|
| <code>__init__(ode_model[, outdir, verbose, ...])</code> | Generate AMICI C++ files for the ODE provided to the constructor.  |
| <code>compile_model()</code>                             | Compiles the generated code it into a simulatable module   |
| <code>generate_model_code()</code>                       | Generates the native C++ code for the loaded model and a Matlab script that can be run to compile a mex file from the C++ code |
| <code>set_name(model_name)</code>                        | Sets the model name  |
| <code>set_paths([output_dir])</code>                     | Set output paths for the model and create if necessary   |

#### Methods

`__init__(ode_model, outdir=None, verbose=False, assume_pow_positivity=False, compiler=None, allow_reinit_fixpar_initcond=True, generate_sensitivity_code=True, model_name='model')`

Generate AMICI C++ files for the ODE provided to the constructor.

#### Parameters

- **ode\_model** (`amici.ode_export.ODEModel`) – ODE definition
- **outdir** (`typing.Union[pathlib.Path, str, None]`) – see `amici.ode_export.ODEExporter.set_paths()`



- **verbose** (`typing.Union[bool, int, None]`) – verbosity level for logging, True/False default to `logging.Error/logging.DEBUG`
- **assume\_pow\_positivity** (`typing.Optional[bool]`) – if set to true, a special pow function is used to avoid problems with state variables that may become negative due to numerical errors
- **compiler** (`typing.Optional[str]`) – distutils/setuptools compiler selection to build the python extension
- **allow\_reinit\_fixpar\_initcond** (`typing.Optional[bool]`) – see [amici.ode\\_export.ODEExporter](#)
- **generate\_sensitivity\_code** (`typing.Optional[bool]`) – specifies whether code required for sensitivity computation will be generated
- **model\_name** (`typing.Optional[str]`) – name of the model to be used during code generation

**compile\_model()**

Compiles the generated code it into a simulatable module

**Return type** `None`

**generate\_model\_code()**

Generates the native C++ code for the loaded model and a Matlab script that can be run to compile a mex file from the C++ code

**Return type** `None`

**set\_name(model\_name)**

Sets the model name

**Parameters** **model\_name** (`str`) – name of the model (may only contain upper and lower case letters, digits and underscores, and must not start with a digit)

**Return type** `None`

**set\_paths(output\_dir=None)**

Set output paths for the model and create if necessary

**Parameters** **output\_dir** (`typing.Union[pathlib.Path, str, None]`) – relative or absolute path where the generated model code is to be placed. If `None`, this will default to `amici-{self.model_name}` in the current working directory. will be created if it does not exist.

**Return type** `None`

## amici.ode\_export.ODEModel

**class** `amici.ode_export.ODEModel(verbose=False, simplify=<function powsimp>, cache_simplify=False)`

Defines an Ordinary Differential Equation as set of `ModelQuantities`. This class provides general purpose interfaces to compute arbitrary symbolic derivatives that are necessary for model simulation or sensitivity computation.

### Variables

- **\_states** – list of state variables
- **\_observables** – list of observables
- **\_sigmayes** – list of sigmayes

- **\_parameters** – list of parameters
- **\_loglikelihoods** – list of loglikelihoods
- **\_expressions** – list of expressions instances
- **\_conservationlaws** – list of conservation laws
- **\_symboldim\_funs** – define functions that compute model dimensions, these are functions as the underlying symbolic expressions have not been populated at compile time
- **\_eqs** – carries symbolic formulas of the symbolic variables of the model
- **\_sparseeqs** – carries linear list of all symbolic formulas for sparsified variables
- **\_vals** – carries numeric values of symbolic identifiers of the symbolic variables of the model
- **\_names** – carries names of symbolic identifiers of the symbolic variables of the model
- **\_syms** – carries symbolic identifiers of the symbolic variables of the model
- **\_strippedsyms** – carries symbolic identifiers that were stripped of additional class information
- **\_sparsesyms** – carries linear list of all symbolic identifiers for sparsified variables
- **\_colptrs** – carries column pointers for sparsified variables. See `SUNMatrixContent_Sparse` definition in `sunmatrix/sunmatrix_sparse.h`
- **\_rowvals** – carries row values for sparsified variables. See `SUNMatrixContent_Sparse` definition in `sunmatrix/sunmatrix_sparse.h`
- **\_equation\_prototype** – defines the attribute from which an equation should be generated via list comprehension (see `ODEModel._generate_equation()`)
- **\_variable\_prototype** – defines the attribute from which a variable should be generated via list comprehension (see `ODEModel._generate_symbol()`)
- **\_value\_prototype** – defines the attribute from which a value should be generated via list comprehension (see `ODEModel._generate_value()`)
- **\_total\_derivative\_prototypes** – defines how a total derivative equation is computed for an equation, key defines the name and values should be arguments for `ODEModel.totalDerivative()`
- **\_lock\_total\_derivative** – add chainvariables to this set when computing total derivative from a partial derivative call to enforce a partial derivative in the next recursion. prevents infinite recursion
- **\_simplify** – If not None, this function will be used to simplify symbolic derivative expressions. Receives sympy expressions as only argument. To apply multiple simplifications, wrap them in a lambda expression.
- **\_x0\_fixedParameters\_idx** – Index list of subset of states for which `x0_fixedParameters` was computed
- **\_w\_recursion\_depth** – recursion depth in w, quantified as nilpotency of `dwdw`
- **\_has\_quadratic\_nllh** – whether all observables have a gaussian noise model, i.e. whether res and FIM make sense.
- **\_code\_printer** – Code printer to generate C++ code

**\_\_init\_\_** (*verbose=False, simplify=<function powsimp>, cache\_simplify=False*)

Create a new `ODEModel` instance.

## Parameters

- **verbose** (`typing.Union[bool, int, None]`) – verbosity level for logging, True/False default to `logging.DEBUG/logging.ERROR`
- **simplify** (`typing.Optional[typing.Callable]`) – see `ODEModel._simplify()`
- **cache\_simplify** (`bool`) – Whether to cache calls to the simplify method. Can e.g. decrease import times for models with events.

## Methods Summary

|  |   |
|--|---|
| <code>__init__([verbose, simplify, cache_simplify])</code>     | Create a new <code>ODEModel</code> instance.  |
| <code>add_component(component[, insert_first])</code>          | Adds a new <code>ModelQuantity</code> to the model.   |
| <code>add_conservation_law(state, total_abundance, ...)</code> | Adds a new conservation law to the model.   |
| <code>colptrs(name)</code>                                     | Returns (and constructs if necessary) the column pointers for a sparsified symbolic variable.   |
| <code>conservation_law_has_multispecies(tcl)</code>            | Checks whether a conservation law has multiple species or it just defines one constant species  |
| <code>eq(name)</code>  | Returns (and constructs if necessary) the formulas for a symbolic entity.   |
| <code>free_symbols()</code>                                    | Returns list of free symbols that appear in ODE RHS and initial conditions.   |
| <code>generate_basic_variables(*[, from_sbml])</code>          | Generates the symbolic identifiers for all variables in <code>ODEModel._variable_prototype</code>   |
| <code>get_appearance_counts(idxs)</code>                       | Counts how often a state appears in the time derivative of another state and expressions for a subset of states   |
| <code>get_conservation_laws()</code>                           | Returns a list of states with conservation law set  |
| <code>get_observable_transformations()</code>                  | List of observable transformations  |
| <code>get_solver_indices()</code>                              | Returns a mapping that maps rdata species indices to solver indices   |
| <code>import_from_sbml_importer(si[, compute_cls])</code>      | Imports a model specification from a <a href="#"><code>amici.sbml_import.SbmlImporter</code></a> instance.  |
| <code>name(name)</code>  | Returns (and constructs if necessary) the names of a symbolic variable  |
| <code>num_cons_law()</code>                                    | Number of conservation laws.  |
| <code>num_const()</code>                                       | Number of Constants.  |
| <code>num_events()</code>                                      | Number of Events.   |
| <code>num_expr()</code>  | Number of Expressions.  |
| <code>num_obs()</code>   | Number of Observables.  |
| <code>num_par()</code>   | Number of Parameters.   |
| <code>num_state_reinits()</code>                               | Number of solver states which would be reinitialized after preequilibration   |
| <code>num_states_rdata()</code>                                | Number of states.   |
| <code>num_states_solver()</code>                               | Number of states after applying conservation laws.  |
| <code>parse_events()</code>                                    | This function checks the right-hand side for roots of Heaviside functions or events, collects the roots, removes redundant roots, and replaces the formulae of the found roots by identifiers of AMICI's Heaviside function implementation in the right-hand side |

continues on next page

Table 58 – continued from previous page

|  |  |
|--|--|
| <code>rowvals(name)</code>                                   | Returns (and constructs if necessary) the row values for a sparsified symbolic variable.                     |
| <code>sparseseq(name)</code>                                 | Returns (and constructs if necessary) the sparsified formulas for a sparsified symbolic variable.            |
| <code>sparsesym(name[, force_generate])</code>               | Returns (and constructs if necessary) the sparsified identifiers for a sparsified symbolic variable.         |
| <code>state_has_conservation_law(ix)</code>                  | Checks whether the state at specified index has a conservation law set                                       |
| <code>state_has_fixed_parameter_initial_condition(ix)</code> | Checks whether the state at specified index has a fixed parameter initial condition                          |
| <code>state_is_constant(ix)</code>                           | Checks whether the temporal derivative of the state is zero  |
| <code>sym(name[, stripped])</code>                           | Returns (and constructs if necessary) the identifiers for a symbolic entity.                                 |
| <code>sym_names()</code>                                     | Returns a list of names of generated symbolic variables  |
| <code>sym_or_eq(name, varname)</code>                        | Returns symbols or equations depending on whether a given variable appears in the function signature or not. |
| <code>val(name)</code>                                       | Returns (and constructs if necessary) the numeric values of a symbolic entity                                |

## Methods

`__init__(verbose=False, simplify=<function powsimp>, cache_simplify=False)`

Create a new ODEModel instance.

### Parameters

- **verbose** (`typing.Union[bool, int, None]`) – verbosity level for logging, True/False default to logging.DEBUG/logging.ERROR
- **simplify** (`typing.Optional[typing.Callable]`) – see `ODEModel._simplify()`
- **cache\_simplify** (`bool`) – Whether to cache calls to the simplify method. Can e.g. decrease import times for models with events.

`add_component(component, insert_first=False)`

Adds a new ModelQuantity to the model.

### Parameters

- **component** (`amici.ode_model.ModelQuantity`) – model quantity to be added
- **insert\_first** (`typing.Optional[bool]`) – whether to add quantity first or last, relevant when components may refer to other components of the same type.

### Return type `None`

`add_conservation_law(state, total_abundance, coefficients)`

Adds a new conservation law to the model. A conservation law is defined by the conserved quantity  $T = \sum_i (a_i * x_i)$ , where  $a_i$  are coefficients and  $x_i$  are different state variables.

### Parameters

- **state** (`sympy.core.symbol.Symbol`) – symbolic identifier of the state that should be replaced by the conservation law ( $x_j$ )

- **total\_abundance** (`sympy.core.symbol.Symbol`) – symbolic identifier of the total abundance ( $T/a_j$ )
- **coefficients** (`typing.Dict[sympy.core.symbol.Symbol, sympy.core.expr.Expr]`) – Dictionary of coefficients  $\{x_i: a_i\}$

**Return type** `None`

**colptrs**(*name*)

Returns (and constructs if necessary) the column pointers for a sparsified symbolic variable.

**Parameters** **name** (`str`) – name of the symbolic variable

**Return type** `typing.Union[typing.List[sympy.core.numbers.Number], typing.List[typing.List[sympy.core.numbers.Number]]]`

**Returns** list containing the column pointers

**conservation\_law\_has\_multispecies**(*tcl*)

Checks whether a conservation law has multiple species or it just defines one constant species

**Parameters** **tcl** (`amici.ode_model.ConservationLaw`) – conservation law

**Return type** `bool`

**Returns** boolean indicating if conservation\_law is not None

**eq**(*name*)

Returns (and constructs if necessary) the formulas for a symbolic entity.

**Parameters** **name** (`str`) – name of the symbolic variable

**Return type** `sympy.matrices.dense.MutableDenseMatrix`

**Returns** matrix of symbolic formulas

**free\_symbols**()

Returns list of free symbols that appear in ODE RHS and initial conditions.

**Return type** `typing.Set[sympy.core.basic.Basic]`

**generate\_basic\_variables**(*\*, from\_sbml=False*)

Generates the symbolic identifiers for all variables in `ODEModel._variable_prototype`

**Parameters** **from\_sbml** (`bool`) – whether the model is generated from SBML

**Return type** `None`

**get\_appearance\_counts**(*idxs*)

Counts how often a state appears in the time derivative of another state and expressions for a subset of states

**Parameters** **idxs** (`typing.List[int]`) – list of state indices for which counts are to be computed

**Return type** `typing.List[int]`

**Returns** list of counts for the states ordered according to the provided indices

**get\_conservation\_laws**()

Returns a list of states with conservation law set

**Return type** `typing.List[typing.Tuple[sympy.core.symbol.Symbol, sympy.core.expr.Expr]]`

**Returns** list of state identifiers

**get\_observable\_transformations()**

List of observable transformations

**Return type** `typing.List[amici.import_utils.ObservableTransformation]`

**Returns** list of transformations

**get\_solver\_indices()**

Returns a mapping that maps rdata species indices to solver indices

**Return type** `typing.Dict[int, int]`

**Returns** dictionary mapping rdata species indices to solver indices

**import\_from\_sbml\_importer**(*si*, *compute\_cls=True*)

Imports a model specification from a `amici.sbml_import.SbmlImporter` instance.

**Parameters**

- **si** (`amici.sbml_import.SbmlImporter`) – imported SBML model
- **compute\_cls** (`typing.Optional[bool]`) – whether to compute conservation laws

**Return type** `None`

**name**(*name*)

Returns (and constructs if necessary) the names of a symbolic variable

**Parameters** **name** (`str`) – name of the symbolic variable

**Return type** `typing.List[str]`

**Returns** list of names

**num\_cons\_law()**

Number of conservation laws.

**Return type** `int`

**Returns** number of conservation laws

**num\_const()**

Number of Constants.

**Return type** `int`

**Returns** number of constant symbols

**num\_events()**

Number of Events.

**Return type** `int`

**Returns** number of event symbols (length of the root vector in AMICI)

**num\_expr()**

Number of Expressions.

**Return type** `int`

**Returns** number of expression symbols

**num\_obs()**

Number of Observables.

**Return type** `int`

**Returns** number of observable symbols

**num\_par()**

Number of Parameters.

**Return type** `int`**Returns** number of parameter symbols**num\_state\_reinits()**

Number of solver states which would be reinitialized after preequilibration

**Return type** `int`**Returns** number of state variable symbols with reinitialization**num\_states\_rdata()**

Number of states.

**Return type** `int`**Returns** number of state variable symbols**num\_states\_solver()**

Number of states after applying conservation laws.

**Return type** `int`**Returns** number of state variable symbols**parse\_events()**

This function checks the right-hand side for roots of Heaviside functions or events, collects the roots, removes redundant roots, and replaces the formulae of the found roots by identifiers of AMICI's Heaviside function implementation in the right-hand side

**Return type** `None`**rowvals**(*name*)

Returns (and constructs if necessary) the row values for a sparsified symbolic variable.

**Parameters** **name** (`str`) – name of the symbolic variable**Return type** `typing.Union[typing.List[sympy.core.numbers.Number], typing.List[typing.List[sympy.core.numbers.Number]]]`**Returns** list containing the row values**sparseeq**(*name*)

Returns (and constructs if necessary) the sparsified formulas for a sparsified symbolic variable.

**Parameters** **name** – name of the symbolic variable**Return type** `sympy.matrices.dense.MutableDenseMatrix`**Returns** linearized matrix containing the symbolic formulas**sparsesym**(*name*, *force\_generate=True*)

Returns (and constructs if necessary) the sparsified identifiers for a sparsified symbolic variable.

**Parameters**

- **name** (`str`) – name of the symbolic variable
- **force\_generate** (`bool`) – whether the symbols should be generated if not available

**Return type** `typing.List[str]`**Returns** linearized Matrix containing the symbolic identifiers

**state\_has\_conservation\_law**(*ix*)

Checks whether the state at specified index has a conservation law set

**Parameters** *ix* (`int`) – state index

**Return type** `bool`

**Returns** boolean indicating if conservation\_law is not None

**state\_has\_fixed\_parameter\_initial\_condition**(*ix*)

Checks whether the state at specified index has a fixed parameter initial condition

**Parameters** *ix* (`int`) – state index

**Return type** `bool`

**Returns** boolean indicating if any of the initial condition free variables is contained in the model constants

**state\_is\_constant**(*ix*)

Checks whether the temporal derivative of the state is zero

**Parameters** *ix* (`int`) – state index

**Return type** `bool`

**Returns** boolean indicating if constant over time

**sym**(*name*, *stripped=False*)

Returns (and constructs if necessary) the identifiers for a symbolic entity.

**Parameters**

- **name** (`str`) – name of the symbolic variable
- **stripped** (`typing.Optional[bool]`) – should additional class information be stripped from the symbolic variables (default=False)

**Return type** `sympy.matrices.dense.MutableDenseMatrix`

**Returns** matrix of symbolic identifiers

**sym\_names**()

Returns a list of names of generated symbolic variables

**Return type** `typing.List[str]`

**Returns** list of names

**sym\_or\_eq**(*name*, *varname*)

Returns symbols or equations depending on whether a given variable appears in the function signature or not.

**Parameters**

- **name** (`str`) – name of function for which the signature should be checked
- **varname** (`str`) – name of the variable which should be contained in the function signature

**Return type** `sympy.matrices.dense.MutableDenseMatrix`

**Returns** the variable symbols if the variable is part of the signature and the variable equations otherwise.

**val**(*name*)

Returns (and constructs if necessary) the numeric values of a symbolic entity

**Parameters** **name** (`str`) – name of the symbolic variable



**Return type** `typing.List[float]`

**Returns** list containing the numeric values

### `amici.ode_export.TemplateAmici`

**class** `amici.ode_export.TemplateAmici`(*template*)  
 Template format used in AMICI (see `string.Template` for more details).  
**Variables** `delimiter` – delimiter that identifies template variables  
`__init__`(*template*)

#### Methods Summary

---

`__init__`(*template*)

---

`safe_substitute`([mapping])

---

`substitute`([mapping])

---

#### Attributes

---

`braceidpattern`


---

`delimiter`


---

`flags`


---

`idpattern`


---

`pattern`


---

#### Methods

`__init__`(*template*)

`safe_substitute`(*mapping*={}, /, *\*\*kws*)

`substitute`(*mapping*={}, /, *\*\*kws*)

## Functions Summary

|  |  |
|--|--|
| <code>apply_template(source_file, target_file, ...)</code>   | Load source file, apply template substitution as provided in <code>templateData</code> and save as <code>targetFile</code> . |
| <code>get_function_extern_declaration(fun, name)</code>      | Constructs the extern function declaration for a given function  |
| <code>get_model_override_implementation(fun, name)</code>    | Constructs <code>amici::Model::*</code> override implementation for a given function   |
| <code>get_sunindex_extern_declaration(fun, name, ...)</code> | Constructs the function declaration for an index function of a given function  |
| <code>get_sunindex_override_implementation(fun, ...)</code>  | Constructs the <code>amici::Model</code> function implementation for an index function of a given function                   |
| <code>is_valid_identififier(x)</code>                        | Check whether $x$ is a valid identifier for conditions, parameters, observables.   |
| <code>remove_typedefs(signature)</code>                      | Strips typedef info from a function signature  |
| <code>smart_is_zero_matrix(x)</code>                         | A faster implementation of sympy's <code>is_zero_matrix</code>   |
| <code>smart_jacobian(eq, sym_var)</code>                     | Wrapper around symbolic jacobian with some additional checks that reduce computation time for large matrices                 |
| <code>smart_multiply(x, y)</code>                            | Wrapper around symbolic multiplication with some additional checks that reduce computation time for large matrices           |
| <code>var_in_function_signature(name, varname)</code>        | Checks if the values for a symbolic variable is passed in the signature of a function  |

## Functions

`amici.ode_export.apply_template(source_file, target_file, template_data)`

Load source file, apply template substitution as provided in `templateData` and save as `targetFile`.

### Parameters

- **source\_file** (`str`) – relative or absolute path to template file
- **target\_file** (`str`) – relative or absolute path to output file
- **template\_data** (`typing.Dict[str, str]`) – template keywords to substitute (key is template variable without `TemplateAmici.delimiter`)

**Return type** `None`

`amici.ode_export.get_function_extern_declaration(fun, name)`

Constructs the extern function declaration for a given function

### Parameters

- **fun** (`str`) – function name
- **name** (`str`) – model name

**Return type** `str`

**Returns** C++ function definition string

`amici.ode_export.get_model_override_implementation(fun, name, nobody=False)`

Constructs `amici::Model::*` override implementation for a given function

### Parameters

- **fun** (`str`) – function name

- **name** (`str`) – model name
- **nobody** (`bool`) – whether the function has a nontrivial implementation

**Return type** `str`

**Returns** C++ function implementation string

`amici.ode_export.get_sunindex_extern_declaration(fun, name, indextype)`

Constructs the function declaration for an index function of a given function

**Parameters**

- **fun** (`str`) – function name
- **name** (`str`) – model name
- **indextype** (`str`) – index function { 'colptrs', 'rowvals' }

**Return type** `str`

**Returns** C++ function declaration string

`amici.ode_export.get_sunindex_override_implementation(fun, name, indextype, nobody=False)`

Constructs the `amici::Model` function implementation for an index function of a given function

**Parameters**

- **fun** (`str`) – function name
- **name** (`str`) – model name
- **indextype** (`str`) – index function { 'colptrs', 'rowvals' }
- **nobody** (`bool`) – whether the corresponding function has a nontrivial implementation

**Return type** `str`

**Returns** C++ function implementation string

`amici.ode_export.is_valid_identifier(x)`

Check whether `x` is a valid identifier for conditions, parameters, observables... . Identifiers may only contain upper and lower case letters, digits and underscores, and must not start with a digit.

**Parameters** **x** (`str`) – string to check

**Return type** `bool`

**Returns** True if valid, False otherwise

`amici.ode_export.remove_typedefs(signature)`

Strips typedef info from a function signature

**Parameters** **signature** (`str`) – function signature

**Return type** `str`

**Returns** string that can be used to construct function calls with the same variable names and ordering as in the function signature

`amici.ode_export.smart_is_zero_matrix(x)`

A faster implementation of `sympy`'s `is_zero_matrix`

Avoids repeated indexer type checks and double iteration to distinguish False/None. Found to be about 100x faster for large matrices.

**Parameters** **x** (`typing.Union[sympy.matrices.dense.MutableDenseMatrix, sympy.matrices.sparse.MutableSparseMatrix]`) – Matrix to check

**Return type** `bool`

`amici.ode_export.smart_jacobian(eq, sym_var)`

Wrapper around symbolic jacobian with some additional checks that reduce computation time for large matrices

**Parameters**

- `eq` (`sympy.matrices.dense.MutableDenseMatrix`) – equation
- `sym_var` (`sympy.matrices.dense.MutableDenseMatrix`) – differentiation variable

**Return type** `sympy.matrices.sparse.MutableSparseMatrix`

**Returns** jacobian of eq wrt sym\_var

`amici.ode_export.smart_multiply(x, y)`

Wrapper around symbolic multiplication with some additional checks that reduce computation time for large matrices

**Parameters**

- `x` (`typing.Union[sympy.matrices.dense.MutableDenseMatrix, sympy.matrices.sparse.MutableSparseMatrix]`) – educt 1
- `y` (`sympy.matrices.dense.MutableDenseMatrix`) – educt 2

**Return type** `typing.Union[sympy.matrices.dense.MutableDenseMatrix, sympy.matrices.sparse.MutableSparseMatrix]`

**Returns** product

`amici.ode_export.var_in_function_signature(name, varname)`

Checks if the values for a symbolic variable is passed in the signature of a function

**Parameters**

- `name` (`str`) – name of the function
- `varname` (`str`) – name of the symbolic variable

**Return type** `bool`

**Returns** boolean indicating whether the variable occurs in the function signature

## 10.4.12 amici.ode\_model

Objects for AMICI's internal ODE model representation

### Classes

|   |   |
|---|---|
| <code>ConservationLaw</code> (identifier, name, value, ...)     | A conservation law defines the absolute the total amount of a (weighted) sum of states                                |
| <code>Constant</code> (identifier, name, value)                 | A Constant is a fixed variable in the model with respect to which sensitivities cannot be computed, abbreviated by k. |
| <code>Event</code> (identifier, name, value, state_update, ...) | An Event defines either a SBML event or a root of the argument of a Heaviside function.                               |
| <code>Expression</code> (identifier, name, value)               | An Expression is a recurring elements in symbolic formulas.   |

continues on next page

Table 62 – continued from previous page

|  |  |
|--|--|
| <i>LogLikelihood</i> (identifier, name, value)     | A LogLikelihood defines the distance between measurements and experiments for a particular observable.   |
| <i>ModelQuantity</i> (identifier, name, value)     | Base class for model components  |
| <i>Observable</i> (identifier, name, value[, ...]) | An Observable links model simulations to experimental measurements, abbreviated by <i>y</i> .  |
| <i>Parameter</i> (identifier, name, value)         | A Parameter is a free variable in the model with respect to which sensitivities may be computed, abbreviated by <i>p</i> .   |
| <i>SigmaY</i> (identifier, name, value)            | A Standard Deviation SigmaY rescales the distance between simulations and measurements when computing residuals or objective functions, abbreviated by <i>sigmay</i> . |
| <i>State</i> (identifier, name, init, dt)          | A State variable defines an entity that evolves with time according to the provided time derivative, abbreviated by <i>x</i> .   |

**amici.ode\_model.ConservationLaw**

**class** amici.ode\_model.**ConservationLaw**(*identifier, name, value, coefficients, state\_id*)

A conservation law defines the absolute the total amount of a (weighted) sum of states

**\_\_init\_\_**(*identifier, name, value, coefficients, state\_id*)

Create a new ConservationLaw instance.

**Parameters**

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the ConservationLaw
- **name** (`str`) – individual name of the ConservationLaw (does not need to be unique)
- **value** (`sympy.core.expr.Expr`) – formula (sum of states)
- **coefficients** (`typing.Dict[sympy.core.symbol.Symbol, sympy.core.expr.Expr]`) – coefficients of the states in the sum
- **state\_id** (`sympy.core.symbol.Symbol`) – identifier of the state that this conservation law replaces

**Methods Summary**

|   |   |
|---|---|
| <b>__init__</b> ( <i>identifier, name, value, ...</i> ) | Create a new ConservationLaw instance.  |
| <b>get_id</b> ()  | ModelQuantity identifier  |
| <b>get_name</b> ()                                      | ModelQuantity name  |
| <b>get_ncoeff</b> ( <i>state_id</i> )                   | Computes the normalized coefficient $a_i/a_j$ where <i>i</i> is the index of the provided <i>state_id</i> and <i>j</i> is the index of the state that is replaced by this conservation law. |
| <b>get_val</b> ()                                       | ModelQuantity value   |
| <b>get_x_rdata</b> ()                                   | Returns the expression that allows computation of <i>x_rdata</i> for the state that this conservation law replaces.   |
| <b>set_val</b> ( <i>val</i> )                           | Set ModelQuantity value   |

## Methods

**\_\_init\_\_**(*identifier, name, value, coefficients, state\_id*)

Create a new ConservationLaw instance.

### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the ConservationLaw
- **name** (`str`) – individual name of the ConservationLaw (does not need to be unique)
- **value** (`sympy.core.expr.Expr`) – formula (sum of states)
- **coefficients** (`typing.Dict[sympy.core.symbol.Symbol, sympy.core.expr.Expr]`) – coefficients of the states in the sum
- **state\_id** (`sympy.core.symbol.Symbol`) – identifier of the state that this conservation law replaces

**get\_id**()

ModelQuantity identifier

**Return type** `sympy.core.symbol.Symbol`

**Returns** identifier of the ModelQuantity

**get\_name**()

ModelQuantity name

**Return type** `str`

**Returns** name of the ModelQuantity

**get\_ncoeff**(*state\_id*)

Computes the normalized coefficient  $a_i/a_j$  where  $i$  is the index of the provided *state\_id* and  $j$  is the index of the state that is replaced by this conservation law. This can be used to compute both  $dtotal\_cl/dx\_rdata$  ( $=ncoeff$ ) and  $dx\_rdata/dx\_solver$  ( $=-ncoeff$ ).

**Parameters** **state\_id** – identifier of the state

**Return type** `typing.Union[sympy.core.expr.Expr, int, float]`

**Returns** normalized coefficient of the state

**get\_val**()

ModelQuantity value

**Return type** `sympy.core.expr.Expr`

**Returns** value of the ModelQuantity

**get\_x\_rdata**()

Returns the expression that allows computation of *x\_rdata* for the state that this conservation law replaces.

**Returns** *x\_rdata* expression

**set\_val**(*val*)

Set ModelQuantity value

**Returns** value of the ModelQuantity

**amici.ode\_model.Constant**

**class** amici.ode\_model.Constant(*identifier, name, value*)

A Constant is a fixed variable in the model with respect to which sensitivities cannot be computed, abbreviated by k.

**\_\_init\_\_**(*identifier, name, value*)

Create a new Expression instance.

**Parameters**

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the Constant
- **name** (`str`) – individual name of the Constant (does not need to be unique)
- **value** (`numbers.Number`) – numeric value

**Methods Summary**

|  |                                   |
|--|-----------------------------------|
| <code>__init__</code> ( <i>identifier, name, value</i> ) | Create a new Expression instance. |
| <code>get_id</code> ()                                   | ModelQuantity identifier          |
| <code>get_name</code> ()                                 | ModelQuantity name                |
| <code>get_val</code> ()                                  | ModelQuantity value               |
| <code>set_val</code> ( <i>val</i> )                      | Set ModelQuantity value           |

**Methods**

**\_\_init\_\_**(*identifier, name, value*)

Create a new Expression instance.

**Parameters**

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the Constant
- **name** (`str`) – individual name of the Constant (does not need to be unique)
- **value** (`numbers.Number`) – numeric value

**get\_id**()

ModelQuantity identifier

**Return type** `sympy.core.symbol.Symbol`

**Returns** identifier of the ModelQuantity

**get\_name**()

ModelQuantity name

**Return type** `str`

**Returns** name of the ModelQuantity

**get\_val**()

ModelQuantity value

**Return type** `sympy.core.expr.Expr`

**Returns** value of the ModelQuantity

**set\_val**(*val*)

Set ModelQuantity value

**Returns** value of the ModelQuantity

### amici.ode\_model.Event

**class** amici.ode\_model.Event(*identifier, name, value, state\_update, event\_observable, initial\_value=True*)

An Event defines either a SBML event or a root of the argument of a Heaviside function. The Heaviside functions will be tracked via the vector `h` during simulation and are needed to inform the ODE solver about a discontinuity in either the right-hand side or the states themselves, causing a reinitialization of the solver.

**\_\_init\_\_**(*identifier, name, value, state\_update, event\_observable, initial\_value=True*)

Create a new Event instance.

#### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the Event
- **name** (`str`) – individual name of the Event (does not need to be unique)
- **value** (`sympy.core.expr.Expr`) – formula for the root / trigger function
- **state\_update** (`typing.Optional[sympy.core.expr.Expr]`) – formula for the bolus function (None for Heaviside functions, zero vector for events without bolus)
- **event\_observable** (`typing.Optional[sympy.core.expr.Expr]`) – formula a potential observable linked to the event (None for Heaviside functions, empty events without observable)
- **initial\_value** (`typing.Optional[bool]`) – initial boolean value of the trigger function at  $t_0$ . If set to *False*, events may trigger at  $t=t_0$ , otherwise not.

### Methods Summary

|  |   |
|--|---|
| <code>__init__(identifier, name, value, ..., ...)</code> | Create a new Event instance.                    |
| <code>get_id()</code>                                    | ModelQuantity identifier                        |
| <code>get_initial_value()</code>                         | Return the initial value for the root function. |
| <code>get_name()</code>                                  | ModelQuantity name                              |
| <code>get_val()</code>                                   | ModelQuantity value                             |
| <code>set_val(val)</code>                                | Set ModelQuantity value                         |

### Methods

**\_\_init\_\_**(*identifier, name, value, state\_update, event\_observable, initial\_value=True*)

Create a new Event instance.

#### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the Event
- **name** (`str`) – individual name of the Event (does not need to be unique)
- **value** (`sympy.core.expr.Expr`) – formula for the root / trigger function
- **state\_update** (`typing.Optional[sympy.core.expr.Expr]`) – formula for the bolus function (None for Heaviside functions, zero vector for events without bolus)
- **event\_observable** (`typing.Optional[sympy.core.expr.Expr]`) – formula a potential observable linked to the event (None for Heaviside functions, empty events without



observable)

- **initial\_value** (`typing.Optional[bool]`) – initial boolean value of the trigger function at `t0`. If set to *False*, events may trigger at `t==t0`, otherwise not.

**get\_id()**

ModelQuantity identifier

**Return type** `sympy.core.symbol.Symbol`

**Returns** identifier of the ModelQuantity

**get\_initial\_value()**

Return the initial value for the root function.

**Return type** `bool`

**Returns** initial value formula

**get\_name()**

ModelQuantity name

**Return type** `str`

**Returns** name of the ModelQuantity

**get\_val()**

ModelQuantity value

**Return type** `sympy.core.expr.Expr`

**Returns** value of the ModelQuantity

**set\_val(val)**

Set ModelQuantity value

**Returns** value of the ModelQuantity

## amici.ode\_model.Expression

**class** `amici.ode_model.Expression(identifier, name, value)`

An Expression is a recurring elements in symbolic formulas. Specifying this may yield more compact expression which may lead to substantially shorter model compilation times, but may also reduce model simulation time. Abbreviated by `w`.

**\_\_init\_\_(identifier, name, value)**

Create a new Expression instance.

**Parameters**

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the Expression
- **name** (`str`) – individual name of the Expression (does not need to be unique)
- **value** (`sympy.core.expr.Expr`) – formula

## Methods Summary

|  |                                   |
|--|-----------------------------------|
| <code>__init__(identifier, name, value)</code> | Create a new Expression instance. |
| <code>get_id()</code>                          | ModelQuantity identifier          |
| <code>get_name()</code>                        | ModelQuantity name                |
| <code>get_val()</code>                         | ModelQuantity value               |
| <code>set_val(val)</code>                      | Set ModelQuantity value           |

## Methods

`__init__(identifier, name, value)`

Create a new Expression instance.

### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the Expression
- **name** (`str`) – individual name of the Expression (does not need to be unique)
- **value** (`sympy.core.expr.Expr`) – formula

`get_id()`

ModelQuantity identifier

**Return type** `sympy.core.symbol.Symbol`

**Returns** identifier of the ModelQuantity

`get_name()`

ModelQuantity name

**Return type** `str`

**Returns** name of the ModelQuantity

`get_val()`

ModelQuantity value

**Return type** `sympy.core.expr.Expr`

**Returns** value of the ModelQuantity

`set_val(val)`

Set ModelQuantity value

**Returns** value of the ModelQuantity

## `amici.ode_model.LogLikelihood`

**class** `amici.ode_model.LogLikelihood(identifier, name, value)`

A LogLikelihood defines the distance between measurements and experiments for a particular observable. The final LogLikelihood value in the simulation will be the sum of all specified LogLikelihood instances evaluated at all timepoints, abbreviated by `Jy`.

`__init__(identifier, name, value)`

Create a new Expression instance.

### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the LogLikelihood

- **name** (`str`) – individual name of the LogLikelihood (does not need to be unique)
- **value** (`sympy.core.expr.Expr`) – formula

## Methods Summary

|  |                                   |
|--|-----------------------------------|
| <code>__init__(identifier, name, value)</code> | Create a new Expression instance. |
| <code>get_id()</code>                          | ModelQuantity identifier          |
| <code>get_name()</code>                        | ModelQuantity name                |
| <code>get_val()</code>                         | ModelQuantity value               |
| <code>set_val(val)</code>                      | Set ModelQuantity value           |

## Methods

`__init__(identifier, name, value)`

Create a new Expression instance.

### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the LogLikelihood
- **name** (`str`) – individual name of the LogLikelihood (does not need to be unique)
- **value** (`sympy.core.expr.Expr`) – formula

`get_id()`

ModelQuantity identifier

**Return type** `sympy.core.symbol.Symbol`

**Returns** identifier of the ModelQuantity

`get_name()`

ModelQuantity name

**Return type** `str`

**Returns** name of the ModelQuantity

`get_val()`

ModelQuantity value

**Return type** `sympy.core.expr.Expr`

**Returns** value of the ModelQuantity

`set_val(val)`

Set ModelQuantity value

**Returns** value of the ModelQuantity

## amici.ode\_model.ModelQuantity

**class** amici.ode\_model.**ModelQuantity**(*identifier, name, value*)

Base class for model components

**\_\_init\_\_**(*identifier, name, value*)

Create a new ModelQuantity instance.

### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the quantity
- **name** (`str`) – individual name of the quantity (does not need to be unique)
- **value** (`typing.Union[typing.SupportsFloat, numbers.Number, sympy.core.expr.Expr]`) – either formula, numeric value or initial value

## Methods Summary

|  |                                      |
|--|--------------------------------------|
| <code>__init__</code> ( <i>identifier, name, value</i> ) | Create a new ModelQuantity instance. |
| <code>get_id</code> ()                                   | ModelQuantity identifier             |
| <code>get_name</code> ()                                 | ModelQuantity name                   |
| <code>get_val</code> ()                                  | ModelQuantity value                  |
| <code>set_val</code> ( <i>val</i> )                      | Set ModelQuantity value              |

## Methods

**\_\_init\_\_**(*identifier, name, value*)

Create a new ModelQuantity instance.

### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the quantity
- **name** (`str`) – individual name of the quantity (does not need to be unique)
- **value** (`typing.Union[typing.SupportsFloat, numbers.Number, sympy.core.expr.Expr]`) – either formula, numeric value or initial value

**get\_id**()

ModelQuantity identifier

**Return type** `sympy.core.symbol.Symbol`

**Returns** identifier of the ModelQuantity

**get\_name**()

ModelQuantity name

**Return type** `str`

**Returns** name of the ModelQuantity

**get\_val**()

ModelQuantity value

**Return type** `sympy.core.expr.Expr`

**Returns** value of the ModelQuantity

**set\_val**(*val*)

Set ModelQuantity value

**Returns** value of the ModelQuantity

## amici.ode\_model.Observable

**class** amici.ode\_model.Observable(*identifier*, *name*, *value*, *measurement\_symbol=None*,  
*transformation='lin'*)

An Observable links model simulations to experimental measurements, abbreviated by y.

### Variables

- **\_measurement\_symbol** – sympy symbol used in the objective function to represent measurements to this observable
- **trafo** – observable transformation, only applies when evaluating objective function or residuals

**\_\_init\_\_**(*identifier*, *name*, *value*, *measurement\_symbol=None*, *transformation='lin'*)

Create a new Observable instance.

### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the Observable
- **name** (`str`) – individual name of the Observable (does not need to be unique)
- **value** (`sympy.core.expr.Expr`) – formula
- **transformation** (`typing.Optional[amici.import_utils.ObservableTransformation]`) – observable transformation, only applies when evaluating objective function or residuals

## Methods Summary

|   |  |
|---|--|
| <code>__init__</code> ( <i>identifier</i> , <i>name</i> , <i>value</i> [, ...]) | Create a new Observable instance.                  |
| <code>get_id</code> ()  | ModelQuantity identifier                           |
| <code>get_measurement_symbol</code> ()  | <b>rtype</b> <code>sympy.core.symbol.Symbol</code> |
| <code>get_name</code> ()  | ModelQuantity name                                 |
| <code>get_val</code> ()   | ModelQuantity value                                |
| <code>set_val</code> ( <i>val</i> )   | Set ModelQuantity value                            |

## Methods

**\_\_init\_\_**(*identifier*, *name*, *value*, *measurement\_symbol=None*, *transformation='lin'*)

Create a new Observable instance.

### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the Observable
- **name** (`str`) – individual name of the Observable (does not need to be unique)
- **value** (`sympy.core.expr.Expr`) – formula

- **transformation** (`typing.Optional[amici.import_utils.ObservableTransformation]`) – observable transformation, only applies when evaluating objective function or residuals

**get\_id()**

ModelQuantity identifier

**Return type** `sympy.core.symbol.Symbol`

**Returns** identifier of the ModelQuantity

**get\_measurement\_symbol()**

**Return type** `sympy.core.symbol.Symbol`

**get\_name()**

ModelQuantity name

**Return type** `str`

**Returns** name of the ModelQuantity

**get\_val()**

ModelQuantity value

**Return type** `sympy.core.expr.Expr`

**Returns** value of the ModelQuantity

**set\_val(val)**

Set ModelQuantity value

**Returns** value of the ModelQuantity

### **amici.ode\_model.Parameter**

**class** `amici.ode_model.Parameter(identifier, name, value)`

A Parameter is a free variable in the model with respect to which sensitivities may be computed, abbreviated by p.

**\_\_init\_\_(identifier, name, value)**

Create a new Expression instance.

**Parameters**

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the Parameter
- **name** (`str`) – individual name of the Parameter (does not need to be unique)
- **value** (`numbers.Number`) – numeric value

## Methods Summary

|  |                                   |
|--|-----------------------------------|
| <code>__init__(identifier, name, value)</code> | Create a new Expression instance. |
| <code>get_id()</code>                          | ModelQuantity identifier          |
| <code>get_name()</code>                        | ModelQuantity name                |
| <code>get_val()</code>                         | ModelQuantity value               |
| <code>set_val(val)</code>                      | Set ModelQuantity value           |

## Methods

`__init__(identifier, name, value)`

Create a new Expression instance.

### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the Parameter
- **name** (`str`) – individual name of the Parameter (does not need to be unique)
- **value** (`numbers.Number`) – numeric value

`get_id()`

ModelQuantity identifier

**Return type** `sympy.core.symbol.Symbol`

**Returns** identifier of the ModelQuantity

`get_name()`

ModelQuantity name

**Return type** `str`

**Returns** name of the ModelQuantity

`get_val()`

ModelQuantity value

**Return type** `sympy.core.expr.Expr`

**Returns** value of the ModelQuantity

`set_val(val)`

Set ModelQuantity value

**Returns** value of the ModelQuantity

## `amici.ode_model.SigmaY`

**class** `amici.ode_model.SigmaY(identifier, name, value)`

A Standard Deviation SigmaY rescales the distance between simulations and measurements when computing residuals or objective functions, abbreviated by `sigmay`.

`__init__(identifier, name, value)`

Create a new Standard Deviation instance.

### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the Standard Deviation

- **name** (`str`) – individual name of the Standard Deviation (does not need to be unique)
- **value** (`sympy.core.expr.Expr`) – formula

## Methods Summary

|  |   |
|--|---|
| <code>__init__(identifier, name, value)</code> | Create a new Standard Deviation instance. |
| <code>get_id()</code>                          | ModelQuantity identifier                  |
| <code>get_name()</code>                        | ModelQuantity name                        |
| <code>get_val()</code>                         | ModelQuantity value                       |
| <code>set_val(val)</code>                      | Set ModelQuantity value                   |

## Methods

`__init__(identifier, name, value)`

Create a new Standard Deviation instance.

### Parameters

- **identifier** (`sympy.core.symbol.Symbol`) – unique identifier of the Standard Deviation
- **name** (`str`) – individual name of the Standard Deviation (does not need to be unique)
- **value** (`sympy.core.expr.Expr`) – formula

`get_id()`

ModelQuantity identifier

**Return type** `sympy.core.symbol.Symbol`

**Returns** identifier of the ModelQuantity

`get_name()`

ModelQuantity name

**Return type** `str`

**Returns** name of the ModelQuantity

`get_val()`

ModelQuantity value

**Return type** `sympy.core.expr.Expr`

**Returns** value of the ModelQuantity

`set_val(val)`

Set ModelQuantity value

**Returns** value of the ModelQuantity



**amici.ode\_model.State**

**class** amici.ode\_model.State(*identifier, name, init, dt*)

A State variable defines an entity that evolves with time according to the provided time derivative, abbreviated by *x*.

**Variables**

- **\_conservation\_law** – algebraic formula that allows computation of this state according to a conservation law
- **\_dt** – algebraic formula that defines the temporal derivative of this state

**\_\_init\_\_**(*identifier, name, init, dt*)

Create a new State instance. Extends *ModelQuantity.\_\_init\_\_()* by *dt*

**Parameters**

- **identifier** (*sympy.core.symbol.Symbol*) – unique identifier of the state
- **name** (*str*) – individual name of the state (does not need to be unique)
- **init** (*sympy.core.expr.Expr*) – initial value
- **dt** (*sympy.core.expr.Expr*) – time derivative

**Methods Summary**

|   |   |
|---|---|
| <i>__init__</i> ( <i>identifier, name, init, dt</i> ) | Create a new State instance.  |
| <i>get_dt</i> ()                                      | Gets the time derivative  |
| <i>get_dx_rdata_dx_solver</i> ( <i>state_id</i> )     | Returns the expression that allows computation of <i>dx_rdata_dx_solver</i> for this state, accounting for conservation laws. |
| <i>get_free_symbols</i> ()                            | Gets the set of free symbols in time derivative and initial conditions  |
| <i>get_id</i> ()                                      | ModelQuantity identifier  |
| <i>get_name</i> ()                                    | ModelQuantity name  |
| <i>get_val</i> ()                                     | ModelQuantity value   |
| <i>get_x_rdata</i> ()                                 | Returns the expression that allows computation of <i>x_rdata</i> for this state, accounting for conservation laws.            |
| <i>has_conservation_law</i> ()                        | Checks whether this state has a conservation law assigned.  |
| <i>set_conservation_law</i> ( <i>law</i> )            | Sets the conservation law of a state.   |
| <i>set_dt</i> ( <i>dt</i> )                           | Sets the time derivative  |
| <i>set_val</i> ( <i>val</i> )                         | Set ModelQuantity value   |

## Methods

**`__init__`**(*identifier, name, init, dt*)

Create a new State instance. Extends `ModelQuantity.__init__()` by `dt`

### Parameters

- **`identifier`** (`sympy.core.symbol.Symbol`) – unique identifier of the state
- **`name`** (`str`) – individual name of the state (does not need to be unique)
- **`init`** (`sympy.core.expr.Expr`) – initial value
- **`dt`** (`sympy.core.expr.Expr`) – time derivative

**`get_dt()`**

Gets the time derivative

**Return type** `sympy.core.expr.Expr`

**Returns** time derivative

**`get_dx_rdata_dx_solver`**(*state\_id*)

Returns the expression that allows computation of `dx_rdata_dx_solver` for this state, accounting for conservation laws.

**Returns** `dx_rdata_dx_solver` expression

**`get_free_symbols()`**

Gets the set of free symbols in time derivative and initial conditions

**Return type** `typing.Set[sympy.core.basic.Basic]`

**Returns** free symbols

**`get_id()`**

ModelQuantity identifier

**Return type** `sympy.core.symbol.Symbol`

**Returns** identifier of the ModelQuantity

**`get_name()`**

ModelQuantity name

**Return type** `str`

**Returns** name of the ModelQuantity

**`get_val()`**

ModelQuantity value

**Return type** `sympy.core.expr.Expr`

**Returns** value of the ModelQuantity

**`get_x_rdata()`**

Returns the expression that allows computation of `x_rdata` for this state, accounting for conservation laws.

**Returns** `x_rdata` expression

**`has_conservation_law()`**

Checks whether this state has a conservation law assigned.

**Returns** True if assigned, False otherwise

**set\_conservation\_law(*law*)**

Sets the conservation law of a state.

If a conservation law is set, the respective state will be replaced by an algebraic formula according to the respective conservation law.

**Parameters** *law* (`amici.ode_model.ConservationLaw`) – linear sum of states that if added to this state remain constant over time

**Return type** `None`

**set\_dt(*dt*)**

Sets the time derivative

**Parameters** *dt* (`sympy.core.expr.Expr`) – time derivative

**Return type** `None`

**set\_val(*val*)**

Set ModelQuantity value

**Returns** value of the ModelQuantity

### 10.4.13 amici.plotting

#### Plotting

Plotting related functions

#### Functions Summary

|   |                              |
|---|------------------------------|
| <code>plotObservableTrajectories(rdata[, ...])</code> | Plot observable trajectories |
| <code>plotStateTrajectories(rdata[, ...])</code>      | Plot state trajectories      |

#### Functions

`amici.plotting.plotObservableTrajectories(rdata, observable_indices=None, ax=None, model=None)`  
Plot observable trajectories

**Parameters**

- **rdata** (`amici.numpy.ReturnDataView`) – AMICI simulation results as returned by `amici.amici.runAmiciSimulation()`
- **observable\_indices** (`typing.Optional[typing.Iterable[int]]`) – Indices of observables for which trajectories are to be plotted
- **ax** (`typing.Optional[matplotlib.axes._axes.Axes]`) – matplotlib Axes instance to plot into
- **model** (`typing.Optional[amici.amici.Model]`) – amici model instance

**Return type** `None`

`amici.plotting.plotStateTrajectories(rdata, state_indices=None, ax=None, model=None)`  
Plot state trajectories

**Parameters**

- **rdata** (`amici.numpy.ReturnDataView`) – AMICI simulation results as returned by `amici.amici.runAmiciSimulation()`
- **state\_indices** (`typing.Optional[typing.Iterable[int]]`) – Indices of states for which trajectories are to be plotted
- **ax** (`typing.Optional[matplotlib.axes._axes.Axes]`) – matplotlib Axes instance to plot into
- **model** (`typing.Optional[amici.amici.Model]`) – amici model instance

Return type `None`

## 10.4.14 amici.pandas

### Pandas Wrappers

This module contains convenience wrappers that allow for easy interconversion between C++ objects from `amici` and pandas DataFrames

### Functions Summary

|  |   |
|--|---|
| <code>constructEdataFromDataFrame(df, model, condition)</code> | Constructs an ExpData instance according to the provided Model and DataFrame. |
| <code>getDataObservablesAsDataFrame(model, edata_list)</code>  | Write Observables from experimental data as DataFrame.                        |
| <code>getEdataFromDataFrame(model, df[, by_id])</code>         | Constructs a ExpData instances according to the provided Model and DataFrame. |
| <code>getResidualsAsDataFrame(model, edata_list, ...)</code>   | Convert a list of ReturnData and ExpData to pandas DataFrame with residuals.  |
| <code>getSimulationObservablesAsDataFrame(model, ...)</code>   | Write Observables from simulation results as DataFrame.                       |
| <code>getSimulationStatesAsDataFrame(model, ...[, ...])</code> | Get model state according to lists of ReturnData and ExpData.                 |
| <code>get_expressions_as_dataframe(model, ...[, by_id])</code> | Get values of model expressions from lists of ReturnData as DataFrame.        |

### Functions

`amici.pandas.constructEdataFromDataFrame(df, model, condition, by_id=False)`

Constructs an ExpData instance according to the provided Model and DataFrame.

#### Parameters

- **df** (`pandas.core.frame.DataFrame`) – `pd.DataFrame` with Observable Names/Ids as columns. Standard deviations may be specified by appending ‘\_std’ as suffix.
- **model** (`typing.Union[amici.amici.ModelPtr, amici.amici.Model]`) – Model instance.
- **condition** (`pandas.core.series.Series`) – `pd.Series` with FixedParameter Names/Ids as columns. Preequilibration conditions may be specified by appending ‘\_preeq’ as suffix. Presimulation conditions may be specified by appending ‘\_presim’ as suffix.

- **by\_id** (`typing.Optional[bool]`) – Indicate whether in the arguments, column headers are based on ids or names. This should correspond to the way *df* and *condition* was created in the first place.

**Return type** `amici.amici.ExpData`

**Returns** ExpData instance.

`amici.pandas.getDataObservablesAsDataFrame(model, edata_list, by_id=False)`

Write Observables from experimental data as DataFrame.

**Parameters**

- **model** (`typing.Union[amici.amici.ModelPtr, amici.amici.Model]`) – Model instance.
- **edata\_list** (`typing.Union[typing.List[amici.amici.ExpData], typing.List[amici.amici.ExpDataPtr], amici.amici.ExpData, amici.amici.ExpDataPtr]`) – list of ExpData instances with experimental data. May also be a single ExpData instance.
- **by\_id** (`typing.Optional[bool]`) – If True, uses observable ids as column names in the generated DataFrame, otherwise the possibly more descriptive observable names are used.

**Return type** `pandas.core.frame.DataFrame`

**Returns** pandas DataFrame with conditions/timepoints as rows and observables as columns.

`amici.pandas.getEdataFromDataFrame(model, df, by_id=False)`

Constructs a ExpData instances according to the provided Model and DataFrame.

**Parameters**

- **df** (`pandas.core.frame.DataFrame`) – dataframe with Observable Names/Ids, FixedParameter Names/Ids and time as columns. Standard deviations may be specified by appending ‘\_std’ as suffix. Preequilibration fixedParameters may be specified by appending ‘\_preeq’ as suffix. Presimulation fixedParameters may be specified by appending ‘\_presim’ as suffix. Presimulation time may be specified as ‘t\_presim’ column.
- **model** (`typing.Union[amici.amici.ModelPtr, amici.amici.Model]`) – Model instance.
- **by\_id** (`typing.Optional[bool]`) – Whether the column names in *df* are based on ids or names, corresponding to how the dataframe was created in the first place.

**Return type** `typing.List[amici.amici.ExpData]`

**Returns** list of ExpData instances.

`amici.pandas.getResidualsAsDataFrame(model, edata_list, rdata_list, by_id=False)`

Convert a list of ReturnData and ExpData to pandas DataFrame with residuals.

**Parameters**

- **model** (`amici.amici.Model`) – Model instance.
- **edata\_list** (`typing.Union[typing.List[amici.amici.ExpData], typing.List[amici.amici.ExpDataPtr], amici.amici.ExpData, amici.amici.ExpDataPtr]`) – list of ExpData instances with experimental data. May also be a single ExpData instance.
- **rdata\_list** (`typing.Union[typing.List[amici.numpy.ReturnDataView], amici.numpy.ReturnDataView]`) – list of ReturnData instances corresponding to ExpData. May also be a single ReturnData instance.

- **by\_id** (`typing.Optional[bool]`) – bool, optional (default = False) If True, ids are used as identifiers, otherwise the possibly more descriptive names.

**Return type** `pandas.core.frame.DataFrame`

**Returns** pandas DataFrame with conditions and residuals.

`amici.pandas.getSimulationObservablesAsDataFrame(model, edata_list, rdata_list, by_id=False)`

Write Observables from simulation results as DataFrame.

**Parameters**

- **model** (`amici.amici.Model`) – Model instance.
- **edata\_list** (`typing.Union[typing.List[amici.amici.ExpData], typing.List[amici.amici.ExpDataPtr], amici.amici.ExpData, amici.amici.ExpDataPtr]`) – list of ExpData instances with experimental data. May also be a single ExpData instance.
- **rdata\_list** (`typing.Union[typing.List[amici.numpy.ReturnDataView], amici.numpy.ReturnDataView]`) – list of ReturnData instances corresponding to ExpData. May also be a single ReturnData instance.
- **by\_id** (`typing.Optional[bool]`) – If True, ids are used as identifiers, otherwise the possibly more descriptive names.

**Return type** `pandas.core.frame.DataFrame`

**Returns** pandas DataFrame with conditions/timepoints as rows and observables as columns.

`amici.pandas.getSimulationStatesAsDataFrame(model, edata_list, rdata_list, by_id=False)`

Get model state according to lists of ReturnData and ExpData.

**Parameters**

- **model** (`amici.amici.Model`) – Model instance.
- **edata\_list** (`typing.Union[typing.List[amici.amici.ExpData], typing.List[amici.amici.ExpDataPtr], amici.amici.ExpData, amici.amici.ExpDataPtr]`) – list of ExpData instances with experimental data. May also be a single ExpData instance.
- **rdata\_list** (`typing.Union[typing.List[amici.numpy.ReturnDataView], amici.numpy.ReturnDataView]`) – list of ReturnData instances corresponding to ExpData. May also be a single ReturnData instance.
- **by\_id** (`typing.Optional[bool]`) – If True, ids are used as identifiers, otherwise the possibly more descriptive names.

**Return type** `pandas.core.frame.DataFrame`

**Returns** pandas DataFrame with conditions/timepoints as rows and state variables as columns.

`amici.pandas.get_expressions_as_dataframe(model, edata_list, rdata_list, by_id=False)`

Get values of model expressions from lists of ReturnData as DataFrame.

**Parameters**

- **model** (`amici.amici.Model`) – Model instance.
- **edata\_list** (`typing.Union[typing.List[amici.amici.ExpData], typing.List[amici.amici.ExpDataPtr], amici.amici.ExpData, amici.amici.ExpDataPtr]`) – list of ExpData instances with experimental data. May also be a single ExpData instance.

- **rdata\_list** (`typing.Union[typing.List[amici.numpy.ReturnDataView], amici.numpy.ReturnDataView]`) – list of ReturnData instances corresponding to ExpData. May also be a single ReturnData instance.
- **by\_id** (`typing.Optional[bool]`) – If True, ids are used as identifiers, otherwise the possibly more descriptive names.

**Return type** `pandas.core.frame.DataFrame`

**Returns** pandas DataFrame with conditions/timepoints as rows and model expressions as columns.

## 10.4.15 amici.logging

### Logging

This module provides custom logging functionality for other amici modules

### Functions Summary

|  |   |
|--|---|
| <code>get_logger([logger_name, log_level])</code>    | Returns (if extistant) or creates an AMICI logger                               |
| <code>log_execution_time(description, logger)</code> | Parameterized function decorator that enables automatic execution time tracking |
| <code>set_log_level(logger, log_level)</code>        |   |
| <b>rtype</b> <code>None</code>                       |   |

### Functions

`amici.logging.get_logger(logger_name='amici', log_level=None, **kwargs)`

Returns (if extistant) or creates an AMICI logger

If the AMICI base logger has already been set up, this method will return it or any of its descendant loggers without overriding the settings - i.e. any values supplied as kwargs will be ignored.

#### Parameters

- **logger\_name** (`typing.Optional[str]`) – Get a logger for a specific namespace, typically `__name__` for code outside of classes or `self.__module__` inside a class
- **log\_level** (`typing.Optional[int]`) – Override the default or preset log level for the requested logger. `None` or `False` uses the default or preset value. `True` evaluates to logging.DEBUG. Any integer is used directly.
- **console\_output** – Set up a default console log handler if `True` (default). Only used when the AMICI logger hasn't been set up yet.
- **file\_output** – Supply a filename to copy all log output to that file, or set to `False` to disable (default). Only used when the AMICI logger hasn't been set up yet.
- **capture\_warnings** – Capture warnings from Python's warnings module if `True` (default). Only used when the AMICI logger hasn't been set up yet..

**Return type** `logging.Logger`

**Returns** A logging.Logger object with the requested name

`amici.logging.log_execution_time(description, logger)`

Parameterized function decorator that enables automatic execution time tracking

**Parameters**

- **description** (`str`) – Description of what the decorated function does
- **logger** (`logging.Logger`) – Logger to which execution timing will be printed

**Return type** `typing.Callable`

`amici.logging.set_log_level(logger, log_level)`

**Return type** `None`

## 10.4.16 amici.gradient\_check

### Finite Difference Check

This module provides functions to automatically check correctness of amici computed sensitivities using finite difference approximations

### Functions Summary

---

|  |  |
|--|--|
| <code>check_derivatives(model, solver[, edata, ...])</code>  | Finite differences check for likelihood gradient.  |
| <code>check_finite_difference(x0, model, solver, ...)</code> | Checks the computed sensitivity based derivatives against a finite difference approximation. |

---

### Functions

`amici.gradient_check.check_derivatives(model, solver, edata=None, atol=0.0001, rtol=0.0001, epsilon=0.001, check_least_squares=True, skip_zero_pars=False)`

Finite differences check for likelihood gradient.

**Parameters**

- **model** (`amici.amici.Model`) – amici model
- **solver** (`amici.amici.Solver`) – amici solver
- **edata** (`typing.Optional[amici.swig_wrappers.ExpData]`) – exp data
- **atol** (`typing.Optional[float]`) – absolute tolerance for comparison
- **rtol** (`typing.Optional[float]`) – relative tolerance for comparison
- **epsilon** (`typing.Optional[float]`) – finite difference step-size
- **check\_least\_squares** (`bool`) – whether to check least squares related values.
- **skip\_zero\_pars** (`bool`) – whether to perform FD checks for parameters that are zero

**Return type** `None`

`amici.gradient_check.check_finite_difference(x0, model, solver, edata, ip, fields, atol=0.0001, rtol=0.0001, epsilon=0.001)`

Checks the computed sensitivity based derivatives against a finite difference approximation.



**Parameters**

- **x0** (`typing.Sequence[float]`) – parameter value at which to check finite difference approximation
- **model** (`amici.amici.Model`) – amici model
- **solver** (`amici.amici.Solver`) – amici solver
- **edata** (`amici.swig_wrappers.ExpData`) – exp data
- **ip** (`int`) – parameter index
- **fields** (`typing.List[str]`) – rdata fields for which to check the gradient
- **atol** (`typing.Optional[float]`) – absolute tolerance for comparison
- **rtol** (`typing.Optional[float]`) – relative tolerance for comparison
- **epsilon** (`typing.Optional[float]`) – finite difference step-size

**Return type** `None`

**10.4.17 amici.parameter\_mapping****Parameter mapping**

When performing parameter inference, often parameters need to be mapped from simulation to estimation parameters, and parameters can differ between conditions. This can be handled using the *ParameterMapping*.

---

**Note:** While the parameter mapping can be used directly with AMICI, it was developed for usage together with PEtab, for which the whole workflow of generating the mapping is automatized.

---

**Classes**

|   |  |
|---|--|
| <code>ParameterMapping([parameter_mappings])</code>           | Parameter mapping for multiple conditions. |
| <code>ParameterMappingForCondition([map_sim_var, ...])</code> | Parameter mapping for condition.           |

**amici.parameter\_mapping.ParameterMapping**

**class** `amici.parameter_mapping.ParameterMapping`(*parameter\_mappings=None*)

Parameter mapping for multiple conditions.

This can be used like a list of *ParameterMappingForConditions*.

**Parameters** **parameter\_mappings** (`typing.Optional[typing.List[amici.parameter_mapping.ParameterMappingForCondition]]`) – List of parameter mappings for specific conditions.

**\_\_init\_\_** (*parameter\_mappings=None*)

## Methods Summary

|   |  |
|---|--|
| <hr/> <code>__init__</code> ([parameter_mappings])    |  |
| <code>append</code> (parameter_mapping_for_condition) | Append a condition specific parameter mapping. |
| <code>count</code> (value)                            |  |
| <hr/>   |  |
| <code>index</code> (value, [start, [stop]])           | Raises ValueError if the value is not present. |
| <hr/>   |  |

## Methods

`__init__`(parameter\_mappings=None)  
`append`(parameter\_mapping\_for\_condition)  
Append a condition specific parameter mapping.  
`count`(value) → integer -- return number of occurrences of value  
`index`(value[, start[, stop ]]) → integer -- return first index of value.  
Raises ValueError if the value is not present.  
Supporting start and stop arguments is optional, but recommended.

## amici.parameter\_mapping.ParameterMappingForCondition

```
class amici.parameter_mapping.ParameterMappingForCondition(map_sim_var=None,  
                                                           scale_map_sim_var=None,  
                                                           map_preeq_fix=None,  
                                                           scale_map_preeq_fix=None,  
                                                           map_sim_fix=None,  
                                                           scale_map_sim_fix=None)
```

Parameter mapping for condition.

Contains mappings for free parameters, fixed parameters, and fixed preequilibration parameters, both for parameters and scales.

In the scale mappings, for each simulation parameter the scale on which the value is passed (and potentially gradients are to be returned) is given. In the parameter mappings, for each simulation parameter a corresponding optimization parameter (or a numeric value) is given.

If a mapping is not passed, the parameter mappings are assumed to be empty, and if a scale mapping is not passed, all scales are set to linear.

### Parameters

- **map\_sim\_var** (typing.Optional[typing.Dict[str, typing.Union[str, numbers.Number]]]) – Mapping for free simulation parameters.
- **scale\_map\_sim\_var** (typing.Optional[typing.Dict[str, str]]) – Scales for free simulation parameters.
- **map\_preeq\_fix** (typing.Optional[typing.Dict[str, typing.Union[str, numbers.Number]]]) – Mapping for fixed preequilibration parameters.
- **scale\_map\_preeq\_fix** (typing.Optional[typing.Dict[str, str]]) – Scales for fixed preequilibration parameters.

- **map\_sim\_fix** (`typing.Optional[typing.Dict[str, typing.Union[str, numbers.Number]]]`) – Mapping for fixed simulation parameters.
- **scale\_map\_sim\_fix** (`typing.Optional[typing.Dict[str, str]]`) – Scales for fixed simulation parameters.

```
__init__(map_sim_var=None, scale_map_sim_var=None, map_preeq_fix=None,
         scale_map_preeq_fix=None, map_sim_fix=None, scale_map_sim_fix=None)
```

## Methods Summary

---

```
__init__([map_sim_var, scale_map_sim_var, ...])
```

---

## Methods

```
__init__(map_sim_var=None, scale_map_sim_var=None, map_preeq_fix=None,
         scale_map_preeq_fix=None, map_sim_fix=None, scale_map_sim_fix=None)
```

## Functions Summary

|   |  |
|---|--|
| <code>amici_to_petab_scale(amici_scale)</code>            | Convert amici scale id to petab scale id.                                  |
| <code>fill_in_parameters(edatas, ...)</code>              | Fill fixed and dynamic parameters into the edatas (in-place).              |
| <code>fill_in_parameters_for_condition(edata, ...)</code> | Fill fixed and dynamic parameters into the edata for condition (in-place). |
| <code>petab_to_amici_scale(petab_scale)</code>            | Convert petab scale id to amici scale id.                                  |
| <code>scale_parameter(value, petab_scale)</code>          | Bring parameter from linear scale to target scale.                         |
| <code>scale_parameters_dict(value_dict, ...)</code>       | Bring parameters from linear scale to target scale.                        |
| <code>unscale_parameter(value, petab_scale)</code>        | Bring parameter from scale to linear scale.                                |
| <code>unscale_parameters_dict(value_dict, ...)</code>     | Bring parameters from target scale to linear scale.                        |

## Functions

`amici.parameter_mapping.amici_to_petab_scale(amici_scale)`

Convert amici scale id to petab scale id.

**Return type** `str`

`amici.parameter_mapping.fill_in_parameters(edatas, problem_parameters, scaled_parameters, parameter_mapping, amici_model)`

Fill fixed and dynamic parameters into the edatas (in-place).

### Parameters

- **edatas** (`typing.List[amici.swig_wrappers.ExpData]`) – List of experimental datas `amici.amici.ExpData` with everything except parameters filled.
- **problem\_parameters** (`typing.Dict[str, numbers.Number]`) – Problem parameters as `parameterId=>value` dict. Only parameters included here will be set. Remaining parameters will be used as currently set in `amici_model`.

- **scaled\_parameters** (*bool*) – If True, problem\_parameters are assumed to be on the scale provided in the parameter mapping. If False, they are assumed to be in linear scale.
- **parameter\_mapping** (*amici.parameter\_mapping.ParameterMapping*) – Parameter mapping for all conditions.
- **amici\_model** (*typing.Union[amici.amici.Model, amici.amici.ModelPtr]*) – AMICI model.

**Return type** *None*

`amici.parameter_mapping.fill_in_parameters_for_condition(edata, problem_parameters, scaled_parameters, parameter_mapping, amici_model)`

Fill fixed and dynamic parameters into the edata for condition (in-place).

#### Parameters

- **edata** (*amici.swig\_wrappers.ExpData*) – Experimental data object to fill parameters into.
- **problem\_parameters** (*typing.Dict[str, numbers.Number]*) – Problem parameters as parameterId=>value dict. Only parameters included here will be set. Remaining parameters will be used as already set in *amici\_model* and *edata*.
- **scaled\_parameters** (*bool*) – If True, problem\_parameters are assumed to be on the scale provided in the parameter mapping. If False, they are assumed to be in linear scale.
- **parameter\_mapping** (*amici.parameter\_mapping.ParameterMappingForCondition*) – Parameter mapping for current condition.
- **amici\_model** (*typing.Union[amici.amici.Model, amici.amici.ModelPtr]*) – AMICI model

**Return type** *None*

`amici.parameter_mapping.petab_to_amici_scale(petab_scale)`  
Convert petab scale id to amici scale id.

**Return type** *int*

`amici.parameter_mapping.scale_parameter(value, petab_scale)`  
Bring parameter from linear scale to target scale.

#### Parameters

- **value** (*numbers.Number*) – Value to scale
- **petab\_scale** (*str*) – Target scale of value

**Return type** *numbers.Number*

**Returns** value on target scale

`amici.parameter_mapping.scale_parameters_dict(value_dict, petab_scale_dict)`  
Bring parameters from linear scale to target scale.

Bring values in *value\_dict* from linear scale to the scale provided in *petab\_scale\_dict* (in-place). Both arguments are expected to have the same length and matching keys.

#### Parameters

- **value\_dict** (*typing.Dict[typing.Any, numbers.Number]*) – Values to scale
- **petab\_scale\_dict** (*typing.Dict[typing.Any, str]*) – Target scales of values

**Return type** `None`

`amici.parameter_mapping.unscale_parameter(value, petab_scale)`

Bring parameter from scale to linear scale.

**Parameters**

- **value** (`numbers.Number`) – Value to scale
- **petab\_scale** (`str`) – Target scale of value

**Return type** `numbers.Number`

**Returns** value on linear scale

`amici.parameter_mapping.unscale_parameters_dict(value_dict, petab_scale_dict)`

Bring parameters from target scale to linear scale.

Bring values in `value_dict` from linear scale to the scale provided in `petab_scale_dict` (in-place). Both arguments are expected to have the same length and matching keys.

**Parameters**

- **value\_dict** (`typing.Dict[typing.Any, numbers.Number]`) – Values to scale
- **petab\_scale\_dict** (`typing.Dict[typing.Any, str]`) – Target scales of values

**Return type** `None`

## 10.4.18 amici.conservated\_quantities\_demartino

### Functions Summary

---

|   |                                   |
|---|-----------------------------------|
| <code>compute_moiety_conservation_laws(...[, ...])</code> | Compute moiety conservation laws. |
|---|-----------------------------------|

---

### Functions

`amici.conservated_quantities_demartino.compute_moiety_conservation_laws(stoichiometric_list, num_species, num_reactions, max_num_monte_carlo=20, rng_seed=False, species_names=None)`

Compute moiety conservation laws.

According to the algorithm proposed by De Martino et al. (2014) <https://doi.org/10.1371/journal.pone.0100750>

**Parameters**

- **stoichiometric\_list** (`typing.Sequence[float]`) – the stoichiometric matrix as a list (species x reactions, column-major ordering)
- **num\_species** (`int`) – total number of species in the reaction network
- **num\_reactions** (`int`) – total number of reactions in the reaction network
- **max\_num\_monte\_carlo** (`int`) – maximum number of MonteCarlo steps before changing to relaxation

- **rng\_seed** (`typing.Union[None, bool, int]`) – Seed for the random number generator. If *False*, the RNG will not be re-initialized. Other values will be passed to `random.seed()`.
- **species\_names** (`typing.Optional[typing.Sequence[str]]`) – Species names. Optional and only used for logging.

**Return type** `typing.Tuple[typing.List[typing.List[int]], typing.List[typing.List[float]]]`

**Returns** Integer MCLs as list of lists of indices of involved species and list of lists of corresponding coefficients.

### 10.4.19 amici.conserverved\_quantities\_rref

Find conserved quantities deterministically

#### Functions Summary

|   |  |
|---|--|
| <code>nullspace_by_rref(mat)</code>     | Compute basis of the nullspace of <code>mat</code> based on the reduced row echelon form     |
| <code>pivots(mat)</code>                | Get indices of pivot columns in <code>mat</code> , assumed to be in reduced row echelon form |
| <code>rref(mat[, round_ndigits])</code> | Bring matrix <code>mat</code> to reduced row echelon form                                    |

#### Functions

`amici.conserverved_quantities_rref.nullspace_by_rref(mat)`

Compute basis of the nullspace of `mat` based on the reduced row echelon form

**Return type** `numpy.array`

`amici.conserverved_quantities_rref.pivots(mat)`

Get indices of pivot columns in `mat`, assumed to be in reduced row echelon form

**Return type** `typing.List[int]`

`amici.conserverved_quantities_rref.rref(mat, round_ndigits=None)`

Bring matrix `mat` to reduced row echelon form

see [https://en.wikipedia.org/wiki/Row\\_echelon\\_form](https://en.wikipedia.org/wiki/Row_echelon_form)

#### Parameters

- **mat** (`numpy.array`) – Numpy float matrix to operate on (will be copied)
- **round\_ndigits** (`typing.Union[typing.Literal[False], int, None]`) – Number of digits to round intermediary results to, or *False* to disable rounding completely. Helps to avoid numerical artifacts.

**Return type** `numpy.array`

**Returns** `mat` in rref form.

## C++ INTERFACE

### 11.1 Building the C++ library

The following section describes building the AMICI C++ library:

---

**Note:** The AMICI C++ interface only supports simulation of models imported using the *Python interface* and *Matlab interface*. It cannot be used for model import itself.

---

Prerequisites:

- CBLAS compatible BLAS library
- HDF5 libraries (currently mandatory, see <https://github.com/AMICI-dev/AMICI/issues/1252>)
- a C++14 compatible compiler
- a C compiler
- Optional: boost for serialization

To use AMICI from C++, run the

```
./scripts/buildSuiteSparse.sh  
./scripts/buildSundials.sh  
./scripts/buildAmici.sh
```

script to build the AMICI library.

---

**Note:** On some systems, the CMake executable may be named something other than `cmake`. In this case, set the `CMAKE` environment variable to the correct name (e.g. `export CMAKE=cmake3`, in case you have CMake available as `cmake3`).

---

The static library can then be linked from

```
./build/libamici.a
```

In CMake-based packages, `amici` can be linked via

```
find_package(Amici)
```

For further usage, consult the AMICI *C++ interface documentation*.

### 11.1.1 Supported CBLAS libraries

The C++ interfaces require a system installation of a CBLAS-compatible *Basic Linear Algebra Subprograms* (BLAS) library. AMICI has been tested with various implementations such as Accelerate, Intel MKL, cblas, openblas and atlas.

### 11.1.2 Optional SuperLU\_MT support

To build AMICI with SuperLU\_MT support, run

```
./scripts/buildSuperLUMT.sh
./scripts/buildSundials.sh
cd build/
cmake -DSUNDIALS_SUPERLUMT_ENABLE=ON ..
make
```

## 11.2 Using AMICI's C++ interface

The various import functions in of the *Python interface* and *Matlab interface* translate models defined in different formats into C++ code. These generated model libraries, together with the AMICI base library can be used in any C++ application for model simulation and sensitivity analysis. This section will give a short overview over the generated files and provide a brief introduction of how this code can be included in other applications. Further details are available in the *C++ API reference*.

### 11.2.1 AMICI-generated C++ model files

After importing a model using either the *Python interface* or the *Matlab interface*, the specified output directory contains (among others) C++ code for the various model functions.

The content of a model source directory looks something like this (given *MODEL\_NAME=model\_steadystate*):

```
CMakeLists.txt
main.cpp
model_steadystate_deltaqB.cpp
model_steadystate_deltaqB.h
[... many more files model_steadystate_*. (cpp|h|md5|o) ]
wrapfunctions.cpp
wrapfunctions.h
model_steadystate.h
```

These files provide the implementation of a model-specific subclass of `amici::Model`. The `CMakeLists.txt` file can be used to build the model library using `CMake`. `main.cpp` contains a simple scaffold for running a model simulation from C++. See next section for more details on these files.



### 11.2.2 Running a model simulation

AMICI's public API is mostly available through `amici/amici.h`. This is the only header file that needs to be included for basic usage. All functions there are declared within the `amici namespace`. Additionally, `amici/hdf5.h` and `amici/serialization.h` may be handy for specific use cases. The former provides some functions for reading and writing `HDF5` files, latter for serialization (requires `Boost`). All model-specific functions are defined in the namespace `model_${modelName}`.

The main function for running an AMICI simulation is `amici::runAmiciSimulation()`. This function requires

- an instance of a `amici::Model` subclass as generated during model import. For the example `model_steadystate` the respective class is provided as `Model_model_steadystate` in `model_steadystate.h` in output directory for the given model.
- a `amici::Solver` instance. This solver instance needs to match the requirements of the model and can be obtained from `amici::AbstractModel::getSolver()`.
- optionally an `amici::ExpData` instance, which contains any experimental data (e.g. measurements, noise model parameters or model inputs) to evaluate residuals or an objective function.

This function returns a `amici::ReturnData` object, which contains all simulation results.

For running simulations for multiple experimental conditions (multiple `amici::ExpData` instances), `amici::runAmiciSimulations()` provides an alternative entry point. If AMICI (and your application) have been compiled with OpenMP support (see installation guide), this allows for running those simulations in parallel.

A scaffold for a standalone simulation program is automatically generated during model import in `main.cpp` in the model output directory. This program shows how to use the above-mentioned classes, how to obtain the simulation results, and may provide a starting point for your own simulation code.

### Working with multiple or anonymous models

AMICI model import generates a `amici::Model` subclass for the specific model, based on the name used during import. On the one hand, this allows you to use multiple models with different names within a single application. On the other hand, this requires you to know the name of the model, which can be inconvenient in some cases.

When working with a single model, the `wrapfunctions.h` file generated during model import can be used to avoid specifying model names explicitly. It defines a function `amici::generic_model::getModel()`, that returns an instance of the model class by a generic name.

---

**Note:** Including multiple `wrapfunctions.h` files from different models in a single application is not possible. When using multiple models, explicit names have to be used or the different model libraries need to be loaded dynamically at runtime.

---

### 11.2.3 Compiling and linking

To run AMICI simulations from within your C++ application, you need to compile and link the following libraries:

- model library
- AMICI base library
- SUNDIALS libraries
- SuiteSparse libraries
- CBLAS-compatible BLAS

- optionally HDF5 (C, HL, and CXX components) set CMake option `ENABLE_HDF5` to OFF to build without HDF5-support
- optionally OpenMP (for parallel simulation of multiple conditions, see `amici::runAmiciSimulations()`)
- optionally boost (only when using serialization of AMICI object)

The simplest and recommended way is using the provide CMake files which take care of all these dependencies.

Considering the simple case, that you want to simulate one specific model in your CMake-based C++ application, you can copy or move the generated model directory containing the `CMakeLists.txt` file to your application directory, add `add_subdirectory(yourModelDirectory)` to your project's `CMakeLists.txt` file and build your project using CMake as usual.

### 11.2.4 Parameter estimation for AMICI models in high-performance computing environments

To perform parameter estimation for large or otherwise computationally demanding AMICI models from C++ in a high-performance computing environment, you may find the [parPE library](#) helpful. parPE allows for the private or shared memory parallel evaluation of a cost function requiring multiple simulations of the same model with different inputs. It provides interfaces to different optimizers, such as Ipopt.

## 11.3 AMICI C++ API

AMICI C++ library functions

### 11.3.1 Class Hierarchy

### 11.3.2 File Hierarchy

### 11.3.3 Full API

#### Namespaces

#### Namespace amici

##### Contents

- *Namespaces*
- *Classes*
- *Enums*
- *Functions*
- *Typedefs*
- *Variables*

## Namespaces

- Namespace *amici::hdf5*

## Classes

- Struct *ModelDimensions*
- Struct *ModelState*
- Struct *ModelStateDerived*
- Struct *SimulationState*
- Class *AbstractModel*
- Class *AmiciApplication*
- Class *AmiException*
- Class *AmiVector*
- Class *AmiVectorArray*
- Class *BackwardProblem*
- Class *ConditionContext*
- Class *ContextManager*
- Class *CvodeException*
- Class *CVodeSolver*
- Class *ExpData*
- Class *FinalStateStorer*
- Class *ForwardProblem*
- Class *IDAException*
- Class *IDASolver*
- Class *IntegrationFailure*
- Class *IntegrationFailureB*
- Class *Model*
- Class *Model\_DAE*
- Class *Model\_ODE*
- Class *ModelContext*
- Class *NewtonFailure*
- Class *NewtonSolver*
- Class *NewtonSolverDense*
- Class *NewtonSolverSparse*
- Class *ReturnData*
- Class *SetupFailure*

- *Class SimulationParameters*
- *Class Solver*
- *Class SteadystateProblem*
- *Class SUNLinSolBand*
- *Class SUNLinSolDense*
- *Class SUNLinSolKLU*
- *Class SUNLinSolPCG*
- *Class SUNLinSolSPBCGS*
- *Class SUNLinSolSPFGMR*
- *Class SUNLinSolSPGMR*
- *Class SUNLinSolSPTFQMR*
- *Class SUNLinSolWrapper*
- *Class SUNMatrixWrapper*
- *Class SUNNonLinSolFixedPoint*
- *Class SUNNonLinSolNewton*
- *Class SUNNonLinSolWrapper*

## Enums

- *Enum BLASLayout*
- *Enum BLASTranspose*
- *Enum FixedParameterContext*
- *Enum InternalSensitivityMethod*
- *Enum InterpolationType*
- *Enum LinearMultistepMethod*
- *Enum LinearSolver*
- *Enum ModelQuantity*
- *Enum NewtonDampingFactorMode*
- *Enum NonlinearSolverIteration*
- *Enum ObservableScaling*
- *Enum ParameterScaling*
- *Enum RDataReporting*
- *Enum SecondOrderMode*
- *Enum SensitivityMethod*
- *Enum SensitivityOrder*
- *Enum SteadyStateContext*
- *Enum SteadyStateSensitivityMode*

- Enum *SteadyStateStatus*

## Functions

- Function *amici::amici\_daxpy*
- Function *amici::amici\_dgemm*
- Function *amici::amici\_dgemv*
- Function *amici::backtraceString*
- Template Function *amici::checkBufferSize*
- Function *amici::checkSigmaPositivity(std::vector<realtype> const &sigmaVector, const char \*vectorName)*
- Function *amici::checkSigmaPositivity(realtype sigma, const char \*sigmaName)*
- Template Function *amici::deserializeFromChar*
- Template Function *amici::deserializeFromString*
- Function *amici::dotProd*
- Function *amici::getScaledParameter*
- Function *amici::getUnscaledParameter*
- Function *amici::linearSum*
- Function *amici::N\_VGetArrayPointerConst*
- Function *amici::operator==(const Model &a, const Model &b)*
- Function *amici::operator==(const ModelDimensions &a, const ModelDimensions &b)*
- Function *amici::operator==(const Solver &a, const Solver &b)*
- Function *amici::operator==(const SimulationParameters &a, const SimulationParameters &b)*
- Function *amici::printErrMsgIdAndTxt*
- Function *amici::printfToString*
- Function *amici::printWarnMsgIdAndTxt*
- Function *amici::regexErrorToString*
- Function *amici::runAmiciSimulation*
- Function *amici::runAmiciSimulations*
- Function *amici::scaleParameters*
- Template Function *amici::serializeToChar*
- Template Function *amici::serializeToStdVec*
- Template Function *amici::serializeToString*
- Template Function *amici::slice(std::vector<T> &data, int index, unsigned size)*
- Template Function *amici::slice(const std::vector<T> &data, int index, unsigned size)*
- Function *amici::unravel\_index(sunindextype i, SUNMatrix m)*
- Function *amici::unravel\_index(size\_t flat\_idx, size\_t num\_cols)*
- Function *amici::unscaleParameters*

- Function *amici::wrapErrHandlerFn*
- Template Function *amici::writeSlice(const gsl::span<const T> slice, gsl::span<T> buffer)*
- Template Function *amici::writeSlice(const std::vector<T> &s, std::vector<T> &b)*
- Template Function *amici::writeSlice(const std::vector<T> &s, gsl::span<T> b)*
- Function *amici::writeSlice(const AmiVector &s, gsl::span<realtype> b)*

## Typedefs

- Typedef *amici::const\_N\_Vector*
- Typedef *amici::outputFunctionType*
- Typedef *amici::realtype*

## Variables

- Variable *amici::AMICI\_CONV\_FAILURE*
- Variable *amici::AMICI\_DAMPING\_FACTOR\_ERROR*
- Variable *amici::AMICI\_DATA\_RETURN*
- Variable *amici::AMICI\_ERR\_FAILURE*
- Variable *amici::AMICI\_ERROR*
- Variable *amici::AMICI\_ILL\_INPUT*
- Variable *amici::AMICI\_MAX\_TIME\_EXCEEDED*
- Variable *amici::AMICI\_NO\_STEADY\_STATE*
- Variable *amici::AMICI\_NORMAL*
- Variable *amici::AMICI\_NOT\_IMPLEMENTED*
- Variable *amici::AMICI\_ONE\_STEP*
- Variable *amici::AMICI\_ONEOUTPUT*
- Variable *amici::AMICI\_PREEQUILIBRATE*
- Variable *amici::AMICI\_RECOVERABLE\_ERROR*
- Variable *amici::AMICI\_RHSFUNC\_FAIL*
- Variable *amici::AMICI\_ROOT\_RETURN*
- Variable *amici::AMICI\_SINGULAR\_JACOBIAN*
- Variable *amici::AMICI\_SUCCESS*
- Variable *amici::AMICI\_TOO\_MUCH\_ACC*
- Variable *amici::AMICI\_TOO\_MUCH\_WORK*
- Variable *amici::AMICI\_UNRECOVERABLE\_ERROR*
- Variable *amici::defaultContext*
- Variable *amici::model\_quantity\_to\_str*

- Variable `amici::pi`

## Namespace `amici::hdf5`

### Contents

- *Functions*

## Functions

- Function `amici::hdf5::attributeExists(H5::H5File const &file, const std::string &optionsObject, const std::string &attributeName)`
- Function `amici::hdf5::attributeExists(H5::H5Object const &object, const std::string &attributeName)`
- Function `amici::hdf5::createAndWriteDouble1DDataset`
- Function `amici::hdf5::createAndWriteDouble2DDataset`
- Function `amici::hdf5::createAndWriteDouble3DDataset`
- Function `amici::hdf5::createAndWriteInt1DDataset`
- Function `amici::hdf5::createAndWriteInt2DDataset`
- Function `amici::hdf5::createGroup`
- Function `amici::hdf5::createOrOpenForWriting`
- Function `amici::hdf5::getDoubleDataset1D`
- Function `amici::hdf5::getDoubleDataset2D`
- Function `amici::hdf5::getDoubleDataset3D`
- Function `amici::hdf5::getDoubleScalarAttribute`
- Function `amici::hdf5::getIntDataset1D`
- Function `amici::hdf5::getIntScalarAttribute`
- Function `amici::hdf5::getStringAttribute`
- Function `amici::hdf5::locationExists(std::string const &filename, std::string const &location)`
- Function `amici::hdf5::locationExists(H5::H5File const &file, std::string const &location)`
- Function `amici::hdf5::readModelDataFromHDF5(std::string const &hdf5file, Model &model, std::string const &datasetPath)`
- Function `amici::hdf5::readModelDataFromHDF5(H5::H5File const &file, Model &model, std::string const &datasetPath)`
- Function `amici::hdf5::readSimulationExpData`
- Function `amici::hdf5::readSolverSettingsFromHDF5(const H5::H5File &file, Solver &solver, std::string const &datasetPath)`
- Function `amici::hdf5::readSolverSettingsFromHDF5(std::string const &hdf5file, Solver &solver, std::string const &datasetPath)`

- Function `amici::hdf5::writeReturnData(const ReturnData &rdata, H5::H5File const &file, const std::string &hdf5Location)`
- Function `amici::hdf5::writeReturnData(const ReturnData &rdata, std::string const &hdf5Filename, const std::string &hdf5Location)`
- Function `amici::hdf5::writeReturnDataDiagnosis`
- Function `amici::hdf5::writeSimulationExpData`
- Function `amici::hdf5::writeSolverSettingsToHDF5(Solver const &solver, std::string const &hdf5Filename, std::string const &hdf5Location)`
- Function `amici::hdf5::writeSolverSettingsToHDF5(Solver const &solver, H5::H5File const &file, std::string const &hdf5Location)`

## Namespace boost

### Contents

- *Namespaces*

## Namespaces

- *Namespace `boost::serialization`*

## Namespace `boost::serialization`

### Contents

- *Functions*

## Functions

- *Template Function `boost::serialization::archiveVector`*
- *Template Function `boost::serialization::serialize(Archive &ar, amici::ReturnData &r, unsigned int version)`*
- *Template Function `boost::serialization::serialize(Archive &ar, amici::Solver &s, unsigned int version)`*
- *Template Function `boost::serialization::serialize(Archive &ar, amici::CNodeSolver &s, unsigned int version)`*
- *Template Function `boost::serialization::serialize(Archive &ar, amici::IDASolver &s, unsigned int version)`*
- *Template Function `boost::serialization::serialize(Archive &ar, amici::Model &m, unsigned int version)`*



## Namespace gsl

### Contents

- *Functions*

## Functions

- *Function* `gsl::make_span(SUNMatrix m)`
- *Function* `gsl::make_span(N_Vector nv)`

## Namespace std

STL namespace.

## Classes and Structs

### Struct ModelDimensions

- Defined in file `include_amici_model_dimensions.h`

## Inheritance Relationships

### Derived Types

- `public amici::Model` (*Class Model*)
- `public amici::ReturnData` (*Class ReturnData*)

### Struct Documentation

`struct amici::ModelDimensions`

Container for model dimensions.

Holds number of states, observables, etc.

Subclassed by *amici::Model*, *amici::ReturnData*

## Public Functions

**ModelDimensions()** = default

Default ctor

```
inline ModelDimensions(const int nx_rdata, const int nxtrue_rdata, const int nx_solver, const int
                        nxtrue_solver, const int nx_solver_reinit, const int np, const int nk, const int ny,
                        const int nytrue, const int nz, const int nztrue, const int ne, const int nJ, const int nw,
                        const int ndwdx, const int ndwdp, const int ndwdw, const int ndxdotdw,
                        std::vector<int> ndJydy, const int ndxrdatadxsolver, const int ndxrdatadtcl, const int
                        ndtotal_cldx_rdata, const int nnz, const int ubw, const int lbw)
```

Constructor with model dimensions.

### Parameters

- **nx\_rdata** – Number of state variables
- **nxtrue\_rdata** – Number of state variables of the non-augmented model
- **nx\_solver** – Number of state variables with conservation laws applied
- **nxtrue\_solver** – Number of state variables of the non-augmented model with conservation laws applied
- **nx\_solver\_reinit** – Number of state variables with conservation laws subject to reinitialization
- **np** – Number of parameters
- **nk** – Number of constants
- **ny** – Number of observables
- **nytrue** – Number of observables of the non-augmented model
- **nz** – Number of event observables
- **nztrue** – Number of event observables of the non-augmented model
- **ne** – Number of events
- **nJ** – Number of objective functions
- **nw** – Number of repeating elements
- **ndwdx** – Number of nonzero elements in the  $\mathbf{x}$  derivative of the repeating elements
- **ndwdp** – Number of nonzero elements in the  $\mathbf{p}$  derivative of the repeating elements
- **ndwdw** – Number of nonzero elements in the  $\mathbf{w}$  derivative of the repeating elements
- **ndxdotdw** – Number of nonzero elements in the  $\mathbf{w}$  derivative of  $\mathbf{x}$  derivative
- **ndJydy** – Number of nonzero elements in the  $\mathbf{y}$  derivative of  $dJy$  (shape **nytrue**)
- **ndxrdatadxsolver** – Number of nonzero elements in the  $\mathbf{x}$  derivative of  $\mathbf{x}_r$  data
- **ndxrdatadtcl** – Number of nonzero elements in the  $\mathbf{tcl}$  derivative of  $\mathbf{x}_r$  data
- **ndtotal\_cldx\_rdata** – Number of nonzero elements in the  $\mathbf{x}_r$  data derivative of  $\mathbf{total}_c$
- **nnz** – Number of nonzero elements in Jacobian
- **ubw** – Upper matrix bandwidth in the Jacobian
- **lbw** – Lower matrix bandwidth in the Jacobian

## Public Members

int **nx\_rdata** = {0}  
 Number of states

int **nxtrue\_rdata** = {0}  
 Number of states in the unaugmented system

int **nx\_solver** = {0}  
 Number of states with conservation laws applied

int **nxtrue\_solver** = {0}  
 Number of states in the unaugmented system with conservation laws applied

int **nx\_solver\_reinit** = {0}  
 Number of solver states subject to reinitialization

int **np** = {0}  
 Number of parameters

int **nk** = {0}  
 Number of constants

int **ny** = {0}  
 Number of observables

int **nytrue** = {0}  
 Number of observables in the unaugmented system

int **nz** = {0}  
 Number of event outputs

int **nztrue** = {0}  
 Number of event outputs in the unaugmented system

int **ne** = {0}  
 Number of events

int **nw** = {0}  
 Number of common expressions

int **ndwdx** = {0}  
 Number of nonzero elements in the **x** derivative of the repeating elements

int **ndwdp** = {0}  
 Number of nonzero elements in the **p** derivative of the repeating elements

int **ndwdw** = {0}  
 Number of nonzero elements in the **w** derivative of the repeating elements

int **ndxdotdw** = {0}  
Number of nonzero elements in the  $w$  derivative of  $x_{dot}$

std::vector<int> **ndJydy**  
Number of nonzero elements in the  $y$  derivative of  $dJy$  (dimension `nytrue`)

int **ndxrdatadxsolver** = {0}  
Number of nonzero elements in the  $x$  derivative of  $x_rdata$

int **ndxrdatadtcl** = {0}  
Number of nonzero elements in the  $tcl$  derivative of  $x_rdata$

int **ndtotal\_cldx\_rdata** = {0}  
Number of nonzero elements in the  $x_rdata$  derivative of  $total_{cl}$

int **nnz** = {0}  
Number of nonzero entries in Jacobian

int **nJ** = {0}  
Dimension of the augmented objective function for 2nd order ASA

int **ubw** = {0}  
Upper bandwidth of the Jacobian

int **lbw** = {0}  
Lower bandwidth of the Jacobian

## Struct ModelState

- Defined in file `_include_amici_model_state.h`

## Struct Documentation

struct amici::ModelState  
Exchange format to store and transfer the state of the model at a specific timepoint.  
This is designed to only encompass the minimal number of attributes that need to be transferred.

## Public Members

std::vector<realtype> **h**  
Flag indicating whether a certain Heaviside function should be active or not (dimension: `ne`)

std::vector<realtype> **total\_cl**  
Total abundances for conservation laws (dimension: `nx_rdata` - `nx_solver`)

```
std::vector<realtype> stotal_cl
    Sensitivities of total abundances for conservation laws (dimension: (nx_rdata-nx_solver) x np, row-
    major)

std::vector<realtype> unscaledParameters
    Unscaled parameters (dimension: np)

std::vector<realtype> fixedParameters
    Constants (dimension: nk)

std::vector<int> plist
    Indexes of parameters wrt to which sensitivities are computed (dimension: nplist)
```

## Struct ModelStateDerived

- Defined in file\_include\_amici\_model\_state.h

## Struct Documentation

```
struct amici::ModelStateDerived
    Storage for amici::Model quantities computed based on amici::ModelState for a specific timepoint.
    Serves as workspace for a model simulation to avoid repeated reallocation.
```

## Public Functions

**ModelStateDerived**() = default

```
explicit ModelStateDerived(ModelDimensions const &dim)
    Constructor from model dimensions.

    Parameters dim – Model dimensions
```

## Public Members

```
SUNMatrixWrapper J_
    Sparse Jacobian (dimension: amici::Model::nnz)

SUNMatrixWrapper JB_
    Sparse Backwards Jacobian (dimension: amici::Model::nnz)

SUNMatrixWrapper dxdotdw_
    Sparse dxdotdw temporary storage (dimension: ndxdotdw)

SUNMatrixWrapper dwdx_
    Sparse dwdx temporary storage (dimension: ndwdx)
```

*SUNMatrixWrapper* **dwdp\_**

Sparse dwdp temporary storage (dimension: ndwdp)

*SUNMatrixWrapper* **M\_**

Dense Mass matrix (dimension: nx\_solver x nx\_solver)

*SUNMatrixWrapper* **dxdotdp\_full**

Temporary storage of dxdotdp\_full data across functions (Python only) (dimension: nplist x nx\_solver, nnz: dynamic, type CSC\_MAT)

*SUNMatrixWrapper* **dxdotdp\_explicit**

Temporary storage of dxdotdp\_explicit data across functions (Python only) (dimension: nplist x nx\_solver, nnz: ndxdotdp\_explicit, type CSC\_MAT)

*SUNMatrixWrapper* **dxdotdp\_implicit**

Temporary storage of dxdotdp\_implicit data across functions, Python-only (dimension: nplist x nx\_solver, nnz: dynamic, type CSC\_MAT)

*SUNMatrixWrapper* **dxdotdx\_explicit**

Temporary storage of dxdotdx\_explicit data across functions (Python only) (dimension: nplist x nx\_solver, nnz: nxdotdotdx\_explicit, type CSC\_MAT)

*SUNMatrixWrapper* **dxdotdx\_implicit**

Temporary storage of dxdotdx\_implicit data across functions, Python-only (dimension: nplist x nx\_solver, nnz: dynamic, type CSC\_MAT)

*SUNMatrixWrapper* **dx\_rdatadx\_solver**

Temporary storage for dx\_rdatadx\_solver (dimension: nx\_rdata x nx\_solver, nnz: ndxrdatadx\_solver, type: CSC\_MAT)

*SUNMatrixWrapper* **dx\_rdatadtcl**

Temporary storage for dx\_rdatadtcl (dimension: nx\_rdata x ncl, nnz: ndxrdatadtclr, type: CSC\_MAT)

*SUNMatrixWrapper* **dtotal\_cldx\_rdata**

Temporary storage for dtotal\_cldx\_rdata (dimension: ncl x nx\_rdata, nnz: ndtotal\_cldx\_rdata, type: CSC\_MAT)

*AmiVectorArray* **dxdotdp** = {0, 0}

Temporary storage of dxdotdp data across functions, Matlab only (dimension: nplist x nx\_solver , row-major)

`std::vector<SUNMatrixWrapper>` **dJydy\_**

Sparse observable derivative of data likelihood, only used if `pythonGenerated == true` (dimension nytrue, nJ x ny, row-major)

`std::vector<realtype>` **dJydy\_matlab\_**

Observable derivative of data likelihood, only used if `pythonGenerated == false` (dimension nJ x ny x nytrue , row-major)

`std::vector<realtype> dJydsigma_`  
 Observable sigma derivative of data likelihood (dimension nJ x ny x nytrue, row-major)

`std::vector<realtype> dJydx_`  
 State derivative of data likelihood (dimension nJ x nx\_solver, row-major)

`std::vector<realtype> dJydp_`  
 Parameter derivative of data likelihood for current timepoint (dimension: nJ x nplist, row-major)

`std::vector<realtype> dJzdz_`  
 event output derivative of event likelihood (dimension nJ x nz x nztrue, row-major)

`std::vector<realtype> dJzdsigma_`  
 event sigma derivative of event likelihood (dimension nJ x nz x nztrue, row-major)

`std::vector<realtype> dJrzdz_`  
 event output derivative of event likelihood at final timepoint (dimension nJ x nz x nztrue, row-major)

`std::vector<realtype> dJrzdsigma_`  
 event sigma derivative of event likelihood at final timepoint (dimension nJ x nz x nztrue, row-major)

`std::vector<realtype> dJzdx_`  
 state derivative of event likelihood (dimension nJ x nx\_solver, row-major)

`std::vector<realtype> dJzdp_`  
 parameter derivative of event likelihood for current timepoint (dimension: nJ x nplist x, row-major)

`std::vector<realtype> dzdx_`  
 state derivative of event output (dimension: nz x nx\_solver, row-major)

`std::vector<realtype> dzdp_`  
 parameter derivative of event output (dimension: nz x nplist, row-major)

`std::vector<realtype> drzdx_`  
 state derivative of event regularization variable (dimension: nz x nx\_solver, row-major)

`std::vector<realtype> drzdp_`  
 parameter derivative of event regularization variable (dimension: nz x nplist, row-major)

`std::vector<realtype> dydp_`  
 parameter derivative of observable (dimension: ny x nplist, row-major)

`std::vector<realtype> dydx_`  
 state derivative of time-resolved observable (dimension: nx\_solver x ny, row-major)

`std::vector<realtype> w_`  
 temporary storage of w data across functions (dimension: nw)

`std::vector<realtype> sx_`  
 temporary storage for flattened sx, (dimension: nx\_solver x nplist, row-major)

`std::vector<realtype> x_rdata_`  
temporary storage for `x_rdata` (dimension: `nx_rdata`)

`std::vector<realtype> sx_rdata_`  
temporary storage for `sx_rdata` slice (dimension: `nx_rdata`)

`std::vector<realtype> y_`  
temporary storage for time-resolved observable (dimension: `ny`)

`std::vector<realtype> sigmay_`  
data standard deviation for current timepoint (dimension: `ny`)

`std::vector<realtype> dsigmaydp_`  
temporary storage for parameter derivative of data standard deviation, (dimension: `ny` x `nplist`, row-major)

`std::vector<realtype> dsigmaydy_`  
temporary storage for observable derivative of data standard deviation, (dimension: `ny` x `ny`, row-major)

`std::vector<realtype> z_`  
temporary storage for event-resolved observable (dimension: `nz`)

`std::vector<realtype> rz_`  
temporary storage for event regularization (dimension: `nz`)

`std::vector<realtype> sigmaz_`  
temporary storage for event standard deviation (dimension: `nz`)

`std::vector<realtype> dsigmazdp_`  
temporary storage for parameter derivative of event standard deviation, (dimension: `nz` x `nplist`, row-major)

`std::vector<realtype> deltax_`  
temporary storage for change in `x` after event (dimension: `nx_solver`)

`std::vector<realtype> deltasx_`  
temporary storage for change in `sx` after event (dimension: `nx_solver` x `nplist`, row-major)

`std::vector<realtype> deltaxB_`  
temporary storage for change in `xB` after event (dimension: `nx_solver`)

`std::vector<realtype> deltaqB_`  
temporary storage for change in `qB` after event (dimension: `nJ` x `nplist`, row-major)

*AmiVector* `x_pos_tmp_ = {0}`  
temporary storage of positified state variables according to `stateIsNonNegative` (dimension: `nx_solver`)



## Struct `SimulationState`

- Defined in `file_include_amici_forwardproblem.h`

## Struct Documentation

struct `amici::SimulationState`

implements an exchange format to store and transfer the state of a simulation at a specific timepoint.

### Public Members

*realtype* **t**  
timepoint

*AmiVector* **x**  
state variables

*AmiVector* **dx**  
state variables

*AmiVectorArray* **sx**  
state variable sensitivity

*ModelState* **state**  
state of the model that was used for simulation

## Class `AbstractModel`

- Defined in `file_include_amici_abstract_model.h`

## Inheritance Relationships

### Derived Type

- public `amici::Model` (*Class Model*)

## Class Documentation

class `amici::AbstractModel`

Abstract base class of *amici::Model* defining functions that need to be implemented in an AMICI model.

Some functions have empty default implementations or throw. This class shall not have any data members.

Subclassed by *amici::Model*

## Public Functions

virtual **~AbstractModel**() = default

virtual std::unique\_ptr<*Solver*> **getSolver**() = 0

Retrieves the solver object.

**Returns** The *Solver* instance

virtual void **froot**(const *realtype* t, const *AmiVector* &x, const *AmiVector* &dx, gsl::span<*realtype*> root) = 0

Root function.

### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **root** – array to which values of the root function will be written

virtual void **fxdot**(const *realtype* t, const *AmiVector* &x, const *AmiVector* &dx, *AmiVector* &xdot) = 0

Residual function.

### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – array to which values of the residual function will be written

virtual void **fsxdot**(const *realtype* t, const *AmiVector* &x, const *AmiVector* &dx, int ip, const *AmiVector* &sx, const *AmiVector* &sdx, *AmiVector* &sxdot) = 0

Sensitivity Residual function.

### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **ip** – parameter index
- **sx** – sensitivity state
- **sdx** – time derivative of sensitivity state (DAE only)
- **sxdot** – array to which values of the sensitivity residual function will be written

virtual void **fxBdot\_ss**(const *realtype* t, const *AmiVector* &xB, const *AmiVector* &dxB, *AmiVector* &xBdot) = 0

Residual function backward when running in steady state mode.

### Parameters

- **t** – time
- **xB** – adjoint state
- **dxB** – time derivative of state (DAE only)

- **xBdot** – array to which values of the residual function will be written

virtual void **fJSparseB\_ss**(SUNMatrix JB) = 0

Sparse Jacobian function backward, steady state case.

**Parameters JB** – sparse matrix to which values of the Jacobian will be written

virtual void **writeSteadystateJB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot) = 0

Computes the sparse backward Jacobian for steadystate integration and writes it to the model member.

**Parameters**

- **t** – timepoint
- **cj** – scalar in Jacobian
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint state right hand side

virtual void **fJ**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, SUNMatrix J) = 0

Dense Jacobian function.

**Parameters**

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **J** – dense matrix to which values of the jacobian will be written

virtual void **fJB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot, SUNMatrix JB) = 0

Dense Jacobian function.

**Parameters**

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side (unused)
- **JB** – dense matrix to which values of the jacobian will be written

virtual void **fJSparse**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, SUNMatrix J) = 0

Sparse Jacobian function.

#### Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **J** – sparse matrix to which values of the Jacobian will be written

virtual void **fJSparseB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot, SUNMatrix JB) = 0

Sparse Jacobian function.

#### Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side (unused)
- **JB** – dense matrix to which values of the jacobian will be written

virtual void **fJDiag**(const *realtype* t, *AmiVector* &Jdiag, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx) = 0

Diagonal Jacobian function.

#### Parameters

- **t** – time
- **Jdiag** – array to which the diagonal of the Jacobian will be written
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)

virtual void **fdxdotdp**(const *realtype* t, const *AmiVector* &x, const *AmiVector* &dx) = 0

Model-specific sparse implementation of explicit parameter derivative of right hand side.

#### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)

virtual void **fJv**(const *realtype* t, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, const *AmiVector* &v, *AmiVector* &nJv, *realtype* cj) = 0

Jacobian multiply function.

#### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **v** – multiplication vector (unused)
- **nJv** – array to which result of multiplication will be written
- **cj** – scaling factor (inverse of timestep, DAE only)

virtual std::string **getAmiciVersion**() const

Returns the AMICI version that was used to generate the model.

**Returns** AMICI version string

virtual std::string **getAmiciCommit**() const

Returns the AMICI commit that was used to generate the model.

**Returns** AMICI commit string

virtual void **fx0**(*realtype* \*x0, const *realtype* t, const *realtype* \*p, const *realtype* \*k)

Model-specific implementation of fx0.

#### Parameters

- **x0** – initial state
- **t** – initial time
- **p** – parameter vector
- **k** – constant vector

virtual bool **isFixedParameterStateReinitializationAllowed**() const

Function indicating whether reinitialization of states depending on fixed parameters is permissible.

**Returns** flag indicating whether reinitialization of states depending on fixed parameters is permissible

virtual void **fx0\_fixedParameters**(*realtype* \*x0, const *realtype* t, const *realtype* \*p, const *realtype* \*k, gsl::span<const int> reinitialization\_state\_idx)

Model-specific implementation of fx0\_fixedParameters.

#### Parameters

- **x0** – initial state
- **t** – initial time
- **p** – parameter vector
- **k** – constant vector
- **reinitialization\_state\_idx** – Indices of states to be reinitialized based on provided constants / fixed parameters.

```
virtual void fsx0_fixedParameters(realtype *sx0, const realtype t, const realtype *x0, const realtype *p,  
                                const realtype *k, int ip, gsl::span<const int>  
                                reinitialization_state_idxs)
```

Model-specific implementation of fsx0\_fixedParameters.

#### Parameters

- **sx0** – initial state sensitivities
- **t** – initial time
- **x0** – initial state
- **p** – parameter vector
- **k** – constant vector
- **ip** – sensitivity index
- **reinitialization\_state\_idxs** – Indices of states to be reinitialized based on provided constants / fixed parameters.

```
virtual void fsx0(realtype *sx0, const realtype t, const realtype *x0, const realtype *p, const realtype *k, int  
                  ip)
```

Model-specific implementation of fsx0.

#### Parameters

- **sx0** – initial state sensitivities
- **t** – initial time
- **x0** – initial state
- **p** – parameter vector
- **k** – constant vector
- **ip** – sensitivity index

```
virtual void fdx0(AmiVector &x0, AmiVector &dx0)
```

Initial value for time derivative of states (only necessary for DAEs)

#### Parameters

- **x0** – Vector with the initial states
- **dx0** – Vector to which the initial derivative states will be written (only DAE)

```
virtual void fstau(realtype *stau, const realtype t, const realtype *x, const realtype *p, const realtype *k,  
                  const realtype *h, const realtype *tcl, const realtype *sx, int ip, int ie)
```

Model-specific implementation of fstau.

#### Parameters

- **stau** – total derivative of event timepoint
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **tcl** – total abundances for conservation laws

- **sx** – current state sensitivity
- **ip** – sensitivity index
- **ie** – event index

virtual void **fy**(*realtype* \*y, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w)

Model-specific implementation of fy.

#### Parameters

- **y** – model output at current timepoint
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **w** – repeating elements vector

virtual void **fdydp**(*realtype* \*dydp, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ip, const *realtype* \*w, const *realtype* \*dwdp)

Model-specific implementation of fdydp (MATLAB-only)

#### Parameters

- **dydp** – partial derivative of observables y w.r.t. model parameters p
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested
- **w** – repeating elements vector
- **dwdp** – Recurring terms in xdot, parameter derivative

virtual void **fdydp**(*realtype* \*dydp, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ip, const *realtype* \*w, const *realtype* \*tcl, const *realtype* \*dtcldp)

Model-specific implementation of fdydp (Python)

#### Parameters

- **dydp** – partial derivative of observables y w.r.t. model parameters p
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested

- **w** – repeating elements vector
- **tc1** – total abundances for conservation laws
- **dtcldp** – Sensitivities of total abundances for conservation laws

virtual void **fdydx**(*realtype* \*dydx, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k,  
const *realtype* \*h, const *realtype* \*w, const *realtype* \*dwdx)

Model-specific implementation of fdydx.

#### Parameters

- **dydx** – partial derivative of observables y w.r.t. model states x
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **w** – repeating elements vector
- **dwdx** – Recurring terms in xdot, state derivative

virtual void **fz**(*realtype* \*z, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k,  
const *realtype* \*h)

Model-specific implementation of fz.

#### Parameters

- **z** – value of event output
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fsz**(*realtype* \*sz, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k,  
const *realtype* \*h, const *realtype* \*sx, int ip)

Model-specific implementation of fsz.

#### Parameters

- **sz** – Sensitivity of rz, total derivative
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **sx** – current state sensitivity



- **ip** – sensitivity index

virtual void **frz**(*realtype* \*rz, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h)

Model-specific implementation of frz.

#### Parameters

- **rz** – value of root function at current timepoint (non-output events not included)
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fsrz**(*realtype* \*srz, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*sx, int ip)

Model-specific implementation of fsrz.

#### Parameters

- **srz** – Sensitivity of rz, total derivative
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **sx** – current state sensitivity
- **h** – Heaviside vector
- **ip** – sensitivity index

virtual void **fdzdp**(*realtype* \*dzdp, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ip)

Model-specific implementation of fdzdp.

#### Parameters

- **dzdp** – partial derivative of event-resolved output z w.r.t. model parameters p
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested

virtual void **fdzdx**(*realtype* \*dzdx, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h)

Model-specific implementation of fdzdx.

#### Parameters

- **dzdx** – partial derivative of event-resolved output z w.r.t. model states x
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fdrzdp**(*realtype* \*drzdp, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ip)

Model-specific implementation of fdrzdp.

#### Parameters

- **drzdp** – partial derivative of root output rz w.r.t. model parameters p
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested

virtual void **fdrzdx**(*realtype* \*drzdx, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h)

Model-specific implementation of fdrzdx.

#### Parameters

- **drzdx** – partial derivative of root output rz w.r.t. model states x
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fdeltax**(*realtype* \*deltax, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ie, const *realtype* \*xdot, const *realtype* \*xdot\_old)

Model-specific implementation of fdeltax.

#### Parameters

- **deltax** – state update

- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ie** – event index
- **xdot** – new model right hand side
- **xdot\_old** – previous model right hand side

```
virtual void fdeltasx(realtype *deltasx, const realtype t, const realtype *x, const realtype *p, const realtype
                    *k, const realtype *h, const realtype *w, int ip, int ie, const realtype *xdot, const
                    realtype *xdot_old, const realtype *sx, const realtype *stau, const realtype *tcl)
```

Model-specific implementation of fdeltasx.

#### Parameters

- **deltasx** – sensitivity update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **w** – repeating elements vector
- **ip** – sensitivity index
- **ie** – event index
- **xdot** – new model right hand side
- **xdot\_old** – previous model right hand side
- **sx** – state sensitivity
- **stau** – event-time sensitivity
- **tcl** – total abundances for conservation laws

```
virtual void fdeltaxB(realtype *deltaxB, const realtype t, const realtype *x, const realtype *p, const realtype
                    *k, const realtype *h, int ie, const realtype *xdot, const realtype *xdot_old, const
                    realtype *xB)
```

Model-specific implementation of fdeltaxB.

#### Parameters

- **deltaxB** – adjoint state update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

- **ie** – event index
- **xdot** – new model right hand side
- **xdot\_old** – previous model right hand side
- **xB** – current adjoint state

virtual void **fdeltaqB**(*realtype* \*deltaqB, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ip, int ie, const *realtype* \*xdot, const *realtype* \*xdot\_old, const *realtype* \*xB)

Model-specific implementation of fdeltaqB.

#### Parameters

- **deltaqB** – sensitivity update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – sensitivity index
- **ie** – event index
- **xdot** – new model right hand side
- **xdot\_old** – previous model right hand side
- **xB** – adjoint state

virtual void **fsigmay**(*realtype* \*sigmay, const *realtype* t, const *realtype* \*p, const *realtype* \*k, const *realtype* \*y)

Model-specific implementation of fsigmay.

#### Parameters

- **sigmay** – standard deviation of measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint t

virtual void **fdsigmaydp**(*realtype* \*dsigmaydp, const *realtype* t, const *realtype* \*p, const *realtype* \*k, const *realtype* \*y, int ip)

Model-specific implementation of fdsigmaydp.

#### Parameters

- **dsigmaydp** – partial derivative of standard deviation of measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint t

- **ip** – sensitivity index

virtual void **fdsigmaydy**(*realtype* \*dsigmaydy, const *realtype* t, const *realtype* \*p, const *realtype* \*k, const *realtype* \*y)

Model-specific implementation of fsigmay.

#### Parameters

- **dsigmaydy** – partial derivative of standard deviation of measurements w.r.t. model outputs
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint t

virtual void **fsigmaz**(*realtype* \*sigmaz, const *realtype* t, const *realtype* \*p, const *realtype* \*k)

Model-specific implementation of fsigmaz.

#### Parameters

- **sigmaz** – standard deviation of event measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector

virtual void **fdsigmazdp**(*realtype* \*dsigmazdp, const *realtype* t, const *realtype* \*p, const *realtype* \*k, int ip)

Model-specific implementation of fsigmaz.

#### Parameters

- **dsigmazdp** – partial derivative of standard deviation of event measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **ip** – sensitivity index

virtual void **fJy**(*realtype* \*nllh, int iy, const *realtype* \*p, const *realtype* \*k, const *realtype* \*y, const *realtype* \*sigmay, const *realtype* \*my)

Model-specific implementation of fJy.

#### Parameters

- **nllh** – negative log-likelihood for measurements y
- **iy** – output index
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint
- **sigmay** – measurement standard deviation at timepoint
- **my** – measurements at timepoint

virtual void **fJz**(*realtype* \*nllh, int iz, const *realtype* \*p, const *realtype* \*k, const *realtype* \*z, const *realtype* \*sigmaz, const *realtype* \*mz)

Model-specific implementation of fJz.

**Parameters**

- **nllh** – negative log-likelihood for event measurements  $z$
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint
- **mz** – event measurements at timepoint

virtual void **fJrz**(*realtype* \*nllh, int iz, const *realtype* \*p, const *realtype* \*k, const *realtype* \*z, const *realtype* \*sigmaz)

Model-specific implementation of fJrz.

**Parameters**

- **nllh** – regularization for event measurements  $z$
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint

virtual void **fdJydy**(*realtype* \*dJydy, int iy, const *realtype* \*p, const *realtype* \*k, const *realtype* \*y, const *realtype* \*sigmay, const *realtype* \*my)

Model-specific implementation of fdJydy.

**Parameters**

- **dJydy** – partial derivative of time-resolved measurement negative log-likelihood  $J_y$
- **iy** – output index
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint
- **sigmay** – measurement standard deviation at timepoint
- **my** – measurement at timepoint

virtual void **fdJydy\_colptrs**(*SUNMatrixWrapper* &dJydy, int index)

Model-specific implementation of fdJydy colptrs.

**Parameters**

- **dJydy** – sparse matrix to which colptrs will be written
- **index** – ytrue index

virtual void **fdJydy\_rowvals**(*SUNMatrixWrapper* &dJydy, int index)

Model-specific implementation of fdJydy rowvals.

**Parameters**

- **dJydy** – sparse matrix to which rowvals will be written

- **index** – ytrue index

virtual void **fdJydsigma**(*realtype* \*dJydsigma, int iy, const *realtype* \*p, const *realtype* \*k, const *realtype* \*y, const *realtype* \*sigmay, const *realtype* \*my)

Model-specific implementation of fdJydsigma.

#### Parameters

- **dJydsigma** – Sensitivity of time-resolved measurement negative log-likelihood Jy w.r.t. standard deviation sigmay
- **iy** – output index
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint
- **sigmay** – measurement standard deviation at timepoint
- **my** – measurement at timepoint

virtual void **fdJzdz**(*realtype* \*dJzdz, int iz, const *realtype* \*p, const *realtype* \*k, const *realtype* \*z, const *realtype* \*sigmaz, const *realtype* \*mz)

Model-specific implementation of fdJzdz.

#### Parameters

- **dJzdz** – partial derivative of event measurement negative log-likelihood Jz
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint
- **mz** – event measurement at timepoint

virtual void **fdJzdsigma**(*realtype* \*dJzdsigma, int iz, const *realtype* \*p, const *realtype* \*k, const *realtype* \*z, const *realtype* \*sigmaz, const *realtype* \*mz)

Model-specific implementation of fdJzdsigma.

#### Parameters

- **dJzdsigma** – Sensitivity of event measurement negative log-likelihood Jz w.r.t. standard deviation sigmaz
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint
- **mz** – event measurement at timepoint

virtual void **fdJrzdz**(*realtype* \*dJrzdz, int iz, const *realtype* \*p, const *realtype* \*k, const *realtype* \*rz, const *realtype* \*sigmaz)

Model-specific implementation of fdJrzdz.

**Parameters**

- **dJrzd** – partial derivative of event penalization Jrz
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **rz** – model root output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint

virtual void **fdJrzdsigma**(*realtype* \*dJrzdsigma, int iz, const *realtype* \*p, const *realtype* \*k, const *realtype* \*rz, const *realtype* \*sigmaz)

Model-specific implementation of fdJrzdsigma.

**Parameters**

- **dJrzdsigma** – Sensitivity of event penalization Jrz w.r.t. standard deviation sigma
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **rz** – model root output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint

virtual void **fw**(*realtype* \*w, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*tcl)

Model-specific implementation of fw.

**Parameters**

- **w** – Recurring terms in xdot
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **tcl** – total abundances for conservation laws

virtual void **fdwdp**(*realtype* \*dwdp, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w, const *realtype* \*tcl, const *realtype* \*stcl)

Model-specific sparse implementation of dwdp.

**Parameters**

- **dwdp** – Recurring terms in xdot, parameter derivative
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector



- **w** – vector with helper variables
- **tcl** – total abundances for conservation laws
- **stcl** – sensitivities of total abundances for conservation laws

virtual void **fdwdp\_colptrs**(*SUNMatrixWrapper* &dwdp)

Model-specific implementation for dwdp, column pointers.

**Parameters** **dwdp** – sparse matrix to which colptrs will be written

virtual void **fdwdp\_rowvals**(*SUNMatrixWrapper* &dwdp)

Model-specific implementation for dwdp, row values.

**Parameters** **dwdp** – sparse matrix to which rowvals will be written

virtual void **fdwdp**(*realtype* \*dwdp, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k,  
const *realtype* \*h, const *realtype* \*w, const *realtype* \*tcl, const *realtype* \*stcl, int ip)

Model-specific sensitivity implementation of dwdp.

**Parameters**

- **dwdp** – Recurring terms in xdot, parameter derivative
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – total abundances for conservation laws
- **stcl** – sensitivities of total abundances for conservation laws
- **ip** – sensitivity parameter index

virtual void **fdwdx**(*realtype* \*dwdx, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k,  
const *realtype* \*h, const *realtype* \*w, const *realtype* \*tcl)

Model-specific implementation of dwdx, data part.

**Parameters**

- **dwdx** – Recurring terms in xdot, state derivative
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – total abundances for conservation laws

virtual void **fdwdx\_colptrs**(*SUNMatrixWrapper* &dwdx)

Model-specific implementation for dwdx, column pointers.

**Parameters** **dwdx** – sparse matrix to which colptrs will be written

virtual void **fdwdx\_rowvals**(*SUNMatrixWrapper* &dwdx)

Model-specific implementation for dwdx, row values.

**Parameters** **dwdx** – sparse matrix to which rowvals will be written

virtual void **fdwdw**(*realtype* \*dwdw, *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w, const *realtype* \*tcl)

Model-specific implementation of fdwdw, no w chainrule (Py)

**Parameters**

- **dwdw** – partial derivative w wrt w
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – Total abundances for conservation laws

virtual void **fdwdw\_colptrs**(*SUNMatrixWrapper* &dwdw)

Model-specific implementation of fdwdw, colptrs part.

**Parameters** **dwdw** – sparse matrix to which colptrs will be written

virtual void **fdwdw\_rowvals**(*SUNMatrixWrapper* &dwdw)

Model-specific implementation of fdwdw, rowvals part.

**Parameters** **dwdw** – sparse matrix to which rowvals will be written

virtual void **fdx\_rdatadx\_solver**(*realtype* \*dx\_rdatadx\_solver, const *realtype* \*x, const *realtype* \*tcl, const *realtype* \*p, const *realtype* \*k)

Compute dx\_rdata / dx\_solver.

**Parameters**

- **dx\_rdatadx\_solver** – dx\_rdata / dx\_solver
- **p** – parameter vector
- **k** – constant vector
- **x** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws

virtual void **fdx\_rdatadx\_solver\_colptrs**(*SUNMatrixWrapper* &dx\_rdatadx\_solver)

Model-specific implementation of fdx\_rdatadx\_solver, colptrs part.

**Parameters** **dx\_rdatadx\_solver** – sparse matrix to which colptrs will be written

virtual void **fdx\_rdatadx\_solver\_rowvals**(*SUNMatrixWrapper* &dx\_rdatadx\_solver)

Model-specific implementation of fdx\_rdatadx\_solver, rowvals part.

**Parameters** **dx\_rdatadx\_solver** – sparse matrix to which rowvals will be written

virtual void **fdx\_rdatadp**(*realtype* \*dx\_rdatadp, const *realtype* \*x, const *realtype* \*tcl, const *realtype* \*p, const *realtype* \*k, const int ip)

Compute dx\_rdata / dp.

**Parameters**

- **dx\_rdatadp** –  $dx\_rdata / dp$
- **p** – parameter vector
- **k** – constant vector
- **x** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws
- **ip** – Sensitivity index

virtual void **fdx\_rdatadtcl**(*realtype* \*dx\_rdatadtcl, const *realtype* \*x, const *realtype* \*tcl, const *realtype* \*p, const *realtype* \*k)

Compute  $dx\_rdata / dtcl$ .

#### Parameters

- **dx\_rdatadtcl** –  $dx\_rdata / dtcl$
- **p** – parameter vector
- **k** – constant vector
- **x** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws

virtual void **fdx\_rdatadtcl\_colptrs**(*SUNMatrixWrapper* &dx\_rdatadtcl)

Model-specific implementation of `fdx_rdatadtcl`, `colptrs` part.

**Parameters** **dx\_rdatadtcl** – sparse matrix to which `colptrs` will be written

virtual void **fdx\_rdatadtcl\_rowvals**(*SUNMatrixWrapper* &dx\_rdatadtcl)

Model-specific implementation of `fdx_rdatadtcl`, `rowvals` part.

**Parameters** **dx\_rdatadtcl** – sparse matrix to which `rowvals` will be written

virtual void **fdtotal\_cldp**(*realtype* \*dtotal\_cldp, const *realtype* \*x\_rdata, const *realtype* \*p, const *realtype* \*k, const int ip)

Compute  $dtotal\_cl / dp$ .

#### Parameters

- **dtotal\_cldp** –  $dtotal\_cl / dp$
- **x\_rdata** – State variables with conservation laws applied
- **p** – parameter vector
- **k** – constant vector
- **ip** – Sensitivity index

virtual void **fdtotal\_cldx\_rdata**(*realtype* \*dtotal\_cldx\_rdata, const *realtype* \*x\_rdata, const *realtype* \*p, const *realtype* \*k, const *realtype* \*tcl)

Compute  $dtotal\_cl / dx\_rdata$ .

#### Parameters

- **dtotal\_cldx\_rdata** –  $dtotal\_cl / dx\_rdata$
- **x\_rdata** – State variables with conservation laws applied
- **p** – parameter vector
- **k** – constant vector
- **tcl** – Total abundances for conservation laws

virtual void **fdtotal\_cldx\_rdata\_colptrs**(*SUNMatrixWrapper* &dtotal\_cldx\_rdata)  
Model-specific implementation of fdtotal\_cldx\_rdata, colptrs part.

**Parameters** **dtotal\_cldx\_rdata** – sparse matrix to which colptrs will be written

virtual void **fdtotal\_cldx\_rdata\_rowvals**(*SUNMatrixWrapper* &dtotal\_cldx\_rdata)  
Model-specific implementation of fdtotal\_cldx\_rdata, rowvals part.

**Parameters** **dtotal\_cldx\_rdata** – sparse matrix to which rowvals will be written

## Class AmiciApplication

- Defined in file\_include\_amici\_amici.h

## Class Documentation

class amici::AmiciApplication

Main class for making calls to AMICI.

This class is used to provide separate AMICI contexts, for example, for use in multi-threaded applications where different threads want to use AMICI with different settings, such custom logging functions.

NOTE: For this moment, the context object needs to be set manually to any *Model* and *Solver* object. If not set, they will use the default output channel.

## Public Functions

**AmiciApplication**() = default

std::unique\_ptr<*ReturnData*> **runAmiciSimulation**(*Solver* &solver, const *ExpData* \*edata, *Model* &model,  
bool rethrow = false)

Core integration routine. Initializes the solver and runs the forward and backward problem.

### Parameters

- **solver** – *Solver* instance
- **edata** – pointer to experimental data object
- **model** – model specification object
- **rethrow** – rethrow integration exceptions?

**Returns** rdata pointer to return data object

std::vector<std::unique\_ptr<*ReturnData*>> **runAmiciSimulations**(*Solver* const &solver, const  
std::vector<*ExpData*\*> &edatas, *Model*  
const &model, bool failfast, int  
num\_threads)

Same as runAmiciSimulation, but for multiple *ExpData* instances.

### Parameters

- **solver** – *Solver* instance
- **edatas** – experimental data objects
- **model** – model specification object

- **failfast** – flag to allow early termination
- **num\_threads** – number of threads for parallel execution

**Returns** vector of pointers to return data objects

void **warningF**(const char \*identifier, const char \*format, ...) const  
printf interface to *warning()*

**Parameters**

- **identifier** – warning identifier
- **format** – string with warning message printf-style format
- ... – arguments to be formatted

void **errorF**(const char \*identifier, const char \*format, ...) const  
printf interface to *error()*

**Parameters**

- **identifier** – warning identifier
- **format** – string with error message printf-style format
- ... – arguments to be formatted

int **checkFinite**(gsl::span<const *realtype*> array, const char \*fun)  
Checks the values in an array for NaNs and Infs.

**Parameters**

- **array** – array
- **fun** – name of calling function

**Returns** AMICI\_RECOVERABLE\_ERROR if a NaN/Inf value was found, AMICI\_SUCCESS otherwise

## Public Members

*outputFunctionType* **warning** = *printWarnMsgIdAndTxt*  
Function to process warnings

*outputFunctionType* **error** = *printErrMsgIdAndTxt*  
Function to process errors

## Class AmiException

- Defined in file\_include\_amici\_exception.h

## Inheritance Relationships

### Base Type

- `public std::exception`

### Derived Types

- `public amici::CvodeException` (*Class CvodeException*)
- `public amici::IDAException` (*Class IDAException*)
- `public amici::IntegrationFailure` (*Class IntegrationFailure*)
- `public amici::IntegrationFailureB` (*Class IntegrationFailureB*)
- `public amici::NewtonFailure` (*Class NewtonFailure*)
- `public amici::SetupFailure` (*Class SetupFailure*)

## Class Documentation

class `amici::AmiException` : `public std::exception`  
AMICI exception class.

Has a printf style interface to allow easy generation of error messages

Subclassed by `amici::CvodeException`, `amici::IDAException`, `amici::IntegrationFailure`, `amici::IntegrationFailureB`, `amici::NewtonFailure`, `amici::SetupFailure`

### Public Functions

#### **AmiException()**

Constructor with printf style interface.

##### **Parameters**

- **fmt** – error message with printf format
- ... – printf formatting variables

explicit **AmiException**(char const \*fmt, ...)

Constructor with printf style interface.

##### **Parameters**

- **fmt** – error message with printf format
- ... – printf formatting variables

const char \***what**() const noexcept override

Override of default error message function.

**Returns** msg error message

const char \***getBacktrace**() const

Returns the stored backtrace.

**Returns** trace backtrace

void **storeBacktrace**(int nMaxFrames)

Stores the current backtrace.

**Parameters** **nMaxFrames** – number of frames to go back in stacktrace

### Protected Functions

void **storeMessage**(const char \*fmt, va\_list argptr)

Store the provided message.

**Parameters**

- **fmt** – error message with printf format
- **argptr** – pointer to variadic argument list

### Class AmiVector

- Defined in file\_include\_amici\_vector.h

### Class Documentation

class amici::AmiVector

*AmiVector* class provides a generic interface to the NVector\_Serial struct

### Public Functions

**AmiVector**() = default

Default constructor.

inline explicit **AmiVector**(const long int length)

empty constructor

Creates an std::vector<realtype> and attaches the data pointer to a newly created N\_Vector\_Serial. Using N\_VMake\_Serial ensures that the N\_Vector module does not try to deallocate the data vector when calling N\_VDestroy\_Serial

**Parameters** **length** – number of elements in vector

inline explicit **AmiVector**(std::vector<realtype> rvec)

constructor from std::vector,

Moves data from std::vector and constructs an nvec that points to the data

**Parameters** **rvec** – vector from which the data will be moved

inline explicit **AmiVector**(gsl::span<realtype> rvec)

constructor from gsl::span,

Copy data from gsl::span and constructs a vector

**Parameters** **rvec** – vector from which the data will be copied

inline **AmiVector**(const *AmiVector* &vold)

copy constructor

**Parameters** **vold** – vector from which the data will be copied

inline **AmiVector**(*AmiVector* &&other) noexcept  
 move constructor

**Parameters** **other** – vector from which the data will be moved

**~AmiVector**()  
 destructor

*AmiVector* &**operator**=(*AmiVector* const &other)  
 copy assignment operator

**Parameters** **other** – right hand side

**Returns** left hand side

inline *AmiVector* &**operator**\*=(*AmiVector* const &multiplier)  
 operator \*= (element-wise multiplication)

**Parameters** **multiplier** – multiplier

**Returns** result

inline *AmiVector* &**operator**/=(*AmiVector* const &divisor)  
 operator /= (element-wise division)

**Parameters** **divisor** – divisor

**Returns** result

inline auto **begin**()  
 Returns an iterator that points to the first element of the vector.

**Returns** iterator that points to the first element

inline auto **end**()  
 Returns an iterator that points to one element after the last element of the vector.

**Returns** iterator that points to one element after the last element

*realtype* \***data**()  
 data accessor

**Returns** pointer to data array

const *realtype* \***data**() const  
 const data accessor

**Returns** const pointer to data array

N\_Vector **getNVector**()  
 N\_Vector accessor.

**Returns** N\_Vector

const N\_Vector **getNVector**() const  
 N\_Vector accessor.

**Returns** N\_Vector

std::vector<*realtype*> const &**getVector**() const  
 Vector accessor.

**Returns** Vector

int **getLength**() const  
 returns the length of the vector



**Returns** length

void **zero**()

fills vector with zero values

void **minus**()

changes the sign of data elements

void **set**(*realtype* val)

sets all data elements to a specific value

**Parameters** **val** – value for data elements

*realtype* &**operator**[](int pos)

accessor to data elements of the vector

**Parameters** **pos** – index of element

**Returns** element

*realtype* &**at**(int pos)

accessor to data elements of the vector

**Parameters** **pos** – index of element

**Returns** element

const *realtype* &**at**(int pos) const

accessor to data elements of the vector

**Parameters** **pos** – index of element

**Returns** element

void **copy**(const *AmiVector* &other)

copies data from another *AmiVector*

**Parameters** **other** – data source

inline void **abs**()

Take absolute value (in-place)

## Class *AmiVectorArray*

- Defined in file\_include\_amici\_vector.h

## Class Documentation

class amici::**AmiVectorArray**

*AmiVectorArray* class.

Provides a generic interface to arrays of NVector\_Serial structs

## Public Functions

**AmiVectorArray()** = default

Default constructor.

**AmiVectorArray**(long int length\_inner, long int length\_outer)

empty constructor

Creates an `std::vector<realtype>` and attaches the data pointer to a newly created `N_VectorArray` using `CloneVectorArrayEmpty` ensures that the `N_Vector` module does not try to deallocate the data vector when calling `N_VDestroyVectorArray_Serial`

### Parameters

- **length\_inner** – length of vectors
- **length\_outer** – number of vectors

**AmiVectorArray**(const *AmiVectorArray* &vaold)

copy constructor

**Parameters** **vaold** – object to copy from

**~AmiVectorArray()** = default

*AmiVectorArray* &**operator=**(*AmiVectorArray* const &other)

copy assignment operator

**Parameters** **other** – right hand side

**Returns** left hand side

*realtype* \***data**(int pos)

accessor to data of *AmiVector* elements

**Parameters** **pos** – index of *AmiVector*

**Returns** pointer to data array

const *realtype* \***data**(int pos) const

const accessor to data of *AmiVector* elements

**Parameters** **pos** – index of *AmiVector*

**Returns** const pointer to data array

*realtype* &**at**(int ipos, int jpos)

accessor to elements of *AmiVector* elements

### Parameters

- **ipos** – inner index in *AmiVector*
- **jpos** – outer index in *AmiVectorArray*

**Returns** element

const *realtype* &**at**(int ipos, int jpos) const

const accessor to elements of *AmiVector* elements

### Parameters

- **ipos** – inner index in *AmiVector*
- **jpos** – outer index in *AmiVectorArray*

**Returns** element

`N_Vector *getNVectorArray()`  
accessor to `NVectorArray`

**Returns** `N_VectorArray`

`N_Vector getNVector(int pos)`  
accessor to `NVector` element

**Parameters** `pos` – index of corresponding *AmiVector*

**Returns** `N_Vector`

`const N_Vector getNVector(int pos) const`  
const accessor to `NVector` element

**Parameters** `pos` – index of corresponding *AmiVector*

**Returns** `N_Vector`

`AmiVector &operator[] (int pos)`  
accessor to *AmiVector* elements

**Parameters** `pos` – index of *AmiVector*

**Returns** *AmiVector*

`const AmiVector &operator[] (int pos) const`  
const accessor to *AmiVector* elements

**Parameters** `pos` – index of *AmiVector*

**Returns** `const AmiVector`

`int getLength() const`  
length of *AmiVectorArray*

**Returns** length

`void zero()`  
set every *AmiVector* in *AmiVectorArray* to zero

`void flatten_to_vector(std::vector<realtype> &vec) const`  
flattens the *AmiVectorArray* to a vector in row-major format

**Parameters** `vec` – vector into which the *AmiVectorArray* will be flattened. Must have length equal to number of elements.

`void copy(const AmiVectorArray &other)`  
copies data from another *AmiVectorArray*

**Parameters** `other` – data source

## Class BackwardProblem

- Defined in file `_include_amici_backwardproblem.h`

## Class Documentation

class `amici::BackwardProblem`

class to solve backwards problems.

solves the backwards problem for adjoint sensitivity analysis and handles events and data-points

### Public Functions

explicit **BackwardProblem**(const *ForwardProblem* &fwd, const *SteadystateProblem* \*posteq)

Construct backward problem from forward problem.

#### Parameters

- **fwd** – pointer to corresponding forward problem
- **posteq** – pointer to postequilibration problem, can be nullptr

void **workBackwardProblem**()

Solve the backward problem.

If adjoint sensitivities are enabled this will also compute sensitivities. `workForwardProblem` must be called before this is function is called.

inline *realtype* **gett**() const

Accessor for current time t.

#### Returns t

inline int **getwhich**() const

Accessor for which.

#### Returns which

inline int \***getwhichptr**()

Accessor for pointer to which.

#### Returns which

inline std::vector<*realtype*> const &**getdJydx**() const

Accessor for dJydx.

#### Returns dJydx

inline *AmiVector* const &**getAdjointState**() const

Accessor for xB.

#### Returns xB

inline *AmiVector* const &**getAdjointQuadrature**() const

Accessor for xQB.

#### Returns xQB

## Class ConditionContext

- Defined in file\_include\_amici\_edata.h

## Inheritance Relationships

### Base Type

- public amici::ContextManager (*Class ContextManager*)

## Class Documentation

class amici::ConditionContext : public amici::ContextManager

The *ConditionContext* class applies condition-specific *amici::Model* settings and restores them when going out of scope.

### Public Functions

explicit ConditionContext(*Model* \*model, const *ExpData* \*edata = nullptr, *FixedParameterContext* fpc = *FixedParameterContext::simulation*)

Apply condition-specific settings from edata to model while keeping a backup of the original values.

#### Parameters

- **model** –
- **edata** –
- **fpc** – flag indicating which fixedParameter from edata to apply

*ConditionContext* &operator=(const *ConditionContext* &other) = delete

~ConditionContext()

void applyCondition(const *ExpData* \*edata, *FixedParameterContext* fpc)

Apply condition-specific settings from edata to the constructor-supplied model, not changing the settings which were backed-up in the constructor call.

#### Parameters

- **edata** –
- **fpc** – flag indicating which fixedParameter from edata to apply

void restore()

Restore original settings on constructor-supplied *amici::Model*. Will be called during destruction. Explicit call is generally not necessary.

## Class ContextManager

- Defined in file\_include\_amici\_misc.h

## Inheritance Relationships

### Derived Types

- public amici::ConditionContext (*Class ConditionContext*)
- public amici::FinalStateStorer (*Class FinalStateStorer*)
- public amici::ModelContext (*Class ModelContext*)

## Class Documentation

### class amici::ContextManager

Generic implementation for a context manager, explicitly deletes copy and move operators for derived classes.

Subclassed by *amici::ConditionContext*, *amici::FinalStateStorer*, *amici::ModelContext*

### Public Functions

**ContextManager**() = default

**ContextManager**(*ContextManager* &other) = delete

**ContextManager**(*ContextManager* &&other) = delete

## Class CvodeException

- Defined in file\_include\_amici\_exception.h

## Inheritance Relationships

### Base Type

- public amici::AmiException (*Class AmiException*)

## Class Documentation

class amici::CvodeException : public amici::AmiException  
 cvode exception handler class

### Public Functions

**CvodeException**(int error\_code, const char \*function)  
 Constructor.

#### Parameters

- **error\_code** – error code returned by cvode function
- **function** – cvode function name

## Class CVodeSolver

- Defined in file\_include\_amici\_solver\_cvodes.h

## Inheritance Relationships

### Base Type

- public amici::Solver (*Class Solver*)

## Class Documentation

class amici::CVodeSolver : public amici::Solver  
 The *CVodeSolver* class is a wrapper around the SUNDIALS CVODES solver.

### Public Functions

**~CVodeSolver**() override = default

virtual *Solver* \***clone**() const override  
 Clone this instance.

**Returns** The clone

virtual void **reInit**(*realtype* t0, const *AmiVector* &yy0, const *AmiVector* &yp0) const override  
 Reinitializes the states in the solver after an event occurrence.

#### Parameters

- **t0** – reinitialization timepoint
- **yy0** – initial state variables
- **yp0** – initial derivative state variables (DAE only)

virtual void **sensReInit**(const *AmiVectorArray* &yyS0, const *AmiVectorArray* &ypS0) const override  
Reinitializes the state sensitivities in the solver after an event occurrence.

**Parameters**

- **yyS0** – new state sensitivity
- **ypS0** – new derivative state sensitivities (DAE only)

virtual void **sensToggleOff**() const override  
Switches off computation of state sensitivities without deallocating the memory for sensitivities.

virtual void **reInitB**(int which, *realtype* tB0, const *AmiVector* &yyB0, const *AmiVector* &ypB0) const override  
Reinitializes the adjoint states after an event occurrence.

**Parameters**

- **which** – identifier of the backwards problem
- **tB0** – reinitialization timepoint
- **yyB0** – new adjoint state
- **ypB0** – new adjoint derivative state

virtual void **quadReInitB**(int which, const *AmiVector* &yQB0) const override  
Reinitialize the adjoint states after an event occurrence.

**Parameters**

- **which** – identifier of the backwards problem
- **yQB0** – new adjoint quadrature state

virtual int **solve**(*realtype* tout, int itask) const override  
Solves the forward problem until a predefined timepoint.

**Parameters**

- **tout** – timepoint until which simulation should be performed
- **itask** – task identifier, can be CV\_NORMAL or CV\_ONE\_STEP

**Returns** status flag indicating success of execution

virtual int **solveF**(*realtype* tout, int itask, int \*ncheckPtr) const override  
Solves the forward problem until a predefined timepoint (adjoint only)

**Parameters**

- **tout** – timepoint until which simulation should be performed
- **itask** – task identifier, can be CV\_NORMAL or CV\_ONE\_STEP
- **ncheckPtr** – pointer to a number that counts the internal checkpoints

**Returns** status flag indicating success of execution

virtual void **solveB**(*realtype* tBout, int itaskB) const override  
Solves the backward problem until a predefined timepoint (adjoint only)

**Parameters**

- **tBout** – timepoint until which simulation should be performed
- **itaskB** – task identifier, can be CV\_NORMAL or CV\_ONE\_STEP



virtual void **getDky**(*realtype* t, int k) const override  
interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order

virtual void **getSensDky**(*realtype* t, int k) const override  
interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order

virtual void **getQuadDkyB**(*realtype* t, int k, int which) const override  
interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order
- **which** – index of backward problem

virtual void **getDkyB**(*realtype* t, int k, int which) const override  
interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order
- **which** – index of backward problem

virtual void **getRootInfo**(int \*rootsfound) const override  
getRootInfo extracts information which event occurred

**Parameters** **rootsfound** – array with flags indicating whether the respective event occurred

virtual void **setStopTime**(*realtype* tstop) const override  
Sets a timepoint at which the simulation will be stopped.

**Parameters** **tstop** – timepoint until which simulation should be performed

virtual void **turnOffRootFinding**() const override  
Disable rootfinding.

virtual const *Model* \***getModel**() const override  
Accessor function to the model stored in the user data

**Returns** user data model

virtual void **setLinearSolver**() const override  
Sets the linear solver for the forward problem.

virtual void **setLinearSolverB**(int which) const override  
Sets the linear solver for the backward problem.

**Parameters** **which** – index of the backward problem

virtual void **setNonLinearSolver**() const override  
Set the non-linear solver for the forward problem.

virtual void **setNonLinearSolverSens**() const override

Set the non-linear solver for sensitivities.

virtual void **setNonLinearSolverB**(int which) const override

Set the non-linear solver for the backward problem.

**Parameters** *which* – index of the backward problem

**Solver**() = default

Default constructor.

**Solver**(*AmiciApplication* \*app)

Constructor.

**Parameters** *app* – AMICI application context

**Solver**(const *Solver* &other)

*Solver* copy constructor.

**Parameters** *other* –

## Protected Functions

virtual void **calcIC**(*realtype* tout1) const override

Calculates consistent initial conditions, assumes initial states to be correct (DAE only)

**Parameters** *tout1* – next timepoint to be computed (sets timescale)

virtual void **calcICB**(int which, *realtype* tout1) const override

Calculates consistent initial conditions for the backwards problem, assumes initial states to be correct (DAE only)

**Parameters**

- *which* – identifier of the backwards problem
- *tout1* – next timepoint to be computed (sets timescale)

virtual void **getB**(int which) const override

extracts the adjoint state at the current timepoint from solver memory and writes it to the xB member variable

**Parameters** *which* – index of the backwards problem

virtual void **getSens**() const override

extracts the state sensitivity at the current timepoint from solver memory and writes it to the sx member variable

virtual void **getQuadB**(int which) const override

extracts the adjoint quadrature state at the current timepoint from solver memory and writes it to the xQB member variable

**Parameters** *which* – index of the backwards problem

virtual void **getQuad**(*realtype* &t) const override

extracts the quadrature at the current timepoint from solver memory and writes it to the xQ member variable

**Parameters** *t* – timepoint for quadrature extraction

virtual void **getQuadDky**(*realtype* t, int k) const override

interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order

virtual void **reInitPostProcessF**(*realtype* tnext) const override  
 reInitPostProcessF postprocessing of the solver memory after a discontinuity in the forward problem

**Parameters** **tnext** – next timepoint (defines integration direction)

virtual void **reInitPostProcessB**(*realtype* tnext) const override  
 reInitPostProcessB postprocessing of the solver memory after a discontinuity in the backward problem

**Parameters** **tnext** – next timepoint (defines integration direction)

void **reInitPostProcess**(void \*cv\_mem, *realtype* \*t, *AmiVector* \*yout, *realtype* tout) const  
 Postprocessing of the solver memory after a discontinuity.

**Parameters**

- **cv\_mem** – pointer to CVODES solver memory object
- **t** – pointer to integration time
- **yout** – new state vector
- **tout** – anticipated next integration timepoint.

virtual void **allocateSolver**() const override  
 Create specifies solver method and initializes solver memory for the forward problem.

virtual void **setSStolerances**(double rtol, double atol) const override  
 sets scalar relative and absolute tolerances for the forward problem

**Parameters**

- **rtol** – relative tolerances
- **atol** – absolute tolerances

virtual void **setSensSStolerances**(double rtol, const double \*atol) const override  
 activates sets scalar relative and absolute tolerances for the sensitivity variables

**Parameters**

- **rtol** – relative tolerances
- **atol** – array of absolute tolerances for every sensitivity variable

virtual void **setSensErrCon**(bool error\_corr) const override  
 SetSensErrCon specifies whether error control is also enforced for sensitivities for the forward problem

**Parameters** **error\_corr** – activation flag

virtual void **setQuadErrConB**(int which, bool flag) const override  
 Specifies whether error control is also enforced for the backward quadrature problem.

**Parameters**

- **which** – identifier of the backwards problem
- **flag** – activation flag

virtual void **setQuadErrCon**(bool flag) const override  
 Specifies whether error control is also enforced for the forward quadrature problem.

**Parameters** **flag** – activation flag

virtual void **setErrHandlerFn**() const override  
Attaches the error handler function (errMsgIdAndTxt) to the solver.

virtual void **setUserData**() const override  
Attaches the user data to the forward problem.

virtual void **setUserDataB**(int which) const override  
attaches the user data to the backward problem

**Parameters** **which** – identifier of the backwards problem

virtual void **setMaxNumSteps**(long int mxsteps) const override  
specifies the maximum number of steps for the forward problem

---

**Note:** in contrast to the SUNDIALS method, this sets the overall maximum, not the maximum between output times.

---

**Parameters** **mxsteps** – number of steps

virtual void **setStabLimDet**(int stldet) const override  
activates stability limit detection for the forward problem

**Parameters** **stldet** – flag for stability limit detection (TRUE or FALSE)

virtual void **setStabLimDetB**(int which, int stldet) const override  
activates stability limit detection for the backward problem

**Parameters**

- **which** – identifier of the backwards problem
- **stldet** – flag for stability limit detection (TRUE or FALSE)

virtual void **setId**(const *Model* \*model) const override  
specify algebraic/differential components (DAE only)

**Parameters** **model** – model specification

virtual void **setSuppressAlg**(bool flag) const override  
deactivates error control for algebraic components (DAE only)

**Parameters** **flag** – deactivation flag

void **resetState**(void \*cv\_mem, const *N\_Vector* y0) const  
resetState reset the CVODES solver to restart integration after a rhs discontinuity.

**Parameters**

- **cv\_mem** – pointer to CVODES solver memory object
- **y0** – new state vector

virtual void **setSensParams**(const *realtypes* \*p, const *realtypes* \*pbar, const int \*plist) const override  
specifies the scaling and indexes for sensitivity computation

**Parameters**

- **p** – parameters
- **pbar** – parameter scaling constants
- **plist** – parameter index list

virtual void **adjInit**() const override  
initializes the adjoint problem

virtual void **quadInit**(const *AmiVector* &xQ0) const override  
initializes the quadratures

**Parameters** **xQ0** – vector with initial values for xQ

virtual void **allocateSolverB**(int \*which) const override  
Specifies solver method and initializes solver memory for the backward problem.

**Parameters** **which** – identifier of the backwards problem

virtual void **setSStolerancesB**(int which, *realtype* relTolB, *realtype* absTolB) const override  
sets relative and absolute tolerances for the backward problem

**Parameters**

- **which** – identifier of the backwards problem
- **relTolB** – relative tolerances
- **absTolB** – absolute tolerances

virtual void **quadSStolerancesB**(int which, *realtype* reltolQB, *realtype* abstolQB) const override  
sets relative and absolute tolerances for the quadrature backward problem

**Parameters**

- **which** – identifier of the backwards problem
- **reltolQB** – relative tolerances
- **abstolQB** – absolute tolerances

virtual void **quadSStolerances**(*realtype* reltolQ, *realtype* abstolQ) const override  
sets relative and absolute tolerances for the quadrature problem

**Parameters**

- **reltolQB** – relative tolerances
- **abstolQB** – absolute tolerances

virtual void **setMaxNumStepsB**(int which, long int mxstepsB) const override  
specifies the maximum number of steps for the forward problem

---

**Note:** in contrast to the SUNDIALS method, this sets the overall maximum, not the maximum between output times.

---

**Parameters**

- **which** – identifier of the backwards problem
- **mxstepsB** – number of steps

virtual void **diag**() const override  
attaches a diagonal linear solver to the forward problem

virtual void **diagB**(int which) const override  
attaches a diagonal linear solver to the backward problem

**Parameters** **which** – identifier of the backwards problem

virtual void **getNumSteps**(const void \*ami\_mem, long int \*numsteps) const override  
reports the number of solver steps

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numsteps** – output array

virtual void **getNumRhsEvals**(const void \*ami\_mem, long int \*numrhsevals) const override  
reports the number of right hand evaluations

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numrhsevals** – output array

virtual void **getNumErrTestFails**(const void \*ami\_mem, long int \*numerrtestfails) const override  
reports the number of local error test failures

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numerrtestfails** – output array

virtual void **getNumNonlinSolvConvFails**(const void \*ami\_mem, long int \*numnonlinsolvconvfails) const override  
reports the number of nonlinear convergence failures

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numnonlinsolvconvfails** – output array

virtual void **getLastOrder**(const void \*ami\_mem, int \*order) const override  
Reports the order of the integration method during the last internal step.

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **order** – output array

virtual void **\*getAdjBmem**(void \*ami\_mem, int which) const override  
Retrieves the solver memory instance for the backward problem.

**Parameters**

- **which** – identifier of the backwards problem
- **ami\_mem** – pointer to the forward solver memory instance

**Returns** A (void \*) pointer to the CVODES memory allocated for the backward problem.

virtual void **init**(*realtype* t0, const *AmiVector* &x0, const *AmiVector* &dx0) const override  
Initializes the states at the specified initial timepoint.

**Parameters**

- **t0** – initial timepoint
- **x0** – initial states
- **dx0** – initial derivative states

virtual void **initSteadystate**(const *realtype* t0, const *AmiVector* &x0, const *AmiVector* &dx0) const override

Initializes the states at the specified initial timepoint.

#### Parameters

- **t0** – initial timepoint
- **x0** – initial states
- **dx0** – initial derivative states

virtual void **sensInit1**(const *AmiVectorArray* &sx0, const *AmiVectorArray* &sdx0) const override

Initializes the forward sensitivities.

#### Parameters

- **sx0** – initial states sensitivities
- **sdx0** – initial derivative states sensitivities

virtual void **binit**(int which, *realtype* tf, const *AmiVector* &xB0, const *AmiVector* &dxB0) const override

Initialize the adjoint states at the specified final timepoint.

#### Parameters

- **which** – identifier of the backwards problem
- **tf** – final timepoint
- **xB0** – initial adjoint state
- **dxB0** – initial adjoint derivative state

virtual void **qbinit**(int which, const *AmiVector* &xQB0) const override

Initialize the quadrature states at the specified final timepoint.

#### Parameters

- **which** – identifier of the backwards problem
- **xQB0** – initial adjoint quadrature state

virtual void **rootInit**(int ne) const override

Initializes the rootfinding for events.

**Parameters** **ne** – number of different events

virtual void **setDenseJacFn**() const override

Set the dense Jacobian function.

virtual void **setSparseJacFn**() const override

sets the sparse Jacobian function

virtual void **setBandJacFn**() const override

sets the banded Jacobian function

virtual void **setJacTimesVecFn**() const override

sets the Jacobian vector multiplication function

virtual void **setDenseJacFnB**(int which) const override

sets the dense Jacobian function

**Parameters** **which** – identifier of the backwards problem

virtual void **setSparseJacFnB**(int which) const override  
sets the sparse Jacobian function

**Parameters** **which** – identifier of the backwards problem

virtual void **setBandJacFnB**(int which) const override  
sets the banded Jacobian function

**Parameters** **which** – identifier of the backwards problem

virtual void **setJacTimesVecFnB**(int which) const override  
sets the Jacobian vector multiplication function

**Parameters** **which** – identifier of the backwards problem

virtual void **setSparseJacFn\_ss**() const override  
sets the sparse Jacobian function for backward steady state case

## Friends

template<class **Archive**>

friend void **serialize**(*Archive* &ar, *CVodeSolver* &s, unsigned int)  
Serialize *amici::CVodeSolver* to boost archive.

### Parameters

- **ar** – Archive
- **s** – *Solver* instance to serialize

friend bool **operator==**(const *CVodeSolver* &a, const *CVodeSolver* &b)  
Equality operator.

### Parameters

- **a** –
- **b** –

**Returns** Whether a and b are equal

## Class ExpData

- Defined in file\_include\_amici\_edata.h

## Inheritance Relationships

### Base Type

- public amici::SimulationParameters (*Class SimulationParameters*)



## Class Documentation

class amici::ExpData : public amici::SimulationParameters  
*ExpData* carries all information about experimental or condition-specific data.

### Public Functions

**ExpData**() = default  
 default constructor

**ExpData**(const *ExpData*&) = default  
 Copy constructor, needs to be declared to be generated in swig.

**ExpData**(int nytrue, int nztrue, int nmaxevent)  
 constructor that only initializes dimensions

#### Parameters

- **nytrue** – Number of observables
- **nztrue** – Number of event outputs
- **nmaxevent** – Maximal number of events to track

**ExpData**(int nytrue, int nztrue, int nmaxevent, std::vector<*realtype*> ts)  
 constructor that initializes timepoints from vectors

#### Parameters

- **nytrue** – Number of observables
- **nztrue** – Number of event outputs
- **nmaxevent** – Maximal number of events to track
- **ts** – Timepoints (dimension: nt)

**ExpData**(int nytrue, int nztrue, int nmaxevent, std::vector<*realtype*> ts, std::vector<*realtype*> fixedParameters)  
 constructor that initializes timepoints and fixed parameters from vectors

#### Parameters

- **nytrue** – Number of observables
- **nztrue** – Number of event outputs
- **nmaxevent** – Maximal number of events to track
- **ts** – Timepoints (dimension: nt)
- **fixedParameters** – *Model* constants (dimension: nk)

**ExpData**(int nytrue, int nztrue, int nmaxevent, std::vector<*realtype*> ts, std::vector<*realtype*> const &observedData, std::vector<*realtype*> const &observedDataStdDev, std::vector<*realtype*> const &observedEvents, std::vector<*realtype*> const &observedEventsStdDev)  
 constructor that initializes timepoints and data from vectors

#### Parameters

- **nytrue** – Number of observables
- **nztrue** – Number of event outputs
- **nmaxevent** – Maximal number of events to track

- **ts** – Timepoints (dimension: nt)
- **observedData** – observed data (dimension: nt x nytrue, row-major)
- **observedDataStdDev** – standard deviation of observed data (dimension: nt x nytrue, row-major)
- **observedEvents** – observed events (dimension: nmaxevents x nztrue, row-major)
- **observedEventsStdDev** – standard deviation of observed events/roots (dimension: nmaxevents x nztrue, row-major)

explicit **ExpData**(const *Model* &model)  
constructor that initializes with *Model*

**Parameters** **model** – pointer to model specification object

**ExpData**(const *ReturnData* &rdata, *realtype* sigma\_y, *realtype* sigma\_z)  
constructor that initializes with returnData, adds noise according to specified sigmas

**Parameters**

- **rdata** – return data pointer with stored simulation results
- **sigma\_y** – scalar standard deviations for all observables
- **sigma\_z** – scalar standard deviations for all event observables

**ExpData**(const *ReturnData* &rdata, std::vector<*realtype*> sigma\_y, std::vector<*realtype*> sigma\_z)  
constructor that initializes with returnData, adds noise according to specified sigmas

**Parameters**

- **rdata** – return data pointer with stored simulation results
- **sigma\_y** – vector of standard deviations for observables (dimension: nytrue or nt x nytrue, row-major)
- **sigma\_z** – vector of standard deviations for event observables (dimension: nztrue or nmax-event x nztrue, row-major)

**~ExpData()** = default

int **nytrue()** const  
number of observables of the non-augmented model

**Returns** number of observables of the non-augmented model

int **nztrue()** const  
number of event observables of the non-augmented model

**Returns** number of event observables of the non-augmented model

int **nmaxevent()** const  
maximal number of events to track

**Returns** maximal number of events to track

int **nt()** const  
number of timepoints

**Returns** number of timepoints

void **setTimepoints**(const std::vector<*realtype*> &ts)  
Set function that copies data from input to ExpData::ts.

**Parameters** **ts** – timepoints

`std::vector<realtype> const &getTimepoints() const`  
 get function that copies data from `ExpData::ts` to output

**Returns** `ExpData::ts`

`realtype getTimepoint(int it) const`  
 get function that returns timepoint at index

**Parameters** **it** – timepoint index

**Returns** timepoint timepoint at index

`void setObservedData(const std::vector<realtype> &observedData)`  
 set function that copies data from input to `ExpData::my`

**Parameters** **observedData** – observed data (dimension: `nt x nytrue`, row-major)

`void setObservedData(const std::vector<realtype> &observedData, int iy)`  
 set function that copies observed data for specific observable

**Parameters**

- **observedData** – observed data (dimension: `nt`)
- **iy** – observed data index

`bool isSetObservedData(int it, int iy) const`  
 get function that checks whether data at specified indices has been set

**Parameters**

- **it** – time index
- **iy** – observable index

**Returns** boolean specifying if data was set

`std::vector<realtype> const &getObservedData() const`  
 get function that copies data from `ExpData::observedData` to output

**Returns** observed data (dimension: `nt x nytrue`, row-major)

`const realtype *getObservedDataPtr(int it) const`  
 get function that returns a pointer to observed data at index

**Parameters** **it** – timepoint index

**Returns** pointer to observed data at index (dimension: `nytrue`)

`void setObservedDataStdDev(const std::vector<realtype> &observedDataStdDev)`  
 set function that copies data from input to `ExpData::observedDataStdDev`

**Parameters** **observedDataStdDev** – standard deviation of observed data (dimension: `nt x nytrue`, row-major)

`void setObservedDataStdDev(realtype stdDev)`  
 set function that sets all `ExpData::observedDataStdDev` to the input value

**Parameters** **stdDev** – standard deviation (dimension: scalar)

`void setObservedDataStdDev(const std::vector<realtype> &observedDataStdDev, int iy)`  
 set function that copies standard deviation of observed data for specific observable

**Parameters**

- **observedDataStdDev** – standard deviation of observed data (dimension: `nt`)

- **iy** – observed data index

void **setObservedDataStdDev**(*realtype* stdDev, int iy)

set function that sets all standard deviation of a specific observable to the input value

**Parameters**

- **stdDev** – standard deviation (dimension: scalar)
- **iy** – observed data index

bool **isSetObservedDataStdDev**(int it, int iy) const

get function that checks whether standard deviation of data at specified indices has been set

**Parameters**

- **it** – time index
- **iy** – observable index

**Returns** boolean specifying if standard deviation of data was set

std::vector<*realtype*> const &**getObservedDataStdDev**() const

get function that copies data from ExpData::observedDataStdDev to output

**Returns** standard deviation of observed data

const *realtype* \***getObservedDataStdDevPtr**(int it) const

get function that returns a pointer to standard deviation of observed data at index

**Parameters** **it** – timepoint index

**Returns** pointer to standard deviation of observed data at index

void **setObservedEvents**(const std::vector<*realtype*> &observedEvents)

set function that copies observed event data from input to ExpData::observedEvents

**Parameters** **observedEvents** – observed data (dimension: nmaxevent x nztrue, row-major)

void **setObservedEvents**(const std::vector<*realtype*> &observedEvents, int iz)

set function that copies observed event data for specific event observable

**Parameters**

- **observedEvents** – observed data (dimension: nmaxevent)
- **iz** – observed event data index

bool **isSetObservedEvents**(int ie, int iz) const

get function that checks whether event data at specified indices has been set

**Parameters**

- **ie** – event index
- **iz** – event observable index

**Returns** boolean specifying if data was set

std::vector<*realtype*> const &**getObservedEvents**() const

get function that copies data from ExpData::mz to output

**Returns** observed event data

const *realtype* \***getObservedEventsPtr**(int ie) const

get function that returns a pointer to observed data at ieth occurrence

**Parameters** **ie** – event occurrence

**Returns** pointer to observed event data at ieth occurrence

void **setObservedEventsStdDev**(const std::vector<*realtype*> &observedEventsStdDev)  
set function that copies data from input to ExpData::observedEventsStdDev

**Parameters** **observedEventsStdDev** – standard deviation of observed event data

void **setObservedEventsStdDev**(*realtype* stdDev)  
set function that sets all ExpData::observedDataStdDev to the input value

**Parameters** **stdDev** – standard deviation (dimension: scalar)

void **setObservedEventsStdDev**(const std::vector<*realtype*> &observedEventsStdDev, int iz)  
set function that copies standard deviation of observed data for specific observable

**Parameters**

- **observedEventsStdDev** – standard deviation of observed data (dimension: nmaxevent)
- **iz** – observed data index

void **setObservedEventsStdDev**(*realtype* stdDev, int iz)  
set function that sets all standard deviation of a specific observable to the input value

**Parameters**

- **stdDev** – standard deviation (dimension: scalar)
- **iz** – observed data index

bool **isSetObservedEventsStdDev**(int ie, int iz) const  
get function that checks whether standard deviation of even data at specified indices has been set

**Parameters**

- **ie** – event index
- **iz** – event observable index

**Returns** boolean specifying if standard deviation of event data was set

std::vector<*realtype*> const &**getObservedEventsStdDev**() const  
get function that copies data from ExpData::observedEventsStdDev to output

**Returns** standard deviation of observed event data

const *realtype* \***getObservedEventsStdDevPtr**(int ie) const  
get function that returns a pointer to standard deviation of observed event data at ie-th occurrence

**Parameters** **ie** – event occurrence

**Returns** pointer to standard deviation of observed event data at ie-th occurrence

## Public Members

std::string **id**  
Arbitrary (not necessarily unique) identifier.

## Protected Functions

void **applyDimensions**()  
resizes `observedData`, `observedDataStdDev`, `observedEvents` and `observedEventsStdDev`

void **applyDataDimension**()  
resizes `observedData` and `observedDataStdDev`

void **applyEventDimension**()  
resizes `observedEvents` and `observedEventsStdDev`

void **checkDataDimension**(std::vector<*realtype*> const &input, const char \*fieldname) const  
checker for dimensions of input `observedData` or `observedDataStdDev`

### Parameters

- **input** – vector input to be checked
- **fieldname** – name of the input

void **checkEventsDimension**(std::vector<*realtype*> const &input, const char \*fieldname) const  
checker for dimensions of input `observedEvents` or `observedEventsStdDev`

### Parameters

- **input** – vector input to be checked
- **fieldname** – name of the input

## Protected Attributes

int **nytrue\_** = {0}  
number of observables

int **nztrue\_** = {0}  
number of event observables

int **nmaxevent\_** = {0}  
maximal number of event occurrences

std::vector<*realtype*> **observed\_data\_**  
observed data (dimension: `nt` x `nytrue`, row-major)

std::vector<*realtype*> **observed\_data\_std\_dev\_**  
standard deviation of observed data (dimension: `nt` x `nytrue`, row-major)

std::vector<*realtype*> **observed\_events\_**  
observed events (dimension: `nmaxevents` x `nztrue`, row-major)

std::vector<*realtype*> **observed\_events\_std\_dev\_**  
standard deviation of observed events/roots (dimension: `nmaxevents` x `nztrue`, row-major)

## Class FinalStateStorer

- Defined in file\_include\_amici\_forwardproblem.h

## Inheritance Relationships

### Base Type

- public amici::ContextManager (*Class ContextManager*)

## Class Documentation

class amici::FinalStateStorer : public amici::ContextManager  
stores the stimulation state when it goes out of scope

### Public Functions

inline explicit FinalStateStorer(ForwardProblem \*fwd)  
constructor, attaches problem pointer

**Parameters** fwd – problem from which the simulation state is to be stored

FinalStateStorer &operator=(const FinalStateStorer &other) = delete

inline ~FinalStateStorer()  
destructor, stores simulation state

## Class ForwardProblem

- Defined in file\_include\_amici\_forwardproblem.h

## Class Documentation

class amici::ForwardProblem  
The ForwardProblem class groups all functions for solving the forward problem.

### Public Functions

ForwardProblem(const ExpData \*edata, Model \*model, Solver \*solver, const SteadystateProblem \*preeq)  
Constructor.

#### Parameters

- edata – pointer to ExpData instance
- model – pointer to Model instance
- solver – pointer to Solver instance

- **preeq** – preequilibration with which to initialize the forward problem, pass nullptr for no initialization

**~ForwardProblem()** = default

void **workForwardProblem()**  
Solve the forward problem.

If forward sensitivities are enabled this will also compute sensitivities.

void **getAdjointUpdates**(*Model* &model, const *ExpData* &edata)  
computes adjoint updates dJydx according to provided model and expdata

**Parameters**

- **model** – *Model* instance
- **edata** – experimental data

inline *realtype* **getTime()** const  
Accessor for t.

**Returns** t

inline *AmiVector* const &**getState()** const  
Accessor for x.

**Returns** x

inline *AmiVector* const &**getStateDerivative()** const  
Accessor for dx.

**Returns** dx

inline *AmiVectorArray* const &**getStateSensitivity()** const  
Accessor for sx.

**Returns** sx

inline std::vector<*AmiVector*> const &**getStatesAtDiscontinuities()** const  
Accessor for x\_disc.

**Returns** x\_disc

inline std::vector<*AmiVector*> const &**getRHSAtDiscontinuities()** const  
Accessor for xdot\_disc.

**Returns** xdot\_disc

inline std::vector<*AmiVector*> const &**getRHSBeforeDiscontinuities()** const  
Accessor for xdot\_old\_disc.

**Returns** xdot\_old\_disc

inline std::vector<int> const &**getNumberOfRoots()** const  
Accessor for nroots.

**Returns** nroots

inline std::vector<*realtype*> const &**getDiscontinuities()** const  
Accessor for discs.

**Returns** discs

inline std::vector<std::vector<int>> const &**getRootIndexes()** const  
Accessor for rootidx.



**Returns** rootidx

inline std::vector<*realtype*> const &getDJydx() const  
 Accessor for dJydx.

**Returns** dJydx

inline std::vector<*realtype*> const &getDJzdx() const  
 Accessor for dJzdx.

**Returns** dJzdx

inline *AmiVector* \*getStatePointer()  
 Accessor for pointer to x.

**Returns** &x

inline *AmiVector* \*getStateDerivativePointer()  
 Accessor for pointer to dx.

**Returns** &dx

inline *AmiVectorArray* \*getStateSensitivityPointer()  
 accessor for pointer to sx

**Returns** &sx

inline *AmiVectorArray* \*getStateDerivativeSensitivityPointer()  
 Accessor for pointer to sdx.

**Returns** &sdx

inline int getCurrentTimeIteration() const  
 Accessor for it.

**Returns** it

inline *realtype* getFinalTime() const  
 Returns final time point for which simulations are available.

**Returns** time point

inline int getEventCounter() const  
 Returns maximal event index for which simulations are available.

**Returns** index

inline int getRootCounter() const  
 Returns maximal event index for which the timepoint is available.

**Returns** index

inline const *SimulationState* &getSimulationStateTimepoint(int it) const  
 Retrieves the carbon copy of the simulation state variables at the specified timepoint index.

**Parameters** *it* – timepoint index

**Returns** state

inline const *SimulationState* &getSimulationStateEvent(int iroot) const  
 Retrieves the carbon copy of the simulation state variables at the specified event index.

**Parameters** *iroot* – event index

**Returns** *SimulationState*

```
inline const SimulationState &getInitialSimulationState() const
```

Retrieves the carbon copy of the simulation state variables at the initial timepoint.

**Returns** *SimulationState*

```
inline const SimulationState &getFinalSimulationState() const
```

Retrieves the carbon copy of the simulation state variables at the final timepoint (or when simulation failed)

**Returns** *SimulationState*

## Public Members

*Model* \***model**

pointer to model instance

*Solver* \***solver**

pointer to solver instance

const *ExpData* \***edata**

pointer to experimental data instance

## Class IDAException

- Defined in file\_include\_amici\_exception.h

## Inheritance Relationships

### Base Type

- public amici::AmiException (*Class AmiException*)

## Class Documentation

```
class amici::IDAException : public amici::AmiException
    ida exception handler class
```

### Public Functions

```
IDAException(int error_code, const char *function)
```

Constructor.

#### Parameters

- **error\_code** – error code returned by ida function
- **function** – ida function name

## Class IDASolver

- Defined in file\_include\_amici\_solver\_idas.h

## Inheritance Relationships

### Base Type

- public amici::Solver (*Class Solver*)

## Class Documentation

class amici::IDASolver : public amici::Solver

The *IDASolver* class is a wrapper around the SUNDIALS IDAS solver.

### Public Functions

**~IDASolver()** override = default

virtual *Solver* \***clone()** const override

Clone this instance.

**Returns** The clone

virtual void **reInitPostProcessF**(*realtype* tnext) const override

reInitPostProcessF postprocessing of the solver memory after a discontinuity in the forward problem

**Parameters** *tnext* – next timepoint (defines integration direction)

virtual void **reInitPostProcessB**(*realtype* tnext) const override

reInitPostProcessB postprocessing of the solver memory after a discontinuity in the backward problem

**Parameters** *tnext* – next timepoint (defines integration direction)

virtual void **reInit**(*realtype* t0, const *AmiVector* &yy0, const *AmiVector* &yp0) const override

Reinitializes the states in the solver after an event occurrence.

**Parameters**

- **t0** – reinitialization timepoint
- **yy0** – initial state variables
- **yp0** – initial derivative state variables (DAE only)

virtual void **sensReInit**(const *AmiVectorArray* &yyS0, const *AmiVectorArray* &ypS0) const override

Reinitializes the state sensitivities in the solver after an event occurrence.

**Parameters**

- **yyS0** – new state sensitivity
- **ypS0** – new derivative state sensitivities (DAE only)

virtual void **sensToggleOff**() const override

Switches off computation of state sensitivities without deallocating the memory for sensitivities.

virtual void **reInitB**(int which, *realtype* tB0, const *AmiVector* &yyB0, const *AmiVector* &ypB0) const override

Reinitializes the adjoint states after an event occurrence.

**Parameters**

- **which** – identifier of the backwards problem
- **tB0** – reinitialization timepoint
- **yyB0** – new adjoint state
- **ypB0** – new adjoint derivative state

virtual void **quadReInitB**(int which, const *AmiVector* &yQB0) const override

Reinitialize the adjoint states after an event occurrence.

**Parameters**

- **which** – identifier of the backwards problem
- **yQB0** – new adjoint quadrature state

virtual void **quadStolerancesB**(int which, *realtype* reltolQB, *realtype* abstolQB) const override  
sets relative and absolute tolerances for the quadrature backward problem

**Parameters**

- **which** – identifier of the backwards problem
- **reltolQB** – relative tolerances
- **abstolQB** – absolute tolerances

virtual void **quadStolerances**(*realtype* reltolQ, *realtype* abstolQ) const override  
sets relative and absolute tolerances for the quadrature problem

**Parameters**

- **reltolQB** – relative tolerances
- **abstolQB** – absolute tolerances

virtual int **solve**(*realtype* tout, int itask) const override  
Solves the forward problem until a predefined timepoint.

**Parameters**

- **tout** – timepoint until which simulation should be performed
- **itask** – task identifier, can be CV\_NORMAL or CV\_ONE\_STEP

**Returns** status flag indicating success of execution

virtual int **solveF**(*realtype* tout, int itask, int \*ncheckPtr) const override  
Solves the forward problem until a predefined timepoint (adjoint only)

**Parameters**

- **tout** – timepoint until which simulation should be performed
- **itask** – task identifier, can be CV\_NORMAL or CV\_ONE\_STEP
- **ncheckPtr** – pointer to a number that counts the internal checkpoints

**Returns** status flag indicating success of execution

virtual void **solveB**(*realtype* tBout, int itaskB) const override  
Solves the backward problem until a predefined timepoint (adjoint only)

**Parameters**

- **tBout** – timepoint until which simulation should be performed
- **itaskB** – task identifier, can be CV\_NORMAL or CV\_ONE\_STEP

virtual void **getRootInfo**(int \*rootsfound) const override  
 getRootInfo extracts information which event occurred

**Parameters rootsfound** – array with flags indicating whether the respective event occurred

virtual void **getDky**(*realtype* t, int k) const override  
 interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order

virtual void **getSens**() const override  
 extracts the state sensitivity at the current timepoint from solver memory and writes it to the sx member variable

virtual void **getSensDky**(*realtype* t, int k) const override  
 interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order

virtual void **getB**(int which) const override  
 extracts the adjoint state at the current timepoint from solver memory and writes it to the xB member variable

**Parameters which** – index of the backwards problem

virtual void **getDkyB**(*realtype* t, int k, int which) const override  
 interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order
- **which** – index of backward problem

virtual void **getQuadB**(int which) const override  
 extracts the adjoint quadrature state at the current timepoint from solver memory and writes it to the xQB member variable

**Parameters which** – index of the backwards problem

virtual void **getQuadDkyB**(*realtype* t, int k, int which) const override  
 interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order
- **which** – index of backward problem

virtual void **getQuad**(*realtype* &t) const override  
extracts the quadrature at the current timepoint from solver memory and writes it to the xQ member variable

**Parameters** **t** – timepoint for quadrature extraction

virtual void **getQuadDky**(*realtype* t, int k) const override  
interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order

virtual void **calcIC**(*realtype* tout1) const override  
Calculates consistent initial conditions, assumes initial states to be correct (DAE only)

**Parameters** **tout1** – next timepoint to be computed (sets timescale)

virtual void **calcICB**(int which, *realtype* tout1) const override  
Calculates consistent initial conditions for the backwards problem, assumes initial states to be correct (DAE only)

**Parameters**

- **which** – identifier of the backwards problem
- **tout1** – next timepoint to be computed (sets timescale)

virtual void **setStopTime**(*realtype* tstop) const override  
Sets a timepoint at which the simulation will be stopped.

**Parameters** **tstop** – timepoint until which simulation should be performed

virtual void **turnOffRootFinding**() const override  
Disable rootfinding.

virtual const *Model* \***getModel**() const override  
Accessor function to the model stored in the user data

**Returns** user data model

virtual void **setLinearSolver**() const override  
Sets the linear solver for the forward problem.

virtual void **setLinearSolverB**(int which) const override  
Sets the linear solver for the backward problem.

**Parameters** **which** – index of the backward problem

virtual void **setNonLinearSolver**() const override  
Set the non-linear solver for the forward problem.

virtual void **setNonLinearSolverSens**() const override  
Set the non-linear solver for sensitivities.

virtual void **setNonLinearSolverB**(int which) const override  
Set the non-linear solver for the backward problem.

**Parameters** **which** – index of the backward problem

**Solver**() = default  
Default constructor.

**Solver**(*AmiciApplication* \*app)  
Constructor.

Parameters **app** – AMICI application context

**Solver**(const *Solver* &other)  
*Solver* copy constructor.

Parameters **other** –

## Protected Functions

void **reInitPostProcess**(void \*ida\_mem, *realtype* \*t, *AmiVector* \*yout, *AmiVector* \*ypout, *realtype* tout)  
 const

Postprocessing of the solver memory after a discontinuity.

Parameters

- **ida\_mem** – pointer to IDAS solver memory object
- **t** – pointer to integration time
- **yout** – new state vector
- **ypout** – new state derivative vector
- **tout** – anticipated next integration timepoint.

virtual void **allocateSolver**() const override

Create specifies solver method and initializes solver memory for the forward problem.

virtual void **setSStolerances**(*realtype* rtol, *realtype* atol) const override  
 sets scalar relative and absolute tolerances for the forward problem

Parameters

- **rtol** – relative tolerances
- **atol** – absolute tolerances

virtual void **setSensSStolerances**(*realtype* rtol, const *realtype* \*atol) const override  
 activates sets scalar relative and absolute tolerances for the sensitivity variables

Parameters

- **rtol** – relative tolerances
- **atol** – array of absolute tolerances for every sensitivity variable

virtual void **setSensErrCon**(bool error\_corr) const override

SetSensErrCon specifies whether error control is also enforced for sensitivities for the forward problem

Parameters **error\_corr** – activation flag

virtual void **setQuadErrConB**(int which, bool flag) const override

Specifies whether error control is also enforced for the backward quadrature problem.

Parameters

- **which** – identifier of the backwards problem
- **flag** – activation flag

virtual void **setQuadErrCon**(bool flag) const override

Specifies whether error control is also enforced for the forward quadrature problem.

Parameters **flag** – activation flag

virtual void **setErrHandlerFn**() const override  
 Attaches the error handler function (errMsgIdAndTxt) to the solver.

virtual void **setUserData**() const override  
 Attaches the user data to the forward problem.

virtual void **setUserDataB**(int which) const override  
 attaches the user data to the backward problem

**Parameters** **which** – identifier of the backwards problem

virtual void **setMaxNumSteps**(long int mxsteps) const override  
 specifies the maximum number of steps for the forward problem

---

**Note:** in contrast to the SUNDIALS method, this sets the overall maximum, not the maximum between output times.

---

**Parameters** **mxsteps** – number of steps

virtual void **setStabLimDet**(int stldet) const override  
 activates stability limit detection for the forward problem

**Parameters** **stldet** – flag for stability limit detection (TRUE or FALSE)

virtual void **setStabLimDetB**(int which, int stldet) const override  
 activates stability limit detection for the backward problem

**Parameters**

- **which** – identifier of the backwards problem
- **stldet** – flag for stability limit detection (TRUE or FALSE)

virtual void **setId**(const *Model* \*model) const override  
 specify algebraic/differential components (DAE only)

**Parameters** **model** – model specification

virtual void **setSuppressAlg**(bool flag) const override  
 deactivates error control for algebraic components (DAE only)

**Parameters** **flag** – deactivation flag

void **resetState**(void \*ida\_mem, const *N\_Vector* yy0, const *N\_Vector* yp0) const  
 resetState reset the IDAS solver to restart integration after a rhs discontinuity.

**Parameters**

- **ida\_mem** – pointer to IDAS solver memory object
- **yy0** – new state vector
- **yp0** – new state derivative vector

virtual void **setSensParams**(const *realtypes* \*p, const *realtypes* \*pbar, const int \*plist) const override  
 specifies the scaling and indexes for sensitivity computation

**Parameters**

- **p** – parameters
- **pbar** – parameter scaling constants
- **plist** – parameter index list



virtual void **adjInit**() const override  
initializes the adjoint problem

virtual void **quadInit**(const *AmiVector* &xQ0) const override  
initializes the quadratures

**Parameters** **xQ0** – vector with initial values for xQ

virtual void **allocateSolverB**(int \*which) const override  
Specifies solver method and initializes solver memory for the backward problem.

**Parameters** **which** – identifier of the backwards problem

virtual void **setMaxNumStepsB**(int which, long int mxstepsB) const override  
specifies the maximum number of steps for the forward problem

---

**Note:** in contrast to the SUNDIALS method, this sets the overall maximum, not the maximum between output times.

---

#### Parameters

- **which** – identifier of the backwards problem
- **mxstepsB** – number of steps

virtual void **setSStolerancesB**(int which, *realtype* relTolB, *realtype* absTolB) const override  
sets relative and absolute tolerances for the backward problem

#### Parameters

- **which** – identifier of the backwards problem
- **relTolB** – relative tolerances
- **absTolB** – absolute tolerances

virtual void **diag**() const override  
attaches a diagonal linear solver to the forward problem

virtual void **diagB**(int which) const override  
attaches a diagonal linear solver to the backward problem

**Parameters** **which** – identifier of the backwards problem

virtual void **getNumSteps**(const void \*ami\_mem, long int \*numsteps) const override  
reports the number of solver steps

#### Parameters

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numsteps** – output array

virtual void **getNumRhsEvals**(const void \*ami\_mem, long int \*numrhsevals) const override  
reports the number of right hand evaluations

#### Parameters

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numrhsevals** – output array

virtual void **getNumErrTestFails**(const void \*ami\_mem, long int \*numerrtestfails) const override  
reports the number of local error test failures

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numerrtestfails** – output array

virtual void **getNumNonlinSolvConvFails**(const void \*ami\_mem, long int \*numnonlinsolvconvfails) const override  
reports the number of nonlinear convergence failures

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numnonlinsolvconvfails** – output array

virtual void **getLastOrder**(const void \*ami\_mem, int \*order) const override  
Reports the order of the integration method during the last internal step.

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **order** – output array

virtual void **\*getAdjBmem**(void \*ami\_mem, int which) const override  
Retrieves the solver memory instance for the backward problem.

**Parameters**

- **which** – identifier of the backwards problem
- **ami\_mem** – pointer to the forward solver memory instance

**Returns** A (void \*) pointer to the CVODES memory allocated for the backward problem.

virtual void **init**(*realtype* t0, const *AmiVector* &x0, const *AmiVector* &dx0) const override  
Initializes the states at the specified initial timepoint.

**Parameters**

- **t0** – initial timepoint
- **x0** – initial states
- **dx0** – initial derivative states

virtual void **initSteadystate**(const *realtype* t0, const *AmiVector* &x0, const *AmiVector* &dx0) const override  
Initializes the states at the specified initial timepoint.

**Parameters**

- **t0** – initial timepoint
- **x0** – initial states
- **dx0** – initial derivative states

virtual void **sensInit1**(const *AmiVectorArray* &sx0, const *AmiVectorArray* &sdx0) const override  
Initializes the forward sensitivities.

**Parameters**

- **sx0** – initial states sensitivities
- **sdx0** – initial derivative states sensitivities

virtual void **binit**(int which, *realtype* tf, const *AmiVector* &xB0, const *AmiVector* &dxB0) const override  
Initialize the adjoint states at the specified final timepoint.

**Parameters**

- **which** – identifier of the backwards problem
- **tf** – final timepoint
- **xB0** – initial adjoint state
- **dxB0** – initial adjoint derivative state

virtual void **qbinit**(int which, const *AmiVector* &xB0) const override  
Initialize the quadrature states at the specified final timepoint.

**Parameters**

- **which** – identifier of the backwards problem
- **xB0** – initial adjoint quadrature state

virtual void **rootInit**(int ne) const override  
Initializes the rootfinding for events.

**Parameters** **ne** – number of different events

virtual void **setDenseJacFn**() const override  
Set the dense Jacobian function.

virtual void **setSparseJacFn**() const override  
sets the sparse Jacobian function

virtual void **setBandJacFn**() const override  
sets the banded Jacobian function

virtual void **setJacTimesVecFn**() const override  
sets the Jacobian vector multiplication function

virtual void **setDenseJacFnB**(int which) const override  
sets the dense Jacobian function

**Parameters** **which** – identifier of the backwards problem

virtual void **setSparseJacFnB**(int which) const override  
sets the sparse Jacobian function

**Parameters** **which** – identifier of the backwards problem

virtual void **setBandJacFnB**(int which) const override  
sets the banded Jacobian function

**Parameters** **which** – identifier of the backwards problem

virtual void **setJacTimesVecFnB**(int which) const override  
sets the Jacobian vector multiplication function

**Parameters** **which** – identifier of the backwards problem

virtual void **setSparseJacFn\_ss**() const override  
sets the sparse Jacobian function for backward steady state case

## Class IntegrationFailure

- Defined in file\_include\_amici\_exception.h

## Inheritance Relationships

### Base Type

- public amici::AmiException (*Class AmiException*)

## Class Documentation

class amici::IntegrationFailure : public amici::AmiException  
Integration failure exception for the forward problem.

This exception should be thrown when an integration failure occurred for this exception we can assume that we can recover from the exception and return a solution struct to the user

### Public Functions

IntegrationFailure(int code, *realtype* t)  
Constructor.

#### Parameters

- **code** – error code returned by ccode/ida
- **t** – time of integration failure

### Public Members

int **error\_code**  
error code returned by ccodes/idas

*realtype* **time**  
time of integration failure

## Class IntegrationFailureB

- Defined in file\_include\_amici\_exception.h

## Inheritance Relationships

### Base Type

- `public amici::AmiException` (*Class AmiException*)

### Class Documentation

`class amici::IntegrationFailureB` : `public amici::AmiException`  
Integration failure exception for the backward problem.

This exception should be thrown when an integration failure occurred for this exception we can assume that we can recover from the exception and return a solution struct to the user

### Public Functions

**IntegrationFailureB**(int code, *realtype* t)  
Constructor.

#### Parameters

- **code** – error code returned by ccode/ida
- **t** – time of integration failure

### Public Members

int **error\_code**  
error code returned by ccode/ida

*realtype* **time**  
time of integration failure

### Class Model

- Defined in `file_include_amici_model.h`

## Inheritance Relationships

### Base Types

- `public amici::AbstractModel` (*Class AbstractModel*)
- `public amici::ModelDimensions` (*Struct ModelDimensions*)

## Derived Types

- `public amici::Model_DAE` (*Class Model\_DAE*)
- `public amici::Model_ODE` (*Class Model\_ODE*)

## Class Documentation

class `amici::Model` : public `amici::AbstractModel`, public `amici::ModelDimensions`

The *Model* class represents an AMICI ODE/DAE model.

The model can compute various model related quantities based on symbolically generated code.

Subclassed by *amici::Model\_DAE*, *amici::Model\_ODE*

### Public Functions

**Model**() = default

Default constructor

**Model**(*ModelDimensions* const &model\_dimensions, *SimulationParameters* simulation\_parameters, *amici::SecondOrderMode* o2mode, std::vector<*amici::realtype*> idlist, std::vector<int> z2event, bool pythonGenerated = false, int ndxdotdp\_explicit = 0, int ndxdotdx\_explicit = 0, int w\_recursion\_depth = 0)

Constructor with model dimensions.

#### Parameters

- **model\_dimensions** – *Model* dimensions
- **simulation\_parameters** – Simulation parameters
- **o2mode** – Second order sensitivity mode
- **idlist** – Indexes indicating algebraic components (DAE only)
- **z2event** – Mapping of event outputs to events
- **pythonGenerated** – Flag indicating matlab or python wrapping
- **ndxdotdp\_explicit** – Number of nonzero elements in `dxdotdp_explicit`
- **ndxdotdx\_explicit** – Number of nonzero elements in `dxdotdx_explicit`
- **w\_recursion\_depth** – Recursion depth of fw

**~Model**() override = default

Destructor.

*Model* &**operator=**(*Model* const &other) = delete

Copy assignment is disabled until const members are removed.

**Parameters** **other** – Object to copy from

#### Returns

virtual *Model* \***clone**() const = 0

Clone this instance.

**Returns** The clone

void **initialize**(*AmiVector* &x, *AmiVector* &dx, *AmiVectorArray* &sx, *AmiVectorArray* &sdx, bool computeSensitivities, std::vector<int> &roots\_found)

Initialize model properties.

#### Parameters

- **x** – Reference to state variables
- **dx** – Reference to time derivative of states (DAE only)
- **sx** – Reference to state variable sensitivities
- **sdx** – Reference to time derivative of state sensitivities (DAE only)
- **computeSensitivities** – Flag indicating whether sensitivities are to be computed
- **roots\_found** – boolean indicators indicating whether roots were found at t0 by this fun

void **initializeB**(*AmiVector* &xB, *AmiVector* &dxB, *AmiVector* &xQB, bool posteq) const

Initialize model properties.

#### Parameters

- **xB** – Adjoint state variables
- **dxB** – Time derivative of adjoint states (DAE only)
- **xQB** – Adjoint quadratures
- **posteq** – Flag indicating whether postequilibration was performed

void **initializeStates**(*AmiVector* &x)

Initialize initial states.

**Parameters** **x** – State vector to be initialized

void **initializeStateSensitivities**(*AmiVectorArray* &sx, const *AmiVector* &x)

Initialize initial state sensitivities.

#### Parameters

- **sx** – Reference to state variable sensitivities
- **x** – Reference to state variables

void **initEvents**(const *AmiVector* &x, const *AmiVector* &dx, std::vector<int> &roots\_found)

Initialize the Heaviside variables **h** at the initial time **t0**.

Heaviside variables activate/deactivate on event occurrences.

#### Parameters

- **x** – Reference to state variables
- **dx** – Reference to time derivative of states (DAE only)
- **roots\_found** – boolean indicators indicating whether roots were found at t0 by this fun

int **nplist**() const

Get number of parameters wrt to which sensitivities are computed.

**Returns** Length of sensitivity index vector

int **np**() const

Get total number of model parameters.

**Returns** Length of parameter vector

int **nk**() const  
Get number of constants.  
**Returns** Length of constant vector

int **ncl**() const  
Get number of conservation laws.  
**Returns** Number of conservation laws (i.e., difference between `nx_rdata` and `nx_solver`).

int **nx\_reinit**() const  
Get number of solver states subject to reinitialization.  
**Returns** *Model* member `nx_solver_reinit`

const double \***k**() const  
Get fixed parameters.  
**Returns** Pointer to constants array

int **nMaxEvent**() const  
Get maximum number of events that may occur for each type.  
**Returns** Maximum number of events that may occur for each type

void **setMaxEvent**(int nmaxevent)  
Set maximum number of events that may occur for each type.  
**Parameters** **nmaxevent** – Maximum number of events that may occur for each type

int **nt**() const  
Get number of timepoints.  
**Returns** Number of timepoints

std::vector<*ParameterScaling*> const &**getParameterScale**() const  
Get parameter scale for each parameter.  
**Returns** Vector of parameter scales

void **setParameterScale**(*ParameterScaling* pscale)  
Set parameter scale for each parameter.  
NOTE: Resets initial state sensitivities.  
**Parameters** **pscale** – Scalar parameter scale to be set for all parameters

void **setParameterScale**(const std::vector<*ParameterScaling*> &pscaleVec)  
Set parameter scale for each parameter.  
NOTE: Resets initial state sensitivities.  
**Parameters** **pscaleVec** – Vector of parameter scales

std::vector<*realtype*> const &**getUnscaledParameters**() const  
Get parameters with transformation according to parameter scale applied.  
**Returns** Unscaled parameters

std::vector<*realtype*> const &**getParameters**() const  
Get parameter vector.  
**Returns** The user-set parameters (see also *Model::getUnscaledParameters*)

*realtype* **getParameterById**(std::string const &par\_id) const  
Get value of first model parameter with the specified ID.



**Parameters** `par_id` – Parameter ID

**Returns** Parameter value

*realtype* `getParameterByName`(std::string const &par\_name) const

Get value of first model parameter with the specified name.

**Parameters** `par_name` – Parameter name

**Returns** Parameter value

void `setParameters`(std::vector<*realtype*> const &p)

Set the parameter vector.

**Parameters** `p` – Vector of parameters

void `setParameterById`(std::map<std::string, *realtype*> const &p, bool ignoreErrors = false)

Set model parameters according to the parameter IDs and mapped values.

**Parameters**

- `p` – Map of parameters IDs and values
- `ignoreErrors` – Ignore errors such as parameter IDs in p which are not model parameters

void `setParameterById`(std::string const &par\_id, *realtype* value)

Set value of first model parameter with the specified ID.

**Parameters**

- `par_id` – Parameter ID
- `value` – Parameter value

int `setParametersByIdRegex`(std::string const &par\_id\_regex, *realtype* value)

Set all values of model parameters with IDs matching the specified regular expression.

**Parameters**

- `par_id_regex` – Parameter ID regex
- `value` – Parameter value

**Returns** Number of parameter IDs that matched the regex

void `setParameterByName`(std::string const &par\_name, *realtype* value)

Set value of first model parameter with the specified name.

**Parameters**

- `par_name` – Parameter name
- `value` – Parameter value

void `setParameterByName`(std::map<std::string, *realtype*> const &p, bool ignoreErrors = false)

Set model parameters according to the parameter name and mapped values.

**Parameters**

- `p` – Map of parameters names and values
- `ignoreErrors` – Ignore errors such as parameter names in p which are not model parameters

int `setParametersByNameRegex`(std::string const &par\_name\_regex, *realtype* value)

Set all values of all model parameters with names matching the specified regex.

**Parameters**

- **par\_name\_regex** – Parameter name regex
- **value** – Parameter value

**Returns** Number of fixed parameter names that matched the regex

`std::vector<realtype> const &getFixedParameters() const`

Get values of fixed parameters.

**Returns** Vector of fixed parameters with same ordering as in *Model::getFixedParameterIds*

*realtype* **getFixedParameterById**(std::string const &par\_id) const

Get value of fixed parameter with the specified ID.

**Parameters** **par\_id** – Parameter ID

**Returns** Parameter value

*realtype* **getFixedParameterByName**(std::string const &par\_name) const

Get value of fixed parameter with the specified name.

If multiple parameters have the same name, the first parameter with matching name is returned.

**Parameters** **par\_name** – Parameter name

**Returns** Parameter value

void **setFixedParameters**(std::vector<realtype> const &k)

Set values for constants.

**Parameters** **k** – Vector of fixed parameters

void **setFixedParameterById**(std::string const &par\_id, *realtype* value)

Set value of first fixed parameter with the specified ID.

**Parameters**

- **par\_id** – Fixed parameter id
- **value** – Fixed parameter value

int **setFixedParametersByIdRegex**(std::string const &par\_id\_regex, *realtype* value)

Set values of all fixed parameters with the ID matching the specified regex.

**Parameters**

- **par\_id\_regex** – Fixed parameter name regex
- **value** – Fixed parameter value

**Returns** Number of fixed parameter IDs that matched the regex

void **setFixedParameterByName**(std::string const &par\_name, *realtype* value)

Set value of first fixed parameter with the specified name.

**Parameters**

- **par\_name** – Fixed parameter ID
- **value** – Fixed parameter value

int **setFixedParametersByNameRegex**(std::string const &par\_name\_regex, *realtype* value)

Set value of all fixed parameters with name matching the specified regex.

**Parameters**

- **par\_name\_regex** – Fixed parameter name regex
- **value** – Fixed parameter value

**Returns** Number of fixed parameter names that matched the regex

virtual std::string **getName()** const

Get the model name.

**Returns** *Model* name

virtual bool **hasParameterNames()** const

Report whether the model has parameter names set.

**Returns** Boolean indicating whether parameter names were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getParameterNames()** const

Get names of the model parameters.

**Returns** The parameter names

virtual bool **hasStateNames()** const

Report whether the model has state names set.

**Returns** Boolean indicating whether state names were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getStateNames()** const

Get names of the model states.

**Returns** State names

virtual std::vector<std::string> **getStateNamesSolver()** const

Get names of the solver states.

**Returns** State names

virtual bool **hasFixedParameterNames()** const

Report whether the model has fixed parameter names set.

**Returns** Boolean indicating whether fixed parameter names were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getFixedParameterNames()** const

Get names of the fixed model parameters.

**Returns** Fixed parameter names

virtual bool **hasObservableNames()** const

Report whether the model has observable names set.

**Returns** Boolean indicating whether observable names were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getObservableNames()** const

Get names of the observables.

**Returns** Observable names

virtual bool **hasExpressionNames()** const

Report whether the model has expression names set.

**Returns** Boolean indicating whether expression names were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getExpressionNames()** const

Get names of the expressions.

**Returns** Expression names

virtual bool **hasParameterIds()** const

Report whether the model has parameter IDs set.

**Returns** Boolean indicating whether parameter IDs were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getParameterIds()** const

Get IDs of the model parameters.

**Returns** Parameter IDs

virtual bool **hasStateIds()** const

Report whether the model has state IDs set.

**Returns** Boolean indicating whether state IDs were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getStateIds()** const

Get IDs of the model states.

**Returns** State IDs

virtual std::vector<std::string> **getStateIdsSolver()** const

Get IDs of the solver states.

**Returns** State IDs

virtual bool **hasFixedParameterIds()** const

Report whether the model has fixed parameter IDs set.

**Returns** Boolean indicating whether fixed parameter IDs were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getFixedParameterIds()** const

Get IDs of the fixed model parameters.

**Returns** Fixed parameter IDs

virtual bool **hasObservableIds()** const

Report whether the model has observable IDs set.

**Returns** Boolean indicating whether observable ids were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getObservableIds()** const

Get IDs of the observables.

**Returns** Observable IDs

virtual bool **hasExpressionIds()** const

Report whether the model has expression IDs set.

**Returns** Boolean indicating whether expression ids were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getExpressionIds()** const

Get IDs of the expression.

**Returns** Expression IDs

virtual bool **hasQuadraticLLH()** const

Checks whether the defined noise model is gaussian, i.e., the nllh is quadratic.

**Returns** boolean flag

`std::vector<realtype> const &getTimepoints() const`

Get the timepoint vector.

**Returns** Timepoint vector

`realtype getTimepoint(int it) const`

Get simulation timepoint for time index `it`.

**Parameters** `it` – Time index

**Returns** Timepoint

`void setTimepoints(std::vector<realtype> const &ts)`

Set the timepoint vector.

**Parameters** `ts` – New timepoint vector

`double t0() const`

Get simulation start time.

**Returns** Simulation start time

`void setT0(double t0)`

Set simulation start time.

**Parameters** `t0` – Simulation start time

`std::vector<bool> const &getStateIsNonNegative() const`

Get flags indicating whether states should be treated as non-negative.

**Returns** Vector of flags

`void setStateIsNonNegative(std::vector<bool> const &stateIsNonNegative)`

Set flags indicating whether states should be treated as non-negative.

**Parameters** `stateIsNonNegative` – Vector of flags

`void setAllStatesNonNegative()`

Set flags indicating that all states should be treated as non-negative.

`inline ModelState const &getModelState() const`

Get the current model state.

**Returns** Current model state

`inline void setModelState(ModelState const &state)`

Set the current model state.

**Parameters** `state` – *Model* state

`inline void setMinimumSigmaResiduals(double min_sigma)`

Sets the estimated lower boundary for `sigma_y`. When `:meth:setAddSigmaResiduals` is activated, this lower boundary must ensure that  $\log(\text{sigma}) + \text{min\_sigma} > 0$ .

**Parameters** `min_sigma` – lower boundary

`inline realtype getMinimumSigmaResiduals() const`

Gets the specified estimated lower boundary for `sigma_y`.

**Returns** lower boundary

`inline void setAddSigmaResiduals(bool sigma_res)`

Specifies whether residuals should be added to account for parameter dependent sigma.

If set to true, additional residuals of the form  $\sqrt{\log(\sigma) + C}$  will be added. This enables least-squares optimization for variables with Gaussian noise assumption and parameter dependent standard deviation sigma. The constant  $C$  can be set via `:meth:setMinimumSigmaResiduals`.

**Parameters** `sigma_res` – if true, additional residuals are added

inline bool **getAddSigmaResiduals**() const

Checks whether residuals should be added to account for parameter dependent sigma.

**Returns** `sigma_res`

std::vector<int> const &**getParameterList**() const

Get the list of parameters for which sensitivities are computed.

**Returns** List of parameter indices

int **plist**(int pos) const

Get entry in parameter list by index.

**Parameters** `pos` – Index in sensitivity parameter list

**Returns** Index in parameter list

void **setParameterList**(std::vector<int> const &plist)

Set the list of parameters for which sensitivities are to be computed.

NOTE: Resets initial state sensitivities.

**Parameters** `plist` – List of parameter indices

std::vector<realtype> **getInitialStates**()

Get the initial states.

**Returns** Initial state vector

void **setInitialStates**(std::vector<realtype> const &x0)

Set the initial states.

**Parameters** `x0` – Initial state vector

bool **hasCustomInitialStates**() const

Return whether custom initial states have been set.

**Returns** true if has custom initial states, otherwise false

std::vector<realtype> **getInitialStateSensitivities**()

Get the initial states sensitivities.

**Returns** vector of initial state sensitivities

void **setInitialStateSensitivities**(std::vector<realtype> const &sx0)

Set the initial state sensitivities.

**Parameters** `sx0` – vector of initial state sensitivities with chainrule applied. This could be a slice of `ReturnData::sx` or `ReturnData::sx0`

bool **hasCustomInitialStateSensitivities**() const

Return whether custom initial state sensitivities have been set.

**Returns** true if has custom initial state sensitivities, otherwise false.

void **setUnscaledInitialStateSensitivities**(std::vector<realtype> const &sx0)

Set the initial state sensitivities.

**Parameters** `sx0` – Vector of initial state sensitivities without chainrule applied. This could be the readin from a `model.sx0data` saved to HDF5.

void **setSteadyStateSensitivityMode**(*SteadyStateSensitivityMode* mode)

Set the mode how sensitivities are computed in the steadystate simulation.

**Parameters** **mode** – Steadystate sensitivity mode

*SteadyStateSensitivityMode* **getSteadyStateSensitivityMode**() const

Gets the mode how sensitivities are computed in the steadystate simulation.

**Returns** Mode

void **setReinitializeFixedParameterInitialStates**(bool flag)

Set whether initial states depending on fixed parameters are to be reinitialized after preequilibration and presimulation.

**Parameters** **flag** – Fixed parameters reinitialized?

bool **getReinitializeFixedParameterInitialStates**() const

Get whether initial states depending on fixedParameters are to be reinitialized after preequilibration and presimulation.

**Returns** flag true / false

void **requireSensitivitiesForAllParameters**()

Require computation of sensitivities for all parameters p [0..np[ in natural order.

NOTE: Resets initial state sensitivities.

void **getExpression**(gsl::span<*realtype*> w, const *realtype* t, const *AmiVector* &x)

Get time-resolved w.

**Parameters**

- **w** – Buffer (shape nw)
- **t** – Current timepoint
- **x** – Current state

void **getObservable**(gsl::span<*realtype*> y, const *realtype* t, const *AmiVector* &x)

Get time-resolved observables.

**Parameters**

- **y** – Buffer (shape ny)
- **t** – Current timepoint
- **x** – Current state

virtual *ObservableScaling* **getObservableScaling**(int iy) const

Get scaling type for observable.

**Parameters** **iy** – observable index

**Returns** scaling type

void **getObservableSensitivity**(gsl::span<*realtype*> sy, const *realtype* t, const *AmiVector* &x, const *AmiVectorArray* &sx)

Get sensitivity of time-resolved observables.

Total derivative  $sy = dydx * sx + dydp$  (only for forward sensitivities).

**Parameters**

- **sy** – buffer (shape ny x nplist, row-major)
- **t** – Timepoint

- **x** – State variables
- **sx** – State sensitivities

void **getObservableSigma**(gsl::span<*realtype*> sigmay, const int it, const *ExpData* \*edata)  
Get time-resolved observable standard deviations.

**Parameters**

- **sigmay** – Buffer (shape ny)
- **it** – Timepoint index
- **edata** – Pointer to experimental data instance (optional, pass nullptr to ignore)

void **getObservableSigmaSensitivity**(gsl::span<*realtype*> ssigmay, gsl::span<const *realtype*> sy, const int it, const *ExpData* \*edata)

Sensitivity of time-resolved observable standard deviation.

Total derivative (can be used with both adjoint and forward sensitivity).

**Parameters**

- **ssigmay** – Buffer (shape ny x nplist, row-major)
- **sy** – Sensitivity of time-resolved observables for current timepoint
- **it** – Timepoint index
- **edata** – Pointer to experimental data instance (optional, pass nullptr to ignore)

void **addObservableObjective**(*realtype* &Jy, const int it, const *AmiVector* &x, const *ExpData* &edata)  
Add time-resolved measurement negative log-likelihood  $J_y$ .

**Parameters**

- **Jy** – Buffer (shape 1)
- **it** – Timepoint index
- **x** – State variables
- **edata** – Experimental data

void **addObservableObjectiveSensitivity**(std::vector<*realtype*> &s1lh, std::vector<*realtype*> &s2lh, const int it, const *AmiVector* &x, const *AmiVectorArray* &sx, const *ExpData* &edata)

Add sensitivity of time-resolved measurement negative log-likelihood  $J_y$ .

**Parameters**

- **s1lh** – First-order buffer (shape nplist)
- **s2lh** – Second-order buffer (shape nJ - 1 x nplist, row-major)
- **it** – Timepoint index
- **x** – State variables
- **sx** – State sensitivities
- **edata** – Experimental data

void **addPartialObservableObjectiveSensitivity**(std::vector<*realtype*> &s1lh, std::vector<*realtype*> &s2lh, const int it, const *AmiVector* &x, const *ExpData* &edata)

Add sensitivity of time-resolved measurement negative log-likelihood  $J_y$ .



Partial derivative (to be used with adjoint sensitivities).

#### Parameters

- **s1lh** – First order output buffer (shape `nplist`)
- **s2lh** – Second order output buffer (shape `nJ - 1 x nplist`, row-major)
- **it** – Timepoint index
- **x** – State variables
- **edata** – Experimental data

void **getAdjointStateObservableUpdate**(gsl::span<*realtype*> dJydx, const int it, const *AmiVector* &x, const *ExpData* &edata)

Get state sensitivity of the negative loglikelihood  $Jy$ , partial derivative (to be used with adjoint sensitivities).

#### Parameters

- **dJydx** – Output buffer (shape `nJ x nx_solver`, row-major)
- **it** – Timepoint index
- **x** – State variables
- **edata** – Experimental data instance

void **getEvent**(gsl::span<*realtype*> z, const int ie, const *realtype* t, const *AmiVector* &x)

Get event-resolved observables.

#### Parameters

- **z** – Output buffer (shape `nz`)
- **ie** – Event index
- **t** – Timepoint
- **x** – State variables

void **getEventSensitivity**(gsl::span<*realtype*> sz, const int ie, const *realtype* t, const *AmiVector* &x, const *AmiVectorArray* &sx)

Get sensitivities of event-resolved observables.

Total derivative (only forward sensitivities).

#### Parameters

- **sz** – Output buffer (shape `nz x nplist`, row-major)
- **ie** – Event index
- **t** – Timepoint
- **x** – State variables
- **sx** – State sensitivities

void **getUnobservedEventSensitivity**(gsl::span<*realtype*> sz, const int ie)

Get sensitivity of  $z$  at final timepoint.

Ignores sensitivity of timepoint. Total derivative.

#### Parameters

- **sz** – Output buffer (shape `nz x nplist`, row-major)

- **ie** – Event index

void **getEventRegularization**(gsl::span<*realtype*> rz, const int ie, const *realtype* t, const *AmiVector* &x)  
Get regularization for event-resolved observables.

#### Parameters

- **rz** – Output buffer (shape nz)
- **ie** – Event index
- **t** – Timepoint
- **x** – State variables

void **getEventRegularizationSensitivity**(gsl::span<*realtype*> srz, const int ie, const *realtype* t, const *AmiVector* &x, const *AmiVectorArray* &sx)

Get sensitivities of regularization for event-resolved observables.

Total derivative. Only forward sensitivities.

#### Parameters

- **srz** – Output buffer (shape nz x nplist, row-major)
- **ie** – Event index
- **t** – Timepoint
- **x** – State variables
- **sx** – State sensitivities

void **getEventSigma**(gsl::span<*realtype*> sigmaz, const int ie, const int nroots, const *realtype* t, const *ExpData* \*edata)

Get event-resolved observable standard deviations.

#### Parameters

- **sigmaz** – Output buffer (shape nz)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **edata** – Pointer to experimental data (optional, pass nullptr to ignore)

void **getEventSigmaSensitivity**(gsl::span<*realtype*> ssigmaz, const int ie, const int nroots, const *realtype* t, const *ExpData* \*edata)

Get sensitivities of event-resolved observable standard deviations.

Total derivative (only forward sensitivities).

#### Parameters

- **ssigmaz** – Output buffer (shape nz x nplist, row-major)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **edata** – Pointer to experimental data (optional, pass nullptr to ignore)

void **addEventObjective**(*realtype* &Jz, const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)

Add event-resolved observable negative log-likelihood.

#### Parameters

- **Jz** – Output buffer (shape 1)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **x** – State variables
- **edata** – Experimental data

void **addEventObjectiveRegularization**(*realtype* &Jrz, const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)

Add event-resolved observable negative log-likelihood.

#### Parameters

- **Jrz** – Output buffer (shape 1)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **x** – State variables
- **edata** – Experimental data

void **addEventObjectiveSensitivity**(std::vector<*realtype*> &s1lh, std::vector<*realtype*> &s2lh, const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *AmiVectorArray* &sx, const *ExpData* &edata)

Add sensitivity of time-resolved measurement negative log-likelihood  $J_y$ .

Total derivative (to be used with forward sensitivities).

#### Parameters

- **s1lh** – First order buffer (shape `nplist`)
- **s2lh** – Second order buffer (shape `nJ-1 x nplist`, row-major)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **x** – State variables
- **sx** – State sensitivities
- **edata** – Experimental data

void **addPartialEventObjectiveSensitivity**(std::vector<*realtype*> &s1lh, std::vector<*realtype*> &s2lh, const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)

Add sensitivity of time-resolved measurement negative log-likelihood  $J_y$ .

Partial derivative (to be used with adjoint sensitivities).

**Parameters**

- **s1lh** – First order buffer (shape `nplist`)
- **s2lh** – Second order buffer (shape `(nJ-1) x nplist`, row-major)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **x** – State variables
- **edata** – Experimental data

void **getAdjointStateEventUpdate**(`gsl::span<realtype> dJzdx`, const int `ie`, const int `nroots`, const *realtype* `t`, const *AmiVector* &`x`, const *ExpData* &`edata`)

State sensitivity of the negative loglikelihood  $Jz$ .

Partial derivative (to be used with adjoint sensitivities).

**Parameters**

- **dJzdx** – Output buffer (shape `nJ x nx_solver`, row-major)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **x** – State variables
- **edata** – Experimental data

void **getEventTimeSensitivity**(`std::vector<realtype> &stau`, const *realtype* `t`, const int `ie`, const *AmiVector* &`x`, const *AmiVectorArray* &`sx`)

Sensitivity of event timepoint, total derivative.

Only forward sensitivities.

**Parameters**

- **stau** – Timepoint sensitivity (shape `nplist`)
- **t** – Timepoint
- **ie** – Event index
- **x** – State variables
- **sx** – State sensitivities

void **addStateEventUpdate**(*AmiVector* &`x`, const int `ie`, const *realtype* `t`, const *AmiVector* &`xdot`, const *AmiVector* &`xdot_old`)

Update state variables after event.

**Parameters**

- **x** – Current state (will be overwritten)
- **ie** – Event index
- **t** – Current timepoint
- **xdot** – Current residual function values
- **xdot\_old** – Value of residual function before event

void **addStateSensitivityEventUpdate**(*AmiVectorArray* &sx, const int ie, const *realtype* t, const *AmiVector* &x\_old, const *AmiVector* &xdot, const *AmiVector* &xdot\_old, const std::vector<*realtype*> &stau)

Update state sensitivity after event.

#### Parameters

- **sx** – Current state sensitivity (will be overwritten)
- **ie** – Event index
- **t** – Current timepoint
- **x\_old** – Current state
- **xdot** – Current residual function values
- **xdot\_old** – Value of residual function before event
- **stau** – Timepoint sensitivity, to be computed with *Model::getEventTimeSensitivity*

void **addAdjointStateEventUpdate**(*AmiVector* &xB, const int ie, const *realtype* t, const *AmiVector* &x, const *AmiVector* &xdot, const *AmiVector* &xdot\_old)

Update adjoint state after event.

#### Parameters

- **xB** – Current adjoint state (will be overwritten)
- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state
- **xdot** – Current residual function values
- **xdot\_old** – Value of residual function before event

void **addAdjointQuadratureEventUpdate**(*AmiVector* xQB, const int ie, const *realtype* t, const *AmiVector* &x, const *AmiVector* &xB, const *AmiVector* &xdot, const *AmiVector* &xdot\_old)

Update adjoint quadratures after event.

#### Parameters

- **xQB** – Current quadrature state (will be overwritten)
- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state
- **xB** – Current adjoint state
- **xdot** – Current residual function values
- **xdot\_old** – Value of residual function before event

void **updateHeaviside**(const std::vector<int> &rootsfound)

Update the Heaviside variables **h** on event occurrences.

**Parameters** **rootsfound** – Provides the direction of the zero-crossing, so adding it will give the right update to the Heaviside variables (zero if no root was found)

void **updateHeavisideB**(const int \*rootsfound)

Updates the Heaviside variables **h** on event occurrences in the backward problem.

**Parameters** **rootsfound** – Provides the direction of the zero-crossing, so adding it will give the right update to the Heaviside variables (zero if no root was found)

int **checkFinite**(gsl::span<const *realtype*> array, *ModelQuantity* model\_quantity) const

Check if the given array has only finite elements.

For (1D) spans.

**Parameters**

- **array** –
- **model\_quantity** – The model quantity array corresponds to

**Returns**

int **checkFinite**(gsl::span<const *realtype*> array, *ModelQuantity* model\_quantity, size\_t num\_cols) const

Check if the given array has only finite elements.

For flattened 2D arrays.

**Parameters**

- **array** – Flattened matrix
- **model\_quantity** – The model quantity array corresponds to
- **num\_cols** – Number of columns of the non-flattened matrix

**Returns**

int **checkFinite**(SUNMatrix m, *ModelQuantity* model\_quantity, *realtype* t) const

Check if the given array has only finite elements.

For SUNMatrix.

**Parameters**

- **m** – Matrix to check
- **model\_quantity** – The model quantity **m** corresponds to
- **t** – current timepoint

**Returns**

void **setAlwaysCheckFinite**(bool alwaysCheck)

Set whether the result of every call to `Model::f*` should be checked for finiteness.

**Parameters** **alwaysCheck** –

bool **getAlwaysCheckFinite**() const

Get setting of whether the result of every call to `Model::f*` should be checked for finiteness.

**Returns** that

void **fx0**(*AmiVector* &x)

Compute/get initial states.

**Parameters** **x** – Output buffer.

void **fx0\_fixedParameters**(*AmiVector* &x)

Set only those initial states that are specified via fixed parameters.

**Parameters** **x** – Output buffer.

void **fsx0**(*AmiVectorArray* &sx, const *AmiVector* &x)

Compute/get initial value for initial state sensitivities.

**Parameters**

- **sx** – Output buffer for state sensitivities
- **x** – State variables

void **fsx0\_fixedParameters**(*AmiVectorArray* &sx, const *AmiVector* &x)

Get only those initial states sensitivities that are affected from *amici::Model::fx0\_fixedParameters*.

**Parameters**

- **sx** – Output buffer for state sensitivities
- **x** – State variables

virtual void **fsdx0**()

Compute sensitivity of derivative initial states sensitivities **sdx0**.

Only necessary for DAEs.

void **fx\_rdata**(*AmiVector* &x\_rdata, const *AmiVector* &x\_solver)

Expand conservation law for states.

**Parameters**

- **x\_rdata** – Output buffer for state variables with conservation laws expanded (stored in *amici::ReturnData*).
- **x\_solver** – State variables with conservation laws applied (solver returns this)

void **fsx\_rdata**(*AmiVectorArray* &sx\_rdata, const *AmiVectorArray* &sx\_solver, const *AmiVector* &x\_solver)

Expand conservation law for state sensitivities.

**Parameters**

- **sx\_rdata** – Output buffer for state variables sensitivities with conservation laws expanded (stored in *amici::ReturnData*).
- **sx\_solver** – State variables sensitivities with conservation laws applied (solver returns this)
- **x\_solver** – State variables with conservation laws applied (solver returns this)

void **setReinitializationStateIdxs**(const std::vector<int> &idxs)

Set indices of states to be reinitialized based on provided constants / fixed parameters.

**Parameters** **idxs** – Array of state indices

std::vector<int> const &**getReinitializationStateIdxs**() const

Return indices of states to be reinitialized based on provided constants / fixed parameters.

**Returns** Those indices.

const *AmiVectorArray* &**get\_dxdotdp**() const

getter for dxdotdp (matlab generated)

**Returns** dxdotdp

const *SUNMatrixWrapper* &**get\_dxdotdp\_full**() const

getter for dxdotdp (python generated)

**Returns** dxdotdp

virtual void **fdeltaqB**(*realtype* \*deltaqB, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ip, int ie, const *realtype* \*xdot, const *realtype* \*xdot\_old, const *realtype* \*xB)

Model-specific implementation of fdeltaqB.

**Parameters**

- **deltaqB** – sensitivity update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – sensitivity index
- **ie** – event index
- **xdot** – new model right hand side
- **xdot\_old** – previous model right hand side
- **xB** – adjoint state

```
virtual void fdeltasx(realtype *deltasx, const realtype t, const realtype *x, const realtype *p, const realtype
                      *k, const realtype *h, const realtype *w, int ip, int ie, const realtype *xdot, const
                      realtype *xdot_old, const realtype *sx, const realtype *stau, const realtype *tcl)
```

Model-specific implementation of fdeltasx.

**Parameters**

- **deltasx** – sensitivity update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **w** – repeating elements vector
- **ip** – sensitivity index
- **ie** – event index
- **xdot** – new model right hand side
- **xdot\_old** – previous model right hand side
- **sx** – state sensitivity
- **stau** – event-time sensitivity
- **tcl** – total abundances for conservation laws

```
virtual void fdeltax(realtype *deltax, const realtype t, const realtype *x, const realtype *p, const realtype *k,
                     const realtype *h, int ie, const realtype *xdot, const realtype *xdot_old)
```

Model-specific implementation of fdeltax.

**Parameters**

- **deltax** – state update
- **t** – current time
- **x** – current state



- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ie** – event index
- **xdot** – new model right hand side
- **xdot\_old** – previous model right hand side

virtual void **fdeltaxB**(*realtype* \*deltaxB, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ie, const *realtype* \*xdot, const *realtype* \*xdot\_old, const *realtype* \*xB)

Model-specific implementation of fdeltaxB.

#### Parameters

- **deltaxB** – adjoint state update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ie** – event index
- **xdot** – new model right hand side
- **xdot\_old** – previous model right hand side
- **xB** – current adjoint state

virtual void **fdJrzdsigma**(*realtype* \*dJrzdsigma, int iz, const *realtype* \*p, const *realtype* \*k, const *realtype* \*rz, const *realtype* \*sigmaz)

Model-specific implementation of fdJrzdsigma.

#### Parameters

- **dJrzdsigma** – Sensitivity of event penalization Jrz w.r.t. standard deviation sigmaz
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **rz** – model root output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint

virtual void **fdJrzd**(*realtype* \*dJrzd, int iz, const *realtype* \*p, const *realtype* \*k, const *realtype* \*rz, const *realtype* \*sigmaz)

Model-specific implementation of fdJrzd.

#### Parameters

- **dJrzd** – partial derivative of event penalization Jrz
- **iz** – event output index
- **p** – parameter vector

- **k** – constant vector
- **rz** – model root output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint

virtual void **fdJydsigma**(*realtype* \*dJydsigma, int iy, const *realtype* \*p, const *realtype* \*k, const *realtype* \*y, const *realtype* \*sigmay, const *realtype* \*my)

Model-specific implementation of fdJydsigma.

#### Parameters

- **dJydsigma** – Sensitivity of time-resolved measurement negative log-likelihood Jy w.r.t. standard deviation sigmay
- **iy** – output index
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint
- **sigmay** – measurement standard deviation at timepoint
- **my** – measurement at timepoint

virtual void **fdJydy**(*realtype* \*dJydy, int iy, const *realtype* \*p, const *realtype* \*k, const *realtype* \*y, const *realtype* \*sigmay, const *realtype* \*my)

Model-specific implementation of fdJydy.

#### Parameters

- **dJydy** – partial derivative of time-resolved measurement negative log-likelihood Jy
- **iy** – output index
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint
- **sigmay** – measurement standard deviation at timepoint
- **my** – measurement at timepoint

virtual void **fdJydy\_colptrs**(*SUNMatrixWrapper* &dJydy, int index)

Model-specific implementation of fdJydy colptrs.

#### Parameters

- **dJydy** – sparse matrix to which colptrs will be written
- **index** – ytrue index

virtual void **fdJydy\_rowvals**(*SUNMatrixWrapper* &dJydy, int index)

Model-specific implementation of fdJydy rowvals.

#### Parameters

- **dJydy** – sparse matrix to which rowvals will be written
- **index** – ytrue index

virtual void **fdJzdsigma**(*realtype* \*dJzdsigma, int iz, const *realtype* \*p, const *realtype* \*k, const *realtype* \*z, const *realtype* \*sigmaz, const *realtype* \*mz)

Model-specific implementation of fdJzdsigma.

**Parameters**

- **dJzdsigma** – Sensitivity of event measurement negative log-likelihood Jz w.r.t. standard deviation sigma<sub>z</sub>
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint
- **mz** – event measurement at timepoint

virtual void **fdJzdz**(*realtype* \*dJzdz, int iz, const *realtype* \*p, const *realtype* \*k, const *realtype* \*z, const *realtype* \*sigmaz, const *realtype* \*mz)

Model-specific implementation of fdJzdz.

**Parameters**

- **dJzdz** – partial derivative of event measurement negative log-likelihood Jz
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint
- **mz** – event measurement at timepoint

virtual void **fdrzdp**(*realtype* \*drzdp, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ip)

Model-specific implementation of fdrzdp.

**Parameters**

- **drzdp** – partial derivative of root output rz w.r.t. model parameters p
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested

virtual void **fdrzdx**(*realtype* \*drzdx, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h)

Model-specific implementation of fdrzdx.

**Parameters**

- **drzdx** – partial derivative of root output rz w.r.t. model states x
- **ie** – event index

- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fdsigmaydp**(*realtype* \*dsigmaydp, const *realtype* t, const *realtype* \*p, const *realtype* \*k, const *realtype* \*y, int ip)

Model-specific implementation of fsigmaydp.

#### Parameters

- **dsigmaydp** – partial derivative of standard deviation of measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint t
- **ip** – sensitivity index

virtual void **fdsigmaydy**(*realtype* \*dsigmaydy, const *realtype* t, const *realtype* \*p, const *realtype* \*k, const *realtype* \*y)

Model-specific implementation of fsigmay.

#### Parameters

- **dsigmaydy** – partial derivative of standard deviation of measurements w.r.t. model outputs
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint t

virtual void **fdsigmazdp**(*realtype* \*dsigmazdp, const *realtype* t, const *realtype* \*p, const *realtype* \*k, int ip)

Model-specific implementation of fsigmaz.

#### Parameters

- **dsigmazdp** – partial derivative of standard deviation of event measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **ip** – sensitivity index

virtual void **fdwdp**(*realtype* \*dwdp, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w, const *realtype* \*tcl, const *realtype* \*stcl)

Model-specific sparse implementation of dwdp.

#### Parameters

- **dwdp** – Recurring terms in xdot, parameter derivative
- **t** – timepoint

- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – total abundances for conservation laws
- **stcl** – sensitivities of total abundances for conservation laws

virtual void **fdwdp**(*realtype* \*dwdp, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w, const *realtype* \*tcl, const *realtype* \*stcl, int ip)

Model-specific sensitivity implementation of dwdp.

#### Parameters

- **dwdp** – Recurring terms in xdot, parameter derivative
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – total abundances for conservation laws
- **stcl** – sensitivities of total abundances for conservation laws
- **ip** – sensitivity parameter index

virtual void **fdwdp\_colptrs**(*SUNMatrixWrapper* &dwdp)

Model-specific implementation for dwdp, column pointers.

**Parameters** **dwdp** – sparse matrix to which colptrs will be written

virtual void **fdwdp\_rowvals**(*SUNMatrixWrapper* &dwdp)

Model-specific implementation for dwdp, row values.

**Parameters** **dwdp** – sparse matrix to which rowvals will be written

virtual void **fdwdx**(*realtype* \*dwdx, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w, const *realtype* \*tcl)

Model-specific implementation of dwdx, data part.

#### Parameters

- **dwdx** – Recurring terms in xdot, state derivative
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables

- **tcl** – total abundances for conservation laws

virtual void **fdwdx\_colptrs**(*SUNMatrixWrapper* &dwdx)

Model-specific implementation for dwdx, column pointers.

**Parameters dwdx** – sparse matrix to which colptrs will be written

virtual void **fdwdx\_rowvals**(*SUNMatrixWrapper* &dwdx)

Model-specific implementation for dwdx, row values.

**Parameters dwdx** – sparse matrix to which rowvals will be written

virtual void **fdwdw**(*realtype* \*dwdw, *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w, const *realtype* \*tcl)

Model-specific implementation of fdwdw, no w chainrule (Py)

#### Parameters

- **dwdw** – partial derivative w wrt w
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – Total abundances for conservation laws

virtual void **fdwdw\_colptrs**(*SUNMatrixWrapper* &dwdw)

Model-specific implementation of fdwdw, colptrs part.

**Parameters dwdw** – sparse matrix to which colptrs will be written

virtual void **fdwdw\_rowvals**(*SUNMatrixWrapper* &dwdw)

Model-specific implementation of fdwdw, rowvals part.

**Parameters dwdw** – sparse matrix to which rowvals will be written

virtual void **fdydp**(*realtype* \*dydp, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ip, const *realtype* \*w, const *realtype* \*dwdp)

Model-specific implementation of fdydp (MATLAB-only)

#### Parameters

- **dydp** – partial derivative of observables y w.r.t. model parameters p
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested
- **w** – repeating elements vector
- **dwdp** – Recurring terms in xdot, parameter derivative

virtual void **fdydp**(*realtype* \*dydp, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ip, const *realtype* \*w, const *realtype* \*tcl, const *realtype* \*dtcldp)

Model-specific implementation of fdydp (Python)

#### Parameters

- **dydp** – partial derivative of observables y w.r.t. model parameters p
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested
- **w** – repeating elements vector
- **tcl** – total abundances for conservation laws
- **dtcldp** – Sensitivities of total abundances for conservation laws

virtual void **fdydx**(*realtype* \*dydx, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w, const *realtype* \*dwdx)

Model-specific implementation of fdydx.

#### Parameters

- **dydx** – partial derivative of observables y w.r.t. model states x
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **w** – repeating elements vector
- **dwdx** – Recurring terms in xdot, state derivative

virtual void **fdzdp**(*realtype* \*dzdp, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ip)

Model-specific implementation of fdzdp.

#### Parameters

- **dzdp** – partial derivative of event-resolved output z w.r.t. model parameters p
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested

virtual void **fdzdx**(*realtype* \*dzdx, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h)

Model-specific implementation of fdzdx.

#### Parameters

- **dzdx** – partial derivative of event-resolved output z w.r.t. model states x
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fJrz**(*realtype* \*nllh, int iz, const *realtype* \*p, const *realtype* \*k, const *realtype* \*z, const *realtype* \*sigmaz)

Model-specific implementation of fJrz.

#### Parameters

- **nllh** – regularization for event measurements z
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint

virtual void **fJy**(*realtype* \*nllh, int iy, const *realtype* \*p, const *realtype* \*k, const *realtype* \*y, const *realtype* \*sigmay, const *realtype* \*my)

Model-specific implementation of fJy.

#### Parameters

- **nllh** – negative log-likelihood for measurements y
- **iy** – output index
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint
- **sigmay** – measurement standard deviation at timepoint
- **my** – measurements at timepoint

virtual void **fJz**(*realtype* \*nllh, int iz, const *realtype* \*p, const *realtype* \*k, const *realtype* \*z, const *realtype* \*sigmaz, const *realtype* \*mz)

Model-specific implementation of fJz.

#### Parameters

- **nllh** – negative log-likelihood for event measurements z
- **iz** – event output index
- **p** – parameter vector



- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint
- **mz** – event measurements at timepoint

virtual void **frz**(*realtype* \*rz, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h)

Model-specific implementation of frz.

#### Parameters

- **rz** – value of root function at current timepoint (non-output events not included)
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fsigmay**(*realtype* \*sigmay, const *realtype* t, const *realtype* \*p, const *realtype* \*k, const *realtype* \*y)

Model-specific implementation of fsigmay.

#### Parameters

- **sigmay** – standard deviation of measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint t

virtual void **fsigmaz**(*realtype* \*sigmaz, const *realtype* t, const *realtype* \*p, const *realtype* \*k)

Model-specific implementation of fsigmaz.

#### Parameters

- **sigmaz** – standard deviation of event measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector

virtual void **fsrz**(*realtype* \*srz, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*sx, int ip)

Model-specific implementation of fsrz.

#### Parameters

- **srz** – Sensitivity of rz, total derivative
- **ie** – event index
- **t** – current time

- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **sx** – current state sensitivity
- **h** – Heaviside vector
- **ip** – sensitivity index

virtual void **fstau**(*realtype* \*stau, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*tcl, const *realtype* \*sx, int ip, int ie)

Model-specific implementation of fstau.

#### Parameters

- **stau** – total derivative of event timepoint
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **tcl** – total abundances for conservation laws
- **sx** – current state sensitivity
- **ip** – sensitivity index
- **ie** – event index

virtual void **fsx0**(*realtype* \*sx0, const *realtype* t, const *realtype* \*x0, const *realtype* \*p, const *realtype* \*k, int ip)

Model-specific implementation of fsx0.

#### Parameters

- **sx0** – initial state sensitivities
- **t** – initial time
- **x0** – initial state
- **p** – parameter vector
- **k** – constant vector
- **ip** – sensitivity index

virtual void **fsx0\_fixedParameters**(*realtype* \*sx0, const *realtype* t, const *realtype* \*x0, const *realtype* \*p, const *realtype* \*k, int ip, gsl::span<const int> reinitialization\_state\_idx)

Model-specific implementation of fsx0\_fixedParameters.

#### Parameters

- **sx0** – initial state sensitivities
- **t** – initial time
- **x0** – initial state

- **p** – parameter vector
- **k** – constant vector
- **ip** – sensitivity index
- **reinitialization\_state\_idx**s – Indices of states to be reinitialized based on provided constants / fixed parameters.

virtual void **fsz**(*realtype* \*sz, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*sx, int ip)

Model-specific implementation of fsz.

#### Parameters

- **sz** – Sensitivity of rz, total derivative
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **sx** – current state sensitivity
- **ip** – sensitivity index

virtual void **fw**(*realtype* \*w, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*tcl)

Model-specific implementation of fw.

#### Parameters

- **w** – Recurring terms in xdot
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **tcl** – total abundances for conservation laws

virtual void **fx0**(*realtype* \*x0, const *realtype* t, const *realtype* \*p, const *realtype* \*k)

Model-specific implementation of fx0.

#### Parameters

- **x0** – initial state
- **t** – initial time
- **p** – parameter vector
- **k** – constant vector

virtual void **fx0\_fixedParameters**(*realtype* \*x0, const *realtype* t, const *realtype* \*p, const *realtype* \*k, gsl::span<const int> reinitialization\_state\_idx)

Model-specific implementation of fx0\_fixedParameters.

**Parameters**

- **x0** – initial state
- **t** – initial time
- **p** – parameter vector
- **k** – constant vector
- **reinitialization\_state\_idxs** – Indices of states to be reinitialized based on provided constants / fixed parameters.

virtual void **fy**(*realtype* \*y, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w)

Model-specific implementation of fy.

**Parameters**

- **y** – model output at current timepoint
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **w** – repeating elements vector

virtual void **fz**(*realtype* \*z, int ie, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h)

Model-specific implementation of fz.

**Parameters**

- **z** – value of event output
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fdx\_rdatadx\_solver**(*realtype* \*dx\_rdatadx\_solver, const *realtype* \*x, const *realtype* \*tcl, const *realtype* \*p, const *realtype* \*k)

Compute dx\_rdata / dx\_solver.

**Parameters**

- **dx\_rdatadx\_solver** – dx\_rdata / dx\_solver
- **p** – parameter vector
- **k** – constant vector
- **x** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws

virtual void **fdx\_rdatadx\_solver\_colptrs**(*SUNMatrixWrapper* &dxrdatadxsolver)

Model-specific implementation of fdx\_rdatadx\_solver, colptrs part.

**Parameters** **dxrdatadxsolver** – sparse matrix to which colptrs will be written

virtual void **fdx\_rdatadx\_solver\_rowvals**(*SUNMatrixWrapper* &dxrdatadxsolver)

Model-specific implementation of fdx\_rdatadx\_solver, rowvals part.

**Parameters** **dxrdatadxsolver** – sparse matrix to which rowvals will be written

virtual void **fdx\_rdatadp**(*realtype* \*dx\_rdatadp, const *realtype* \*x, const *realtype* \*tcl, const *realtype* \*p, const *realtype* \*k, const int ip)

Compute dx\_rdata / dp.

**Parameters**

- **dx\_rdatadp** – dx\_rdata / dp
- **p** – parameter vector
- **k** – constant vector
- **x** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws
- **ip** – Sensitivity index

virtual void **fdx\_rdatadtcl**(*realtype* \*dx\_rdatadtcl, const *realtype* \*x, const *realtype* \*tcl, const *realtype* \*p, const *realtype* \*k)

Compute dx\_rdata / dtcl.

**Parameters**

- **dx\_rdatadtcl** – dx\_rdata / dtcl
- **p** – parameter vector
- **k** – constant vector
- **x** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws

virtual void **fdx\_rdatadtcl\_colptrs**(*SUNMatrixWrapper* &dx\_rdatadtcl)

Model-specific implementation of fdx\_rdatadtcl, colptrs part.

**Parameters** **dx\_rdatadtcl** – sparse matrix to which colptrs will be written

virtual void **fdx\_rdatadtcl\_rowvals**(*SUNMatrixWrapper* &dx\_rdatadtcl)

Model-specific implementation of fdx\_rdatadtcl, rowvals part.

**Parameters** **dx\_rdatadtcl** – sparse matrix to which rowvals will be written

virtual void **fdtotal\_cldx\_rdata**(*realtype* \*dtotal\_cldx\_rdata, const *realtype* \*x\_rdata, const *realtype* \*p, const *realtype* \*k, const *realtype* \*tcl)

Compute dtotal\_cl / dx\_rdata.

**Parameters**

- **dtotal\_cldx\_rdata** – dtotal\_cl / dx\_rdata
- **x\_rdata** – State variables with conservation laws applied
- **p** – parameter vector
- **k** – constant vector

- **tcl** – Total abundances for conservation laws

virtual void **fdtotal\_cldx\_rdata\_colptrs**(*SUNMatrixWrapper* &dtotal\_cldx\_rdata)  
 Model-specific implementation of fdtotal\_cldx\_rdata, colptrs part.

**Parameters** **dtotal\_cldx\_rdata** – sparse matrix to which colptrs will be written

virtual void **fdtotal\_cldx\_rdata\_rowvals**(*SUNMatrixWrapper* &dtotal\_cldx\_rdata)  
 Model-specific implementation of fdtotal\_cldx\_rdata, rowvals part.

**Parameters** **dtotal\_cldx\_rdata** – sparse matrix to which rowvals will be written

virtual void **fdtotal\_cldp**(*realtype* \*dtotal\_cldp, const *realtype* \*x\_rdata, const *realtype* \*p, const *realtype* \*k, const int ip)  
 Compute dtotal\_cl / dp.

Compute dtotal\_cl / dp.

**Parameters**

- **dtotal\_cldp** – dtotal\_cl / dp
- **x\_rdata** – State variables with conservation laws applied
- **p** – parameter vector
- **k** – constant vector
- **ip** – Sensitivity index

## Public Members

bool **pythonGenerated**

Flag indicating Matlab- or Python-based model generation

*SecondOrderMode* **o2mode** = {*SecondOrderMode::none*}

Flag indicating whether for amici::Solver::sensi\_ == amici::SensitivityOrder::second directional or full second order derivative will be computed

std::vector<*realtype*> **idlist**

Flag array for DAE equations

*AmiciApplication* \***app** = &*defaultContext*

AMICI application context

## Protected Functions

void **writeSliceEvent**(gsl::span<const *realtype*> slice, gsl::span<*realtype*> buffer, const int ie)

Write part of a slice to a buffer according to indices specified in z2event.

**Parameters**

- **slice** – Input data slice
- **buffer** – Output data slice
- **ie** – Event index

void **writeSensitivitySliceEvent**(gsl::span<const *realtype*> slice, gsl::span<*realtype*> buffer, const int ie)

Write part of a sensitivity slice to a buffer according to indices specified in z2event.

**Parameters**

- **slice** – source data slice
- **buffer** – output data slice
- **ie** – event index

void **writeLLHSensitivitySlice**(const std::vector<*realtype*> &dLLhdp, std::vector<*realtype*> &sllh, std::vector<*realtype*> &s2llh)

Separate first and second order objective sensitivity information and write them into the respective buffers.

**Parameters**

- **dLLhdp** – Data with mangled first- and second-order information
- **sllh** – First order buffer
- **s2llh** – Second order buffer

void **checkLLHBufferSize**(const std::vector<*realtype*> &sllh, const std::vector<*realtype*> &s2llh) const  
Verify that the provided buffers have the expected size.

**Parameters**

- **sllh** – first order buffer
- **s2llh** – second order buffer

void **initializeVectors**()

Set the nplist-dependent vectors to their proper sizes.

void **fy**(*realtype* t, const *AmiVector* &x)  
Compute observables / measurements.

**Parameters**

- **t** – Current timepoint
- **x** – Current state

void **fdydp**(*realtype* t, const *AmiVector* &x)  
Compute partial derivative of observables  $y$  w.r.t. model parameters  $p$ .

**Parameters**

- **t** – Current timepoint
- **x** – Current state

void **fdydx**(*realtype* t, const *AmiVector* &x)  
Compute partial derivative of observables  $y$  w.r.t. state variables  $x$ .

**Parameters**

- **t** – Current timepoint
- **x** – Current state

void **fsigmay**(int it, const *ExpData* \*edata)  
Compute standard deviation of measurements.

**Parameters**

- **it** – Timepoint index
- **edata** – Experimental data

void **fdsigmaydp**(int it, const *ExpData* \*edata)

Compute partial derivative of standard deviation of measurements w.r.t. model parameters.

**Parameters**

- **it** – Timepoint index
- **edata** – pointer to *amici::ExpData* data instance holding sigma values

void **fdsigmaydy**(int it, const *ExpData* \*edata)

Compute partial derivative of standard deviation of measurements w.r.t. model outputs.

**Parameters**

- **it** – Timepoint index
- **edata** – pointer to *amici::ExpData* data instance holding sigma values

void **fJy**(*realtype* &Jy, int it, const *AmiVector* &y, const *ExpData* &edata)

Compute negative log-likelihood of measurements  $y$ .

**Parameters**

- **Jy** – Variable to which llh will be added
- **it** – Timepoint index
- **y** – Simulated observable
- **edata** – Pointer to experimental data instance

void **fdJydy**(int it, const *AmiVector* &x, const *ExpData* &edata)

Compute partial derivative of time-resolved measurement negative log-likelihood  $Jy$ .

**Parameters**

- **it** – timepoint index
- **x** – state variables
- **edata** – Pointer to experimental data

void **fdJydsigma**(int it, const *AmiVector* &x, const *ExpData* &edata)

Sensitivity of time-resolved measurement negative log-likelihood  $Jy$  w.r.t. standard deviation sigma.

**Parameters**

- **it** – timepoint index
- **x** – state variables
- **edata** – pointer to experimental data instance

void **fdJydp**(const int it, const *AmiVector* &x, const *ExpData* &edata)

Compute sensitivity of time-resolved measurement negative log-likelihood  $Jy$  w.r.t. parameters for the given timepoint.

**Parameters**

- **it** – timepoint index
- **x** – state variables
- **edata** – pointer to experimental data instance

void **fdJydx**(const int it, const *AmiVector* &x, const *ExpData* &edata)

Sensitivity of time-resolved measurement negative log-likelihood  $Jy$  w.r.t. state variables.

**Parameters**



- **it** – Timepoint index
- **x** – State variables
- **edata** – Pointer to experimental data instance

void **fz**(int ie, *realtype* t, const *AmiVector* &x)

Compute event-resolved output.

#### Parameters

- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state

void **fdzdp**(int ie, *realtype* t, const *AmiVector* &x)

Compute partial derivative of event-resolved output *z* w.r.t. model parameters *p*

#### Parameters

- **ie** – event index
- **t** – current timepoint
- **x** – current state

void **fdzdx**(int ie, *realtype* t, const *AmiVector* &x)

Compute partial derivative of event-resolved output *z* w.r.t. model states *x*.

#### Parameters

- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state

void **frz**(int ie, *realtype* t, const *AmiVector* &x)

Compute event root function of events.

Equal to *Model::froot* but does not include non-output events.

#### Parameters

- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state

void **fdrzdp**(int ie, *realtype* t, const *AmiVector* &x)

Compute sensitivity of event-resolved root output w.r.t. model parameters *p*.

#### Parameters

- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state

void **fdrzdx**(int ie, *realtype* t, const *AmiVector* &x)

Compute sensitivity of event-resolved measurements *rz* w.r.t. model states *x*.

#### Parameters

- **ie** – Event index

- **t** – Current timepoint
- **x** – Current state

void **fsigmaz**(const int ie, const int nroots, const *realtype* t, const *ExpData* \*edata)  
Compute standard deviation of events.

**Parameters**

- **ie** – Event index
- **nroots** – Event index
- **t** – Current timepoint
- **edata** – Experimental data

void **fdsigmazdp**(int ie, int nroots, *realtype* t, const *ExpData* \*edata)  
Compute sensitivity of standard deviation of events measurements w.r.t. model parameters p.

**Parameters**

- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Current timepoint
- **edata** – Pointer to experimental data instance

void **fJz**(*realtype* &Jz, int nroots, const *AmiVector* &z, const *ExpData* &edata)  
Compute negative log-likelihood of event-resolved measurements z.

**Parameters**

- **Jz** – Variable to which llh will be added
- **nroots** – Event index
- **z** – Simulated event
- **edata** – Experimental data

void **fdJzdz**(const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)  
Compute partial derivative of event measurement negative log-likelihood  $Jz$ .

**Parameters**

- **ie** – Event index
- **nroots** – Event index
- **t** – Current timepoint
- **x** – State variables
- **edata** – Experimental data

void **fdJzdsigma**(const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)  
Compute sensitivity of event measurement negative log-likelihood  $Jz$  w.r.t. standard deviation  $\sigma_{maz}$ .

**Parameters**

- **ie** – Event index
- **nroots** – Event index
- **t** – Current timepoint
- **x** – State variables

- **edata** – Pointer to experimental data instance

void **fdJzdp**(const int ie, const int nroots, *realtype* t, const *AmiVector* &x, const *ExpData* &edata)  
 Compute sensitivity of event-resolved measurement negative log-likelihood Jz w.r.t. parameters.

#### Parameters

- **ie** – Event index
- **nroots** – Event index
- **t** – Current timepoint
- **x** – State variables
- **edata** – Pointer to experimental data instance

void **fdJzdx**(const int ie, const int nroots, *realtype* t, const *AmiVector* &x, const *ExpData* &edata)  
 Compute sensitivity of event-resolved measurement negative log-likelihood Jz w.r.t. state variables.

#### Parameters

- **ie** – Event index
- **nroots** – Event index
- **t** – Current timepoint
- **x** – State variables
- **edata** – Experimental data

void **fJrz**(*realtype* &Jrz, int nroots, const *AmiVector* &rz, const *ExpData* &edata)  
 Compute regularization of negative log-likelihood with roots of event-resolved measurements rz.

#### Parameters

- **Jrz** – Variable to which regularization will be added
- **nroots** – Event index
- **rz** – Regularization variable
- **edata** – Experimental data

void **fdJrzdz**(const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)  
 Compute partial derivative of event measurement negative log-likelihood J.

#### Parameters

- **ie** – Event index
- **nroots** – Event index
- **t** – Current timepoint
- **x** – State variables
- **edata** – Experimental data

void **fdJrzdsigma**(const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)  
 Compute sensitivity of event measurement negative log-likelihood Jz w.r.t. standard deviation sigma<sub>z</sub>.

#### Parameters

- **ie** – event index
- **nroots** – event index
- **t** – current timepoint

- **x** – state variables
- **edata** – pointer to experimental data instance

void **fw**(*realtype* t, const *realtype* \*x)  
Compute recurring terms in xdot.

#### Parameters

- **t** – Timepoint
- **x** – Array with the states

void **fdwdp**(*realtype* t, const *realtype* \*x)  
Compute parameter derivative for recurring terms in xdot.

#### Parameters

- **t** – Timepoint
- **x** – Array with the states

void **fdwdx**(*realtype* t, const *realtype* \*x)  
Compute state derivative for recurring terms in xdot.

#### Parameters

- **t** – Timepoint
- **x** – Array with the states

void **fdwdw**(*realtype* t, const *realtype* \*x)  
Compute self derivative for recurring terms in xdot.

#### Parameters

- **t** – Timepoint
- **x** – Array with the states

virtual void **fx\_rdata**(*realtype* \*x\_rdata, const *realtype* \*x\_solver, const *realtype* \*tcl, const *realtype* \*p, const *realtype* \*k)

Compute fx\_rdata.

To be implemented by derived class if applicable.

#### Parameters

- **x\_rdata** – State variables with conservation laws expanded
- **x\_solver** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws
- **p** – parameter vector
- **k** – constant vector

virtual void **fsx\_rdata**(*realtype* \*sx\_rdata, const *realtype* \*sx\_solver, const *realtype* \*stcl, const *realtype* \*p, const *realtype* \*k, const *realtype* \*x\_solver, const *realtype* \*tcl, const int ip)  
Compute fsx\_solver.

To be implemented by derived class if applicable.

#### Parameters

- **sx\_rdata** – State sensitivity variables with conservation laws expanded
- **sx\_solver** – State sensitivity variables with conservation laws applied

- **stcl** – Sensitivities of total abundances for conservation laws
- **p** – parameter vector
- **k** – constant vector
- **x\_solver** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws
- **ip** – Sensitivity index

virtual void **fx\_solver**(*realtype* \*x\_solver, const *realtype* \*x\_rdata)

Compute fx\_solver.

To be implemented by derived class if applicable.

#### Parameters

- **x\_solver** – State variables with conservation laws applied
- **x\_rdata** – State variables with conservation laws expanded

virtual void **fsx\_solver**(*realtype* \*sx\_solver, const *realtype* \*sx\_rdata)

Compute fsx\_solver.

To be implemented by derived class if applicable.

#### Parameters

- **sx\_rdata** – State sensitivity variables with conservation laws expanded
- **sx\_solver** – State sensitivity variables with conservation laws applied

virtual void **ftotal\_cl**(*realtype* \*total\_cl, const *realtype* \*x\_rdata, const *realtype* \*p, const *realtype* \*k)

Compute ftotal\_cl.

To be implemented by derived class if applicable.

#### Parameters

- **total\_cl** – Total abundances of conservation laws
- **x\_rdata** – State variables with conservation laws expanded
- **p** – parameter vector
- **k** – constant vector

virtual void **fstotal\_cl**(*realtype* \*stotal\_cl, const *realtype* \*sx\_rdata, const int ip, const *realtype* \*x\_rdata, const *realtype* \*p, const *realtype* \*k, const *realtype* \*tcl)

Compute fstotal\_cl.

To be implemented by derived class if applicable.

#### Parameters

- **stotal\_cl** – Sensitivities for the total abundances of conservation laws
- **sx\_rdata** – State sensitivity variables with conservation laws expanded
- **ip** – Sensitivity index
- **x\_rdata** – State variables with conservation laws expanded
- **p** – parameter vector
- **k** – constant vector
- **tcl** – Total abundances for conservation laws

*const\_N\_Vector* **computeX\_pos**(*const\_N\_Vector* x)

Compute non-negative state vector.

Compute non-negative state vector according to `stateIsNonNegative`. If `anyStateNonNegative` is set to `false`, i.e., all entries in `stateIsNonNegative` are `false`, this function directly returns `x`, otherwise all entries of `x` are copied in to `amici::Model::x_pos_tmp_` and negative values are replaced by 0 where applicable.

**Parameters** `x` – State vector possibly containing negative values

**Returns** State vector with negative values replaced by 0 according to `stateIsNonNegative`

*const realtype* \***computeX\_pos**(*AmiVector* const &x)

Compute non-negative state vector.

Compute non-negative state vector according to `stateIsNonNegative`. If `anyStateNonNegative` is set to `false`, i.e., all entries in `stateIsNonNegative` are `false`, this function directly returns `x`, otherwise all entries of `x` are copied in to `amici::Model::x_pos_tmp_` and negative values are replaced by 0 where applicable.

**Parameters** `x` – State vector possibly containing negative values

**Returns** State vector with negative values replaced by 0 according to `stateIsNonNegative`

## Protected Attributes

*ModelState* **state\_**

All variables necessary for function evaluation

*ModelStateDerived* **derived\_state\_**

Storage for model quantities beyond *ModelState* for the current timepoint

`std::vector<int>` **z2event\_**

index indicating to which event an event output belongs

`std::vector<realtype>` **x0data\_**

state initialization (size `nx_solver`)

`std::vector<realtype>` **sx0data\_**

sensitivity initialization (size `nx_rdata` x `nplist`, row-major)

`std::vector<bool>` **state\_is\_non\_negative\_**

vector of bools indicating whether state variables are to be assumed to be positive

`std::vector<bool>` **root\_initial\_values\_**

Vector of booleans indicating the initial boolean value for every event trigger function. Events at `t0` can only trigger if the initial value is set to `false`. Must be specified during model compilation by setting the `initialValue` attribute of an event trigger.

`bool` **any\_state\_non\_negative\_** = {false}

boolean indicating whether any entry in `stateIsNonNegative` is `true`

`int` **nmaxevent\_** = {10}

maximal number of events to track

```

SteadyStateSensitivityMode steadystate_sensitivity_mode_ =
{SteadyStateSensitivityMode::newtonOnly}
    flag indicating whether steadystate sensitivities are to be computed via FSA when steadyStateSimulation
    is used

bool always_check_finite_ = {false}
    Indicates whether the result of every call to Model::f* should be checked for finiteness

bool sigma_res_ = {false}
    indicates whether sigma residuals are to be added for every datapoint

realtype min_sigma_ = {50.0}
    offset to ensure positivity of sigma residuals, only has an effect when sigma_res_ is true

```

## Friends

```

template<class Archive>
friend void serialize(Archive &ar, Model &m, unsigned int version)
    Serialize Model (see boost::serialization::serialize).

```

### Parameters

- **ar** – Archive to serialize to
- **m** – Data to serialize
- **version** – Version number

```

friend bool operator==(const Model &a, const Model &b)
    Check equality of data members.

```

### Parameters

- **a** – First model instance
- **b** – Second model instance

**Returns** Equality

## Class `Model_DAE`

- Defined in `file_include_amici_model_dae.h`

## Inheritance Relationships

### Base Type

- `public amici::Model` (*Class Model*)

## Class Documentation

class amici::Model\_DAE : public amici::Model

The *Model* class represents an AMICI DAE model.

The model does not contain any data, but represents the state of the model at a specific time *t*. The states must not always be in sync, but may be updated asynchronously.

### Public Functions

**Model\_DAE()** = default

default constructor

inline **Model\_DAE**(const *ModelDimensions* &model\_dimensions, *SimulationParameters* simulation\_parameters, const *SecondOrderMode* o2mode, std::vector<realtype> const &idlist, std::vector<int> const &z2event, const bool pythonGenerated = false, const int ndxdotdp\_explicit = 0)

Constructor with model dimensions.

#### Parameters

- **model\_dimensions** – *Model* dimensions
- **simulation\_parameters** – Simulation parameters
- **o2mode** – second order sensitivity mode
- **idlist** – indexes indicating algebraic components (DAE only)
- **z2event** – mapping of event outputs to events
- **pythonGenerated** – flag indicating matlab or python wrapping
- **ndxdotdp\_explicit** – number of nonzero elements dxdotdp\_explicit

virtual void **fJ**(realtype t, realtype cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, SUNMatrix J) override

Dense Jacobian function.

#### Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **J** – dense matrix to which values of the jacobian will be written

void **fJ**(realtype t, realtype cj, const *N\_Vector* x, const *N\_Vector* dx, const *N\_Vector* xdot, SUNMatrix J)

Jacobian of xdot with respect to states x.

#### Parameters

- **t** – timepoint
- **cj** – scaling factor, inverse of the step size
- **x** – Vector with the states



- **dx** – Vector with the derivative states
- **xdot** – Vector with the right hand side
- **J** – Matrix to which the Jacobian will be written

virtual void **fJB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot, SUNMatrix JB) override  
Dense Jacobian function.

#### Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side (unused)
- **JB** – dense matrix to which values of the jacobian will be written

void **fJB**(*realtype* t, *realtype* cj, *const\_N\_Vector* x, *const\_N\_Vector* dx, *const\_N\_Vector* xB, *const\_N\_Vector* dxB, SUNMatrix JB)

Jacobian of xBdot with respect to adjoint state xB.

#### Parameters

- **t** – timepoint
- **cj** – scaling factor, inverse of the step size
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **JB** – Matrix to which the Jacobian will be written

virtual void **fJSparse**(*realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, SUNMatrix J) override

Sparse Jacobian function.

#### Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **J** – sparse matrix to which values of the Jacobian will be written

void **fJSparse**(*realtype* t, *realtype* cj, *const\_N\_Vector* x, *const\_N\_Vector* dx, SUNMatrix J)  
J in sparse form (for sparse solvers from the SuiteSparse Package)

**Parameters**

- **t** – timepoint
- **cj** – scalar in Jacobian (inverse stepsize)
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **J** – Matrix to which the Jacobian will be written

virtual void **fJSparseB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot, SUNMatrix JB)  
override

Sparse Jacobian function.

**Parameters**

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side (unused)
- **JB** – dense matrix to which values of the jacobian will be written

void **fJSparseB**(*realtype* t, *realtype* cj, *const\_N\_Vector* x, *const\_N\_Vector* dx, *const\_N\_Vector* xB, *const\_N\_Vector* dxB, SUNMatrix JB)

JB in sparse form (for sparse solvers from the SuiteSparse Package)

**Parameters**

- **t** – timepoint
- **cj** – scalar in Jacobian
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **JB** – Matrix to which the Jacobian will be written

virtual void **fJDiag**(*realtype* t, *AmiVector* &JDiag, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx)  
override

Diagonal of the Jacobian (for preconditioning)

**Parameters**

- **t** – timepoint
- **JDiag** – Vector to which the Jacobian diagonal will be written
- **cj** – scaling factor, inverse of the step size
- **x** – Vector with the states

- **dx** – Vector with the derivative states

virtual void **fJv**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, const *AmiVector* &v, *AmiVector* &nJv, *realtype* cj) override

Jacobian multiply function.

#### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **v** – multiplication vector (unused)
- **nJv** – array to which result of multiplication will be written
- **cj** – scaling factor (inverse of timestep, DAE only)

void **fJv**(*realtype* t, *const\_N\_Vector* x, *const\_N\_Vector* dx, *const\_N\_Vector* v, *N\_Vector* Jv, *realtype* cj)

Matrix vector product of J with a vector v (for iterative solvers)

#### Parameters

- **t** – timepoint
- **cj** – scaling factor, inverse of the step size
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **v** – Vector with which the Jacobian is multiplied
- **Jv** – Vector to which the Jacobian vector product will be written

void **fJvB**(*realtype* t, *const\_N\_Vector* x, *const\_N\_Vector* dx, *const\_N\_Vector* xB, *const\_N\_Vector* dxB, *const\_N\_Vector* vB, *N\_Vector* JvB, *realtype* cj)

Matrix vector product of JB with a vector v (for iterative solvers)

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **vB** – Vector with which the Jacobian is multiplied
- **JvB** – Vector to which the Jacobian vector product will be written
- **cj** – scalar in Jacobian (inverse stepsize)

virtual void **froot**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, gsl::span<*realtype*> root) override

Root function.

#### Parameters

- **t** – time
- **x** – state

- **dx** – time derivative of state (DAE only)
- **root** – array to which values of the root function will be written

void **froot**(*realtype* t, *const\_N\_Vector* x, *const\_N\_Vector* dx, gsl::span<*realtype*> root)  
Event trigger function for events.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **root** – array with root function values

virtual void **fxdot**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, *AmiVector* &xdot) override  
Residual function.

#### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – array to which values of the residual function will be written

void **fxdot**(*realtype* t, *const\_N\_Vector* x, *const\_N\_Vector* dx, *N\_Vector* xdot)  
Residual function of the DAE.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xdot** – Vector with the right hand side

void **fxBdot**(*realtype* t, *const\_N\_Vector* x, *const\_N\_Vector* dx, *const\_N\_Vector* xB, *const\_N\_Vector* dxB, *N\_Vector* xBdot)  
Right hand side of differential equation for adjoint state xB.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side

void **fqBdot**(*realtype* t, *const\_N\_Vector* x, *const\_N\_Vector* dx, *const\_N\_Vector* xB, *const\_N\_Vector* dxB, *N\_Vector* qBdot)  
Right hand side of integral equation for quadrature states qB.

#### Parameters

- **t** – timepoint

- $\mathbf{x}$  – Vector with the states
- $\mathbf{dx}$  – Vector with the derivative states
- $\mathbf{xB}$  – Vector with the adjoint states
- $\mathbf{dxB}$  – Vector with the adjoint derivative states
- $\mathbf{qBdot}$  – Vector with the adjoint quadrature right hand side

virtual void **fxBdot\_ss**(const *realtype* t, const *AmiVector* &xB, const *AmiVector* &dxB, *AmiVector* &xBdot)  
override

Residual function backward when running in steady state mode.

#### Parameters

- $t$  – time
- $\mathbf{xB}$  – adjoint state
- $\mathbf{dxB}$  – time derivative of state (DAE only)
- $\mathbf{xBdot}$  – array to which values of the residual function will be written

void **fxBdot\_ss**(*realtype* t, *const\_N\_Vector* xB, *const\_N\_Vector* dxB, *N\_Vector* xBdot) const  
Implementation of fxBdot for steady state case at the *N\_Vector* level.

#### Parameters

- $t$  – timepoint
- $\mathbf{xB}$  – Vector with the adjoint state
- $\mathbf{dxB}$  – Vector with the adjoint derivative states
- $\mathbf{xBdot}$  – Vector with the adjoint right hand side

void **fqBdot\_ss**(*realtype* t, *const\_N\_Vector* xB, *const\_N\_Vector* dxB, *N\_Vector* qBdot) const  
Implementation of fqBdot for steady state at the *N\_Vector* level.

#### Parameters

- $t$  – timepoint
- $\mathbf{xB}$  – Vector with the adjoint states
- $\mathbf{dxB}$  – Vector with the adjoint derivative states
- $\mathbf{qBdot}$  – Vector with the adjoint quadrature right hand side

virtual void **fJSparseB\_ss**(*SUNMatrix* JB) override  
Sparse Jacobian function backward, steady state case.

**Parameters**  $\mathbf{JB}$  – sparse matrix to which values of the Jacobian will be written

virtual void **writeSteadystateJB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx,  
const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot)  
override

Computes the sparse backward Jacobian for steadystate integration and writes it to the model member.

#### Parameters

- $t$  – timepoint
- $cj$  – scalar in Jacobian
- $\mathbf{x}$  – Vector with the states
- $\mathbf{dx}$  – Vector with the derivative states

- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint state right hand side

void **fdxdotdp**(*realtype* t, const *const\_N\_Vector* x, const *const\_N\_Vector* dx)  
Sensitivity of dx/dt wrt model parameters p.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states

inline virtual void **fdxdotdp**(const *realtype* t, const *AmiVector* &x, const *AmiVector* &dx) override  
Model-specific sparse implementation of explicit parameter derivative of right hand side.

#### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)

virtual void **fsxdot**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, int ip, const *AmiVector* &sx, const *AmiVector* &sdx, *AmiVector* &sxdot) override  
Sensitivity Residual function.

#### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **ip** – parameter index
- **sx** – sensitivity state
- **sdx** – time derivative of sensitivity state (DAE only)
- **sxdot** – array to which values of the sensitivity residual function will be written

void **fsxdot**(*realtype* t, *const\_N\_Vector* x, *const\_N\_Vector* dx, int ip, *const\_N\_Vector* sx, *const\_N\_Vector* sdx, *N\_Vector* sxdot)  
Right hand side of differential equation for state sensitivities sx.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **ip** – parameter index
- **sx** – Vector with the state sensitivities
- **sdx** – Vector with the derivative state sensitivities
- **sxdot** – Vector with the sensitivity right hand side

void **fm**(*realtype* t, *const\_N\_Vector* x)  
Mass matrix for DAE systems.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states

virtual std::unique\_ptr<*Solver*> **getSolver**() override  
Retrieves the solver object.

**Returns** The *Solver* instance

### Protected Functions

virtual void **fJSparse**(SUNMatrixContent\_Sparse JSparse, *realtype* t, const *realtype* \*x, const double \*p, const double \*k, const *realtype* \*h, *realtype* cj, const *realtype* \*dx, const *realtype* \*w, const *realtype* \*dwdx) = 0

*Model* specific implementation for fJSparse.

#### Parameters

- **JSparse** – Matrix to which the Jacobian will be written
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **cj** – scaling factor, inverse of the step size
- **dx** – Vector with the derivative states
- **w** – vector with helper variables
- **dwdx** – derivative of w wrt x

virtual void **froot**(*realtype* \*root, *realtype* t, const *realtype* \*x, const double \*p, const double \*k, const *realtype* \*h, const *realtype* \*dx)

*Model* specific implementation for froot.

#### Parameters

- **root** – values of the trigger function
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **dx** – Vector with the derivative states

virtual void **fxdot**(*realtype* \*xdot, *realtype* t, const *realtype* \*x, const double \*p, const double \*k, const *realtype* \*h, const *realtype* \*dx, const *realtype* \*w) = 0

*Model* specific implementation for fxdot.

**Parameters**

- **`xdot`** – residual function
- **`t`** – timepoint
- **`x`** – Vector with the states
- **`p`** – parameter vector
- **`k`** – constants vector
- **`h`** – Heaviside vector
- **`w`** – vector with helper variables
- **`dx`** – Vector with the derivative states

virtual void **`fdxdotdp`**(*realtype* \*dxdotdp, *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ip, const *realtype* \*dx, const *realtype* \*w, const *realtype* \*dwdp)

*Model* specific implementation of `fdxdotdp`.

**Parameters**

- **`dxdotdp`** – partial derivative `xdot` wrt `p`
- **`t`** – timepoint
- **`x`** – Vector with the states
- **`p`** – parameter vector
- **`k`** – constants vector
- **`h`** – Heaviside vector
- **`ip`** – parameter index
- **`dx`** – Vector with the derivative states
- **`w`** – vector with helper variables
- **`dwdp`** – derivative of `w` wrt `p`

virtual void **`fM`**(*realtype* \*M, const *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k)

*Model* specific implementation of `fM`.

**Parameters**

- **`M`** – mass matrix
- **`t`** – timepoint
- **`x`** – Vector with the states
- **`p`** – parameter vector
- **`k`** – constants vector



## Class Model\_ODE

- Defined in file\_include\_amici\_model\_ode.h

## Inheritance Relationships

### Base Type

- public amici::Model (*Class Model*)

## Class Documentation

class amici::Model\_ODE : public amici::Model

The *Model* class represents an AMICI ODE model.

The model does not contain any data, but represents the state of the model at a specific time t. The states must not always be in sync, but may be updated asynchronously.

### Public Functions

**Model\_ODE()** = default  
default constructor

inline **Model\_ODE**(*ModelDimensions* const &model\_dimensions, *SimulationParameters* simulation\_parameters, const *SecondOrderMode* o2mode, std::vector<realtype> const &idlist, std::vector<int> const &z2event, const bool pythonGenerated = false, const int ndxdotdp\_explicit = 0, const int ndxdotdx\_explicit = 0, const int w\_recursion\_depth = 0)

Constructor with model dimensions.

#### Parameters

- **model\_dimensions** – *Model* dimensions
- **simulation\_parameters** – Simulation parameters
- **o2mode** – second order sensitivity mode
- **idlist** – indexes indicating algebraic components (DAE only)
- **z2event** – mapping of event outputs to events
- **pythonGenerated** – flag indicating matlab or python wrapping
- **ndxdotdp\_explicit** – number of nonzero elements dxdotdp\_explicit
- **ndxdotdx\_explicit** – number of nonzero elements dxdotdx\_explicit
- **w\_recursion\_depth** – Recursion depth of fw

virtual void **fJ**(*realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, SUNMatrix J) override

Dense Jacobian function.

#### Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)

- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **J** – dense matrix to which values of the jacobian will be written

void **fJ**(*realtype* t, *const\_N\_Vector* x, *const\_N\_Vector* xdot, SUNMatrix J)

Implementation of fJ at the N\_Vector level.

This function provides an interface to the model specific routines for the solver implementation as well as the *AmiVector* level implementation

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **xdot** – Vector with the right hand side
- **J** – Matrix to which the Jacobian will be written

virtual void **fJB**(*const realtype* t, *realtype* cj, *const AmiVector* &x, *const AmiVector* &dx, *const AmiVector* &xB, *const AmiVector* &dxB, *const AmiVector* &xBdot, SUNMatrix JB) override

Dense Jacobian function.

#### Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side (unused)
- **JB** – dense matrix to which values of the jacobian will be written

void **fJB**(*realtype* t, *const\_N\_Vector* x, *const\_N\_Vector* xB, *const\_N\_Vector* xBdot, SUNMatrix JB)

Implementation of fJB at the N\_Vector level, this function provides an interface to the model specific routines for the solver implementation.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **xB** – Vector with the adjoint states
- **xBdot** – Vector with the adjoint right hand side
- **JB** – Matrix to which the Jacobian will be written

virtual void **fJSparse**(*realtype* t, *realtype* cj, *const AmiVector* &x, *const AmiVector* &dx, *const AmiVector* &xdot, SUNMatrix J) override

Sparse Jacobian function.

#### Parameters

- **t** – time

- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **J** – sparse matrix to which values of the Jacobian will be written

void **fJSparse**(*realtype* t, *const\_N\_Vector* x, SUNMatrix J)

Implementation of fJSparse at the N\_Vector level, this function provides an interface to the model specific routines for the solver implementation as well as the *AmiVector* level implementation.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **J** – Matrix to which the Jacobian will be written

virtual void **fJSparseB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot, SUNMatrix JB)  
override

Sparse Jacobian function.

#### Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side (unused)
- **JB** – dense matrix to which values of the jacobian will be written

void **fJSparseB**(*realtype* t, *const\_N\_Vector* x, *const\_N\_Vector* xB, *const\_N\_Vector* xBdot, SUNMatrix JB)

Implementation of fJSparseB at the N\_Vector level, this function provides an interface to the model specific routines for the solver implementation.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **xB** – Vector with the adjoint states
- **xBdot** – Vector with the adjoint right hand side
- **JB** – Matrix to which the Jacobian will be written

void **fJDiag**(*realtype* t, N\_Vector JDiag, *const\_N\_Vector* x)

Implementation of fJDiag at the N\_Vector level, this function provides an interface to the model specific routines for the solver implementation.

#### Parameters

- **t** – timepoint

- **JDiag** – Vector to which the Jacobian diagonal will be written
- **x** – Vector with the states

virtual void **fJDiag**(*realtype* t, *AmiVector* &JDiag, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx) override

Diagonal of the Jacobian (for preconditioning)

#### Parameters

- **t** – timepoint
- **JDiag** – Vector to which the Jacobian diagonal will be written
- **cj** – scaling factor, inverse of the step size
- **x** – Vector with the states
- **dx** – Vector with the derivative states

virtual void **fJv**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, const *AmiVector* &v, *AmiVector* &nJv, *realtype* cj) override

Jacobian multiply function.

#### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **v** – multiplication vector (unused)
- **nJv** – array to which result of multiplication will be written
- **cj** – scaling factor (inverse of timestep, DAE only)

void **fJv**(const *N\_Vector* v, *N\_Vector* Jv, *realtype* t, const *N\_Vector* x)

Implementation of fJv at the *N\_Vector* level.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **v** – Vector with which the Jacobian is multiplied
- **Jv** – Vector to which the Jacobian vector product will be written

void **fJvB**(const *N\_Vector* vB, *N\_Vector* JvB, *realtype* t, const *N\_Vector* x, const *N\_Vector* xB)

Implementation of fJvB at the *N\_Vector* level.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **xB** – Vector with the adjoint states
- **vB** – Vector with which the Jacobian is multiplied
- **JvB** – Vector to which the Jacobian vector product will be written

virtual void **froot**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, gsl::span<*realtype*> root) override  
Root function.

#### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **root** – array to which values of the root function will be written

void **froot**(*realtype* t, *const\_N\_Vector* x, gsl::span<*realtype*> root)

Implementation of froot at the N\_Vector level This function provides an interface to the model specific routines for the solver implementation as well as the *AmiVector* level implementation.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **root** – array with root function values

virtual void **fxdot**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, *AmiVector* &xdot) override  
Residual function.

#### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – array to which values of the residual function will be written

void **fxdot**(*realtype* t, *const\_N\_Vector* x, N\_Vector xdot)

Implementation of fxdot at the N\_Vector level, this function provides an interface to the model specific routines for the solver implementation as well as the *AmiVector* level implementation.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **xdot** – Vector with the right hand side

void **fxBdot**(*realtype* t, N\_Vector x, N\_Vector xB, N\_Vector xBdot)

Implementation of fxBdot at the N\_Vector level.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **xB** – Vector with the adjoint states
- **xBdot** – Vector with the adjoint right hand side

void **fqBdot**(*realtype* t, *const\_N\_Vector* x, *const\_N\_Vector* xB, N\_Vector qBdot)

Implementation of fqBdot at the N\_Vector level.

#### Parameters

- **t** – timepoint

- **x** – Vector with the states
- **xB** – Vector with the adjoint states
- **qBdot** – Vector with the adjoint quadrature right hand side

virtual void **fxBdot\_ss**(const *realtype* t, const *AmiVector* &xB, const *AmiVector*&, *AmiVector* &xBdot) override

Residual function backward when running in steady state mode.

#### Parameters

- **t** – time
- **xB** – adjoint state
- **dxB** – time derivative of state (DAE only)
- **xBdot** – array to which values of the residual function will be written

void **fxBdot\_ss**(*realtype* t, *const\_N\_Vector* xB, *N\_Vector* xBdot) const

Implementation of fxBdot for steady state at the *N\_Vector* level.

#### Parameters

- **t** – timepoint
- **xB** – Vector with the states
- **xBdot** – Vector with the adjoint right hand side

void **fqBdot\_ss**(*realtype* t, *N\_Vector* xB, *N\_Vector* qBdot) const

Implementation of fqBdot for steady state case at the *N\_Vector* level.

#### Parameters

- **t** – timepoint
- **xB** – Vector with the adjoint states
- **qBdot** – Vector with the adjoint quadrature right hand side

virtual void **fJSparseB\_ss**(*SUNMatrix* JB) override

Sparse Jacobian function backward, steady state case.

**Parameters** **JB** – sparse matrix to which values of the Jacobian will be written

virtual void **writeSteadystateJB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot) override

Computes the sparse backward Jacobian for steadystate integration and writes it to the model member.

#### Parameters

- **t** – timepoint
- **cj** – scalar in Jacobian
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint state right hand side

virtual void **fsxdot**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, int ip, const *AmiVector* &sx, const *AmiVector* &sdx, *AmiVector* &sxdot) override

Sensitivity Residual function.

#### Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **ip** – parameter index
- **sx** – sensitivity state
- **sdx** – time derivative of sensitivity state (DAE only)
- **sxdot** – array to which values of the sensitivity residual function will be written

void **fsxdot**(*realtype* t, *const\_N\_Vector* x, int ip, *const\_N\_Vector* sx, *N\_Vector* sxdot)

Implementation of fsxdot at the *N\_Vector* level.

#### Parameters

- **t** – timepoint
- **x** – Vector with the states
- **ip** – parameter index
- **sx** – Vector with the state sensitivities
- **sxdot** – Vector with the sensitivity right hand side

virtual std::unique\_ptr<*Solver*> **getSolver**() override

Retrieves the solver object.

**Returns** The *Solver* instance

## Protected Functions

virtual void **fJSparse**(SUNMatrixContent\_Sparse JSparse, *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w, const *realtype* \*dwdx)

*Model* specific implementation for fJSparse (Matlab)

#### Parameters

- **JSparse** – Matrix to which the Jacobian will be written
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **dwdx** – derivative of w wrt x

virtual void **fJSparse**(*realtype* \*JSparse, *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w, const *realtype* \*dwdx)

*Model* specific implementation for fJSparse, data only (Py)

**Parameters**

- **JSparse** – Matrix to which the Jacobian will be written
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **dwdx** – derivative of w wrt x

virtual void **fJSparse\_colptrs**(*SUNMatrixWrapper* &JSparse)

*Model* specific implementation for fJSparse, column pointers.

**Parameters** **JSparse** – sparse matrix to which colptrs will be written

virtual void **fJSparse\_rowvals**(*SUNMatrixWrapper* &JSparse)

*Model* specific implementation for fJSparse, row values.

**Parameters** **JSparse** – sparse matrix to which rowvals will be written

virtual void **froot**(*realtype* \*root, *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*tcl)

*Model* specific implementation for froot.

**Parameters**

- **root** – values of the trigger function
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **tcl** – total abundances for conservation laws

virtual void **fxdot**(*realtype* \*xdot, *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w) = 0

*Model* specific implementation for fxdot.

**Parameters**

- **xdot** – residual function
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables



virtual void **fdxdotdp**(*realtype* \*dxdotdp, *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, int ip, const *realtype* \*w, const *realtype* \*dwdp)

*Model* specific implementation of fdxdotdp, with w chainrule (Matlab)

#### Parameters

- **dxdotdp** – partial derivative xdot wrt p
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **ip** – parameter index
- **w** – vector with helper variables
- **dwdp** – derivative of w wrt p

virtual void **fdxdotdp\_explicit**(*realtype* \*dxdotdp\_explicit, *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w)

*Model* specific implementation of fdxdotdp\_explicit, no w chainrule (Py)

#### Parameters

- **dxdotdp\_explicit** – partial derivative xdot wrt p
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables

virtual void **fdxdotdp\_explicit\_colptrs**(*SUNMatrixWrapper* &dxdotdp)

*Model* specific implementation of fdxdotdp\_explicit, colptrs part.

**Parameters** **dxdotdp** – sparse matrix to which colptrs will be written

virtual void **fdxdotdp\_explicit\_rowvals**(*SUNMatrixWrapper* &dxdotdp)

*Model* specific implementation of fdxdotdp\_explicit, rowvals part.

**Parameters** **dxdotdp** – sparse matrix to which rowvals will be written

virtual void **fdxdotdx\_explicit**(*realtype* \*dxdotdx\_explicit, *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k, const *realtype* \*h, const *realtype* \*w)

*Model* specific implementation of fdxdotdx\_explicit, no w chainrule (Py)

#### Parameters

- **dxdotdx\_explicit** – partial derivative xdot wrt x
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector

- **h** – heavyside vector
- **w** – vector with helper variables

virtual void **fdxdotdx\_explicit\_colptrs**(*SUNMatrixWrapper* &dxdotdx)  
*Model* specific implementation of fdxdotdx\_explicit, colptrs part.

**Parameters** **dxdotdx** – sparse matrix to which colptrs will be written

virtual void **fdxdotdx\_explicit\_rowvals**(*SUNMatrixWrapper* &dxdotdx)  
*Model* specific implementation of fdxdotdx\_explicit, rowvals part.

**Parameters** **dxdotdx** – sparse matrix to which rowvals will be written

virtual void **fdxdotdw**(*realtype* \*dxdotdw, *realtype* t, const *realtype* \*x, const *realtype* \*p, const *realtype* \*k,  
const *realtype* \*h, const *realtype* \*w)  
*Model* specific implementation of fdxdotdw, data part.

**Parameters**

- **dxdotdw** – partial derivative xdot wrt w
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables

virtual void **fdxdotdw\_colptrs**(*SUNMatrixWrapper* &dxdotdw)  
*Model* specific implementation of fdxdotdw, colptrs part.

**Parameters** **dxdotdw** – sparse matrix to which colptrs will be written

virtual void **fdxdotdw\_rowvals**(*SUNMatrixWrapper* &dxdotdw)  
*Model* specific implementation of fdxdotdw, rowvals part.

**Parameters** **dxdotdw** – sparse matrix to which rowvals will be written

void **fdxdotdw**(*realtype* t, *const\_N\_Vector* x)  
Sensitivity of dx/dt wrt model parameters w.

**Parameters**

- **t** – timepoint
- **x** – Vector with the states

void **fdxdotdp**(*realtype* t, *const\_N\_Vector* x)  
Explicit sensitivity of dx/dt wrt model parameters p

**Parameters**

- **t** – timepoint
- **x** – Vector with the states

virtual void **fdxdotdp**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx) override  
Model-specific sparse implementation of explicit parameter derivative of right hand side.

**Parameters**

- **t** – time

- $\mathbf{x}$  – state
- $\mathbf{dx}$  – time derivative of state (DAE only)

### Class `ModelContext`

- Defined in `file_include_amici_rdata.h`

### Inheritance Relationships

#### Base Type

- `public amici::ContextManager` (*Class `ContextManager`*)

### Class Documentation

`class amici::ModelContext : public amici::ContextManager`

The *ModelContext* temporarily stores `amici::Model::state` and restores it when going out of scope.

#### Public Functions

explicit **ModelContext**(*Model* \*model)  
initialize backup of the original values.

Parameters **model** –

*ModelContext* &**operator**=(const *ModelContext* &other) = delete

**~ModelContext**()

void **restore**()  
Restore original state on constructor-supplied *amici::Model*. Will be called during destruction. Explicit call is generally not necessary.

### Class `NewtonFailure`

- Defined in `file_include_amici_exception.h`

### Inheritance Relationships

#### Base Type

- `public amici::AmiException` (*Class `AmiException`*)

## Class Documentation

class amici::NewtonFailure : public amici::AmiException  
Newton failure exception.

This exception should be thrown when the steady state computation failed to converge for this exception we can assume that we can recover from the exception and return a solution struct to the user

### Public Functions

**NewtonFailure**(int code, const char \*function)  
Constructor, simply calls *AmiException* constructor.

#### Parameters

- **function** – name of the function in which the error occurred
- **code** – error code

### Public Members

int **error\_code**  
error code returned by solver

## Class NewtonSolver

- Defined in file\_include\_amici\_newton\_solver.h

## Inheritance Relationships

### Derived Types

- public amici::NewtonSolverDense (*Class NewtonSolverDense*)
- public amici::NewtonSolverSparse (*Class NewtonSolverSparse*)

## Class Documentation

class amici::NewtonSolver  
The *NewtonSolver* class sets up the linear solver for the Newton method.  
Subclassed by *amici::NewtonSolverDense*, *amici::NewtonSolverSparse*

## Public Functions

explicit **NewtonSolver**(const *Model* &model)

Initializes solver according to the dimensions in the provided model.

**Parameters** **model** – pointer to the model object

void **getStep**(*AmiVector* &delta, *Model* &model, const *SimulationState* &state)

Computes the solution of one Newton iteration.

**Parameters**

- **delta** – containing the RHS of the linear system, will be overwritten by solution to the linear system
- **model** – pointer to the model instance
- **state** – current simulation state

void **computeNewtonSensis**(*AmiVectorArray* &sx, *Model* &model, const *SimulationState* &state)

Computes steady state sensitivities.

**Parameters**

- **sx** – pointer to state variable sensitivities
- **model** – pointer to the model instance
- **state** – current simulation state

virtual void **prepareLinearSystem**(*Model* &model, const *SimulationState* &state) = 0

Writes the Jacobian for the Newton iteration and passes it to the linear solver.

**Parameters**

- **model** – pointer to the model instance
- **state** – current simulation state

virtual void **prepareLinearSystemB**(*Model* &model, const *SimulationState* &state) = 0

Writes the Jacobian (JB) for the Newton iteration and passes it to the linear solver

**Parameters**

- **model** – pointer to the model instance
- **state** – current simulation state

virtual void **solveLinearSystem**(*AmiVector* &rhs) = 0

Solves the linear system for the Newton step.

**Parameters** **rhs** – containing the RHS of the linear system, will be overwritten by solution to the linear system

virtual void **reinitialize**() = 0

Reinitialize the linear solver.

virtual bool **is\_singular**(*Model* &model, const *SimulationState* &state) const = 0

Checks whether linear system is singular.

**Parameters**

- **model** – pointer to the model instance
- **state** – current simulation state

**Returns** boolean indicating whether the linear system is singular (condition number < 1/machine precision)

virtual `~NewtonSolver()` = default

## Public Static Functions

static `std::unique_ptr<NewtonSolver>` **getSolver**(const *Solver* &simulationSolver, const *Model* &model)  
Factory method to create a *NewtonSolver* based on `linsolType`.

### Parameters

- **simulationSolver** – solver with settings
- **model** – pointer to the model instance

**Returns** solver *NewtonSolver* according to the specified `linsolType`

## Protected Attributes

*AmiVector* **xdot\_**

dummy rhs, used as dummy argument when computing J and JB

*AmiVector* **x\_**

dummy state, attached to linear solver

*AmiVector* **xB\_**

dummy adjoint state, used as dummy argument when computing JB

*AmiVector* **dxB\_**

dummy differential adjoint state, used as dummy argument when computing JB

## Class NewtonSolverDense

- Defined in `file_include_amici_newton_solver.h`

## Inheritance Relationships

### Base Type

- `public amici::NewtonSolver` (*Class NewtonSolver*)

## Class Documentation

class amici::**NewtonSolverDense** : public amici::*NewtonSolver*

The *NewtonSolverDense* provides access to the dense linear solver for the Newton method.

### Public Functions

explicit **NewtonSolverDense**(const *Model* &model)

constructor for sparse solver

**Parameters** **model** – model instance that provides problem dimensions

**NewtonSolverDense**(const *NewtonSolverDense*&) = delete

*NewtonSolverDense* &**operator**=(const *NewtonSolverDense* &other) = delete

**~NewtonSolverDense**() override

virtual void **solveLinearSystem**(*AmiVector* &rhs) override

Solves the linear system for the Newton step.

**Parameters** **rhs** – containing the RHS of the linear system, will be overwritten by solution to the linear system

virtual void **prepareLinearSystem**(*Model* &model, const *SimulationState* &state) override

Writes the Jacobian for the Newton iteration and passes it to the linear solver.

#### Parameters

- **model** – pointer to the model instance
- **state** – current simulation state

virtual void **prepareLinearSystemB**(*Model* &model, const *SimulationState* &state) override

Writes the Jacobian (JB) for the Newton iteration and passes it to the linear solver

#### Parameters

- **model** – pointer to the model instance
- **state** – current simulation state

virtual void **reinitialize**() override

Reinitialize the linear solver.

virtual bool **is\_singular**(*Model* &model, const *SimulationState* &state) const override

Checks whether linear system is singular.

#### Parameters

- **model** – pointer to the model instance
- **state** – current simulation state

**Returns** boolean indicating whether the linear system is singular (condition number < 1/machine precision)

## Class `NewtonSolverSparse`

- Defined in file `include/amici/newton_solver.h`

## Inheritance Relationships

### Base Type

- `public amici::NewtonSolver` (*Class `NewtonSolver`*)

## Class Documentation

`class amici::NewtonSolverSparse` : `public amici::NewtonSolver`

The *NewtonSolverSparse* provides access to the sparse linear solver for the Newton method.

### Public Functions

explicit **NewtonSolverSparse**(const *Model* &model)  
constructor for dense solver

**Parameters** `model` – model instance that provides problem dimensions

**NewtonSolverSparse**(const *NewtonSolverSparse*&) = delete

*NewtonSolverSparse* &**operator**=(const *NewtonSolverSparse* &other) = delete

**~NewtonSolverSparse**() override

virtual void **solveLinearSystem**(*AmiVector* &rhs) override  
Solves the linear system for the Newton step.

**Parameters** `rhs` – containing the RHS of the linear system, will be overwritten by solution to the linear system

virtual void **prepareLinearSystem**(*Model* &model, const *SimulationState* &state) override  
Writes the Jacobian for the Newton iteration and passes it to the linear solver.

#### Parameters

- `model` – pointer to the model instance
- `state` – current simulation state

virtual void **prepareLinearSystemB**(*Model* &model, const *SimulationState* &state) override  
Writes the Jacobian (JB) for the Newton iteration and passes it to the linear solver

#### Parameters

- `model` – pointer to the model instance
- `state` – current simulation state

virtual bool **is\_singular**(*Model* &model, const *SimulationState* &state) const override  
Checks whether linear system is singular.



**Parameters**

- **model** – pointer to the model instance
- **state** – current simulation state

**Returns** boolean indicating whether the linear system is singular (condition number < 1/machine precision)

virtual void **reinitialize()** override  
Reinitialize the linear solver.

**Class ReturnData**

- Defined in file\_include\_amici\_rdata.h

**Inheritance Relationships****Base Type**

- public amici::ModelDimensions (*Struct ModelDimensions*)

**Class Documentation**

class amici::ReturnData : public amici::ModelDimensions  
Stores all data to be returned by amici::runAmiciSimulation.

NOTE: multi-dimensional arrays are stored in row-major order (C-style)

**Public Functions**

**ReturnData()** = default  
Default constructor.

**ReturnData**(std::vector<realtype> ts, *ModelDimensions* const &model\_dimensions, int nplist, int nmaxevent, int nt, int newton\_maxsteps, std::vector<ParameterScaling> pscale, *SecondOrderMode* o2mode, *SensitivityOrder* sensi, *SensitivityMethod* sensi\_meth, *RDataReporting* rdrm, bool quadratic\_llh, bool sigma\_res, realtype sigma\_offset)

Constructor.

**Parameters**

- **ts** – see amici::SimulationParameters::ts
- **model\_dimensions** – *Model* dimensions
- **nplist** – see amici::ModelDimensions::nplist
- **nmaxevent** – see amici::ModelDimensions::nmaxevent
- **nt** – see amici::ModelDimensions::nt
- **newton\_maxsteps** – see amici::Solver::newton\_maxsteps
- **pscale** – see *amici::SimulationParameters::pscale*
- **o2mode** – see amici::SimulationParameters::o2mode

- **sensi** – see amici::Solver::sensi
- **sensi\_meth** – see amici::Solver::sensi\_meth
- **rdrn** – see amici::Solver::rdata\_reporting
- **quadratic\_llh** – whether model defines a quadratic nllh and computing res, sres and FIM makes sense
- **sigma\_res** – indicates whether additional residuals are to be added for each sigma
- **sigma\_offset** – offset to ensure real-valuedness of sigma residuals

**ReturnData**(*Solver* const &solver, const *Model* &model)

constructor that uses information from model and solver to appropriately initialize fields

#### Parameters

- **solver** – solver instance
- **model** – model instance

**~ReturnData**() = default

void **processSimulationObjects**(*SteadystateProblem* const \*preeq, *ForwardProblem* const \*fwd, *BackwardProblem* const \*bwd, *SteadystateProblem* const \*posteq, *Model* &model, *Solver* const &solver, *ExpData* const \*edata)

constructor that uses information from model and solver to appropriately initialize fields

#### Parameters

- **preeq** – simulated preequilibration problem, pass nullptr to ignore
- **fwd** – simulated forward problem, pass nullptr to ignore
- **bwd** – simulated backward problem, pass nullptr to ignore
- **posteq** – simulated postequilibration problem, pass nullptr to ignore
- **model** – matching model instance
- **solver** – matching solver instance
- **edata** – matching experimental data

## Public Members

std::string **id**

Arbitrary (not necessarily unique) identifier.

std::vector<*realtype*> **ts**

timepoints (shape nt)

std::vector<*realtype*> **xdot**

time derivative (shape nx)

std::vector<*realtype*> **J**

Jacobian of differential equation right hand side (shape nx x nx, row-major)

`std::vector<realtype> w`  
 w data from the model (recurring terms in `xdot`, for imported SBML models from python, this contains the flux vector) (shape `nt x nw`, row-major)

`std::vector<realtype> z`  
 event output (shape `nmaxevent x nz`, row-major)

`std::vector<realtype> sigmaz`  
 event output sigma standard deviation (shape `nmaxevent x nz`, row-major)

`std::vector<realtype> sz`  
 parameter derivative of event output (shape `nmaxevent x nplist x nz`, row-major)

`std::vector<realtype> ssigmaz`  
 parameter derivative of event output standard deviation (shape `nmaxevent x nplist x nz`, row-major)

`std::vector<realtype> rz`  
 event trigger output (shape `nmaxevent x nz`, row-major)

`std::vector<realtype> srz`  
 parameter derivative of event trigger output (shape `nmaxevent x nplist x nz`, row-major)

`std::vector<realtype> s2rz`  
 second-order parameter derivative of event trigger output (shape `nmaxevent x nztrue x nplist x nplist`, row-major)

`std::vector<realtype> x`  
 state (shape `nt x nx`, row-major)

`std::vector<realtype> sx`  
 parameter derivative of state (shape `nt x nplist x nx`, row-major)

`std::vector<realtype> y`  
 observable (shape `nt x ny`, row-major)

`std::vector<realtype> sigmay`  
 observable standard deviation (shape `nt x ny`, row-major)

`std::vector<realtype> sy`  
 parameter derivative of observable (shape `nt x nplist x ny`, row-major)

`std::vector<realtype> ssigmay`  
 parameter derivative of observable standard deviation (shape `nt x nplist x ny`, row-major)

`std::vector<realtype> res`  
 observable (shape `nt*ny`, row-major)

`std::vector<realtype> sres`  
 parameter derivative of residual (shape `nt*ny x nplist`, row-major)

`std::vector<realtype> FIM`  
fisher information matrix (shape `nplist` x `nplist`, row-major)

`std::vector<int> numsteps`  
number of integration steps forward problem (shape `nt`)

`std::vector<int> numstepsB`  
number of integration steps backward problem (shape `nt`)

`std::vector<int> numrhsevals`  
number of right hand side evaluations forward problem (shape `nt`)

`std::vector<int> numrhsevalsB`  
number of right hand side evaluations backward problem (shape `nt`)

`std::vector<int> numerrtestfails`  
number of error test failures forward problem (shape `nt`)

`std::vector<int> numerrtestfailsB`  
number of error test failures backward problem (shape `nt`)

`std::vector<int> numnonlinsolvconvfails`  
number of linear solver convergence failures forward problem (shape `nt`)

`std::vector<int> numnonlinsolvconvfailsB`  
number of linear solver convergence failures backward problem (shape `nt`)

`std::vector<int> order`  
employed order forward problem (shape `nt`)

double **cpu\_time** = 0.0  
computation time of forward solve [ms]

double **cpu\_timeB** = 0.0  
computation time of backward solve [ms]

double **cpu\_time\_total** = 0.0  
total CPU time from entering `runAmiciSimulation` until exiting [ms]

`std::vector<SteadyStateStatus> preeq_status`  
flags indicating success of steady state solver (preequilibration)

double **preeq\_cpu\_time** = 0.0  
computation time of the steady state solver [ms] (preequilibration)

double **preeq\_cpu\_timeB** = 0.0  
computation time of the steady state solver of the backward problem [ms] (preequilibration)

`std::vector<SteadyStateStatus> posteq_status`  
flags indicating success of steady state solver (postequilibration)

double **posteq\_cpu\_time** = 0.0  
 computation time of the steady state solver [ms] (postequilibration)

double **posteq\_cpu\_timeB** = 0.0  
 computation time of the steady state solver of the backward problem [ms] (postequilibration)

std::vector<int> **preeq\_numsteps**  
 number of Newton steps for steady state problem (preequilibration) [newton, simulation, newton] (length = 3)

int **preeq\_numstepsB** = 0  
 number of simulation steps for adjoint steady state problem (preequilibration) [== 0 if analytical solution worked, > 0 otherwise]

std::vector<int> **posteq\_numsteps**  
 number of Newton steps for steady state problem (preequilibration) [newton, simulation, newton] (shape 3) (postequilibration)

int **posteq\_numstepsB** = 0  
 number of simulation steps for adjoint steady state problem (postequilibration) [== 0 if analytical solution worked, > 0 otherwise]

*realtype* **preeq\_t** = NAN  
 time when steadystate was reached via simulation (preequilibration)

*realtype* **preeq\_wrms** = NAN  
 weighted root-mean-square of the rhs when steadystate was reached (preequilibration)

*realtype* **posteq\_t** = NAN  
 time when steadystate was reached via simulation (postequilibration)

*realtype* **posteq\_wrms** = NAN  
 weighted root-mean-square of the rhs when steadystate was reached (postequilibration)

std::vector<*realtype*> **x0**  
 initial state (shape nx)

std::vector<*realtype*> **x\_ss**  
 preequilibration steady state found by Newton solver (shape nx)

std::vector<*realtype*> **sx0**  
 initial sensitivities (shape nplist x nx, row-major)

std::vector<*realtype*> **sx\_ss**  
 preequilibration sensitivities found by Newton solver (shape nplist x nx, row-major)

*realtype* **llh** = 0.0  
 log-likelihood value

*realtype* **chi2** = 0.0  
 $\chi^2$  value

`std::vector<realtype> s1lh`  
parameter derivative of log-likelihood (shape `nplist`)

`std::vector<realtype> s21lh`  
second-order parameter derivative of log-likelihood (shape `nJ-1 x nplist`, row-major)

`int status = 0`  
status code

`int nx = {0}`  
number of states (alias `nx_rdata`, kept for backward compatibility)

`int nxtrue = {0}`  
number of states in the unaugmented system (alias `nxtrue_rdata`, kept for backward compatibility)

`int nplist = {0}`  
number of parameter for which sensitivities were requested

`int nmaxevent = {0}`  
maximal number of occurring events (for every event type)

`int nt = {0}`  
number of considered timepoints

`int newton_maxsteps = {0}`  
maximal number of newton iterations for steady state calculation

`std::vector<ParameterScaling> pscale`  
scaling of parameterization

*SecondOrderMode* `o2mode = {SecondOrderMode::none}`  
flag indicating whether second-order sensitivities were requested

*SensitivityOrder* `sensi = {SensitivityOrder::none}`  
sensitivity order

*SensitivityMethod* `sensi_meth = {SensitivityMethod::none}`  
sensitivity method

*RDataReporting* `rdata_reporting = {RDataReporting::full}`  
reporting mode

`bool sigma_res`  
boolean indicating whether residuals for standard deviations have been added

## Protected Functions

void **initializeLikelihoodReporting**(bool quadratic\_llh)  
initializes storage for likelihood reporting mode

**Parameters** **quadratic\_llh** – whether model defines a quadratic nllh and computing res, sres and FIM makes sense.

void **initializeResidualReporting**(bool enable\_res)  
initializes storage for residual reporting mode

**Parameters** **enable\_res** – whether residuals are to be computed

void **initializeFullReporting**(bool enable\_fim)  
initializes storage for full reporting mode

**Parameters** **enable\_fim** – whether FIM Hessian approximation is to be computed

void **initializeObjectiveFunction**(bool enable\_chi2)  
initialize values for chi2 and llh and derivatives

**Parameters** **enable\_chi2** – whether chi2 values are to be computed

void **processPreEquilibration**(*SteadystateProblem* const &preeq, *Model* &model)  
extracts data from a preequilibration *SteadystateProblem*

**Parameters**

- **preeq** – *SteadystateProblem* for preequilibration
- **model** – *Model* instance to compute return values

void **processPostEquilibration**(*SteadystateProblem* const &posteq, *Model* &model, *ExpData* const \*edata)  
extracts data from a preequilibration *SteadystateProblem*

**Parameters**

- **posteq** – *SteadystateProblem* for postequilibration
- **model** – *Model* instance to compute return values
- **edata** – *ExpData* instance containing observable data

void **processForwardProblem**(*ForwardProblem* const &fwd, *Model* &model, *ExpData* const \*edata)  
extracts results from forward problem

**Parameters**

- **fwd** – forward problem
- **model** – model that was used for forward simulation
- **edata** – *ExpData* instance containing observable data

void **processBackwardProblem**(*ForwardProblem* const &fwd, *BackwardProblem* const &bwd, *SteadystateProblem* const \*preeq, *Model* &model)  
extracts results from backward problem

**Parameters**

- **fwd** – forward problem
- **bwd** – backward problem
- **preeq** – *SteadystateProblem* for preequilibration

- **model** – model that was used for forward/backward simulation

void **processSolver**(*Solver* const &solver)  
extracts results from solver

**Parameters** **solver** – solver that was used for forward/backward simulation

template<class T>

inline void **storeJacobianAndDerivativeInReturnData**(T const &problem, *Model* &model)  
Evaluates and stores the Jacobian and right hand side at final timepoint.

**Parameters**

- **problem** – forward problem or steadystate problem
- **model** – model that was used for forward/backward simulation

void **readSimulationState**(*SimulationState* const &state, *Model* &model)  
sets member variables and model state according to provided simulation state

**Parameters**

- **state** – simulation state provided by Problem
- **model** – model that was used for forward/backward simulation

void **fres**(int it, *Model* &model, const *ExpData* &edata)  
Residual function.

**Parameters**

- **it** – time index
- **model** – model that was used for forward/backward simulation
- **edata** – *ExpData* instance containing observable data

void **fchi2**(int it, const *ExpData* &edata)  
Chi-squared function.

**Parameters**

- **it** – time index
- **edata** – *ExpData* instance containing observable data

void **fsres**(int it, *Model* &model, const *ExpData* &edata)  
Residual sensitivity function.

**Parameters**

- **it** – time index
- **model** – model that was used for forward/backward simulation
- **edata** – *ExpData* instance containing observable data

void **ffim**(int it, *Model* &model, const *ExpData* &edata)  
Fisher information matrix function.

**Parameters**

- **it** – time index
- **model** – model that was used for forward/backward simulation
- **edata** – *ExpData* instance containing observable data



void **invalidate**(int it\_start)  
Set likelihood, state variables, outputs and respective sensitivities to NaN (typically after integration failure)

**Parameters** **it\_start** – time index at which to start invalidating

void **invalidateLLH**()  
Set likelihood and chi2 to NaN (typically after integration failure)

void **invalidateSLLH**()  
Set likelihood sensitivities to NaN (typically after integration failure)

void **applyChainRuleFactorToSimulationResults**(const *Model* &model)  
applies the chain rule to account for parameter transformation in the sensitivities of simulation results

**Parameters** **model** – *Model* from which the *ReturnData* was obtained

inline bool **computingFSA**() const  
Checks whether forward sensitivity analysis is performed.

**Returns** boolean indicator

void **getDataOutput**(int it, *Model* &model, *ExpData* const \*edata)  
Extracts output information for data-points, expects that x\_solver\_ and sx\_solver\_ were set appropriately.

**Parameters**

- **it** – timepoint index
- **model** – model that was used in forward solve
- **edata** – *ExpData* instance carrying experimental data

void **getDataSensisFSA**(int it, *Model* &model, *ExpData* const \*edata)  
Extracts data information for forward sensitivity analysis, expects that x\_solver\_ and sx\_solver\_ were set appropriately.

**Parameters**

- **it** – index of current timepoint
- **model** – model that was used in forward solve
- **edata** – *ExpData* instance carrying experimental data

void **getEventOutput**(*realtype* t, const std::vector<int> rootidx, *Model* &model, *ExpData* const \*edata)  
Extracts output information for events, expects that x\_solver\_ and sx\_solver\_ were set appropriately.

**Parameters**

- **t** – event timepoint
- **rootidx** – information about which roots fired (1 indicating fired, 0/-1 for not)
- **model** – model that was used in forward solve
- **edata** – *ExpData* instance carrying experimental data

void **getEventSensisFSA**(int ie, *realtype* t, *Model* &model, *ExpData* const \*edata)  
Extracts event information for forward sensitivity analysis, expects that x\_solver\_ and sx\_solver\_ were set appropriately.

**Parameters**

- **ie** – index of event type
- **t** – event timepoint
- **model** – model that was used in forward solve

- **edata** – *ExpData* instance carrying experimental data

void **handleSx0Backward**(const *Model* &model, *SteadystateProblem* const &preeq, std::vector<*realtype*> &llhS0, *AmiVector* &xQB) const

Updates contribution to likelihood from quadratures (xQB), if preequilibration was run in adjoint mode.

#### Parameters

- **model** – model that was used for forward/backward simulation
- **preeq** – *SteadystateProblem* for preequilibration
- **llhS0** – contribution to likelihood for initial state sensitivities of preequilibration
- **xQB** – vector with quadratures from adjoint computation

void **handleSx0Forward**(const *Model* &model, std::vector<*realtype*> &llhS0, *AmiVector* &xB) const

Updates contribution to likelihood for initial state sensitivities (llhS0), if no preequilibration was run or if forward sensitivities were used.

#### Parameters

- **model** – model that was used for forward/backward simulation
- **llhS0** – contribution to likelihood for initial state sensitivities
- **xB** – vector with final adjoint state (excluding conservation laws)

### Protected Attributes

*realtype* **sigma\_offset**  
offset for sigma\_residuals

*realtype* **t\_**  
timepoint for model evaluation

*AmiVector* **x\_solver\_**  
partial state vector, excluding states eliminated from conservation laws

*AmiVector* **dx\_solver\_**  
partial time derivative of state vector, excluding states eliminated from conservation laws

*AmiVectorArray* **sx\_solver\_**  
partial sensitivity state vector array, excluding states eliminated from conservation laws

*AmiVector* **x\_rdata\_**  
full state vector, including states eliminated from conservation laws

*AmiVectorArray* **sx\_rdata\_**  
full sensitivity state vector array, including states eliminated from conservation laws

std::vector<int> **nroots\_**  
array of number of found roots for a certain event type (shape ne)

## Friends

```
template<class Archive>
friend void serialize(Archive &ar, ReturnData &r, unsigned int version)
    Serialize ReturnData (see boost::serialization::serialize)
```

### Parameters

- **ar** – Archive to serialize to
- **r** – Data to serialize
- **version** – Version number

## Class SetupFailure

- Defined in file\_include\_amici\_exception.h

## Inheritance Relationships

### Base Type

- public amici::AmiException (*Class AmiException*)

## Class Documentation

```
class amici::SetupFailure : public amici::AmiException
    Setup failure exception.
```

This exception should be thrown when the solver setup failed for this exception we can assume that we cannot recover from the exception and an error will be thrown

### Public Functions

```
explicit SetupFailure(char const *fmt, ...)
    Constructor with printf style interface.
```

### Parameters

- **fmt** – error message with printf format
- ... – printf formatting variables

## Class SimulationParameters

- Defined in file\_include\_amici\_simulation\_parameters.h

## Inheritance Relationships

### Derived Type

- public amici::ExpData (*Class ExpData*)

## Class Documentation

class amici::SimulationParameters

Container for various simulation parameters.

Subclassed by *amici::ExpData*

### Public Functions

**SimulationParameters()** = default

inline explicit **SimulationParameters**(std::vector<*realtype*> timepoints)

Constructor.

**Parameters timepoints** – Timepoints for which simulation results are requested

inline **SimulationParameters**(std::vector<*realtype*> fixedParameters, std::vector<*realtype*> parameters)

Constructor.

**Parameters**

- **fixedParameters** – *Model* constants
- **parameters** – *Model* parameters

inline **SimulationParameters**(std::vector<*realtype*> fixedParameters, std::vector<*realtype*> parameters,  
std::vector<int> plist)

Constructor.

**Parameters**

- **fixedParameters** – *Model* constants
- **parameters** – *Model* parameters
- **plist** – *Model* parameter indices w.r.t. which sensitivities are to be computed

inline **SimulationParameters**(std::vector<*realtype*> timepoints, std::vector<*realtype*> fixedParameters,  
std::vector<*realtype*> parameters)

Constructor.

**Parameters**

- **timepoints** – Timepoints for which simulation results are requested
- **fixedParameters** – *Model* constants

- **parameters** – *Model* parameters

void **reinitializeAllFixedParameterDependentInitialStatesForPresimulation**(int nx\_rdata)

Set reinitialization of all states based on model constants for presimulation (only meaningful if preequilibration is performed).

Convenience function to populate `reinitialization_state_idxes_presim` and `reinitialization_state_idxes_sim`

**Parameters** `nx_rdata` – Number of states (*Model::nx\_rdata*)

void **reinitializeAllFixedParameterDependentInitialStatesForSimulation**(int nx\_rdata)

Set reinitialization of all states based on model constants for the ‘main’ simulation (only meaningful if presimulation or preequilibration is performed).

Convenience function to populate `reinitialization_state_idxes_presim` and `reinitialization_state_idxes_sim`

**Parameters** `nx_rdata` – Number of states (*Model::nx\_rdata*)

void **reinitializeAllFixedParameterDependentInitialStates**(int nx\_rdata)

Set reinitialization of all states based on model constants for all simulation phases.

Convenience function to populate `reinitialization_state_idxes_presim` and `reinitialization_state_idxes_sim`

**Parameters** `nx_rdata` – Number of states (*Model::nx\_rdata*)

## Public Members

std::vector<*realtype*> **fixedParameters**

*Model* constants.

Vector of size *Model::nk()* or empty

std::vector<*realtype*> **fixedParametersPreequilibration**

*Model* constants for pre-equilibration.

Vector of size *Model::nk()* or empty.

std::vector<*realtype*> **fixedParametersPresimulation**

*Model* constants for pre-simulation.

Vector of size *Model::nk()* or empty.

std::vector<*realtype*> **parameters**

*Model* parameters.

Vector of size *Model::np()* or empty with parameter scaled according to `SimulationParameter::pscale`.

std::vector<*realtype*> **x0**

Initial state.

Vector of size *Model::nx()* or empty

std::vector<*realtype*> **sx0**

Initial state sensitivities.

Dimensions:  $\text{Model::nx()} * \text{Model::nplist}()$ ,  $\text{Model::nx()} * \text{ExpData::plist.size}()$ , if *ExpData::plist* is not empty, or empty

`std::vector<ParameterScaling> pscale`

Parameter scales.

Vector of parameter scale of size *Model::np()*, indicating how/if each parameter is to be scaled.

`std::vector<int> plist`

Parameter indices w.r.t. which to compute sensitivities.

*realtype* `tstart_ = {0.0}`

starting time

*realtype* `t_presim = {0.0}`

Duration of pre-simulation.

If this is > 0, presimulation will be performed from (model->t0 - t\_presim) to model->t0 using the fixed-Parameters in fixedParametersPresimulation

`std::vector<realtype> ts_`

Timepoints for which model state/outputs/... are requested.

Vector of timepoints.

`bool reinitializeFixedParameterInitialStates = {false}`

Flag indicating whether reinitialization of states depending on fixed parameters is activated.

`std::vector<int> reinitialization_state_idxes_presim`

Indices of states to be reinitialized based on provided presimulation constants / fixed parameters.

`std::vector<int> reinitialization_state_idxes_sim`

Indices of states to be reinitialized based on provided constants / fixed parameters.

## Class Solver

- Defined in file\_include\_amici\_solver.h

## Inheritance Relationships

## Derived Types

- `public amici::CvodeSolver (Class CvodeSolver)`
- `public amici::IDASolver (Class IDASolver)`

## Class Documentation

### class amici::Solver

The *Solver* class provides a generic interface to CVODES and IDAS solvers, individual realizations are realized in the *CVodeSolver* and the *IDASolver* class. All transient private/protected members (CVODES/IDAS memory, interface variables and status flags) are specified as mutable and not included in serialization or equality checks. No solver setting parameter should be marked mutable.

NOTE: Any changes in data members here must be propagated to copy ctor, equality operator, serialization functions in `serialization.h`, and `amici::hdf5::(read/write)SolverSettings(From/To)HDF5` in `hdf5.cpp`.

Subclassed by *amici::CVodeSolver*, *amici::IDASolver*

### Public Types

using **user\_data\_type** = std::pair<*Model*\*, *Solver* const\*>  
Type of what is passed to Sundials solvers as user\_data

### Public Functions

**Solver**() = default

Default constructor.

**Solver**(*AmiciApplication* \*app)

Constructor.

**Parameters** **app** – AMICI application context

**Solver**(const *Solver* &other)

*Solver* copy constructor.

**Parameters** **other** –

virtual **~Solver**() = default

virtual *Solver* \***clone**() const = 0

Clone this instance.

**Returns** The clone

int **run**(*realtype* tout) const

runs a forward simulation until the specified timepoint

**Parameters** **tout** – next timepoint

**Returns** status flag

int **step**(*realtype* tout) const

makes a single step in the simulation

**Parameters** **tout** – next timepoint

**Returns** status flag

void **runB**(*realtype* tout) const

runs a backward simulation until the specified timepoint

**Parameters** **tout** – next timepoint

void **setup**(*realtype* t0, *Model* \*model, const *AmiVector* &x0, const *AmiVector* &dx0, const *AmiVectorArray* &sx0, const *AmiVectorArray* &sdx0) const

Initializes the ami memory object and applies specified options.

**Parameters**

- **t0** – initial timepoint
- **model** – pointer to the model instance
- **x0** – initial states
- **dx0** – initial derivative states
- **sx0** – initial state sensitivities
- **sdx0** – initial derivative state sensitivities

void **setupB**(int \*which, *realtype* tf, *Model* \*model, const *AmiVector* &xB0, const *AmiVector* &dxB0, const *AmiVector* &xQB0) const

Initializes the AMI memory object for the backwards problem.

**Parameters**

- **which** – index of the backward problem, will be set by this routine
- **tf** – final timepoint (initial timepoint for the bwd problem)
- **model** – pointer to the model instance
- **xB0** – initial adjoint states
- **dxB0** – initial adjoint derivative states
- **xQB0** – initial adjoint quadratures

void **setupSteadystate**(const *realtype* t0, *Model* \*model, const *AmiVector* &x0, const *AmiVector* &dx0, const *AmiVector* &xB0, const *AmiVector* &dxB0, const *AmiVector* &xQ0) const

Initializes the ami memory for quadrature computation.

**Parameters**

- **t0** – initial timepoint
- **model** – pointer to the model instance
- **x0** – initial states
- **dx0** – initial derivative states
- **xB0** – initial adjoint states
- **dxB0** – initial derivative adjoint states
- **xQ0** – initial quadrature vector

void **updateAndReinitStatesAndSensitivities**(*Model* \*model) const

Reinitializes state and respective sensitivities (if necessary) according to changes in fixedParameters.

**Parameters** **model** – pointer to the model instance

virtual void **getRootInfo**(int \*rootsfound) const = 0

getRootInfo extracts information which event occurred

**Parameters** **rootsfound** – array with flags indicating whether the respective event occurred

virtual void **calcIC**(*realtype* tout1) const = 0

Calculates consistent initial conditions, assumes initial states to be correct (DAE only)



**Parameters** **tout1** – next timepoint to be computed (sets timescale)

virtual void **calcICB**(int which, *realtype* tout1) const = 0

Calculates consistent initial conditions for the backwards problem, assumes initial states to be correct (DAE only)

**Parameters**

- **which** – identifier of the backwards problem
- **tout1** – next timepoint to be computed (sets timescale)

virtual void **solveB**(*realtype* tBout, int itaskB) const = 0

Solves the backward problem until a predefined timepoint (adjoint only)

**Parameters**

- **tBout** – timepoint until which simulation should be performed
- **itaskB** – task identifier, can be CV\_NORMAL or CV\_ONE\_STEP

virtual void **turnOffRootFinding**() const = 0

Disable rootfinding.

*SensitivityMethod* **getSensitivityMethod**() const

Return current sensitivity method.

**Returns** method enum

void **setSensitivityMethod**(*SensitivityMethod* sensi\_meth)

Set sensitivity method.

**Parameters** **sensi\_meth** –

*SensitivityMethod* **getSensitivityMethodPreequilibration**() const

Return current sensitivity method during preequilibration.

**Returns** method enum

void **setSensitivityMethodPreequilibration**(*SensitivityMethod* sensi\_meth\_preeq)

Set sensitivity method for preequilibration.

**Parameters** **sensi\_meth\_preeq** –

void **switchForwardSensisOff**() const

Disable forward sensitivity integration (used in steady state sim)

int **getNewtonMaxSteps**() const

Get maximum number of allowed Newton steps for steady state computation.

**Returns**

void **setNewtonMaxSteps**(int newton\_maxsteps)

Set maximum number of allowed Newton steps for steady state computation.

**Parameters** **newton\_maxsteps** –

*NewtonDampingFactorMode* **getNewtonDampingFactorMode**() const

Get a state of the damping factor used in the Newton solver.

**Returns**

void **setNewtonDampingFactorMode**(*NewtonDampingFactorMode* dampingFactorMode)

Turn on/off a damping factor in the Newton method.

**Parameters** **dampingFactorMode** –

double **getNewtonDampingFactorLowerBound()** const

Get a lower bound of the damping factor used in the Newton solver.

**Returns**

void **setNewtonDampingFactorLowerBound**(double dampingFactorLowerBound)

Set a lower bound of the damping factor in the Newton solver.

**Parameters** **dampingFactorLowerBound** –

*SensitivityOrder* **getSensitivityOrder()** const

Get sensitivity order.

**Returns** sensitivity order

void **setSensitivityOrder**(*SensitivityOrder* sensi)

Set the sensitivity order.

**Parameters** **sensi** – sensitivity order

double **getRelativeTolerance()** const

Get the relative tolerances for the forward problem.

Same tolerance is used for the backward problem if not specified differently via `setRelativeToleranceASA`.

**Returns** relative tolerances

void **setRelativeTolerance**(double rtol)

Sets the relative tolerances for the forward problem.

Same tolerance is used for the backward problem if not specified differently via `setRelativeToleranceASA`.

**Parameters** **rtol** – relative tolerance (non-negative number)

double **getAbsoluteTolerance()** const

Get the absolute tolerances for the forward problem.

Same tolerance is used for the backward problem if not specified differently via `setAbsoluteToleranceASA`.

**Returns** absolute tolerances

void **setAbsoluteTolerance**(double atol)

Sets the absolute tolerances for the forward problem.

Same tolerance is used for the backward problem if not specified differently via `setAbsoluteToleranceASA`.

**Parameters** **atol** – absolute tolerance (non-negative number)

double **getRelativeToleranceFSA()** const

Returns the relative tolerances for the forward sensitivity problem.

**Returns** relative tolerances

void **setRelativeToleranceFSA**(double rtol)

Sets the relative tolerances for the forward sensitivity problem.

**Parameters** **rtol** – relative tolerance (non-negative number)

double **getAbsoluteToleranceFSA()** const

Returns the absolute tolerances for the forward sensitivity problem.

**Returns** absolute tolerances

void **setAbsoluteToleranceFSA**(double atol)

Sets the absolute tolerances for the forward sensitivity problem.

**Parameters** **atol** – absolute tolerance (non-negative number)

double **getRelativeToleranceB()** const

Returns the relative tolerances for the adjoint sensitivity problem.

**Returns** relative tolerances

void **setRelativeToleranceB**(double rtol)

Sets the relative tolerances for the adjoint sensitivity problem.

**Parameters** **rtol** – relative tolerance (non-negative number)

double **getAbsoluteToleranceB()** const

Returns the absolute tolerances for the backward problem for adjoint sensitivity analysis.

**Returns** absolute tolerances

void **setAbsoluteToleranceB**(double atol)

Sets the absolute tolerances for the backward problem for adjoint sensitivity analysis.

**Parameters** **atol** – absolute tolerance (non-negative number)

double **getRelativeToleranceQuadratures()** const

Returns the relative tolerance for the quadrature problem.

**Returns** relative tolerance

void **setRelativeToleranceQuadratures**(double rtol)

sets the relative tolerance for the quadrature problem

**Parameters** **rtol** – relative tolerance (non-negative number)

double **getAbsoluteToleranceQuadratures()** const

returns the absolute tolerance for the quadrature problem

**Returns** absolute tolerance

void **setAbsoluteToleranceQuadratures**(double atol)

sets the absolute tolerance for the quadrature problem

**Parameters** **atol** – absolute tolerance (non-negative number)

double **getSteadyStateToleranceFactor()** const

returns the steady state simulation tolerance factor.

Steady state simulation tolerances are the product of the simulation tolerances and this factor, unless manually set with `set(Absolute/Relative)ToleranceSteadyState()`.

**Returns** steady state simulation tolerance factor

void **setSteadyStateToleranceFactor**(double factor)

set the steady state simulation tolerance factor.

Steady state simulation tolerances are the product of the simulation tolerances and this factor, unless manually set with `set(Absolute/Relative)ToleranceSteadyState()`.

**Parameters** **factor** – tolerance factor (non-negative number)

double **getRelativeToleranceSteadyState()** const

returns the relative tolerance for the steady state problem

**Returns** relative tolerance

void **setRelativeToleranceSteadyState**(double rtol)

sets the relative tolerance for the steady state problem

**Parameters** **rtol** – relative tolerance (non-negative number)

double **getAbsoluteToleranceSteadyState()** const  
returns the absolute tolerance for the steady state problem

**Returns** absolute tolerance

void **setAbsoluteToleranceSteadyState**(double atol)  
sets the absolute tolerance for the steady state problem

**Parameters** **atol** – absolute tolerance (non-negative number)

double **getSteadyStateSensiToleranceFactor()** const  
returns the steady state sensitivity simulation tolerance factor.

Steady state sensitivity simulation tolerances are the product of the sensitivity simulation tolerances and this factor, unless manually set with **set(Absolute/Relative)ToleranceSteadyStateSensi()**.

**Returns** steady state simulation tolerance factor

void **setSteadyStateSensiToleranceFactor**(double factor)  
set the steady state sensitivity simulation tolerance factor.

Steady state sensitivity simulation tolerances are the product of the sensitivity simulation tolerances and this factor, unless manually set with **set(Absolute/Relative)ToleranceSteadyStateSensi()**.

**Parameters** **factor** – tolerance factor (non-negative number)

double **getRelativeToleranceSteadyStateSensi()** const  
returns the relative tolerance for the sensitivities of the steady state problem

**Returns** relative tolerance

void **setRelativeToleranceSteadyStateSensi**(double rtol)  
sets the relative tolerance for the sensitivities of the steady state problem

**Parameters** **rtol** – relative tolerance (non-negative number)

double **getAbsoluteToleranceSteadyStateSensi()** const  
returns the absolute tolerance for the sensitivities of the steady state problem

**Returns** absolute tolerance

void **setAbsoluteToleranceSteadyStateSensi**(double atol)  
sets the absolute tolerance for the sensitivities of the steady state problem

**Parameters** **atol** – absolute tolerance (non-negative number)

long int **getMaxSteps()** const  
returns the maximum number of solver steps for the forward problem

**Returns** maximum number of solver steps

void **setMaxSteps**(long int maxsteps)  
sets the maximum number of solver steps for the forward problem

**Parameters** **maxsteps** – maximum number of solver steps (positive number)

double **getMaxTime()** const  
Returns the maximum time allowed for integration.

**Returns** Time in seconds

void **setMaxTime**(double maxtime)  
Set the maximum time allowed for integration.

**Parameters** **maxtime** – Time in seconds

void **startTimer()** const  
Start timer for tracking integration time.

bool **timeExceeded()** const  
Check whether maximum integration time was exceeded.

**Returns** True if the maximum integration time was exceeded, false otherwise.

long int **getMaxStepsBackwardProblem()** const  
returns the maximum number of solver steps for the backward problem

**Returns** maximum number of solver steps

void **setMaxStepsBackwardProblem**(long int maxsteps)  
sets the maximum number of solver steps for the backward problem

---

**Note:** default behaviour (100 times the value for the forward problem) can be restored by passing maxsteps=0

---

**Parameters** **maxsteps** – maximum number of solver steps (non-negative number)

*LinearMultistepMethod* **getLinearMultistepMethod()** const  
returns the linear system multistep method

**Returns** linear system multistep method

void **setLinearMultistepMethod**(*LinearMultistepMethod* lmm)  
sets the linear system multistep method

**Parameters** **lmm** – linear system multistep method

*NonlinearSolverIteration* **getNonlinearSolverIteration()** const  
returns the nonlinear system solution method

**Returns**

void **setNonlinearSolverIteration**(*NonlinearSolverIteration* iter)  
sets the nonlinear system solution method

**Parameters** **iter** – nonlinear system solution method

*InterpolationType* **getInterpolationType()** const  
getInterpolationType

**Returns**

void **setInterpolationType**(*InterpolationType* interpType)  
sets the interpolation of the forward solution that is used for the backwards problem

**Parameters** **interpType** – interpolation type

int **getStateOrdering()** const  
Gets KLU / SuperLUMT state ordering mode.

**Returns** State-ordering as integer according to *SUNLinSolKLU::StateOrdering* or *SUNLinSolSuperLUMT::StateOrdering* (which differ).

void **setStateOrdering**(int ordering)  
Sets KLU / SuperLUMT state ordering mode.

This only applies when linsol is set to *LinearSolver::KLU* or *LinearSolver::SuperLUMT*. Mind the difference between *SUNLinSolKLU::StateOrdering* and *SUNLinSolSuperLUMT::StateOrdering*.

**Parameters** **ordering** – state ordering

bool **getStabilityLimitFlag**() const  
returns stability limit detection mode

**Returns** stldet can be false (deactivated) or true (activated)

void **setStabilityLimitFlag**(bool stldet)  
set stability limit detection mode

**Parameters** **stldet** – can be false (deactivated) or true (activated)

*LinearSolver* **getLinearSolver**() const  
getLinearSolver

**Returns**

void **setLinearSolver**(*LinearSolver* linsol)  
setLinearSolver

**Parameters** **linsol** –

*InternalSensitivityMethod* **getInternalSensitivityMethod**() const  
returns the internal sensitivity method

**Returns** internal sensitivity method

void **setInternalSensitivityMethod**(*InternalSensitivityMethod* ism)  
sets the internal sensitivity method

**Parameters** **ism** – internal sensitivity method

*RDataReporting* **getReturnDataReportingMode**() const  
returns the *ReturnData* reporting mode

**Returns** *ReturnData* reporting mode

void **setReturnDataReportingMode**(*RDataReporting* rdrm)  
sets the *ReturnData* reporting mode

**Parameters** **rdrm** – *ReturnData* reporting mode

void **writeSolution**(*realtype* \*t, *AmiVector* &x, *AmiVector* &dx, *AmiVectorArray* &sx, *AmiVector* &xQ)  
const  
write solution from forward simulation

**Parameters**

- **t** – time
- **x** – state
- **dx** – derivative state
- **sx** – state sensitivity
- **xQ** – quadrature

void **writeSolutionB**(*realtype* \*t, *AmiVector* &xB, *AmiVector* &dxB, *AmiVector* &xQB, int which) const  
write solution from backward simulation

**Parameters**

- **t** – time
- **xB** – adjoint state
- **dxB** – adjoint derivative state

- **xQB** – adjoint quadrature
- **which** – index of adjoint problem

const *AmiVector* &**getState**(*realtype* t) const  
Access state solution at time t.

**Parameters** **t** – time

**Returns** x or interpolated solution dky

const *AmiVector* &**getDerivativeState**(*realtype* t) const  
Access derivative state solution at time t.

**Parameters** **t** – time

**Returns** dx or interpolated solution dky

const *AmiVectorArray* &**getStateSensitivity**(*realtype* t) const  
Access state sensitivity solution at time t.

**Parameters** **t** – time

**Returns** (interpolated) solution sx

const *AmiVector* &**getAdjointState**(int which, *realtype* t) const  
Access adjoint solution at time t.

**Parameters**

- **which** – adjoint problem index
- **t** – time

**Returns** (interpolated) solution xB

const *AmiVector* &**getAdjointDerivativeState**(int which, *realtype* t) const  
Access adjoint derivative solution at time t.

**Parameters**

- **which** – adjoint problem index
- **t** – time

**Returns** (interpolated) solution dxB

const *AmiVector* &**getAdjointQuadrature**(int which, *realtype* t) const  
Access adjoint quadrature solution at time t.

**Parameters**

- **which** – adjoint problem index
- **t** – time

**Returns** (interpolated) solution xQB

const *AmiVector* &**getQuadrature**(*realtype* t) const  
Access quadrature solution at time t.

**Parameters** **t** – time

**Returns** (interpolated) solution xQ

virtual void **reInit**(*realtype* t0, const *AmiVector* &yy0, const *AmiVector* &yp0) const = 0  
Reinitializes the states in the solver after an event occurrence.

**Parameters**

- **t0** – reinitialization timepoint
- **yy0** – initial state variables
- **yp0** – initial derivative state variables (DAE only)

virtual void **sensReInit**(const *AmiVectorArray* &yyS0, const *AmiVectorArray* &ypS0) const = 0  
Reinitializes the state sensitivities in the solver after an event occurrence.

**Parameters**

- **yyS0** – new state sensitivity
- **ypS0** – new derivative state sensitivities (DAE only)

virtual void **sensToggleOff**() const = 0  
Switches off computation of state sensitivities without deallocating the memory for sensitivities.

virtual void **reInitB**(int which, *realtype* tB0, const *AmiVector* &yyB0, const *AmiVector* &ypB0) const = 0  
Reinitializes the adjoint states after an event occurrence.

**Parameters**

- **which** – identifier of the backwards problem
- **tB0** – reinitialization timepoint
- **yyB0** – new adjoint state
- **ypB0** – new adjoint derivative state

virtual void **quadReInitB**(int which, const *AmiVector* &yQB0) const = 0  
Reinitialize the adjoint states after an event occurrence.

**Parameters**

- **which** – identifier of the backwards problem
- **yQB0** – new adjoint quadrature state

*realtype* **gett**() const  
current solver timepoint

**Returns** t

*realtype* **getCpuTime**() const  
Reads out the CPU time needed for forward solve.

**Returns** cpu\_time

*realtype* **getCpuTimeB**() const  
Reads out the CPU time needed for backward solve.

**Returns** cpu\_timeB

int **nx**() const  
number of states with which the solver was initialized

**Returns** x.getLength()

int **nplist**() const  
number of parameters with which the solver was initialized

**Returns** sx.getLength()

int **nquad**() const  
number of quadratures with which the solver was initialized



**Returns** xQB.getLength()

inline bool **computingFSA**() const  
check if FSA is being computed

**Returns** flag

inline bool **computingASA**() const  
check if ASA is being computed

**Returns** flag

void **resetDiagnosis**() const  
Resets vectors containing diagnosis information.

void **storeDiagnosis**() const  
Stores diagnosis information from solver memory block for forward problem.

void **storeDiagnosisB**(int which) const  
Stores diagnosis information from solver memory block for backward problem.

**Parameters** **which** – identifier of the backwards problem

inline std::vector<int> const &**getNumSteps**() const  
Accessor ns.

**Returns** ns

inline std::vector<int> const &**getNumStepsB**() const  
Accessor nsB.

**Returns** nsB

inline std::vector<int> const &**getNumRhsEvals**() const  
Accessor nrhs.

**Returns** nrhs

inline std::vector<int> const &**getNumRhsEvalsB**() const  
Accessor nrhsB.

**Returns** nrhsB

inline std::vector<int> const &**getNumErrTestFails**() const  
Accessor netf.

**Returns** netf

inline std::vector<int> const &**getNumErrTestFailsB**() const  
Accessor netfB.

**Returns** netfB

inline std::vector<int> const &**getNumNonlinSolvConvFails**() const  
Accessor nnlsf.

**Returns** nnlsf

inline std::vector<int> const &**getNumNonlinSolvConvFailsB**() const  
Accessor nnlsfB.

**Returns** nnlsfB

inline std::vector<int> const &**getLastOrder**() const  
Accessor order.

**Returns** order

inline bool **getNewtonStepSteadyStateCheck**() const

Returns how convergence checks for steadystate computation are performed. If activated, convergence checks are limited to every 25 steps in the simulation solver to limit performance impact.

**Returns** boolean flag indicating newton step (true) or the right hand side (false)

inline bool **getSensiSteadyStateCheck**() const

Returns how convergence checks for steadystate computation are performed.

**Returns** boolean flag indicating state and sensitivity equations (true) or only state variables (false).

inline void **setNewtonStepSteadyStateCheck**(bool flag)

Sets how convergence checks for steadystate computation are performed.

**Parameters** **flag** – boolean flag to pick newton step (true) or the right hand side (false, default)

inline void **setSensiSteadyStateCheck**(bool flag)

Sets for which variables convergence checks for steadystate computation are performed.

**Parameters** **flag** – boolean flag to pick state and sensitivity equations (true, default) or only state variables (false).

## Public Members

*AmiciApplication* \***app** = &*defaultContext*  
AMICI context

## Protected Functions

virtual void **setStopTime**(*realtype* tstop) const = 0

Sets a timepoint at which the simulation will be stopped.

**Parameters** **tstop** – timepoint until which simulation should be performed

virtual int **solve**(*realtype* tout, int itask) const = 0

Solves the forward problem until a predefined timepoint.

**Parameters**

- **tout** – timepoint until which simulation should be performed
- **itask** – task identifier, can be CV\_NORMAL or CV\_ONE\_STEP

**Returns** status flag indicating success of execution

virtual int **solveF**(*realtype* tout, int itask, int \*ncheckPtr) const = 0

Solves the forward problem until a predefined timepoint (adjoint only)

**Parameters**

- **tout** – timepoint until which simulation should be performed
- **itask** – task identifier, can be CV\_NORMAL or CV\_ONE\_STEP
- **ncheckPtr** – pointer to a number that counts the internal checkpoints

**Returns** status flag indicating success of execution

virtual void **reInitPostProcessF**(*realtype* tnext) const = 0

reInitPostProcessF postprocessing of the solver memory after a discontinuity in the forward problem

**Parameters** **tnext** – next timepoint (defines integration direction)

virtual void **reInitPostProcessB**(*realtype* tnext) const = 0

reInitPostProcessB postprocessing of the solver memory after a discontinuity in the backward problem

**Parameters** **tnext** – next timepoint (defines integration direction)

virtual void **getSens**() const = 0

extracts the state sensitivity at the current timepoint from solver memory and writes it to the sx member variable

virtual void **getB**(int which) const = 0

extracts the adjoint state at the current timepoint from solver memory and writes it to the xB member variable

**Parameters** **which** – index of the backwards problem

virtual void **getQuadB**(int which) const = 0

extracts the adjoint quadrature state at the current timepoint from solver memory and writes it to the xQB member variable

**Parameters** **which** – index of the backwards problem

virtual void **getQuad**(*realtype* &t) const = 0

extracts the quadrature at the current timepoint from solver memory and writes it to the xQ member variable

**Parameters** **t** – timepoint for quadrature extraction

virtual void **init**(*realtype* t0, const *AmiVector* &x0, const *AmiVector* &dx0) const = 0

Initializes the states at the specified initial timepoint.

**Parameters**

- **t0** – initial timepoint
- **x0** – initial states
- **dx0** – initial derivative states

virtual void **initSteadystate**(*realtype* t0, const *AmiVector* &x0, const *AmiVector* &dx0) const = 0

Initializes the states at the specified initial timepoint.

**Parameters**

- **t0** – initial timepoint
- **x0** – initial states
- **dx0** – initial derivative states

virtual void **sensInit1**(const *AmiVectorArray* &sx0, const *AmiVectorArray* &sdx0) const = 0

Initializes the forward sensitivities.

**Parameters**

- **sx0** – initial states sensitivities
- **sdx0** – initial derivative states sensitivities

virtual void **binit**(int which, *realtype* tf, const *AmiVector* &xB0, const *AmiVector* &dxB0) const = 0

Initialize the adjoint states at the specified final timepoint.

**Parameters**

- **which** – identifier of the backwards problem
- **tf** – final timepoint

- **xB0** – initial adjoint state
- **dxB0** – initial adjoint derivative state

virtual void **qbinit**(int which, const *AmiVector* &xQB0) const = 0  
Initialize the quadrature states at the specified final timepoint.

**Parameters**

- **which** – identifier of the backwards problem
- **xQB0** – initial adjoint quadrature state

virtual void **rootInit**(int ne) const = 0  
Initializes the rootfinding for events.

**Parameters** **ne** – number of different events

void **initializeNonLinearSolverSens**(const *Model* \*model) const  
Initialize non-linear solver for sensitivities.

**Parameters** **model** – *Model* instance

virtual void **setDenseJacFn**() const = 0  
Set the dense Jacobian function.

virtual void **setSparseJacFn**() const = 0  
sets the sparse Jacobian function

virtual void **setBandJacFn**() const = 0  
sets the banded Jacobian function

virtual void **setJacTimesVecFn**() const = 0  
sets the Jacobian vector multiplication function

virtual void **setDenseJacFnB**(int which) const = 0  
sets the dense Jacobian function

**Parameters** **which** – identifier of the backwards problem

virtual void **setSparseJacFnB**(int which) const = 0  
sets the sparse Jacobian function

**Parameters** **which** – identifier of the backwards problem

virtual void **setBandJacFnB**(int which) const = 0  
sets the banded Jacobian function

**Parameters** **which** – identifier of the backwards problem

virtual void **setJacTimesVecFnB**(int which) const = 0  
sets the Jacobian vector multiplication function

**Parameters** **which** – identifier of the backwards problem

virtual void **setSparseJacFn\_ss**() const = 0  
sets the sparse Jacobian function for backward steady state case

virtual void **allocateSolver**() const = 0  
Create specifies solver method and initializes solver memory for the forward problem.

virtual void **setStolerances**(double rtol, double atol) const = 0  
sets scalar relative and absolute tolerances for the forward problem

**Parameters**

- **rtol** – relative tolerances

- **atol** – absolute tolerances

virtual void **setSensStolerances**(double rtol, const double \*atol) const = 0  
 activates sets scalar relative and absolute tolerances for the sensitivity variables

**Parameters**

- **rtol** – relative tolerances
- **atol** – array of absolute tolerances for every sensitivity variable

virtual void **setSensErrCon**(bool error\_corr) const = 0  
 SetSensErrCon specifies whether error control is also enforced for sensitivities for the forward problem

**Parameters** **error\_corr** – activation flag

virtual void **setQuadErrConB**(int which, bool flag) const = 0  
 Specifies whether error control is also enforced for the backward quadrature problem.

**Parameters**

- **which** – identifier of the backwards problem
- **flag** – activation flag

virtual void **setQuadErrCon**(bool flag) const = 0  
 Specifies whether error control is also enforced for the forward quadrature problem.

**Parameters** **flag** – activation flag

virtual void **setErrHandlerFn**() const = 0  
 Attaches the error handler function (errMsgIdAndTxt) to the solver.

virtual void **setUserData**() const = 0  
 Attaches the user data to the forward problem.

virtual void **setUserDataB**(int which) const = 0  
 attaches the user data to the backward problem

**Parameters** **which** – identifier of the backwards problem

virtual void **setMaxNumSteps**(long int mxsteps) const = 0  
 specifies the maximum number of steps for the forward problem

---

**Note:** in contrast to the SUNDIALS method, this sets the overall maximum, not the maximum between output times.

---

**Parameters** **mxsteps** – number of steps

virtual void **setMaxNumStepsB**(int which, long int mxstepsB) const = 0  
 specifies the maximum number of steps for the forward problem

---

**Note:** in contrast to the SUNDIALS method, this sets the overall maximum, not the maximum between output times.

---

**Parameters**

- **which** – identifier of the backwards problem
- **mxstepsB** – number of steps

virtual void **setStabLimDet**(int stldet) const = 0  
activates stability limit detection for the forward problem

**Parameters** **stldet** – flag for stability limit detection (TRUE or FALSE)

virtual void **setStabLimDetB**(int which, int stldet) const = 0  
activates stability limit detection for the backward problem

**Parameters**

- **which** – identifier of the backwards problem
- **stldet** – flag for stability limit detection (TRUE or FALSE)

virtual void **setId**(const *Model* \*model) const = 0  
specify algebraic/differential components (DAE only)

**Parameters** **model** – model specification

virtual void **setSuppressAlg**(bool flag) const = 0  
deactivates error control for algebraic components (DAE only)

**Parameters** **flag** – deactivation flag

virtual void **setSensParams**(const *realtype* \*p, const *realtype* \*pbar, const int \*plist) const = 0  
specifies the scaling and indexes for sensitivity computation

**Parameters**

- **p** – parameters
- **pbar** – parameter scaling constants
- **plist** – parameter index list

virtual void **getDky**(*realtype* t, int k) const = 0  
interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order

virtual void **getDkyB**(*realtype* t, int k, int which) const = 0  
interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order
- **which** – index of backward problem

virtual void **getSensDky**(*realtype* t, int k) const = 0  
interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order

virtual void **getQuadDkyB**(*realtype* t, int k, int which) const = 0  
interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order
- **which** – index of backward problem

virtual void **getQuadDky**(*realtype* t, int k) const = 0  
interpolates the (derivative of the) solution at the requested timepoint

**Parameters**

- **t** – timepoint
- **k** – derivative order

virtual void **adjInit**() const = 0  
initializes the adjoint problem

virtual void **quadInit**(const *AmiVector* &xQ0) const = 0  
initializes the quadratures

**Parameters** **xQ0** – vector with initial values for xQ

virtual void **allocateSolverB**(int \*which) const = 0  
Specifies solver method and initializes solver memory for the backward problem.

**Parameters** **which** – identifier of the backwards problem

virtual void **setSStolerancesB**(int which, *realtype* relTolB, *realtype* absTolB) const = 0  
sets relative and absolute tolerances for the backward problem

**Parameters**

- **which** – identifier of the backwards problem
- **relTolB** – relative tolerances
- **absTolB** – absolute tolerances

virtual void **quadSStolerancesB**(int which, *realtype* reltolQB, *realtype* abstolQB) const = 0  
sets relative and absolute tolerances for the quadrature backward problem

**Parameters**

- **which** – identifier of the backwards problem
- **reltolQB** – relative tolerances
- **abstolQB** – absolute tolerances

virtual void **quadSStolerances**(*realtype* reltolQB, *realtype* abstolQB) const = 0  
sets relative and absolute tolerances for the quadrature problem

**Parameters**

- **reltolQB** – relative tolerances
- **abstolQB** – absolute tolerances

virtual void **getNumSteps**(const void \*ami\_mem, long int \*numsteps) const = 0  
reports the number of solver steps

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numsteps** – output array

virtual void **getNumRhsEvals**(const void \*ami\_mem, long int \*numrhsevals) const = 0  
reports the number of right hand evaluations

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numrhsevals** – output array

virtual void **getNumErrTestFails**(const void \*ami\_mem, long int \*numerrtestfails) const = 0  
reports the number of local error test failures

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numerrtestfails** – output array

virtual void **getNumNonlinSolvConvFails**(const void \*ami\_mem, long int \*numnonlinsolvconvfails) const = 0  
reports the number of nonlinear convergence failures

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numnonlinsolvconvfails** – output array

virtual void **getLastOrder**(const void \*ami\_mem, int \*order) const = 0  
Reports the order of the integration method during the last internal step.

**Parameters**

- **ami\_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **order** – output array

void **initializeLinearSolver**(const *Model* \*model) const  
Initializes and sets the linear solver for the forward problem.

**Parameters** **model** – pointer to the model object

void **initializeNonLinearSolver**() const  
Sets the non-linear solver.

virtual void **setLinearSolver**() const = 0  
Sets the linear solver for the forward problem.

virtual void **setLinearSolverB**(int which) const = 0  
Sets the linear solver for the backward problem.

**Parameters** **which** – index of the backward problem

virtual void **setNonLinearSolver**() const = 0  
Set the non-linear solver for the forward problem.

virtual void **setNonLinearSolverB**(int which) const = 0  
Set the non-linear solver for the backward problem.

**Parameters** **which** – index of the backward problem



virtual void **setNonLinearSolverSens**() const = 0  
Set the non-linear solver for sensitivities.

void **initializeLinearSolverB**(const *Model* \*model, int which) const  
Initializes the linear solver for the backward problem.

**Parameters**

- **model** – pointer to the model object
- **which** – index of the backward problem

void **initializeNonLinearSolverB**(int which) const  
Initializes the non-linear solver for the backward problem.

**Parameters** **which** – index of the backward problem

virtual const *Model* \***getModel**() const = 0  
Accessor function to the model stored in the user data

**Returns** user data model

bool **getInitDone**() const  
checks whether memory for the forward problem has been allocated

**Returns** proxy for solverMemory->(cv|ida)\_MallocDone

bool **getSensInitDone**() const  
checks whether memory for forward sensitivities has been allocated

**Returns** proxy for solverMemory->(cv|ida)\_SensMallocDone

bool **getAdjInitDone**() const  
checks whether memory for forward interpolation has been allocated

**Returns** proxy for solverMemory->(cv|ida)\_adjMallocDone

bool **getInitDoneB**(int which) const  
checks whether memory for the backward problem has been allocated

**Parameters** **which** – adjoint problem index

**Returns** proxy for solverMemoryB->(cv|ida)\_MallocDone

bool **getQuadInitDoneB**(int which) const  
checks whether memory for backward quadratures has been allocated

**Parameters** **which** – adjoint problem index

**Returns** proxy for solverMemoryB->(cv|ida)\_QuadMallocDone

bool **getQuadInitDone**() const  
checks whether memory for quadratures has been allocated

**Returns** proxy for solverMemory->(cv|ida)\_QuadMallocDone

virtual void **diag**() const = 0  
attaches a diagonal linear solver to the forward problem

virtual void **diagB**(int which) const = 0  
attaches a diagonal linear solver to the backward problem

**Parameters** **which** – identifier of the backwards problem

void **resetMutableMemory**(int nx, int nplist, int nquad) const  
resets solverMemory and solverMemoryB

**Parameters**

- **nx** – new number of state variables
- **nplist** – new number of sensitivity parameters
- **nquad** – new number of quadratures (only differs from nplist for higher order sensitivity computation)

virtual void **\*getAdjBmem**(void \*ami\_mem, int which) const = 0

Retrieves the solver memory instance for the backward problem.

**Parameters**

- **which** – identifier of the backwards problem
- **ami\_mem** – pointer to the forward solver memory instance

**Returns** A (void \*) pointer to the CVODES memory allocated for the backward problem.

void **applyTolerances**() const

updates solver tolerances according to the currently specified member variables

void **applyTolerancesFSA**() const

updates FSA solver tolerances according to the currently specified member variables

void **applyTolerancesASA**(int which) const

updates ASA solver tolerances according to the currently specified member variables

**Parameters** **which** – identifier of the backwards problem

void **applyQuadTolerancesASA**(int which) const

updates ASA quadrature solver tolerances according to the currently specified member variables

**Parameters** **which** – identifier of the backwards problem

void **applyQuadTolerances**() const

updates quadrature solver tolerances according to the currently specified member variables

void **applySensitivityTolerances**() const

updates all sensitivity solver tolerances according to the currently specified member variables

void **setInitDone**() const

sets that memory for the forward problem has been allocated

void **setSensInitDone**() const

sets that memory for forward sensitivities has been allocated

void **setSensInitOff**() const

sets that memory for forward sensitivities has not been allocated

void **setAdjInitDone**() const

sets that memory for forward interpolation has been allocated

void **setInitDoneB**(int which) const

sets that memory for the backward problem has been allocated

**Parameters** **which** – adjoint problem index

void **setQuadInitDoneB**(int which) const

sets that memory for backward quadratures has been allocated

**Parameters** **which** – adjoint problem index

void **setQuadInitDone**() const

sets that memory for quadratures has been allocated

void **checkSensitivityMethod**(const *SensitivityMethod* sensi\_meth, bool preequilibration) const  
Sets sensitivity method (for simulation or preequilibration)

#### Parameters

- **sensi\_meth** – new value for sensi\_meth[\_preeq]
- **preequilibration** – flag indicating preequilibration or simulation

#### Protected Attributes

mutable std::unique\_ptr<void, std::function<void(void\*)>>> **solver\_memory\_**  
pointer to solver memory block

mutable std::vector<std::unique\_ptr<void, std::function<void(void\*)>>>> **solver\_memory\_B\_**  
pointer to solver memory block

mutable *user\_data\_type* **user\_data**  
Sundials user\_data

*InternalSensitivityMethod* **ism\_** = {*InternalSensitivityMethod::simultaneous*}  
internal sensitivity method flag used to select the sensitivity solution method. Only applies for Forward Sensitivities.

*LinearMultistepMethod* **lmm\_** = {*LinearMultistepMethod::BDF*}  
specifies the linear multistep method.

*NonlinearSolverIteration* **iter\_** = {*NonlinearSolverIteration::newton*}  
specifies the type of nonlinear solver iteration

*InterpolationType* **interp\_type\_** = {*InterpolationType::hermite*}  
interpolation type for the forward problem solution which is then used for the backwards problem.

long int **maxsteps\_** = {10000}  
maximum number of allowed integration steps

std::chrono::duration<double, std::ratio<1>> **maxtime\_** = {std::chrono::duration<double>::max()}  
Maximum wall-time for integration in seconds

mutable std::chrono::time\_point<std::chrono::system\_clock> **starttime\_**  
Time at which solver timer was started

mutable std::unique\_ptr<*SUNLinSolWrapper*> **linear\_solver\_**  
linear solver for the forward problem

mutable std::unique\_ptr<*SUNLinSolWrapper*> **linear\_solver\_B\_**  
linear solver for the backward problem

mutable std::unique\_ptr<*SUNNonLinSolWrapper*> **non\_linear\_solver\_**  
non-linear solver for the forward problem

mutable std::unique\_ptr<*SUNNonLinSolWrapper*> **non\_linear\_solver\_B\_**  
non-linear solver for the backward problem

mutable std::unique\_ptr<*SUNNonLinSolWrapper*> **non\_linear\_solver\_sens\_**  
non-linear solver for the sensitivities

mutable bool **solver\_was\_called\_F\_** = {false}  
flag indicating whether the forward solver has been called

mutable bool **solver\_was\_called\_B\_** = {false}  
flag indicating whether the backward solver has been called

mutable *AmiVector* **x\_** = {0}  
state (dimension: nx\_solver)

mutable *AmiVector* **dxy\_** = {0}  
state interface variable (dimension: nx\_solver)

mutable *AmiVector* **dx\_** = {0}  
state derivative dummy (dimension: nx\_solver)

mutable *AmiVectorArray* **sx\_** = {0, 0}  
state sensitivities interface variable (dimension: nx\_solver x nplist)

mutable *AmiVectorArray* **sdx\_** = {0, 0}  
state derivative sensitivities dummy (dimension: nx\_solver x nplist)

mutable *AmiVector* **xB\_** = {0}  
adjoint state interface variable (dimension: nx\_solver)

mutable *AmiVector* **dxB\_** = {0}  
adjoint derivative dummy variable (dimension: nx\_solver)

mutable *AmiVector* **xQB\_** = {0}  
adjoint quadrature interface variable (dimension: nJ x nplist)

mutable *AmiVector* **xQ\_** = {0}  
forward quadrature interface variable (dimension: nx\_solver)

mutable *realtype* **t\_** = {std::nan("")}  
integration time of the forward problem

mutable bool **force\_reinit\_postprocess\_F\_** = {false}  
flag to force reInitPostProcessF before next call to solve

mutable bool **force\_reinit\_postprocess\_B\_** = {false}  
flag to force reInitPostProcessB before next call to solveB

mutable bool **sens\_initialized\_** = {false}  
flag indicating whether sensInit1 was called

## Friends

```
template<class Archive>
friend void serialize(Archive &ar, Solver &s, unsigned int version)
    Serialize Solver (see boost::serialization::serialize)
```

### Parameters

- **ar** – Archive to serialize to
- **s** – Data to serialize
- **version** – Version number

```
friend bool operator==(const Solver &a, const Solver &b)
    Check equality of data members excluding solver memory.
```

### Parameters

- **a** –
- **b** –

### Returns

## Class SteadystateProblem

- Defined in file\_include\_amici\_steadystateproblem.h

## Class Documentation

```
class amici::SteadystateProblem
```

The *SteadystateProblem* class solves a steady-state problem using Newton's method and falls back to integration on failure.

## Public Functions

```
explicit SteadystateProblem(const Solver &solver, const Model &model)
    constructor
```

### Parameters

- **solver** – *Solver* instance
- **model** – *Model* instance

```
void workSteadyStateProblem(const Solver &solver, Model &model, int it)
```

Handles steady state computation in the forward case: tries to determine the steady state of the ODE system and computes steady state sensitivities if requested.

### Parameters

- **solver** – pointer to the solver object
- **model** – pointer to the model object
- **it** – integer with the index of the current time step

void **workSteadyStateBackwardProblem**(const *Solver* &solver, *Model* &model, const *BackwardProblem* \*bwd)

Integrates over the adjoint state backward in time by solving a linear system of equations, which gives the analytical solution. Computes the gradient via adjoint steady state sensitivities

**Parameters**

- **solver** – pointer to the solver object
- **model** – pointer to the model object
- **bwd** – backward problem

inline const *SimulationState* &**getFinalSimulationState**() const  
Returns the stored *SimulationState*.

**Returns** stored *SimulationState*

inline const *AmiVector* &**getEquilibrationQuadratures**() const  
Returns the quadratures from pre- or postequilibration.

**Returns** xQB Vector with quadratures

inline const *AmiVector* &**getState**() const  
Returns state at steadystate.

**Returns** x

inline const *AmiVectorArray* &**getStateSensitivity**() const  
Returns state sensitivity at steadystate.

**Returns** sx

inline std::vector<*realtype*> const &**getDJydx**() const  
Accessor for dJydx.

**Returns** dJydx

inline double **getCPUTime**() const  
Accessor for run\_time of the forward problem.

**Returns** run\_time

inline double **getCPUTimeB**() const  
Accessor for run\_time of the backward problem.

**Returns** run\_time

inline std::vector<*SteadyStateStatus*> const &**getSteadyStateStatus**() const  
Accessor for steady\_state\_status.

**Returns** steady\_state\_status

inline *realtype* **getSteadyStateTime**() const  
Get model time at which steadystate was found through simulation.

**Returns** t

inline *realtype* **getResidualNorm**() const  
Accessor for wrms.

**Returns** wrms

inline const std::vector<int> &**getNumSteps**() const  
Accessor for numsteps.

**Returns** numsteps

inline int **getNumStepsB**() const  
 Accessor for numstepsB.

**Returns** numstepsB

void **getAdjointUpdates**(*Model* &model, const *ExpData* &edata)  
 computes adjoint updates dJydx according to provided model and expdata

**Parameters**

- **model** – *Model* instance
- **edata** – experimental data

inline *AmiVector* const &**getAdjointState**() const  
 Return the adjoint state.

**Returns** xB adjoint state

inline *AmiVector* const &**getAdjointQuadrature**() const  
 Accessor for xQB.

**Returns** xQB

inline bool **hasQuadrature**() const  
 Accessor for hasQuadrature\_.

**Returns** hasQuadrature\_

bool **checkSteadyStateSuccess**() const  
 computes adjoint updates dJydx according to provided model and expdata

**Returns** convergence of steady state solver

## Class SUNLinSolBand

- Defined in file\_include\_amici\_sundials\_linsol\_wrapper.h

## Inheritance Relationships

### Base Type

- public amici::SUNLinSolWrapper (*Class* *SUNLinSolWrapper*)

## Class Documentation

class amici::SUNLinSolBand : public amici::SUNLinSolWrapper  
 SUNDIALS band direct solver.

## Public Functions

**SUNLinSolBand**(N\_Vector x, SUNMatrix A)

Create solver using existing matrix A without taking ownership of A.

### Parameters

- **x** – A template for cloning vectors needed within the solver.
- **A** – square matrix

**SUNLinSolBand**(*AmiVector* const &x, int ubw, int lbw)

Create new band solver and matrix A.

### Parameters

- **x** – A template for cloning vectors needed within the solver.
- **ubw** – upper bandwidth of band matrix A
- **lbw** – lower bandwidth of band matrix A

virtual SUNMatrix **getMatrix**() const override

Get the matrix A (matrix solvers only).

**Returns** A

## Class SUNLinSolDense

- Defined in file\_include\_amici\_sundials\_linsol\_wrapper.h

## Inheritance Relationships

### Base Type

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

## Class Documentation

class amici::SUNLinSolDense : public amici::SUNLinSolWrapper  
SUNDIALS dense direct solver.

## Public Functions

explicit **SUNLinSolDense**(*AmiVector* const &x)

Create dense solver.

**Parameters** **x** – A template for cloning vectors needed within the solver.

virtual SUNMatrix **getMatrix**() const override

Get the matrix A (matrix solvers only).

**Returns** A



## Class SUNLinSolKLU

- Defined in file\_include\_amici\_sundials\_linsol\_wrapper.h

## Inheritance Relationships

### Base Type

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

## Class Documentation

class amici::SUNLinSolKLU : public amici::SUNLinSolWrapper  
SUNDIALS KLU sparse direct solver.

### Public Types

enum **StateOrdering**

KLU state reordering (different from SuperLUMT ordering!)

*Values:*

enumerator **AMD**

enumerator **COLAMD**

enumerator **natural**

### Public Functions

**SUNLinSolKLU**(N\_Vector x, SUNMatrix A)

Create KLU solver with given matrix.

#### Parameters

- **x** – A template for cloning vectors needed within the solver.
- **A** – sparse matrix

**SUNLinSolKLU**(*AmiVector* const &x, int nnz, int sparsetype, *StateOrdering* ordering)

Create KLU solver and matrix to operate on.

#### Parameters

- **x** – A template for cloning vectors needed within the solver.
- **nnz** – Number of non-zeros in matrix A
- **sparsetype** – Sparse matrix type (CSC\_MAT, CSR\_MAT)
- **ordering** –

virtual SUNMatrix **getMatrix**() const override

Get the matrix A (matrix solvers only).

**Returns** A

void **reInit**(int nnz, int reinit\_type)

Reinitializes memory and flags for a new factorization (symbolic and numeric) to be conducted at the next solver setup call.

For more details see sunlinsol/sunlinsol\_klu.h

**Parameters**

- **nnz** – Number of non-zeros
- **reinit\_type** – SUNKLU\_REINIT\_FULL or SUNKLU\_REINIT\_PARTIAL

void **setOrdering**(*StateOrdering* ordering)

Sets the ordering used by KLU for reducing fill in the linear solve.

**Parameters** **ordering** –

**Class SUNLinSolPCG**

- Defined in file\_include\_amici\_sundials\_linsol\_wrapper.h

**Inheritance Relationships****Base Type**

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

**Class Documentation**

class amici::SUNLinSolPCG : public amici::SUNLinSolWrapper

SUNDIALS scaled preconditioned CG (Conjugate Gradient method) (PCG) solver.

**Public Functions**

**SUNLinSolPCG**(N\_Vector y, int pretype, int maxl)

Create PCG solver.

**Parameters**

- **y** –
- **pretype** – Preconditioner type (PREC\_NONE, PREC\_LEFT, PREC\_RIGHT, PREC\_BOTH)
- **maxl** – Maximum number of solver iterations

int **setATimes**(void \*A\_data, ATimesFn ATimes)

Sets the function pointer for ATimes (see sundials/sundials\_linearsolver.h).

**Parameters**

- **A\_data** –
- **ATimes** –

**Returns**

int **setPreconditioner**(void \*P\_data, PSetupFn Pset, PSolveFn Psol)

Sets function pointers for PSetup and PSolve routines inside of iterative linear solver objects (see sundials/sundials\_linearsolver.h).

**Parameters**

- **P\_data** –
- **Pset** –
- **Psol** –

**Returns**

int **setScalingVectors**(N\_Vector s, N\_Vector nul)

Sets pointers to left/right scaling vectors for the linear system solve (see sundials/sundials\_linearsolver.h).

**Parameters**

- **s** –
- **nul** –

**Returns**

int **getNumIters**() const

Returns the number of linear iterations performed in the last ‘Solve’ call.

**Returns** Number of iterations

*realtype* **getResNorm**() const

Returns the final residual norm from the last ‘Solve’ call.

**Returns** residual norm

N\_Vector **getResid**() const

Get preconditioned initial residual (see sundials/sundials\_linearsolver.h).

**Returns****Class SUNLinSolSPBCGS**

- Defined in file\_include\_amici\_sundials\_linsol\_wrapper.h

**Inheritance Relationships****Base Type**

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

## Class Documentation

class amici::SUNLinSolSPBCGS : public amici::SUNLinSolWrapper  
SUNDIALS scaled preconditioned Bi-CGStab (Bi-Conjugate Gradient Stable method) (SPBCGS) solver.

### Public Functions

explicit SUNLinSolSPBCGS(N\_Vector x, int pretype = PREC\_NONE, int maxl =  
SUNSPBCGS\_MAXL\_DEFAULT)  
*SUNLinSolSPBCGS*.

#### Parameters

- **x** – A template for cloning vectors needed within the solver.
- **pretype** – Preconditioner type (PREC\_NONE, PREC\_LEFT, PREC\_RIGHT, PREC\_BOTH)
- **maxl** – Maximum number of solver iterations

explicit SUNLinSolSPBCGS(*AmiVector* const &x, int pretype = PREC\_NONE, int maxl =  
SUNSPBCGS\_MAXL\_DEFAULT)  
*SUNLinSolSPBCGS*.

#### Parameters

- **x** – A template for cloning vectors needed within the solver.
- **pretype** – Preconditioner type (PREC\_NONE, PREC\_LEFT, PREC\_RIGHT, PREC\_BOTH)
- **maxl** – Maximum number of solver iterations

int **setATimes**(void \*A\_data, ATimesFn ATimes)  
Sets the function pointer for ATimes (see sundials/sundials\_linearsolver.h).

#### Parameters

- **A\_data** –
- **ATimes** –

#### Returns

int **setPreconditioner**(void \*P\_data, PSetupFn Pset, PSolveFn Psol)  
Sets function pointers for PSetup and PSolve routines inside of iterative linear solver objects (see sundials/sundials\_linearsolver.h).

#### Parameters

- **P\_data** –
- **Pset** –
- **Psol** –

#### Returns

int **setScalingVectors**(N\_Vector s, N\_Vector nul)  
Sets pointers to left/right scaling vectors for the linear system solve (see sundials/sundials\_linearsolver.h).

#### Parameters

- **s** –

- **nul** –

#### Returns

int **getNumIters()** const

Returns the number of linear iterations performed in the last ‘Solve’ call.

**Returns** Number of iterations

*realtype* **getResNorm()** const

Returns the final residual norm from the last ‘Solve’ call.

**Returns** residual norm

N\_Vector **getResid()** const

Get preconditioned initial residual (see sundials/sundials\_linearsolver.h).

**Returns**

### Class SUNLinSolSPFGMR

- Defined in file\_include\_amici\_sundials\_linsol\_wrapper.h

### Inheritance Relationships

#### Base Type

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

### Class Documentation

class amici::SUNLinSolSPFGMR : public amici::SUNLinSolWrapper

SUNDIALS scaled preconditioned FGMRES (Flexible Generalized Minimal Residual method) (SPFGMR) solver.

#### Public Functions

**SUNLinSolSPFGMR**(*AmiVector* const &x, int pretype, int maxl)

*SUNLinSolSPFGMR*.

#### Parameters

- **x** – A template for cloning vectors needed within the solver.
- **pretype** – Preconditioner type (PREC\_NONE, PREC\_LEFT, PREC\_RIGHT, PREC\_BOTH)
- **maxl** – Maximum number of solver iterations

int **setATimes**(void \*A\_data, ATimesFn ATimes)

Sets the function pointer for ATimes (see sundials/sundials\_linearsolver.h).

#### Parameters

- **A\_data** –
- **ATimes** –

**Returns**

int **setPreconditioner**(void \*P\_data, PSetupFn Pset, PSolveFn Psol)

Sets function pointers for PSetup and PSolve routines inside of iterative linear solver objects (see sundials/sundials\_linearsolver.h).

**Parameters**

- **P\_data** –
- **Pset** –
- **Psol** –

**Returns**

int **setScalingVectors**(N\_Vector s, N\_Vector nul)

Sets pointers to left/right scaling vectors for the linear system solve (see sundials/sundials\_linearsolver.h).

**Parameters**

- **s** –
- **nul** –

**Returns**

int **getNumIters**() const

Returns the number of linear iterations performed in the last ‘Solve’ call.

**Returns** Number of iterations

*realtype* **getResNorm**() const

Returns the final residual norm from the last ‘Solve’ call.

**Returns** residual norm

N\_Vector **getResid**() const

Get preconditioned initial residual (see sundials/sundials\_linearsolver.h).

**Returns****Class SUNLinSolSPGMR**

- Defined in file\_include\_amici\_sundials\_linsol\_wrapper.h

**Inheritance Relationships****Base Type**

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

## Class Documentation

class amici::SUNLinSolSPGMR : public amici::SUNLinSolWrapper  
 SUNDIALS scaled preconditioned GMRES (Generalized Minimal Residual method) solver (SPGMR).

### Public Functions

explicit SUNLinSolSPGMR(*AmiVector* const &x, int pretype = PREC\_NONE, int maxl =  
 SUNSPGMR\_MAXL\_DEFAULT)

Create SPGMR solver.

#### Parameters

- **x** – A template for cloning vectors needed within the solver.
- **pretype** – Preconditioner type (PREC\_NONE, PREC\_LEFT, PREC\_RIGHT, PREC\_BOTH)
- **maxl** – Maximum number of solver iterations

int setATimes(void \*A\_data, ATimesFn ATimes)

Sets the function pointer for ATimes (see sundials/sundials\_linearsolver.h).

#### Parameters

- **A\_data** –
- **ATimes** –

#### Returns

int setPreconditioner(void \*P\_data, PSetupFn Pset, PSolveFn Psol)

Sets function pointers for Pset and Psolve routines inside of iterative linear solver objects (see sundials/sundials\_linearsolver.h).

#### Parameters

- **P\_data** –
- **Pset** –
- **Psol** –

#### Returns

int setScalingVectors(N\_Vector s, N\_Vector nul)

Sets pointers to left/right scaling vectors for the linear system solve (see sundials/sundials\_linearsolver.h).

#### Parameters

- **s** –
- **nul** –

#### Returns

int getNumIters() const

Returns the number of linear iterations performed in the last ‘Solve’ call.

**Returns** Number of iterations

*realtype* getResNorm() const

Returns the final residual norm from the last ‘Solve’ call.

**Returns** residual norm

N\_Vector **getResid()** const

Get preconditioned initial residual (see sundials/sundials\_linearsolver.h).

**Returns**

## Class SUNLinSolSPTFQMR

- Defined in file\_include\_amici\_sundials\_linsol\_wrapper.h

## Inheritance Relationships

### Base Type

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

## Class Documentation

class amici::SUNLinSolSPTFQMR : public amici::SUNLinSolWrapper  
SUNDIALS scaled preconditioned TFQMR (Transpose-Free Quasi-Minimal Residual method) (SPTFQMR) solver.

### Public Functions

explicit SUNLinSolSPTFQMR(N\_Vector x, int pretype = PREC\_NONE, int maxl =  
SUNSPTFQMR\_MAXL\_DEFAULT)

Create SPTFQMR solver.

#### Parameters

- **x** – A template for cloning vectors needed within the solver.
- **pretype** – Preconditioner type (PREC\_NONE, PREC\_LEFT, PREC\_RIGHT, PREC\_BOTH)
- **maxl** – Maximum number of solver iterations

explicit SUNLinSolSPTFQMR(*AmiVector* const &x, int pretype = PREC\_NONE, int maxl =  
SUNSPTFQMR\_MAXL\_DEFAULT)

Create SPTFQMR solver.

#### Parameters

- **x** – A template for cloning vectors needed within the solver.
- **pretype** – Preconditioner type (PREC\_NONE, PREC\_LEFT, PREC\_RIGHT, PREC\_BOTH)
- **maxl** – Maximum number of solver iterations

int **setATimes**(void \*A\_data, ATimesFn ATimes)

Sets the function pointer for ATimes (see sundials/sundials\_linearsolver.h).

#### Parameters



- **A\_data** –
- **ATimes** –

**Returns**

int **setPreconditioner**(void \*P\_data, PSetupFn Pset, PSolveFn Psol)

Sets function pointers for PSetup and PSolve routines inside of iterative linear solver objects (see sundials/sundials\_linearsolver.h).

**Parameters**

- **P\_data** –
- **Pset** –
- **Psol** –

**Returns**

int **setScalingVectors**(N\_Vector s, N\_Vector nul)

Sets pointers to left/right scaling vectors for the linear system solve (see sundials/sundials\_linearsolver.h).

**Parameters**

- **s** –
- **nul** –

**Returns**

int **getNumIters**() const

Returns the number of linear iterations performed in the last ‘Solve’ call.

**Returns** Number of iterations

*realtype* **getResNorm**() const

Returns the final residual norm from the last ‘Solve’ call.

**Returns** residual norm

N\_Vector **getResid**() const

Get preconditioned initial residual (see sundials/sundials\_linearsolver.h).

**Returns****Class SUNLinSolWrapper**

- Defined in file\_include\_amici\_sundials\_linsol\_wrapper.h

**Inheritance Relationships****Derived Types**

- public amici::SUNLinSolBand (*Class SUNLinSolBand*)
- public amici::SUNLinSolDense (*Class SUNLinSolDense*)
- public amici::SUNLinSolKLU (*Class SUNLinSolKLU*)
- public amici::SUNLinSolPCG (*Class SUNLinSolPCG*)
- public amici::SUNLinSolSPBCGS (*Class SUNLinSolSPBCGS*)

- public amici::SUNLinSolSPFGMR (*Class SUNLinSolSPFGMR*)
- public amici::SUNLinSolSPGMR (*Class SUNLinSolSPGMR*)
- public amici::SUNLinSolSPTFQMR (*Class SUNLinSolSPTFQMR*)

## Class Documentation

### class amici::SUNLinSolWrapper

A RAII wrapper for SUNLinearSolver structs.

For details on member functions see documentation in sunlinSol/sundials\_linearsolver.h.

Subclassed by *amici::SUNLinSolBand*, *amici::SUNLinSolDense*, *amici::SUNLinSolKLU*, *amici::SUNLinSolPCG*, *amici::SUNLinSolSPBCGS*, *amici::SUNLinSolSPFGMR*, *amici::SUNLinSolSPGMR*, *amici::SUNLinSolSPTFQMR*

### Public Functions

**SUNLinSolWrapper()** = default

explicit **SUNLinSolWrapper**(SUNLinearSolver linsol)

Wrap existing SUNLinearSolver.

**Parameters** *linsol* –

virtual **~SUNLinSolWrapper()**

**SUNLinSolWrapper**(const *SUNLinSolWrapper* &other) = delete

Copy constructor.

**Parameters** *other* –

**SUNLinSolWrapper**(*SUNLinSolWrapper* &&other) noexcept

Move constructor.

**Parameters** *other* –

*SUNLinSolWrapper* &**operator**=(const *SUNLinSolWrapper* &other) = delete

Copy assignment.

**Parameters** *other* –

**Returns**

*SUNLinSolWrapper* &**operator**=(*SUNLinSolWrapper* &&other) noexcept

Move assignment.

**Parameters** *other* –

**Returns**

SUNLinearSolver **get**() const

Returns the wrapped SUNLinSol.

**Returns** SUNLinearSolver

SUNLinearSolver\_Type **getType**() const

Returns an identifier for the linear solver type.

**Returns**

void **setup**(SUNMatrix A) const

Performs any linear solver setup needed, based on an updated system matrix A.

**Parameters** **A** –

void **setup**(const *SUNMatrixWrapper* &A) const

Performs any linear solver setup needed, based on an updated system matrix A.

**Parameters** **A** –

int **Solve**(SUNMatrix A, N\_Vector x, N\_Vector b, *realtype* tol) const

Solves a linear system  $A \cdot x = b$ .

**Parameters**

- **A** –
- **x** – A template for cloning vectors needed within the solver.
- **b** –
- **tol** – Tolerance (weighted 2-norm), iterative solvers only

**Returns** error flag

long int **getLastFlag**() const

Returns the last error flag encountered within the linear solver.

**Returns** error flag

int **space**(long int \*lenrwLS, long int \*leniwLS) const

Returns the integer and real workspace sizes for the linear solver.

**Parameters**

- **lenrwLS** – output argument for size of real workspace
- **leniwLS** – output argument for size of integer workspace

**Returns** workspace size

virtual SUNMatrix **getMatrix**() const

Get the matrix A (matrix solvers only).

**Returns** A

**Protected Functions**

int **initialize**()

Performs linear solver initialization (assumes that all solver-specific options have been set).

**Returns** error code

## Protected Attributes

SUNLinearSolver **solver\_** = {nullptr}  
    Wrapped solver

## Class SUNMatrixWrapper

- Defined in file `_include_amici_sundials_matrix_wrapper.h`

## Class Documentation

class amici::SUNMatrixWrapper

    A RAII wrapper for SUNMatrix structs.

    This can create dense, sparse, or banded matrices using the respective constructor.

### Public Functions

**SUNMatrixWrapper**() = default

**SUNMatrixWrapper**(sunindextype M, sunindextype N, sunindextype NNZ, int sparsetype)  
    Create sparse matrix. See SUNSparseMatrix in `sunmatrix_sparse.h`.

#### Parameters

- **M** – Number of rows
- **N** – Number of columns
- **NNZ** – Number of nonzeros
- **sparsetype** – Sparse type

**SUNMatrixWrapper**(sunindextype M, sunindextype N)  
    Create dense matrix. See SUNDenseMatrix in `sunmatrix_dense.h`.

#### Parameters

- **M** – Number of rows
- **N** – Number of columns

**SUNMatrixWrapper**(sunindextype M, sunindextype ubw, sunindextype lbw)  
    Create banded matrix. See SUNBandMatrix in `sunmatrix_band.h`.

#### Parameters

- **M** – Number of rows and columns
- **ubw** – Upper bandwidth
- **lbw** – Lower bandwidth

**SUNMatrixWrapper**(const *SUNMatrixWrapper* &A, *realtype* droptol, int sparsetype)  
    Create sparse matrix from dense or banded matrix. See SUNSparseFromDenseMatrix and SUNSparseFromBandMatrix in `sunmatrix_sparse.h`.

#### Parameters

- **A** – Wrapper for dense matrix
- **droptol** – tolerance for dropping entries
- **sparsetype** – Sparse type

explicit **SUNMatrixWrapper**(SUNMatrix mat)  
Wrap existing SUNMatrix.

**Parameters** **mat** –

**~SUNMatrixWrapper**()

**SUNMatrixWrapper**(const *SUNMatrixWrapper* &other)  
Copy constructor.

**Parameters** **other** –

**SUNMatrixWrapper**(*SUNMatrixWrapper* &&other)  
Move constructor.

**Parameters** **other** –

*SUNMatrixWrapper* &**operator**=(const *SUNMatrixWrapper* &other)  
Copy assignment.

**Parameters** **other** –

**Returns**

*SUNMatrixWrapper* &**operator**=(*SUNMatrixWrapper* &&other)  
Move assignment.

**Parameters** **other** –

**Returns**

void **reallocate**(sunindextype nnz)  
Reallocate space for sparse matrix according to specified nnz.

**Parameters** **nnz** – new number of nonzero entries

void **realloc**()  
Reallocate space for sparse matrix to used space according to last entry in indexptrs.

SUNMatrix **get**() const  
Get the wrapped SUNMatrix.

---

**Note:** Even though the returned `matrix_` pointer is `const` qualified, `matrix_->content` will not be `const`. This is a shortcoming in the underlying C library, which we cannot address and it is not intended that any of those values are modified externally. If `matrix_->content` is manipulated, `cpp:meth:SUNMatrixWrapper:refresh` needs to be called.

---

**Returns** raw SunMatrix object

inline sunindextype **rows**() const  
Get the number of rows.

**Returns** number of rows

inline sunindextype **columns**() const  
Get the number of columns.

**Returns** number of columns

sunindextype **num\_nonzeros**() const

Get the number of specified non-zero elements (sparse matrices only)

---

**Note:** value will be 0 before `indexptrs` are set.

---

**Returns** number of nonzero entries

sunindextype **num\_indexptrs**() const

Get the number of `indexptrs` that can be specified (sparse matrices only)

**Returns** number of `indexptrs`

sunindextype **capacity**() const

Get the number of allocated data elements.

**Returns** number of allocated entries

*realtype* **\*data**()

Get raw data of a sparse matrix.

**Returns** pointer to first data entry

const *realtype* **\*data**() const

Get const raw data of a sparse matrix.

**Returns** pointer to first data entry

inline *realtype* **get\_data**(sunindextype `idx`) const

Get data of a sparse matrix.

**Parameters** `idx` – data index

**Returns** `idx`-th data entry

inline *realtype* **get\_data**(sunindextype `irow`, sunindextype `icol`) const

Get data entry for a dense matrix.

**Parameters**

- `irow` – row
- `icol` – col

**Returns** `A(irow,icol)`

inline void **set\_data**(sunindextype `idx`, *realtype* `data`)

Set data entry for a sparse matrix.

**Parameters**

- `idx` – data index
- `data` – data for `idx`-th entry

inline void **set\_data**(sunindextype `irow`, sunindextype `icol`, *realtype* `data`)

Set data entry for a dense matrix.

**Parameters**

- `irow` – row
- `icol` – col

- **data** – data for idx-th entry

inline sunindextype **get\_indexval**(sunindextype idx) const  
Get the index value of a sparse matrix.

**Parameters** **idx** – data index

**Returns** row (CSC) or column (CSR) for idx-th data entry

inline void **set\_indexval**(sunindextype idx, sunindextype val)  
Set the index value of a sparse matrix.

**Parameters**

- **idx** – data index
- **val** – row (CSC) or column (CSR) for idx-th data entry

inline void **set\_indexvals**(const gsl::span<const sunindextype> vals)  
Set the index values of a sparse matrix.

**Parameters** **vals** – rows (CSC) or columns (CSR) for data entries

inline sunindextype **get\_indexptr**(sunindextype ptr\_idx) const  
Get the index pointer of a sparse matrix.

**Parameters** **ptr\_idx** – pointer index

**Returns** index where the ptr\_idx-th column (CSC) or row (CSR) starts

inline void **set\_indexptr**(sunindextype ptr\_idx, sunindextype ptr)  
Set the index pointer of a sparse matrix.

**Parameters**

- **ptr\_idx** – pointer index
- **ptr** – data-index where the ptr\_idx-th column (CSC) or row (CSR) starts

inline void **set\_indexptrs**(const gsl::span<const sunindextype> ptrs)  
Set the index pointers of a sparse matrix.

**Parameters** **ptrs** – starting data-indices where the columns (CSC) or rows (CSR) start

int **sparsetype**() const  
Get the type of sparse matrix.

**Returns** matrix type

void **scale**(*realtype* a)  
multiply with a scalar (in-place)

**Parameters** **a** – scalar value to multiply matrix

void **multiply**(N\_Vector c, *const\_N\_Vector* b, *realtype* alpha = 1.0) const  
N\_Vector interface for multiply.

**Parameters**

- **c** – output vector, may already contain values
- **b** – multiplication vector
- **alpha** – scalar coefficient for matrix

inline void **multiply**(*AmiVector* &c, *AmiVector* const &b, *realtype* alpha = 1.0) const  
*AmiVector* interface for multiply.

**Parameters**

- **c** – output vector, may already contain values
- **b** – multiplication vector
- **alpha** – scalar coefficient for matrix

void **multiply**(gsl::span<*realtype*> c, gsl::span<const *realtype*> b, const *realtype* alpha = 1.0) const  
Perform matrix vector multiplication  $c += \text{alpha} * A * b$ .

**Parameters**

- **c** – output vector, may already contain values
- **b** – multiplication vector
- **alpha** – scalar coefficient

void **multiply**(N\_Vector c, *const\_N\_Vector* b, gsl::span<const int> cols, bool transpose) const  
Perform reordered matrix vector multiplication  $c += A[:, \text{cols}] * b$ .

**Parameters**

- **c** – output vector, may already contain values
- **b** – multiplication vector
- **cols** – int vector for column reordering
- **transpose** – bool transpose A before multiplication

void **multiply**(gsl::span<*realtype*> c, gsl::span<const *realtype*> b, gsl::span<const int> cols, bool transpose) const  
Perform reordered matrix vector multiplication  $c += A[:, \text{cols}] * b$ .

**Parameters**

- **c** – output vector, may already contain values
- **b** – multiplication vector
- **cols** – int vector for column reordering
- **transpose** – bool transpose A before multiplication

void **sparse\_multiply**(*SUNMatrixWrapper* &C, const *SUNMatrixWrapper* &B) const  
Perform matrix matrix multiplication  $C = A * B$  for sparse A, B, C.

---

**Note:** will overwrite existing data, indexptrs, indexvals for C, but will use preallocated space for these vars

---

**Parameters**

- **C** – output matrix,
- **B** – multiplication matrix

void **sparse\_add**(const *SUNMatrixWrapper* &A, *realtype* alpha, const *SUNMatrixWrapper* &B, *realtype* beta)  
Perform sparse matrix matrix addition  $C = \text{alpha} * A + \text{beta} * B$ .

---

**Note:** will overwrite existing data, indexptrs, indexvals for C, but will use preallocated space for these vars

---



**Parameters**

- **A** – addition matrix
- **alpha** – scalar A
- **B** – addition matrix
- **beta** – scalar B

void **sparse\_sum**(const std::vector<*SUNMatrixWrapper*> &mats)  
 Perform matrix-matrix addition  $A = \text{sum}(\text{mats}(0) \dots \text{mats}(\text{len}(\text{mats})))$

---

**Note:** will overwrite existing data, indexptrs, indexvals for A, but will use preallocated space for these vars

---

**Parameters** **mats** – vector of sparse matrices

sunindextype **scatter**(const sunindextype k, const *realtype* beta, sunindextype \*w, gsl::span<*realtype*> x, const sunindextype mark, *SUNMatrixWrapper* \*C, sunindextype nnz) const  
 Compute  $x = x + \text{beta} * A(:,k)$ , where x is a dense vector and  $A(:,k)$  is sparse, and update the sparsity pattern for  $C(:,j)$  if applicable.

This function currently has two purposes:

- perform parts of sparse matrix-matrix multiplication  $C(:,j)=A(:,k)*B(k,j)$  enabled by passing  $\text{beta}=B(k,j)$ ,  $x=C(:,j)$ ,  $C=C$ ,  $w=\text{sparsity of } C(:,j)$  from  $B(k,0 \dots j-1)$ ,  $\text{nnz}=\text{nnz}(C(:,0 \dots j-1))$
- add the k-th column of the sparse matrix A multiplied by beta to the dense vector x. enabled by passing  $\text{beta}=*$ ,  $x=x$ ,  $C=\text{nullptr}$ ,  $w=\text{nullptr}$ ,  $\text{nnz}=*$

**Parameters**

- **k** – column index
- **beta** – scaling factor
- **w** – index workspace, ( $w[i]<\text{mark}$ ) indicates non-zerosness of  $C(i,j)$  (dimension: m), if this is a nullptr, sparsity pattern of C will not be updated (if applicable).
- **x** – dense output vector (dimension: m)
- **mark** – marker for w to indicate nonzero pattern
- **C** – sparse output matrix, if this is a nullptr, sparsity pattern of C will not be updated
- **nnz** – number of nonzeros that were already written to C

**Returns** updated number of nonzeros in C

void **transpose**(*SUNMatrixWrapper* &C, const *realtype* alpha, sunindextype blocksize) const  
 Compute transpose  $A'$  of sparse matrix A and writes it to the matrix  $C = \text{alpha} * A'$ .

**Parameters**

- **C** – output matrix (sparse or dense)
- **alpha** – scalar multiplier
- **blocksize** – blocksize for transposition. For full matrix transpose set to ncols/nrows

void **to\_dense**(*SUNMatrixWrapper* &D) const  
Writes a sparse matrix A to a dense matrix D.

**Parameters** **D** – dense output matrix

void **to\_diag**(N\_Vector v) const  
Writes the diagonal of sparse matrix A to a dense vector v.

**Parameters** **v** – dense output vector

void **zero**()  
Set to 0.0, for sparse matrices also resets indexptr/indexvals.

inline SUNMatrix\_ID **matrix\_id**() const  
Get matrix id.

**Returns** SUNMatrix\_ID

void **refresh**()  
Update internal cache, needs to be called after external manipulation of matrix\_→content.

## Class SUNNonLinSolFixedPoint

- Defined in file\_include\_amici\_sundials\_linsol\_wrapper.h

## Inheritance Relationships

### Base Type

- public amici::SUNNonLinSolWrapper (*Class SUNNonLinSolWrapper*)

## Class Documentation

class amici::SUNNonLinSolFixedPoint : public amici::SUNNonLinSolWrapper  
SUNDIALS Fixed point non-linear solver to solve  $G(y) = y$ .

## Public Functions

explicit SUNNonLinSolFixedPoint(*const N\_Vector* x, int m = 0)  
Create fixed-point solver.

### Parameters

- **x** – template for cloning vectors needed within the solver.
- **m** – number of acceleration vectors to use

SUNNonLinSolFixedPoint(int count, *const N\_Vector* x, int m = 0)  
Create fixed-point solver for use with sensitivity analysis.

### Parameters

- **count** – Number of vectors in the nonlinear solve. When integrating a system containing  $N_s$  sensitivities the value of count is:  
–  $N_s+1$  if using a simultaneous corrector approach.

- Ns if using a staggered corrector approach.
- **x** – template for cloning vectors needed within the solver.
- **m** – number of acceleration vectors to use

int **getSysFn**(SUNNonlinSolSysFn \*SysFn) const  
Get function to evaluate the fixed point function  $G(y) = y$ .

**Parameters** **SysFn** –

**Returns**

## Class SUNNonLinSolNewton

- Defined in file\_include\_amici\_sundials\_linsol\_wrapper.h

## Inheritance Relationships

### Base Type

- public amici::SUNNonLinSolWrapper (*Class SUNNonLinSolWrapper*)

## Class Documentation

class amici::SUNNonLinSolNewton : public amici::SUNNonLinSolWrapper  
SUNDIALS Newton non-linear solver to solve  $F(y) = 0$ .

### Public Functions

explicit **SUNNonLinSolNewton**(N\_Vector x)  
Create Newton solver.

**Parameters** **x** – A template for cloning vectors needed within the solver.

**SUNNonLinSolNewton**(int count, N\_Vector x)  
Create Newton solver for enabled sensitivity analysis.

**Parameters**

- **count** – Number of vectors in the nonlinear solve. When integrating a system containing Ns sensitivities the value of count is:
  - Ns+1 if using a simultaneous corrector approach.
  - Ns if using a staggered corrector approach.
- **x** – A template for cloning vectors needed within the solver.

int **getSysFn**(SUNNonlinSolSysFn \*SysFn) const  
Get function to evaluate the nonlinear residual function  $F(y) = 0$ .

**Parameters** **SysFn** –

**Returns**

## Class `SUNNonLinSolWrapper`

- Defined in file `include/amici_sundials_linsol_wrapper.h`

## Inheritance Relationships

## Derived Types

- `public amici::SUNNonLinSolFixedPoint` (*Class `SUNNonLinSolFixedPoint`*)
- `public amici::SUNNonLinSolNewton` (*Class `SUNNonLinSolNewton`*)

## Class Documentation

class `amici::SUNNonLinSolWrapper`

A RAII wrapper for `SUNNonLinearSolver` structs which solve the nonlinear system  $F(y) = 0$  or  $G(y) = y$ .

Subclassed by *`amici::SUNNonLinSolFixedPoint`*, *`amici::SUNNonLinSolNewton`*

## Public Functions

explicit **`SUNNonLinSolWrapper`**(`SUNNonlinearSolver` sol)

*`SUNNonLinSolWrapper`* from existing `SUNNonlinearSolver`.

**Parameters** `sol` –

virtual `~SUNNonLinSolWrapper()`

**`SUNNonLinSolWrapper`**(const *`SUNNonLinSolWrapper`* &other) = delete

Copy constructor.

**Parameters** `other` –

**`SUNNonLinSolWrapper`**(*`SUNNonLinSolWrapper`* &&other) noexcept

Move constructor.

**Parameters** `other` –

*`SUNNonLinSolWrapper`* &**`operator=`**(const *`SUNNonLinSolWrapper`* &other) = delete

Copy assignment.

**Parameters** `other` –

**Returns**

*`SUNNonLinSolWrapper`* &**`operator=`**(*`SUNNonLinSolWrapper`* &&other) noexcept

Move assignment.

**Parameters** `other` –

**Returns**

`SUNNonlinearSolver` **`get()`** const

Get the wrapped `SUNNonlinearSolver`.

**Returns** `SUNNonlinearSolver`

SUNNonlinearSolver\_Type **getType()** const  
Get type ID of the solver.

**Returns**

int **setup**(N\_Vector y, void \*mem)  
Setup solver.

**Parameters**

- **y** – the initial iteration passed to the nonlinear solver.
- **mem** – the sundials integrator memory structure.

**Returns**

int **Solve**(N\_Vector y0, N\_Vector y, N\_Vector w, *realtype* tol, bool callLSetup, void \*mem)  
Solve the nonlinear system  $F(y) = 0$  or  $G(y) = y$ .

**Parameters**

- **y0** – the initial iterate for the nonlinear solve. This must remain unchanged throughout the solution process.
- **y** – the solution to the nonlinear system
- **w** – the solution error weight vector used for computing weighted error norms.
- **tol** – the requested solution tolerance in the weighted root-mean- squared norm.
- **callLSetup** – a flag indicating that the integrator recommends for the linear solver setup function to be called.
- **mem** – the sundials integrator memory structure.

**Returns**

int **setSysFn**(SUNNonlinSolSysFn SysFn)  
Set function to evaluate the nonlinear residual function  $F(y) = 0$  or the fixed point function  $G(y) = y$ .

**Parameters SysFn** –

**Returns**

int **setLSetupFn**(SUNNonlinSolLSetupFn SetupFn)  
Set linear solver setup function.

**Parameters SetupFn** –

**Returns**

int **setLSolveFn**(SUNNonlinSolLSolveFn SolveFn)  
Set linear solver solve function.

**Parameters SolveFn** –

**Returns**

int **setConvTestFn**(SUNNonlinSolConvTestFn CTestFn, void \*ctest\_data)  
Set function to test for convergence.

**Parameters**

- **CTestFn** –
- **ctest\_data** –

**Returns**

int **setMaxIters**(int maxiters)  
 Set maximum number of non-linear iterations.

**Parameters** **maxiters** –

**Returns**

long int **getNumIters**() const  
 getNumIters

**Returns**

int **getCurIter**() const  
 getCurIter

**Returns**

long int **getNumConvFails**() const  
 getNumConvFails

**Returns**

## Protected Functions

void **initialize**()  
 initialize

## Protected Attributes

SUNNonlinearSolver **solver** = nullptr  
 the wrapper solver

## Enums

### Enum BLASLayout

- Defined in file\_include\_amici\_defines.h

### Enum Documentation

enum amici::**BLASLayout**  
 BLAS Matrix Layout, affects dgemm and gemv calls

*Values:*

enumerator **rowMajor**

enumerator **colMajor**

## Enum BLASTranspose

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::BLASTranspose

BLAS Matrix Transposition, affects dgemm and gemv calls

*Values:*

enumerator **noTrans**

enumerator **trans**

enumerator **conjTrans**

## Enum FixedParameterContext

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::FixedParameterContext

fixedParameter to be used in condition context

*Values:*

enumerator **simulation**

enumerator **preequilibration**

enumerator **presimulation**

## Enum InternalSensitivityMethod

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::InternalSensitivityMethod

CVODES/IDAS forward sensitivity computation method

*Values:*

enumerator **simultaneous**

enumerator **staggered**

enumerator **staggered1**

## Enum InterpolationType

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::InterpolationType

CVODES/IDAS state interpolation for adjoint sensitivity analysis

*Values:*

enumerator **hermite**

enumerator **polynomial**

## Enum LinearMultistepMethod

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::LinearMultistepMethod

CVODES/IDAS linear multistep method

*Values:*

enumerator **adams**

enumerator **BDF**

## Enum LinearSolver

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::LinearSolver

linear solvers for CVODES/IDAS

*Values:*

enumerator **dense**

enumerator **band**

enumerator **LAPACKDense**

enumerator **LAPACKBand**

enumerator **diag**



enumerator **SPGMR**  
enumerator **SPBCG**  
enumerator **SPTFQMR**  
enumerator **KLU**  
enumerator **SuperLUMT**

## Enum ModelQuantity

- Defined in file `_include_amici_model.h`

## Enum Documentation

enum `amici::ModelQuantity`  
Describes the various model quantities.

*Values:*

enumerator **J**  
enumerator **JB**  
enumerator **Jv**  
enumerator **JvB**  
enumerator **JDiag**  
enumerator **sx**  
enumerator **sy**  
enumerator **ssigmay**  
enumerator **xdot**  
enumerator **sxdot**  
enumerator **xBdot**  
enumerator **x0\_rdata**  
enumerator **x0**  
enumerator **x\_rdata**  
enumerator **x**  
enumerator **dwdw**  
enumerator **dwdx**  
enumerator **dwdp**  
enumerator **y**  
enumerator **dydp**  
enumerator **dydx**

enumerator **w**  
enumerator **root**  
enumerator **qBdot**  
enumerator **qBdot\_ss**  
enumerator **xBdot\_ss**  
enumerator **JSparseB\_ss**

## Enum NewtonDampingFactorMode

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::NewtonDampingFactorMode  
Damping factor flag for the Newton method  
*Values:*  
  
enumerator **off**  
enumerator **on**

## Enum NonlinearSolverIteration

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::NonlinearSolverIteration  
CVODES/IDAS Nonlinear Iteration method  
*Values:*  
  
enumerator **functional**  
enumerator **fixedpoint**  
depreciated  
  
enumerator **newton**

### Enum ObservableScaling

- Defined in file\_include\_amici\_defines.h

### Enum Documentation

enum amici::ObservableScaling  
modes for observable scaling

*Values:*

enumerator **lin**

enumerator **log**

enumerator **log10**

### Enum ParameterScaling

- Defined in file\_include\_amici\_defines.h

### Enum Documentation

enum amici::ParameterScaling  
modes for parameter transformations

*Values:*

enumerator **none**

enumerator **ln**

enumerator **log10**

### Enum RDataReporting

- Defined in file\_include\_amici\_defines.h

### Enum Documentation

enum amici::RDataReporting  
*Values:*

enumerator **full**

enumerator **residuals**

enumerator **likelihood**

## Enum SecondOrderMode

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::SecondOrderMode  
modes for second order sensitivity analysis

*Values:*

enumerator **none**

enumerator **full**

enumerator **directional**

## Enum SensitivityMethod

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::SensitivityMethod  
methods for sensitivity computation

*Values:*

enumerator **none**

enumerator **forward**

enumerator **adjoint**

## Enum SensitivityOrder

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::SensitivityOrder  
orders of sensitivity analysis

*Values:*

enumerator **none**

enumerator **first**

enumerator **second**

## Enum SteadyStateContext

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::SteadyStateContext

Context for which the sensitivity flag should be computed

*Values:*

enumerator **newtonSensi**

enumerator **sensiStorage**

enumerator **solverCreation**

## Enum SteadyStateSensitivityMode

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::SteadyStateSensitivityMode

Sensitivity computation mode in steadyStateProblem

*Values:*

enumerator **newtonOnly**

enumerator **integrationOnly**

enumerator **integrateIfNewtonFails**

## Enum SteadyStateStatus

- Defined in file\_include\_amici\_defines.h

## Enum Documentation

enum amici::SteadyStateStatus

State in which the steady state computation finished

*Values:*

enumerator **failed\_too\_long\_simulation**

enumerator **failed\_damping**

enumerator **failed\_factorization**

enumerator **failed\_convergence**  
enumerator **failed**  
enumerator **not\_run**  
enumerator **success**

## Functions

### Function amici::amici\_daxpy

- Defined in file\_include\_amici\_cblas.h

### Function Documentation

void amici::amici\_daxpy(int n, double alpha, const double \*x, int incx, double \*y, int incy)  
Compute  $y = a*x + y$ .

#### Parameters

- **n** – number of elements in y
- **alpha** – scalar coefficient of x
- **x** – vector of length n\*incx
- **incx** – x stride
- **y** – vector of length n\*incy
- **incy** – y stride

### Function amici::amici\_dgemm

- Defined in file\_include\_amici\_cblas.h

### Function Documentation

void amici::amici\_dgemm(*BLASLayout* layout, *BLASTranspose* TransA, *BLASTranspose* TransB, int M, int N, int K, double alpha, const double \*A, int lda, const double \*B, int ldb, double beta, double \*C, int ldc)

CBLAS matrix matrix multiplication (dgemm)

This routines computes  $C = \alpha * A * B + \beta * C$  with A: [MxK] B:[KxN] C:[MxN]

#### Parameters

- **layout** – memory layout.
- **TransA** – flag indicating whether A should be transposed before multiplication
- **TransB** – flag indicating whether B should be transposed before multiplication
- **M** – number of rows in A/C
- **N** – number of columns in B/C

- **K** – number of rows in B, number of columns in A
- **alpha** – coefficient alpha
- **A** – matrix A
- **lda** – leading dimension of A ( $\geq M$  or  $\geq K$ )
- **B** – matrix B
- **ldb** – leading dimension of B ( $\geq K$  or  $\geq N$ )
- **beta** – coefficient beta
- **C** – matrix C
- **ldc** – leading dimension of C ( $\geq M$  or  $\geq N$ )

### Function amici::amici\_dgemv

- Defined in file\_include\_amici\_cblas.h

### Function Documentation

void amici::amici\_dgemv(*BLASLayout* layout, *BLASTranspose* TransA, int M, int N, double alpha, const double \*A, int lda, const double \*X, int incX, double beta, double \*Y, int incY)

CBLAS matrix vector multiplication (dgemv).

Computes  $y = \alpha * A * x + \beta * y$  with A: [MxN] x:[Nx1] y:[Mx1]

#### Parameters

- **layout** – Matrix layout, column major or row major.
- **TransA** – flag indicating whether A should be transposed before multiplication
- **M** – number of rows in A
- **N** – number of columns in A
- **alpha** – coefficient alpha
- **A** – matrix A
- **lda** – leading dimension / stride of A ( $\geq N$  if row-major,  $\geq M$  if col-major)
- **X** – vector X
- **incX** – increment for entries of X
- **beta** – coefficient beta
- **Y** – vector Y
- **incY** – increment for entries of Y

## Function amici::backtraceString

- Defined in file\_include\_amici\_misc.h

### Function Documentation

std::string amici::backtraceString(int maxFrames)

Returns the current backtrace as std::string.

**Parameters** **maxFrames** – Number of frames to include

**Returns** Backtrace

## Template Function amici::checkBufferSize

- Defined in file\_include\_amici\_misc.h

### Function Documentation

template<class T>

void amici::checkBufferSize(gsl::span<T> buffer, typename gsl::span<T>::index\_type expected\_size)

local helper to check whether the provided buffer has the expected size

**Parameters**

- **buffer** – buffer to which values are to be written
- **expected\_size** – expected size of the buffer

## Function amici::checkSigmaPositivity(std::vector<realtype> const &sigmaVector, const char \*vectorName)

- Defined in file\_include\_amici\_edata.h

### Function Documentation

void amici::checkSigmaPositivity(std::vector<realtype> const &sigmaVector, const char \*vectorName)

checks input vector of sigmas for not strictly positive values

**Parameters**

- **sigmaVector** – vector input to be checked
- **vectorName** – name of the input



### Function amici::checkSigmaPositivity(realtype sigma, const char \*sigmaName)

- Defined in file\_include\_amici\_edata.h

#### Function Documentation

void amici::checkSigmaPositivity(*realtype* sigma, const char \*sigmaName)  
checks input scalar sigma for not strictly positive value

##### Parameters

- **sigma** – input to be checked
- **sigmaName** – name of the input

### Template Function amici::deserializeFromChar

- Defined in file\_include\_amici\_serialization.h

#### Function Documentation

template<typename T>  
T amici::deserializeFromChar(const char \*buffer, int size)  
Deserialize object that has been serialized using serializeToChar.

##### Parameters

- **buffer** – serialized object
- **size** – length of buffer

**Returns** The deserialized object

### Template Function amici::deserializeFromString

- Defined in file\_include\_amici\_serialization.h

#### Function Documentation

template<typename T>  
T amici::deserializeFromString(std::string const &serialized)  
Deserialize object that has been serialized using serializeToString.

**Parameters** **serialized** – serialized object

**Returns** The deserialized object

## Function amici::dotProd

- Defined in file\_include\_amici\_vector.h

## Function Documentation

inline *realtype* amici::dotProd(*AmiVector* const &x, *AmiVector* const &y)  
 Compute dot product of x and y.

### Parameters

- **x** – vector
- **y** – vector

**Returns** dot product of x and y

## Function amici::getScaledParameter

- Defined in file\_include\_amici\_misc.h

## Function Documentation

double amici::getScaledParameter(double unscaledParameter, *ParameterScaling* scaling)  
 Apply parameter scaling according to scaling

### Parameters

- **unscaledParameter** –
- **scaling** – parameter scaling

**Returns** Scaled parameter

## Function amici::getUnscaledParameter

- Defined in file\_include\_amici\_misc.h

## Function Documentation

double amici::getUnscaledParameter(double scaledParameter, *ParameterScaling* scaling)  
 Remove parameter scaling according to scaling

### Parameters

- **scaledParameter** – scaled parameter
- **scaling** – parameter scaling

**Returns** Unscaled parameter

**Function amici::hdf5::attributeExists(H5::H5File const &file, const std::string &optionsObject, const std::string &attributeName)**

- Defined in file\_include\_amici\_hdf5.h

### Function Documentation

**bool amici::hdf5::attributeExists(H5::H5File const &file, const std::string &optionsObject, const std::string &attributeName)**

Check whether an attribute with the given name exists on the given dataset.

#### Parameters

- **file** – The HDF5 file object
- **optionsObject** – Dataset of which attributes should be checked
- **attributeName** – Name of the attribute of interest

**Returns** true if attribute exists, false otherwise

**Function amici::hdf5::attributeExists(H5::H5Object const &object, const std::string &attributeName)**

- Defined in file\_include\_amici\_hdf5.h

### Function Documentation

**bool amici::hdf5::attributeExists(H5::H5Object const &object, const std::string &attributeName)**

Check whether an attribute with the given name exists on the given object.

#### Parameters

- **object** – An HDF5 object
- **attributeName** – Name of the attribute of interest

**Returns** true if attribute exists, false otherwise

**Function amici::hdf5::createAndWriteDouble1DDataset**

- Defined in file\_include\_amici\_hdf5.h

### Function Documentation

**void amici::hdf5::createAndWriteDouble1DDataset(H5::H5File const &file, std::string const &datasetName, gsl::span<const double> buffer)**

Create and write to 1-dimensional native double dataset.

#### Parameters

- **file** – HDF5 file object
- **datasetName** – Name of dataset to create
- **buffer** – Data to write to dataset

## Function amici::hdf5::createAndWriteDouble2DDataset

- Defined in file\_include\_amici\_hdf5.h

### Function Documentation

```
void amici::hdf5::createAndWriteDouble2DDataset(H5::H5File const &file, std::string const &datasetName,  
                                                gsl::span<const double> buffer, hsize_t m, hsize_t n)
```

Create and write to 2-dimensional native double dataset.

#### Parameters

- **file** – HDF5 file object
- **datasetName** – Name of dataset to create
- **buffer** – Flattened data to write to dataset (assuming row-major)
- **m** – Number of rows in buffer
- **n** – Number of columns buffer

## Function amici::hdf5::createAndWriteDouble3DDataset

- Defined in file\_include\_amici\_hdf5.h

### Function Documentation

```
void amici::hdf5::createAndWriteDouble3DDataset(H5::H5File const &file, std::string const &datasetName,  
                                                gsl::span<const double> buffer, hsize_t m, hsize_t n,  
                                                hsize_t o)
```

Create and write to 3-dimensional native double dataset.

#### Parameters

- **file** – HDF5 file object
- **datasetName** – Name of dataset to create
- **buffer** – Flattened data to write to dataset (assuming row-major)
- **m** – Length of first dimension in buffer
- **n** – Length of first dimension in buffer
- **o** – Length of first dimension in buffer

### Function amici::hdf5::createAndWriteInt1DDataset

- Defined in file\_include\_amici\_hdf5.h

#### Function Documentation

```
void amici::hdf5::createAndWriteInt1DDataset(H5::H5File const &file, std::string const &datasetName,  
                                              gsl::span<const int> buffer)
```

Create and write to 1-dimensional native integer dataset.

##### Parameters

- **file** – HDF5 file object
- **datasetName** – Name of dataset to create
- **buffer** – Data to write to dataset

### Function amici::hdf5::createAndWriteInt2DDataset

- Defined in file\_include\_amici\_hdf5.h

#### Function Documentation

```
void amici::hdf5::createAndWriteInt2DDataset(H5::H5File const &file, std::string const &datasetName,  
                                              gsl::span<const int> buffer, hsize_t m, hsize_t n)
```

Create and write to 2-dimensional native integer dataset.

##### Parameters

- **file** – HDF5 file object
- **datasetName** – Name of dataset to create
- **buffer** – Flattened data to write to dataset (assuming row-major)
- **m** – Number of rows in buffer
- **n** – Number of columns buffer

### Function amici::hdf5::createGroup

- Defined in file\_include\_amici\_hdf5.h

#### Function Documentation

```
void amici::hdf5::createGroup(const H5::H5File &file, std::string const &groupPath, bool recursively = true)
```

Create the given group and possibly parents.

##### Parameters

- **file** – HDF5 file to write to
- **groupPath** – Path to the group to be created
- **recursively** – Create intermediary groups

## Function amici::hdf5::createOrOpenForWriting

- Defined in file\_include\_amici\_hdf5.h

### Function Documentation

H5::H5File amici::hdf5::createOrOpenForWriting(std::string const &hdf5filename)

Open the given file for writing.

Append if exists, create if not.

**Parameters** **hdf5filename** – File to open

**Returns** File object

## Function amici::hdf5::getDoubleDataset1D

- Defined in file\_include\_amici\_hdf5.h

### Function Documentation

std::vector<double> amici::hdf5::getDoubleDataset1D(const H5::H5File &file, std::string const &name)

Read 1-dimensional native double dataset from HDF5 file.

**Parameters**

- **file** – HDF5 file object
- **name** – Name of dataset to read

**Returns** Data read

## Function amici::hdf5::getDoubleDataset2D

- Defined in file\_include\_amici\_hdf5.h

### Function Documentation

std::vector<double> amici::hdf5::getDoubleDataset2D(const H5::H5File &file, std::string const &name, hsize\_t &m, hsize\_t &n)

Read 2-dimensional native double dataset from HDF5 file.

**Parameters**

- **file** – HDF5 file object
- **name** – Name of dataset to read
- **m** – Number of rows in the dataset
- **n** – Number of columns in the dataset

**Returns** Flattened data (row-major)

### Function amici::hdf5::getDoubleDataset3D

- Defined in file\_include\_amici\_hdf5.h

#### Function Documentation

`std::vector<double> amici::hdf5::getDoubleDataset3D(const H5::H5File &file, std::string const &name, hsize_t &m, hsize_t &n, hsize_t &o)`

Read 3-dimensional native double dataset from HDF5 file.

##### Parameters

- **file** – HDF5 file object
- **name** – Name of dataset to read
- **m** – Length of first dimension in dataset
- **n** – Length of first dimension in dataset
- **o** – Length of first dimension in dataset

**Returns** Flattened data (row-major)

### Function amici::hdf5::getDoubleScalarAttribute

- Defined in file\_include\_amici\_hdf5.h

#### Function Documentation

`double amici::hdf5::getDoubleScalarAttribute(const H5::H5File &file, const std::string &optionsObject, const std::string &attributeName)`

Read scalar native double attribute from HDF5 object.

##### Parameters

- **file** – HDF5 file
- **optionsObject** – Object to read attribute from
- **attributeName** – Name of attribute to read

**Returns** Attribute value

### Function amici::hdf5::getIntDataset1D

- Defined in file\_include\_amici\_hdf5.h

## Function Documentation

`std::vector<int> amici::hdf5::getIntDataset1D(const H5::H5File &file, std::string const &name)`

Read 1-dimensional native integer dataset from HDF5 file.

### Parameters

- **file** – HDF5 file object
- **name** – Name of dataset to read

**Returns** Data read

## Function `amici::hdf5::getIntScalarAttribute`

- Defined in `file_include_amici_hdf5.h`

## Function Documentation

`int amici::hdf5::getIntScalarAttribute(const H5::H5File &file, const std::string &optionsObject, const std::string &attributeName)`

Read scalar native integer attribute from HDF5 object.

### Parameters

- **file** – HDF5 file
- **optionsObject** – Object to read attribute from
- **attributeName** – Name of attribute to read

**Returns** Attribute value

## Function `amici::hdf5::getStringAttribute`

- Defined in `file_include_amici_hdf5.h`

## Function Documentation

`std::string amici::hdf5::getStringAttribute(H5::H5File const &file, std::string const &optionsObject, std::string const &attributeName)`

Read string attribute from HDF5 object.

### Parameters

- **file** – HDF5 file
- **optionsObject** – Object to read attribute from
- **attributeName** – Name of attribute to read

**Returns** Attribute value



**Function amici::hdf5::locationExists(std::string const &filename, std::string const &location)**

- Defined in file\_include\_amici\_hdf5.h

**Function Documentation**

bool amici::hdf5::locationExists(std::string const &filename, std::string const &location)

Check if the given location (group, link or dataset) exists in the given file.

**Parameters**

- **filename** – HDF5 filename
- **location** – Location to test for

**Returns** true if exists, false otherwise

**Function amici::hdf5::locationExists(H5::H5File const &file, std::string const &location)**

- Defined in file\_include\_amici\_hdf5.h

**Function Documentation**

bool amici::hdf5::locationExists(H5::H5File const &file, std::string const &location)

Check if the given location (group, link or dataset) exists in the given file.

**Parameters**

- **file** – HDF5 file object
- **location** – Location to test for

**Returns** true if exists, false otherwise

**Function amici::hdf5::readModelDataFromHDF5(std::string const &hdfFile, Model &model, std::string const &datasetPath)**

- Defined in file\_include\_amici\_hdf5.h

**Function Documentation**

void amici::hdf5::readModelDataFromHDF5(std::string const &hdfFile, *Model* &model, std::string const &datasetPath)

Read model data from HDF5 file.

**Parameters**

- **hdfFile** – Name of HDF5 file
- **model** – *Model* to set data on
- **datasetPath** – Path inside the HDF5 file

**Function `amici::hdf5::readModelDataFromHDF5(H5::H5File const &file, Model &model, std::string const &datasetPath)`**

- Defined in `file_include_amici_hdf5.h`

### Function Documentation

`void amici::hdf5::readModelDataFromHDF5(H5::H5File const &file, Model &model, std::string const &datasetPath)`

Read model data from HDF5 file.

#### Parameters

- **file** – HDF5 file handle to read from
- **model** – *Model* to set data on
- **datasetPath** – Path inside the HDF5 file

### Function `amici::hdf5::readSimulationExpData`

- Defined in `file_include_amici_hdf5.h`

### Function Documentation

`std::unique_ptr<ExpData> amici::hdf5::readSimulationExpData(const std::string &hdf5Filename, const std::string &hdf5Root, const Model &model)`

Read AMICI *ExpData* data from HDF5 file.

#### Parameters

- **hdf5Filename** – Name of HDF5 file
- **hdf5Root** – Path inside the HDF5 file to object having *ExpData*
- **model** – The model for which data is to be read

**Returns** *ExpData* created from data in the given location

**Function `amici::hdf5::readSolverSettingsFromHDF5(const H5::H5File &file, Solver &solver, std::string const &datasetPath)`**

- Defined in `file_include_amici_hdf5.h`

## Function Documentation

`void amici::hdf5::readSolverSettingsFromHDF5`(const H5::H5File &file, *Solver* &solver, std::string const &datasetPath)

Read solver options from HDF5 file.

### Parameters

- **file** – HDF5 file to read from
- **solver** – *Solver* to set options on
- **datasetPath** – Path inside the HDF5 file

**Function `amici::hdf5::readSolverSettingsFromHDF5`(std::string const &hdffile, *Solver* &solver, std::string const &datasetPath)**

- Defined in file\_include\_amici\_hdf5.h

## Function Documentation

`void amici::hdf5::readSolverSettingsFromHDF5`(std::string const &hdffile, *Solver* &solver, std::string const &datasetPath)

Read solver options from HDF5 file.

### Parameters

- **hdffile** – Name of HDF5 file
- **solver** – *Solver* to set options on
- **datasetPath** – Path inside the HDF5 file

**Function `amici::hdf5::writeReturnData`(const *ReturnData* &rdata, H5::H5File const &file, const std::string &hdf5Location)**

- Defined in file\_include\_amici\_hdf5.h

## Function Documentation

`void amici::hdf5::writeReturnData`(const *ReturnData* &rdata, H5::H5File const &file, const std::string &hdf5Location)

Write *ReturnData* to HDF5 file.

### Parameters

- **rdata** – Data to write
- **file** – HDF5 file to write to
- **hdf5Location** – Full dataset path inside the HDF5 file (will be created)

**Function amici::hdf5::writeReturnData(const ReturnData &rdata, std::string const &hdf5Filename, const std::string &hdf5Location)**

- Defined in file\_include\_amici\_hdf5.h

### Function Documentation

void amici::hdf5::writeReturnData(const *ReturnData* &rdata, std::string const &hdf5Filename, const std::string &hdf5Location)

Write *ReturnData* to HDF5 file.

#### Parameters

- **rdata** – Data to write
- **hdf5Filename** – Filename of HDF5 file
- **hdf5Location** – Full dataset path inside the HDF5 file (will be created)

### Function amici::hdf5::writeReturnDataDiagnosis

- Defined in file\_include\_amici\_hdf5.h

### Function Documentation

void amici::hdf5::writeReturnDataDiagnosis(const *ReturnData* &rdata, H5::H5File const &file, const std::string &hdf5Location)

Write *ReturnData* diagnosis data to HDF5 file.

#### Parameters

- **rdata** – Data to write
- **file** – HDF5 file to write to
- **hdf5Location** – Full dataset path inside the HDF5 file (will be created)

### Function amici::hdf5::writeSimulationExpData

- Defined in file\_include\_amici\_hdf5.h

### Function Documentation

void amici::hdf5::writeSimulationExpData(const *ExpData* &edata, H5::H5File const &file, const std::string &hdf5Location)

Write AMICI experimental data to HDF5 file.

#### Parameters

- **edata** – The experimental data which is to be written
- **file** – Name of HDF5 file
- **hdf5Location** – Path inside the HDF5 file to object having *ExpData*

**Function** `amici::hdf5::writeSolverSettingsToHDF5(Solver const &solver, std::string const &hdf5Filename, std::string const &hdf5Location)`

- Defined in `file_include_amici_hdf5.h`

### Function Documentation

`void amici::hdf5::writeSolverSettingsToHDF5(Solver const &solver, std::string const &hdf5Filename, std::string const &hdf5Location)`

Write solver options to HDF5 file.

#### Parameters

- **hdf5Filename** – Name of HDF5 file to write to
- **solver** – *Solver* to write options from
- **hdf5Location** – Path inside the HDF5 file

**Function** `amici::hdf5::writeSolverSettingsToHDF5(Solver const &solver, H5::H5File const &file, std::string const &hdf5Location)`

- Defined in `file_include_amici_hdf5.h`

### Function Documentation

`void amici::hdf5::writeSolverSettingsToHDF5(Solver const &solver, H5::H5File const &file, std::string const &hdf5Location)`

Write solver options to HDF5 file.

#### Parameters

- **file** – File to read from
- **solver** – *Solver* to write options from
- **hdf5Location** – Path inside the HDF5 file

### Function `amici::linearSum`

- Defined in `file_include_amici_vector.h`

### Function Documentation

`inline void amici::linearSum(realtype a, AmiVector const &x, realtype b, AmiVector const &y, AmiVector &z)`  
Computes  $z = a*x + b*y$ .

#### Parameters

- **a** – coefficient for x
- **x** – a vector
- **b** – coefficient for y

- **y** – another vector with same size as **x**
- **z** – result vector of same size as **x** and **y**

### Function amici::N\_VGetArrayPointerConst

- Defined in file\_include\_amici\_vector.h

### Function Documentation

inline const *realttype* \*amici::N\_VGetArrayPointerConst(const *N\_Vector* x)

### Function amici::operator==(const Model &a, const Model &b)

- Defined in file\_include\_amici\_model.h

### Function Documentation

bool amici::operator==(const *Model* &a, const *Model* &b)

#### Parameters

- **a** – First model instance
- **b** – Second model instance

**Returns** Equality

### Function amici::operator==(const ModelDimensions &a, const ModelDimensions &b)

- Defined in file\_include\_amici\_model.h

### Function Documentation

bool amici::operator==(const *ModelDimensions* &a, const *ModelDimensions* &b)

### Function amici::operator==(const SimulationParameters &a, const SimulationParameters &b)

- Defined in file\_include\_amici\_simulation\_parameters.h

## Function Documentation

`bool amici::operator==(const SimulationParameters &a, const SimulationParameters &b)`

## Function `amici::operator==(const Solver &a, const Solver &b)`

- Defined in `file_include_amici_solver.h`

## Function Documentation

`bool amici::operator==(const Solver &a, const Solver &b)`

### Parameters

- **a** –
- **b** –

### Returns

## Function `amici::printErrMsgIdAndTxt`

- Defined in `file_include_amici_amici.h`

## Function Documentation

`void amici::printErrMsgIdAndTxt(std::string const &id, std::string const &message)`

Prints a specified error message associated with the specified identifier.

### Parameters

- **id** – error identifier
- **message** – error message

## Function `amici::printfToString`

- Defined in `file_include_amici_misc.h`

## Function Documentation

`std::string amici::printfToString(const char *fmt, va_list ap)`

Format printf-style arguments to `std::string`.

### Parameters

- **fmt** – Format string
- **ap** – Argument list pointer

**Returns** Formatted String

## Function amici::printWarnMsgIdAndTxt

- Defined in file\_include\_amici\_amici.h

### Function Documentation

void amici::printWarnMsgIdAndTxt(std::string const &id, std::string const &message)  
Prints a specified warning message associated with the specified identifier.

#### Parameters

- **id** – warning identifier
- **message** – warning message

## Function amici::regexErrorToString

- Defined in file\_include\_amici\_misc.h

### Function Documentation

std::string amici::regexErrorToString(std::regex\_constants::error\_type err\_type)  
Convert std::regex\_constants::error\_type to string.

**Parameters** **err\_type** – error type

**Returns** Error type as string

## Function amici::runAmiciSimulation

- Defined in file\_include\_amici\_amici.h

### Function Documentation

std::unique\_ptr<ReturnData> amici::runAmiciSimulation(*Solver* &solver, const *ExpData* \*edata, *Model* &model, bool rethrow = false)

Core integration routine. Initializes the solver and runs the forward and backward problem.

#### Parameters

- **solver** – *Solver* instance
- **edata** – pointer to experimental data object
- **model** – model specification object
- **rethrow** – rethrow integration exceptions?

**Returns** rdata pointer to return data object



## Function amici::runAmiciSimulations

- Defined in file\_include\_amici\_amici.h

### Function Documentation

```
std::vector<std::unique_ptr<ReturnData>> amici::runAmiciSimulations(Solver const &solver, const
                                                                std::vector<ExpData*> &edatas,
                                                                Model const &model, bool failfast, int
                                                                num_threads)
```

Same as runAmiciSimulation, but for multiple *ExpData* instances. When compiled with OpenMP support, this function runs multi-threaded.

#### Parameters

- **solver** – *Solver* instance
- **edatas** – experimental data objects
- **model** – model specification object
- **failfast** – flag to allow early termination
- **num\_threads** – number of threads for parallel execution

**Returns** vector of pointers to return data objects

## Function amici::scaleParameters

- Defined in file\_include\_amici\_misc.h

### Function Documentation

```
void amici::scaleParameters(gsl::span<const realtype> bufferUnscaled, gsl::span<const ParameterScaling>
                           pscale, gsl::span<realtype> bufferScaled)
```

Apply parameter scaling according to **scaling**

#### Parameters

- **bufferUnscaled** –
- **pscale** – parameter scaling
- **bufferScaled** – destination

## Template Function amici::serializeToChar

- Defined in file\_include\_amici\_serialization.h

## Function Documentation

template<typename T>  
char \*amici::serializeToChar(*T* const &data, int \*size)  
Serialize object to char array.

### Parameters

- **data** – input object
- **size** – maximum char length

**Returns** The object serialized as char

## Template Function amici::serializeToStdVec

- Defined in file\_include\_amici\_serialization.h

## Function Documentation

template<typename T>  
std::vector<char> amici::serializeToStdVec(*T* const &data)  
Serialize object to std::vector<char>

**Parameters** **data** – input object

**Returns** The object serialized as std::vector<char>

## Template Function amici::serializeToString

- Defined in file\_include\_amici\_serialization.h

## Function Documentation

template<typename T>  
std::string amici::serializeToString(*T* const &data)  
Serialize object to string.

**Parameters** **data** – input object

**Returns** The object serialized as string

## Template Function amici::slice(std::vector<T> &data, int index, unsigned size)

- Defined in file\_include\_amici\_misc.h

## Function Documentation

template<class **T**>  
 gsl::span<**T**> amici::slice(std::vector<**T**> &data, int index, unsigned size)  
 creates a slice from existing data

### Parameters

- **data** – to be sliced
- **index** – slice index
- **size** – slice size

**Returns** span of the slice

## Template Function amici::slice(const std::vector<**T**> &data, int index, unsigned size)

- Defined in file\_include\_amici\_misc.h

## Function Documentation

template<class **T**>  
 gsl::span<const **T**> amici::slice(const std::vector<**T**> &data, int index, unsigned size)  
 creates a constant slice from existing constant data

### Parameters

- **data** – to be sliced
- **index** – slice index
- **size** – slice size

**Returns** span of the slice

## Function amici::unravel\_index(size\_t flat\_idx, size\_t num\_cols)

- Defined in file\_include\_amici\_misc.h

## Function Documentation

auto amici::unravel\_index(size\_t flat\_idx, size\_t num\_cols) -> std::pair<size\_t, size\_t>  
 Convert a flat index to a pair of row/column indices, assuming row-major order.

### Parameters

- **flat\_idx** – flat index
- **num\_cols** – number of columns of referred to matrix

**Returns** row index, column index

### Function `amici::unravel_index(sunindextype i, SUNMatrix m)`

- Defined in `file_include_amici_sundials_matrix_wrapper.h`

#### Function Documentation

auto `amici::unravel_index`(`sunindextype i`, `SUNMatrix m`) -> `std::pair<sunindextype, sunindextype>`  
Convert a flat index to a pair of row/column indices.

##### Parameters

- **i** – flat index
- **m** – referred to matrix

**Returns** row index, column index

### Function `amici::unscaleParameters`

- Defined in `file_include_amici_misc.h`

#### Function Documentation

void `amici::unscaleParameters`(`gsl::span<const realtype>` `bufferScaled`, `gsl::span<const ParameterScaling>` `pscale`, `gsl::span<realtype>` `bufferUnscaled`)  
Remove parameter scaling according to the parameter scaling in `pscale`.

All vectors must be of same length.

##### Parameters

- **bufferScaled** – scaled parameters
- **pscale** – parameter scaling
- **bufferUnscaled** – unscaled parameters are written to the array

### Function `amici::wrapErrHandlerFn`

- Defined in `file_include_amici_solver.h`

#### Function Documentation

void `amici::wrapErrHandlerFn`(`int error_code`, `const char *module`, `const char *function`, `char *msg`, `void *eh_data`)  
Extracts diagnosis information from solver memory block and passes them to the specified output function.

##### Parameters

- **error\_code** – error identifier
- **module** – name of the module in which the error occurred
- **function** – name of the function in which the error occurred
- **msg** – error message

- **eh\_data** – *amici::Solver* as void\*

### Template Function `amici::writeSlice(const gsl::span<const T> slice, gsl::span<T> buffer)`

- Defined in `file_include_amici_misc.h`

#### Function Documentation

```
template<class T>
void amici::writeSlice(const gsl::span<const T> slice, gsl::span<T> buffer)
    local helper function to write computed slice to provided buffer (span)
```

##### Parameters

- **slice** – computed value
- **buffer** – buffer to which values are to be written

### Template Function `amici::writeSlice(const std::vector<T> &s, std::vector<T> &b)`

- Defined in `file_include_amici_misc.h`

#### Function Documentation

```
template<class T>
void amici::writeSlice(const std::vector<T> &s, std::vector<T> &b)
    local helper function to write computed slice to provided buffer (vector)
```

##### Parameters

- **s** – computed value
- **b** – buffer to which values are to be written

### Template Function `amici::writeSlice(const std::vector<T> &s, gsl::span<T> b)`

- Defined in `file_include_amici_misc.h`

#### Function Documentation

```
template<class T>
void amici::writeSlice(const std::vector<T> &s, gsl::span<T> b)
    local helper function to write computed slice to provided buffer (vector/span)
```

##### Parameters

- **s** – computed value
- **b** – buffer to which values are to be written

**Function amici::writeSlice(const AmiVector &s, gsl::span<realtype> b)**

- Defined in file\_include\_amici\_misc.h

**Function Documentation**

void amici::writeSlice(const *AmiVector* &s, gsl::span<*realtype*> b)  
local helper function to write computed slice to provided buffer (AmiVector/span)

**Parameters**

- **s** – computed value
- **b** – buffer to which values are to be written

**Template Function boost::serialization::archiveVector**

- Defined in file\_include\_amici\_serialization.h

**Function Documentation**

template<class **Archive**, typename **T**>  
void boost::serialization::archiveVector(*Archive* &ar, *T* \*\*p, int size)  
Serialize a raw array to a boost archive.

**Parameters**

- **ar** – archive
- **p** – Pointer to array
- **size** – Size of p

**Template Function boost::serialization::serialize(Archive &ar, amici::Model &m, unsigned int version)**

- Defined in file\_include\_amici\_model.h

**Function Documentation**

template<class **Archive**>  
void boost::serialization::serialize(*Archive* &ar, amici::Model &m, unsigned int version)

**Template Function `boost::serialization::serialize(Archive &ar, amici::ReturnData &r, unsigned int version)`**

- Defined in `file_include_amici_rdata.h`

**Function Documentation**

```
template<class Archive>
void boost::serialization::serialize(Archive &ar, amici::ReturnData &r, unsigned int version)
```

**Template Function `boost::serialization::serialize(Archive &ar, amici::Solver &s, unsigned int version)`**

- Defined in `file_include_amici_solver.h`

**Function Documentation**

```
template<class Archive>
void boost::serialization::serialize(Archive &ar, amici::Solver &s, unsigned int version)
```

**Template Function `boost::serialization::serialize(Archive &ar, amici::CCodeSolver &s, unsigned int version)`**

- Defined in `file_include_amici_solver_cvodes.h`

**Function Documentation**

```
template<class Archive>
void boost::serialization::serialize(Archive &ar, amici::CCodeSolver &s, unsigned int version)
```

**Template Function `boost::serialization::serialize(Archive &ar, amici::IDASolver &s, unsigned int version)`**

- Defined in `file_include_amici_solver_idas.h`

## Function Documentation

```
template<class Archive>
void boost::serialization::serialize(Archive &ar, amici::IDASolver &s, unsigned int version)
```

## Function `gsl::make_span(SUNMatrix m)`

- Defined in `file_include_amici_sundials_matrix_wrapper.h`

## Function Documentation

```
inline span<realtype> gsl::make_span(SUNMatrix m)
    Create span from SUNMatrix.
```

**Parameters** `m` – SUNMatrix

**Returns** Created span

## Function `gsl::make_span(N_Vector nv)`

- Defined in `file_include_amici_vector.h`

## Function Documentation

```
inline span<realtype> gsl::make_span(N_Vector nv)
    Create span from N_Vector.
```

**Parameters** `nv` –

**Returns**

## Variables

### Variable `amici::AMICI_CONV_FAILURE`

- Defined in `file_include_amici_defines.h`

## Variable Documentation

```
constexpr int amici::AMICI_CONV_FAILURE = -4
```



**Variable amici::AMICI\_DAMPING\_FACTOR\_ERROR**

- Defined in file\_include\_amici\_defines.h

**Variable Documentation**

```
constexpr int amici::AMICI_DAMPING_FACTOR_ERROR = -86
```

**Variable amici::AMICI\_DATA\_RETURN**

- Defined in file\_include\_amici\_defines.h

**Variable Documentation**

```
constexpr int amici::AMICI_DATA_RETURN = 1
```

**Variable amici::AMICI\_ERR\_FAILURE**

- Defined in file\_include\_amici\_defines.h

**Variable Documentation**

```
constexpr int amici::AMICI_ERR_FAILURE = -3
```

**Variable amici::AMICI\_ERROR**

- Defined in file\_include\_amici\_defines.h

**Variable Documentation**

```
constexpr int amici::AMICI_ERROR = -99
```

**Variable amici::AMICI\_ILL\_INPUT**

- Defined in file\_include\_amici\_defines.h

## Variable Documentation

constexpr int amici::AMICI\_ILL\_INPUT = -22

## Variable amici::AMICI\_MAX\_TIME\_EXCEEDED

- Defined in file\_include\_amici\_defines.h

## Variable Documentation

constexpr int amici::AMICI\_MAX\_TIME\_EXCEEDED = -1000

## Variable amici::AMICI\_NO\_STEADY\_STATE

- Defined in file\_include\_amici\_defines.h

## Variable Documentation

constexpr int amici::AMICI\_NO\_STEADY\_STATE = -81

## Variable amici::AMICI\_NORMAL

- Defined in file\_include\_amici\_defines.h

## Variable Documentation

constexpr int amici::AMICI\_NORMAL = 1

## Variable amici::AMICI\_NOT\_IMPLEMENTED

- Defined in file\_include\_amici\_defines.h

## Variable Documentation

constexpr int amici::AMICI\_NOT\_IMPLEMENTED = -999

**Variable amici::AMICI\_ONE\_STEP**

- Defined in file\_include\_amici\_defines.h

**Variable Documentation**

```
constexpr int amici::AMICI_ONE_STEP = 2
```

**Variable amici::AMICI\_ONEOUTPUT**

- Defined in file\_include\_amici\_defines.h

**Variable Documentation**

```
constexpr int amici::AMICI_ONEOUTPUT = 5
```

**Variable amici::AMICI\_PREEQUILIBRATE**

- Defined in file\_include\_amici\_defines.h

**Variable Documentation**

```
constexpr int amici::AMICI_PREEQUILIBRATE = -1
```

**Variable amici::AMICI\_RECOVERABLE\_ERROR**

- Defined in file\_include\_amici\_defines.h

**Variable Documentation**

```
constexpr int amici::AMICI_RECOVERABLE_ERROR = 1
```

**Variable amici::AMICI\_RHSFUNC\_FAIL**

- Defined in file\_include\_amici\_defines.h

## Variable Documentation

constexpr int amici::AMICI\_RHSFUNC\_FAIL = -8

## Variable amici::AMICI\_ROOT\_RETURN

- Defined in file\_include\_amici\_defines.h

## Variable Documentation

constexpr int amici::AMICI\_ROOT\_RETURN = 2

## Variable amici::AMICI\_SINGULAR\_JACOBIAN

- Defined in file\_include\_amici\_defines.h

## Variable Documentation

constexpr int amici::AMICI\_SINGULAR\_JACOBIAN = -809

## Variable amici::AMICI\_SUCCESS

- Defined in file\_include\_amici\_defines.h

## Variable Documentation

constexpr int amici::AMICI\_SUCCESS = 0

## Variable amici::AMICI\_TOO\_MUCH\_ACC

- Defined in file\_include\_amici\_defines.h

## Variable Documentation

constexpr int amici::AMICI\_TOO\_MUCH\_ACC = -2

### Variable amici::AMICI\_TOO\_MUCH\_WORK

- Defined in file\_include\_amici\_defines.h

### Variable Documentation

```
constexpr int amici::AMICI_TOO_MUCH_WORK = -1
```

### Variable amici::AMICI\_UNRECOVERABLE\_ERROR

- Defined in file\_include\_amici\_defines.h

### Variable Documentation

```
constexpr int amici::AMICI_UNRECOVERABLE_ERROR = -10
```

### Variable amici::defaultContext

- Defined in file\_include\_amici\_model.h

### Variable Documentation

*AmiciApplication* amici::defaultContext

### Variable amici::model\_quantity\_to\_str

- Defined in file\_include\_amici\_model.h

### Variable Documentation

```
const std::map<ModelQuantity, std::string> amici::model_quantity_to_str
```

### Variable amici::pi

- Defined in file\_include\_amici\_defines.h

## Variable Documentation

constexpr double amici::pi = 3.14159265358979323846

## Defines

### Define \_USE\_MATH\_DEFINES

- Defined in file\_include\_amici\_defines.h

## Define Documentation

**\_USE\_MATH\_DEFINES**

### Define AMICI\_H5\_RESTORE\_ERROR\_HANDLER

- Defined in file\_include\_amici\_hdf5.h

## Define Documentation

**AMICI\_H5\_RESTORE\_ERROR\_HANDLER**

### Define AMICI\_H5\_SAVE\_ERROR\_HANDLER

- Defined in file\_include\_amici\_hdf5.h

## Define Documentation

**AMICI\_H5\_SAVE\_ERROR\_HANDLER**

### Define AMICI\_VERSION

- Defined in file\_include\_amici\_version.in.h

## Define Documentation

**AMICI\_VERSION**

## Define M\_1\_PI

- Defined in file\_include\_amici\_defines.h

## Define Documentation

**M\_1\_PI**

## Define M\_2\_PI

- Defined in file\_include\_amici\_defines.h

## Define Documentation

**M\_2\_PI**

## Define M\_2\_SQRTPI

- Defined in file\_include\_amici\_defines.h

## Define Documentation

**M\_2\_SQRTPI**

## Define M\_E

- Defined in file\_include\_amici\_defines.h

## Define Documentation

**M\_E**

### Define M\_LN10

- Defined in file\_include\_amici\_defines.h

### Define Documentation

**M\_LN10**

### Define M\_LN2

- Defined in file\_include\_amici\_defines.h

### Define Documentation

**M\_LN2**

### Define M\_LOG10E

- Defined in file\_include\_amici\_defines.h

### Define Documentation

**M\_LOG10E**

### Define M\_LOG2E

- Defined in file\_include\_amici\_defines.h

### Define Documentation

**M\_LOG2E**

### Define M\_PI

- Defined in file\_include\_amici\_defines.h



## Define Documentation

**M\_PI**

## Define M\_PI\_2

- Defined in file\_include\_amici\_defines.h

## Define Documentation

**M\_PI\_2**

## Define M\_PI\_4

- Defined in file\_include\_amici\_defines.h

## Define Documentation

**M\_PI\_4**

## Define M\_SQRT1\_2

- Defined in file\_include\_amici\_defines.h

## Define Documentation

**M\_SQRT1\_2**

## Define M\_SQRT2

- Defined in file\_include\_amici\_defines.h

## Define Documentation

**M\_SQRT2**

## Typedefs

### Typedef amici::const\_N\_Vector

- Defined in file\_include\_amici\_vector.h

### Typedef Documentation

using amici::const\_N\_Vector = std::add\_const\_t<typename std::remove\_pointer\_t<N\_Vector>>\*

Since const N\_Vector is not what we want

### Typedef amici::outputFunctionType

- Defined in file\_include\_amici\_defines.h

### Typedef Documentation

using amici::outputFunctionType = std::function<void(std::string const &identifier, std::string const &message)>

Type for function to process warnings or error messages.

### Typedef amici::realtype

- Defined in file\_include\_amici\_defines.h

### Typedef Documentation

using amici::realtype = double

defines variable type for simulation variables (determines numerical accuracy)

## MATLAB INTERFACE

### 12.1 Installing the AMICI MATLAB toolbox

To use AMICI from MATLAB, start MATLAB and add the `AMICI/matlab` directory to the MATLAB path. To add all toolbox directories to the MATLAB path, execute the matlab script:

```
installAMICI.m
```

To store the installation for further MATLAB session, the path can be saved via:

```
savepath
```

For the compilation of `.mex` files, MATLAB needs to be configured with a working C++ compiler. The C++ compiler needs to be installed and configured via:

```
mex -setup c++
```

For a list of supported compilers we refer to the respective MathWorks [documentation](#).

### 12.2 Using AMICI's MATLAB interface

In the following we will give a detailed overview how to specify models in MATLAB and how to call the generated simulation files.

---

**Note:** The MATLAB interface requires the MathWorks [Symbolic Math Toolbox](#) for model import (but not for model simulation).

The Symbolic Math Toolbox requirement can be circumvented by performing model import using the Python interface. The resulting code can then be used from Matlab (see [Compiling a Python-generated model](#)).

---

**Warning:** Due to changes in the Symbolic Math Toolbox, the last MATLAB release with working AMICI model import is R2017b (see <https://github.com/AMICI-dev/AMICI/issues/307>).

## 12.2.1 Specifying models in Matlab

This guide will guide the user on how to specify models in MATLAB. For example implementations see the examples in the `matlab/examples` directory.

### Header

The model definition needs to be defined as a function which returns a `struct` with all symbolic definitions and options.

```
function [model] = example_model_syms()
```

### Options

Set the options by specifying the respective field of the model struct

```
model.(fieldname) = value
```

The options specify default options for simulation, parametrisation and compilation. All of these options are optional.

| field    | description                                 | default |
|----------|---|---------|
| .param   | default parametrisation 'log'/'log10'/'lin' | 'lin'   |
| .debug   | flag to compile with debug symbols          | false   |
| .forward | flag to activate forward sensitivities      | true    |
| .adjoint | flag to activate adjoint sensitivities      | true    |

When set to false, the fields `forward` and `adjoint` will speed up the time required to compile the model but also disable the respective sensitivity computation.

### States

Create the respective symbolic variables. The name of the symbolic variable can be chosen arbitrarily.

```
syms state1 state2 state3
```

Create the state vector containing all states:

```
model.sym.x = [ state1 state2 state3 ];
```

### Parameters

Create the respective symbolic variables. The name of the symbolic variable can be chosen arbitrarily. Sensitivities will be derived for all *parameters*.

```
syms param1 param2 param3 param4 param5 param6
```

Create the parameters vector

```
model.sym.p = [ param1 param2 param3 param4 param5 param6 ];
```

## Constants

Create the respective symbolic variables. The name of the symbolic variable can be chosen arbitrarily. Sensitivities with respect to *constants* will not be derived.

```
syms const1 const2
```

Create the constants vector

```
model.sym.k = [ const1 const2 ];
```

## Differential equations

For time-dependent differential equations you can specify a symbolic variable for time. This **needs** to be denoted by `t`.

```
syms t
```

Specify the right hand side of the differential equation `f` or `xdot`

```
model.sym.xdot(1) = [ const1 - param1*state1 ];
model.sym.xdot(2) = [ +param2*state1 + dirac(t-param3) - const2*state2 ];
model.sym.xdot(3) = [ param4*state2 ];
```

or

```
model.sym.f(1) = [ const1 - param1*state1 ];
model.sym.f(2) = [ +param2*state1 + dirac(t-param3) - const2*state2 ];
model.sym.f(3) = [ param4*state2 ];
```

The specification of `f` or `xdot` may depend on states, parameters and constants.

For DAEs also specify the mass matrix.

```
model.sym.M = [1, 0, 0;...
               0, 1, 0;...
               0, 0, 0];
```

The specification of `M` may depend on parameters and constants.

For ODEs the integrator will solve the equation  $\dot{x} = f$  and for DAEs the equations  $M \cdot \dot{x} = f$ . AMICI will decide whether to use CVODES (for ODEs) or IDAS (for DAEs) based on whether the mass matrix is defined or not.

In the definition of the differential equation you can use certain symbolic functions. For a full list of available functions see `src/symbolic_functions.cpp`.

Dirac functions can be used to cause a jump in the respective states at the specified time-point. This is typically used to model injections, or other external stimuli. Spline functions can be used to model time/state dependent response with unknown time/state dependence.

## Initial Conditions

Specify the initial conditions. These may depend on parameters on constants and must have the same size as `x`.

```
model.sym.x0 = [ param4, 0, 0 ];
```

## Observables

Specify the observables. These may depend on parameters and constants.

```
model.sym.y(1) = state1 + state2;  
model.sym.y(2) = state3 - state2;
```

In the definition of the observable you can use certain symbolic functions. For a full list of available functions see `src/symbolic_functions.cpp`. Dirac functions in observables will have no effect.

## Events

Specifying events is optional. Events are specified in terms of a trigger function, a bolus function and an output function. The roots of the trigger function defines the occurrences of the event. The bolus function defines the change in the state on event occurrences. The output function defines the expression which is evaluated and reported by the simulation routine on every event occurrence. The user can create events by constructing a vector of objects of the class [amievent](#).

```
model.sym.event(1) = amievent(state1 - state2,0,[]);
```

Events may depend on states, parameters and constants but *not* on observables.

For more details about event support see:

Fröhlich, F., Theis, F. J., Rädler, J. O., & Hasenauer, J. (2017). Parameter estimation for dynamical systems with discrete events and logical operations. *Bioinformatics*, 33(7), 1049-1056. doi:10.1093/bioinformatics/btw764.

## Standard deviation

Specifying standard deviations is optional. It only has an effect when computing adjoint sensitivities. It allows the user to specify standard deviations of experimental data for observables and events.

Standard deviation for observable data is denoted by `sigma_y`

```
model.sym.sigma_y(1) = param5;
```

Standard deviation for event data is denoted by `sigma_t`

```
model.sym.sigma_t(1) = param6;
```

Both `sigma_y` and `sigma_t` can either be a scalar or of the same dimension as the observables / events function. They can depend on time and parameters but must not depend on the states or observables. The values provided in `sigma_y` and `sigma_t` will only be used if the value in `D.Sigma_Y` or `D.Sigma_T` in the user-provided data struct is NaN. See simulation for details.

## Objective Function

By default, AMICI assumes a normal noise model and uses the corresponding negative log-likelihood

$$J = 1/2 * \text{sum}(((y_i(t) - my_{ti})/\sigma_{y_i})^2 + \log(2 * \pi * \sigma_{y_i}^2))$$

as objective function. A user provided objective function can be specified in

```
model.sym.Jy
```

As reference see the default specification of `this.sym.Jy` in `amimodel.makeSyms`.

### 12.2.2 SBML

AMICI can also import SBML models using the command `SBML2AMICI`. This will generate a model specification as described above, which may be edited by the user to apply further changes.

### 12.2.3 Model Compilation

The model can then be compiled by calling `amiwrap.m`:

```
amiwrap(modelname, 'example_model_syms', dir, o2flag)
```

Here `modelname` should be a string defining the name of the model, `dir` should be a string containing the path to the directory in which simulation files should be placed and `o2flag` is a flag indicating whether second order sensitivities should also be compiled. The user should make sure that the previously defined function `example_model_syms` is in the user path. Alternatively, the user can also call the function `example_model_syms`

```
[model] = example_model_syms()
```

and subsequently provide the generated struct to `amiwrap(...)`, instead of providing the symbolic function:

```
amiwrap(modelname, model, dir, o2flag)
```

In a similar fashion, the user could also generate multiple models and pass them directly to `amiwrap(...)` without generating respective model definition scripts.

### Compiling a Python-generated model

For better performance or to avoid the Symbolic Math Toolbox requirement, it might be desirable to import a model in Python and compile the resulting code into a mex file. For Python model import, consult the respective section of the Python documentation. Once the imported succeeded, there will be a `compileMexFile.m` script inside the newly created model directory which can be invoked to compile the mex file. This mex file and `simulate_*.m` can be used as if fully created by matlab.

## Using Python-AMICI model import from Matlab

With recent matlab versions it is possible to use the AMICI python package from within Matlab. This not quite comfortable yet, but it is possible.

Here for proof of concept:

- Install the python package as described in the documentation
- Ensure pyversion shows the correct python version (3.6 or 3.7)
- Then, from within the AMICI matlab/ directory:

```
sbml_importer = py.amici.SbmlImporter('../python/examples/example_steadystate/model_
↪steadystate_scaled.xml')
sbml_importer.sbml2amici('steadystate', 'steadystate_example_from_python')
model = py.steadystate.getModel()
solver = model.getSolver()
model.setTimepoints(linspace(0, 50, 51))
rdata = py.amici.runAmiciSimulation(model, solver)
result = struct(py.dict(rdata.items()))
t = double(py.array.array('d', result.ts))
x = double(py.array.array('d', result.x.flatten()))
x = reshape(x, flip(double(py.array.array('d', result.x.shape))))
plot(t, x)
```

### 12.2.4 Model simulation

After the call to `amiwrap(...)` two files will be placed in the specified directory. One is a `_modelname_.mex` and the other is `simulate_*modelname*.m`. The mex file should never be called directly. Instead the MATLAB script, which acts as a wrapper around the .mex simulation file should be used.

The `simulate_ _modelname_.m` itself carries extensive documentation on how to call the function, what it returns and what additional options can be specified. In the following we will give a short overview of possible function calls.

#### Integration

Define a time vector:

```
t = linspace(0,10,100)
```

Generate a parameter vector:

```
theta = ones(6,1);
```

Generate a constants vector:

```
kappa = ones(2,1);
```

Integrate:

```
sol = simulate_modelname(t,theta,kappa,[],options)
```

The integration status will be indicated by the `sol.status` flag. Negative values indicated failed integration. The states will then be available as `sol.x`. The observables will then be available as `sol.y`. The event outputs will then



be available as `sol.z`. If no event occurred there will be an event at the end of the considered interval with the final value of the root function is stored in `sol.rz`.

Alternatively the integration can also be called via

```
[status,t,x,y] = simulate_modelname(t,theta,kappa,[],options)
```

The integration status will be indicated by the flag `status`. Negative values indicated failed integration. The states will then be available as `x`. The observables will then be available as `y`. No event output will be given.

## Forward Sensitivities

Set the sensitivity computation to forward sensitivities and integrate:

```
options.sensi = 1;
options.sensi_meth = 'forward';
sol = simulate_modelname(t,theta,kappa,[],options)
```

The integration status will be indicated by the `sol.status` flag. Negative values indicate failed integration. The states will be available as `sol.x`, with the derivative with respect to the parameters in `sol.sx`. The observables will be available as `sol.y`, with the derivative with respect to the parameters in `sol.sy`. The event outputs will be available as `sol.z`, with the derivative with respect to the parameters in `sol.sz`. If no event occurred there will be an event at the end of the considered interval with the final value of the root function stored in `sol.rz`, with the derivative with respect to the parameters in `sol.srz`.

Alternatively the integration can also be called via

```
[status,t,x,y,sx,sy] = simulate_modelname(t,theta,kappa,[],options)
```

The integration status will be indicated by the `status` flag. Negative values indicate failed integration. The states will then be available as `x`, with derivative with respect to the parameters in `sx`. The observables will then be available as `y`, with derivative with respect to the parameters in `sy`. No event output will be given.

## Adjoint sensitivities

Set the sensitivity computation to adjoint sensitivities:

```
options.sensi = 1;
options.sensi_meth = 'adjoint';
```

Define Experimental Data:

```
D.Y = [NaN(1,2)],ones(length(t)-1,2)];
D.Sigma_Y = [0.1*ones(length(t)-1,2),NaN(1,2)];
D.T = ones(1,1);
D.Sigma_T = NaN;
```

The NaN values in `Sigma_Y` and `Sigma_T` will be replaced by the specification in `model.sym.sigma_y` and `model.sym.sigma_t`. Data points with NaN value will be completely ignored.

Integrate:

```
sol = simulate_modelname(t,theta,kappa,D,options)
```

The integration status will be indicated by the `sol.status` flag. Negative values indicate failed integration. The log-likelihood will then be available as `sol.llh` and the derivative with respect to the parameters in `sol.sllh`. Note that for adjoint sensitivities no state, observable and event sensitivities will be available. Yet this approach can be expected to be significantly faster for systems with a large number of parameters.

### Steady-state sensitivities

This will compute state sensitivities according to the formula

$$s_k^x = - \left( \frac{\partial f}{\partial x} \right)^{-1} \frac{\partial f}{\partial \theta_k}$$

In the current implementation this formulation does not allow for conservation laws as this would result in a singular Jacobian.

Set the final timepoint as infinity, this will indicate the solver to compute the steadystate:

```
t = Inf;
```

Set the sensitivity computation to steady state sensitivities:

```
options.sensi = 1;
```

Integrate:

```
sol = simulate_modelname(t,theta,kappa,D,options)
```

The states will be available as `sol.x`, with the derivative with respect to the parameters in `sol.sx`. The observables will be available as `sol.y`, with the derivative with respect to the parameters in `sol.sy`. Notice that for steady state sensitivities no event sensitivities will be available. For the accuracy of the computed derivatives it is essential that the system is sufficiently close to a steady state. This can be checked by examining the right hand side of the system at the final time-point via `sol.diagnosis.xdot`.

## 12.3 FAQ

**Q:** My model fails to build.

**A:** Remove the corresponding model directory located in `AMICI/models/yourmodelname` and compile again.

---

**Q:** It still does not compile.

**A:** Remove the directory `AMICI/models/mexext` and compile again.

---

**Q:** It still does not compile.

**A:** Make an [issue](#) and we will have a look.

---

**Q:** My Python-generated model does not compile from MATLAB.

**A:** Try building any of the available examples before. If this succeeds, retry building the original model. Some dependencies might not be built correctly when using only the `compileMexFile.m` script.

---

**Q:** I get an out of memory error while compiling my model on a Windows machine.

**A:** This may be due to an old compiler version. See [issue #161](#) for instructions on how to install a new compiler.

---

**Q:** How are events interpreted in a DAE context?

**A:** Currently we only support impulse free events. Also sensitivities have never been tested. Proceed with care and create an [issue](#) if any problems arise!

---

**Q:** The simulation/sensitivities I get are incorrect.

**A:** There are some known issues, especially with adjoint sensitivities, events and DAEs. If your particular problem is not featured in the [issues](#) list, please add it!

## 12.4 AMICI Matlab API

AMICI Matlab library functions

### 12.4.1 Class Hierarchy

### 12.4.2 File Hierarchy

### 12.4.3 Full API

#### Namespaces

#### Namespace matlab

##### Contents

- [Namespaces](#)

#### Namespaces

- [Namespace matlab::mixin](#)

#### Namespace matlab::mixin

#### Classes and Structs

#### Class amidata

- Defined in file\_matlab\_@amidata\_amidata.m

## Inheritance Relationships

### Base Type

- public handle

### Class Documentation

#### **amidata : public handle**

AMIDATA provides a data container to pass experimental data to the simulation routine for likelihood computation. when any of the properties are updated, the class automatically checks consistency of dimension and updates related properties and initialises them with NaNs.

### Public Functions

#### **amidata::amidata(matlabtypesubstitute varargin)**

amidata creates an amidata container for experimental data with specified dimensions amidata.

AMIDATA(amidata) creates a copy of the input container

AMIDATA(struct) tries to creates an amidata container from the input struct. the struct should have the following

AMIDATA(nt,ny,nz,ne,nk) constructs an empty data container with in the provided dimensions intialised with NaNs

**fields** t [nt,1] Y [nt,ny] Sigma\_Y [nt,ny] Z [ne,nz] Sigma\_Z [ne,nz] condition [nk,1] conditionPreequilibration [nk,1] if some fields are missing the function will try to initialise them with NaNs with consistent dimensions

**param** varargin

### Public Members

**matlabtypesubstitute nt = 0**

number of timepoints

**Default:** 0

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute ny = 0**

number of observables

**Default:** 0

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute nz** = 0  
number of event observables

**Default:** 0

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute ne** = 0  
number of events

**Default:** 0

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute nk** = 0  
number of conditions/constants

**Default:** 0

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute t** = `double.empty("")`  
timepoints of observations

**Default:** `double.empty("")`

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute Y** = `double.empty("")`  
observations

**Default:** `double.empty("")`

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute Sigma\_Y** = `double.empty("")`  
standard deviation of observations

**Default:** `double.empty("")`

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute Z** = `double.empty("")`  
event observations

**Default:** `double.empty("")`

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute Sigma\_Z** = `double.empty("")`  
standard deviation of event observations

**Default:** `double.empty("")`

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute condition** = `double.empty("")`  
experimental condition

**Default:** `double.empty("")`

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute conditionPreequilibration** = `double.empty("")`  
experimental condition for preequilibration

**Default:** `double.empty("")`

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute reinitializeStates** = `false`  
reinitialize states based on fixed parameters after preeq.?

**Default:** `false`

## Class amievent

- Defined in file\_matlab\_@amievent\_amievent.m

## Class Documentation

### class amievent

AMIEVENT defines events which later on will be transformed into appropriate C code.

## Public Functions

**amievent::amievent(matlabtypesubstitute trigger, matlabtypesubstitute bolus, matlabtypesubstitute z)**

amievent constructs an amievent object from the provided input.

**param trigger** trigger function, the event will be triggered on at all roots of this function

**param bolus** the bolus that will be added to all states on every occurrence of the event

**param z** the event output that will be reported on every occurrence of the event

**mlhsInnerSubst<::amievent > amievent::setHflag(matlabtypesubstitute hflag)**

setHflag sets the hflag property.

**param hflag** value for the hflag property, type double

**returns this** – updated event definition object

## Public Members

**::symbolic trigger = sym.empty("")**

the trigger function activates the event on every zero crossing

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** `sym.empty("")`

---

**::symbolic bolus = sym.empty("")**

the bolus function defines the change in states that is applied on every event occurrence

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** `sym.empty("")`

---

**::symbolic z = sym.empty("")**

output function for the event

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** `sym.empty("")`

---

**matlabtypesubstitute hflag** = `logical.empty("")`

flag indicating that a heaviside function is present, this helps to speed up symbolic computations

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** `logical.empty("")`

---

## Class amifun

- Defined in file\_matlab\_@amifun\_amifun.m

## Class Documentation

### class amifun

AMIFUN defines functions which later on will be transformed into appropriate C code.

## Public Functions

**amifun::amifun(matlabtypesubstitute funstr, matlabtypesubstitute model)**

amievent constructs an amifun object from the provided input.

**param funstr** name of the requested function

**param model** amimodel object which carries all symbolic definitions to construct the function

**noret::substitute amifun::writeCcode\_sensi(::amimodel model, ::fileid fid)**

writeCcode\_sensi is a wrapper for writeCcode which loops over parameters and reduces overhead by check nonzero values

**param model** model definition object

**param fid** file id in which the final expression is written

**returns fid** – void

**noret::substitute amifun::writeCcode(::amimodel model, ::fileid fid)**

writeCcode is a wrapper for gccode which initialises data and reduces overhead by check nonzero values

**param model** model definition object

**param fid** file id in which the final expression is written

**returns fid** – void

**noret::substitute amifun::writeMcode(::amimodel model)**

writeMcode generates matlab evaluable code for specific model functions

**param model** model definition object

**returns model** – void



**mlhsInnerSubst<::amifun > amifun::gcode(::amimodel model, ::fileid fid)**  
 gcode transforms symbolic expressions into c code and writes the respective expression into a specified file

**param model** model definition object

**param fid** file id in which the expression should be written

**returns this** – function definition object

**mlhsInnerSubst<::amifun > amifun::getDeps(::amimodel model)**  
 getDeps populates the sensiflag for the requested function

**param model** model definition object

**returns this** – updated function definition object

**mlhsInnerSubst<::amifun > amifun::getArgs(::amimodel model)**  
 getFArgs populates the fargstr property with the argument string of the respective model function (if applicable). model functions are not wrapped versions of functions which have a model specific name and for which the call is solver specific.

**param model** model definition object

**returns this** – updated function definition object

**mlhsInnerSubst<::amifun > amifun::getNVecs()**  
 getfunargs populates the nvecs property with the names of the N\_Vector elements which are required in the execution of the function (if applicable). the information is directly extracted from the argument string

**returns this** – updated function definition object

**mlhsInnerSubst<::amifun > amifun::getCVar()**  
 getCVar populates the cvar property

**returns this** – updated function definition object

**mlhsInnerSubst<::amifun > amifun::getSensiFlag()**  
 getSensiFlag populates the sensiflag property

**returns this** – updated function definition object

**mlhsSubst< mlhsInnerSubst<::amifun >, mlhsInnerSubst<::amimodel > > amifun::getSyms(:amimodel model)**  
 getSyms computes the symbolic expression for the requested function

**param model** model definition object

**returns**

- **this** – updated function definition object
- **model** – updated model definition object

## Public Members

**::symbolic sym = sym("[]")**  
symbolic definition struct  
**Default:** sym("[]")

**::symbolic sym\_noopt = sym("[]")**  
symbolic definition which was not optimized (no dependencies on w)  
**Default:** sym("[]")

**::symbolic strsym = sym("[]")**  
short symbolic string which can be used for the reuse of precomputed values  
**Default:** sym("[]")

**::symbolic strsym\_old = sym("[]")**  
short symbolic string which can be used for the reuse of old values  
**Default:** sym("[]")

**::char funstr = char.empty("")**  
name of the model  
**Default:** char.empty("")

**::char cvar = char.empty("")**  
name of the c variable  
**Default:** char.empty("")

**::char argstr = char.empty("")**  
argument string (solver specific)  
**Default:** char.empty("")

**::cell deps = cell.empty("")**  
dependencies on other functions  
**Default:** cell.empty("")

**matlabtypesubstitute nvecs = cell.empty("")**  
nvec dependencies  
**Default:** cell.empty("")

**matlabtypesubstitute sensiflag = logical.empty("")**  
indicates whether the function is a sensitivity or derivative with respect to parameters  
**Default:** logical.empty("")

## Class amimodel

- Defined in file\_matlab\_@amimodel\_amimodel.m

## Inheritance Relationships

### Base Type

- public handle

## Class Documentation

### **amimodel : public handle**

AMIMODEL carries all model definitions including functions and events.

### Public Functions

#### **amimodel::amimodel(::string symfun, ::string modelname)**

amimodel initializes the model object based on the provided symfun and modelname

**param symfun** this is the string to the function which generates the modelstruct. You can also directly pass the struct here

**param modelname** name of the model

#### **noret::substitute amimodel::updateRHS(matlabtypesubstitute xdot)**

updateRHS updates the private fun property .fun.xdot.sym (right hand side of the differential equation)

**param xdot** new right hand side of the differential equation

**returns xdot** – void

#### **noret::substitute amimodel::updateModelName(matlabtypesubstitute modelname)**

updateModelName updates the modelname

**param modelname** new modelname

**returns modelname** – void

#### **noret::substitute amimodel::updateWrapPath(matlabtypesubstitute wrap\_path)**

updateModelName updates the modelname

**param wrap\_path** new wrap\_path

**returns wrap\_path** – void

#### **noret::substitute amimodel::parseModel()**

parseModel parses the model definition and computes all necessary symbolic expressions.

**returns void** –

#### **noret::substitute amimodel::generateC()**

generateC generates the c files which will be used in the compilation.

**returns void** –

**noret::substitute amimodel::generateRebuildM()**

generateRebuildM generates a Matlab script for recompilation of this model

**returns void** –

**noret::substitute amimodel::compileC()**

compileC compiles the mex simulation file

**returns void** –

**noret::substitute amimodel::generateM(::amimodel amimodelo2)**

generateM generates the matlab wrapper for the compiled C files.

**param amimodelo2** this struct must contain all necessary symbolic definitions for second order sensitivities

**returns amimodelo2** – void

**noret::substitute amimodel::getFun(::struct HTable, ::string funstr)**

getFun generates symbolic expressions for the requested function.

**param HTable** struct with hashes of symbolic definition from the previous compilation

**param funstr** function for which symbolic expressions should be computed

**returns funstr** – void

**noret::substitute amimodel::makeEvents()**

makeEvents extracts discontinuities from the model right hand side and converts them into events

**returns void** –

**noret::substitute amimodel::makeSyms()**

makeSyms extracts symbolic definition from the user provided model and checks them for consistency

**returns void** –

**mlhsInnerSubst<:bool > amimodel::checkDeps(::struct HTable, ::cell deps)**

checkDeps checks the dependencies of functions and populates sym fields if necessary

**param HTable** struct with reference hashes of functions in its fields

**param deps** cell array with containing a list of dependencies

**returns cflag** – boolean indicating whether any of the dependencies have changed with respect to the hashes stored in HTable

**mlhsInnerSubst<:struct > amimodel::loadOldHashes()**

loadOldHashes loads information from a previous compilation of the model.

**returns HTable** – struct with hashes of symbolic definition from the previous compilation

**mlhsInnerSubst< matlabtypesubstitute > amimodel::augmento2()**

augmento2 augments the system equation to also include equations for sensitivity equation. This will enable us to compute second order sensitivities in a forward-adjoint or forward-forward approach later on.

**returns this** – augmented system which contains symbolic definition of the original system and its sensitivities

**mlhsInnerSubst<::amimodel > amimodel::augmento2vec()**

augmento2 augments the system equation to also include equations for sensitivity equation. This will enable us to compute second order sensitivities in a forward-adjoint or forward-forward approach later on.

**returns** **modelo2vec** – augmented system which contains symbolic definition of the original system and its sensitivities

## Public Members

**::struct sym = struct.empty("")**

symbolic definition struct

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** `struct.empty("")`

---

**::struct fun = struct.empty("")**

struct which stores information for which functions c code needs to be generated

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** `struct.empty("")`

---

**::amievent event = amievent.empty("")**

struct which stores information for which functions c code needs to be generated

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** `amievent.empty("")`

---

**::string modelname = char.empty("")**

name of the model

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** `char.empty("")`

---

**::struct HTable = struct.empty("")**

struct that contains hash values for the symbolic model definitions

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** struct.empty("")

---

**::bool debug = false**

flag indicating whether debugging symbols should be compiled

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** false

---

**::bool adjoint = true**

flag indicating whether adjoint sensitivities should be enabled

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** true

---

**::bool forward = true**

flag indicating whether forward sensitivities should be enabled

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** true

---

**::double t0 = 0**

default initial time

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** 0

---

**::string wtype = char.empty("")**  
 type of wrapper (cvcodes/idas)

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** char.empty("")

---

**::int nx = double.empty("")**  
 number of states

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** double.empty("")

---

**::int nxtrue = double.empty("")**  
 number of original states for second order sensitivities

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** double.empty("")

---

**::int ny = double.empty("")**  
 number of observables

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** double.empty("")

---

**::int nytrue = double.empty("")**  
 number of original observables for second order sensitivities

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess =

---

Public

---

**Note:** [Matlab documentation of property attributes](#). **Default:** double.empty("")

---

**::int np = double.empty("")**  
number of parameters

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

**Note:** [Matlab documentation of property attributes](#). **Default:** double.empty("")

---

**::int nk = double.empty("")**  
number of constants

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

**Note:** [Matlab documentation of property attributes](#). **Default:** double.empty("")

---

**::int ng = double.empty("")**  
number of objective functions

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

**Note:** [Matlab documentation of property attributes](#). **Default:** double.empty("")

---

**::int nevent = double.empty("")**  
number of events

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

**Note:** [Matlab documentation of property attributes](#). **Default:** double.empty("")

---

**::int nz = double.empty("")**  
number of event outputs

---



---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

---

**::int nztrue = double.empty("")**

number of original event outputs for second order sensitivities

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

---

**::\*int id = double.empty("")**

flag for DAEs

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

---

**::int ubw = double.empty("")**

upper Jacobian bandwidth

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

---

**::int lbw = double.empty("")**

lower Jacobian bandwidth

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

---

**::int nnz** = `double.empty("")`  
number of nonzero entries in Jacobian

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

---

**::\*int sparseidx** = `double.empty("")`  
dataindexes of sparse Jacobian

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

---

**::\*int rowvals** = `double.empty("")`  
rowindexes of sparse Jacobian

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

---

**::\*int colptrs** = `double.empty("")`  
columnindexes of sparse Jacobian

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

---

**::\*int sparseidxB** = `double.empty("")`  
dataindexes of sparse Jacobian

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

---

**::\*int rowvalsB** = `double.empty("")`  
 rowindexes of sparse Jacobian

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

---

**::\*int colptrsB** = `double.empty("")`  
 columnindexes of sparse Jacobian

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

---

**::\*cell funs** = `cell.empty("")`  
 cell array of functions to be compiled

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** `cell.empty("")`

---

**::\*cell mfun**s = `cell.empty("")`  
 cell array of matlab functions to be compiled

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** `cell.empty("")`

---

**::string coptim** = `"-03"`  
 optimisation flag for compilation

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess =`

---

Public

---

**Note:** [Matlab documentation of property attributes](#). **Default:** “-O3”

---

**::string param = "lin"**  
default parametrisation

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

**Note:** [Matlab documentation of property attributes](#). **Default:** “lin”

---

**matlabtypesubstitute wrap\_path = char.empty("")**  
path to wrapper

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

**Note:** [Matlab documentation of property attributes](#). **Default:** char.empty("")

---

**matlabtypesubstitute recompile = false**  
flag to enforce recompilation of the model

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

**Note:** [Matlab documentation of property attributes](#). **Default:** false

---

**matlabtypesubstitute cfun = struct.empty("")**  
storage for flags determining recompilation of individual functions

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

**Note:** [Matlab documentation of property attributes](#). **Default:** struct.empty("")

---

**matlabtypesubstitute o2flag = 0**  
flag which identifies augmented models 0 indicates no augmentation 1 indicates augmentation by first order

---

sensitivities (yields second order sensitivities) 2 indicates augmentation by one linear combination of first order sensitivities (yields hessian-vector product)

---

**Note:** This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** 0

---

**matlabtypesubstitute z2event** = `double.empty("")`

vector that maps outputs to events

**Default:** `double.empty("")`

**matlabtypesubstitute splineflag** = `false`

flag indicating whether the model contains spline functions

**Default:** `false`

**matlabtypesubstitute minflag** = `false`

flag indicating whether the model contains min functions

**Default:** `false`

**matlabtypesubstitute maxflag** = `false`

flag indicating whether the model contains max functions

**Default:** `false`

**::int nw** = 0

number of derived variables w, w is used for code optimization to reduce the number of frequently occurring expressions

**Default:** 0

**::int ndwdx** = 0

number of derivatives of derived variables w, dwdx

**Default:** 0

**::int ndwdp** = 0

number of derivatives of derived variables w, dwdp

**Default:** 0

## Public Static Functions

**noret::substitute amimodel::compileAndLinkModel(matlabtypesubstitute modelname, matlabtypesubstitute modelSourceFolder, matlabtypesubstitute coptim, matlabtypesubstitute debug, matlabtypesubstitute funs, matlabtypesubstitute cfun)**

compileAndLinkModel compiles the mex simulation file. It does not check if the model files have changed since generating C++ code or whether all files are still present. Use only if you know what you are doing. The safer alternative is rerunning *amiwrap()*.

**param modelname** name of the model as specified for *amiwrap()*

**param modelSourceFolder** path to model source directory

**param coptim** optimization flags

**param debug** enable debugging

**param funs** array with names of the model functions, will be guessed from source files if left empty

**param cfun** struct indicating which files should be recompiled

**returns cfun** – void

**noret::substitute amimodel::generateMatlabWrapper(matlabtypesubstitute nx, matlabtypesubstitute ny, matlabtypesubstitute np, matlabtypesubstitute nk, matlabtypesubstitute nz, matlabtypesubstitute o2flag, ::amimodel amimodelo2, matlabtypesubstitute wrapperFilename, matlabtypesubstitute modelname, matlabtypesubstitute pscale, matlabtypesubstitute forward, matlabtypesubstitute adjoint)**

generateMatlabWrapper generates the matlab wrapper for the compiled C files.

**param nx** number of states

**param ny** number of observables

**param np** number of parameters

**param nk** number of fixed parameters

**param nz** number of events

**param o2flag** o2flag

**param amimodelo2** this struct must contain all necessary symbolic definitions for second order sensitivities

**param wrapperFilename** output filename

**param modelname** name of the model

**param pscale** default parameter scaling

**param forward** has forward sensitivity equations

**param adjoint** has adjoint sensitivity equations

**returns adjoint** – void

## Class amioption

- Defined in file\_matlab\_@amioption\_amioption.m

## Inheritance Relationships

### Base Type

- public matlab::mixin::CustomDisplay

## Class Documentation

**amioption : public matlab::mixin::CustomDisplay**

AMIOPTION provides an option container to pass simulation parameters to the simulation routine.

### Public Functions

**amioption::amioption(matlabtypesubstitute varargin)**

amioptions Construct a new amioptions object `OPTS = amioption()` creates a set of options with each option set to its default value.

`OPTS = amioption(PARAM, VAL, ...)` creates a set of options with the named parameters altered with the specified values.

`OPTS = amioption(OLDOPTS, PARAM, VAL, ...)` creates a copy of OLDOPTS with the named parameters altered with the specified value

Note: to see the parameters, check the documentation page for amioption

**param varargin** input to construct amioption object, see function function description

### Public Members

**matlabtypesubstitute atol = 1e-16**

absolute integration tolerace

**Default:** 1e-16

**matlabtypesubstitute rtol = 1e-8**

relative integration tolerace

**Default:** 1e-8

**matlabtypesubstitute maxsteps = 1e4**

maximum number of integration steps

**Default:** 1e4

**matlabtypesubstitute quad\_atol = 1e-12**

absolute quadrature tolerace

**Default:** 1e-12

**matlabtypesubstitute quad\_rtol** = 1e-8  
relative quadrature tolerance

**Default:** 1e-8

**matlabtypesubstitute maxstepsB** = 0  
maximum number of integration steps

**Default:** 0

**matlabtypesubstitute ss\_atol** = 1e-16  
absolute steady state tolerance

**Default:** 1e-16

**matlabtypesubstitute ss\_rtol** = 1e-8  
relative steady state tolerance

**Default:** 1e-8

**matlabtypesubstitute sens\_ind** = double.empty("")  
index of parameters for which the sensitivities are computed

**Default:** double.empty("")

**matlabtypesubstitute tstart** = 0  
starting time of the simulation

**Default:** 0

**matlabtypesubstitute lmm** = 2  
linear multistep method.

**Default:** 2

**matlabtypesubstitute iter** = 2  
iteration method for linear multistep.

**Default:** 2

**matlabtypesubstitute linsol** = 9  
linear solver

**Default:** 9

**matlabtypesubstitute stldet** = true  
stability detection flag

**Default:** true

**matlabtypesubstitute interpType** = 1  
interpolation type

**Default:** 1

**matlabtypesubstitute ism** = 1  
forward sensitivity mode



**Default:** 1

**matlabtypesubstitute sensi\_meth** = 1  
sensitivity method

**Default:** 1

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute sensi\_meth\_preeq** = 1  
sensitivity method for preequilibration

**Default:** 1

**matlabtypesubstitute sensi** = 0  
sensitivity order

**Default:** 0

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute nmaxevent** = 10  
number of reported events

**Default:** 10

**matlabtypesubstitute ordering** = 0  
reordering of states

**Default:** 0

**matlabtypesubstitute ss** = 0  
steady state sensitivity flag

**Default:** 0

**matlabtypesubstitute x0** = double.empty("")  
custom initial state

**Default:** double.empty("")

**matlabtypesubstitute sx0** = double.empty("")  
custom initial sensitivity

**Default:** double.empty("")

**matlabtypesubstitute newton\_maxsteps** = 40  
newton solver: maximum newton steps

**Default:** 40

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute z2event** = `double.empty("")`  
mapping of event outputs to events

**Default:** `double.empty("")`

**matlabtypesubstitute pscale** = `[]`

parameter scaling Single value or vector matching `sens_ind`. Valid options are “log”, “log10” and “lin” for log, log10 or unscaled parameters `p`. Use `[]` for default as specified in the model (fallback: `lin`).

**Default:** `[]`

---

**Note:** This property has custom functionality when its value is changed.

---

**matlabtypesubstitute steadyStateSensitivityMode** = `0`

Mode for computing sensitivities ({0: Newton}, 1: Simulation)

**Default:** `0`

## Public Static Functions

**mlhsInnerSubst** < **matlabtypesubstitute** > **amioption::**

**getIntegerPScale**(**matlabtypesubstitute pscaleString**)

`pscaleInt` converts a parameter scaling string into the corresponding integer representation

**param pscaleString** parameter scaling string

**returns pscaleString** – int

## Class amised

- Defined in `file_matlab_@amised_amised.m`

## Inheritance Relationships

### Base Type

- public handle

## Class Documentation

**amised : public handle**

AMISED is a container for SED-ML objects.

## Public Functions

**amised::amised(matlabtypesubstitute sedname)**

amised reads in an SEDML document using the JAVA binding of libSEDML

**param sedname** name/path of the SEDML document

## Public Members

**matlabtypesubstitute model = struct("event",[],'sym',[])**

amimodel from the specified model

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** struct("event",[],'sym',[])

---

**matlabtypesubstitute modelname = {""}**

cell array of model identifiers

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** {""}

---

**matlabtypesubstitute sedml = struct.empty("")**

stores the struct tree from the xml definition

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** struct.empty("")

---

**matlabtypesubstitute outputcount = []**

count the number of outputs per model

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---



---

**Note:** [Matlab documentation of property attributes](#). **Default:** []

---

**matlabtypesubstitute varidx** = "[]"  
indexes for dataGenerators

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** ""

---

**matlabtypesubstitute varsym** = sym("[]")  
symbolic expressions for variables

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** sym("")

---

**matlabtypesubstitute datasym** = sym("[]")  
symbolic expressions for data

---

**Note:** This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

---

---

**Note:** [Matlab documentation of property attributes](#). **Default:** sym("")

---

## Class optsym

- Defined in file\_matlab\_@optsym\_optsym.m

## Inheritance Relationships

### Base Type

- public sym

## Class Documentation

### **optsym : public sym**

OPTSYM is an auxiliary class to gain access to the private symbolic property `s` which is necessary to be able to call `symobj::optimize` on it.

### Public Functions

#### **optsym::optsym(::sym symbol)**

optsym converts the symbolic object into a optsym object

**param symbol** symbolic object

#### **mlhsInnerSubst<::sym > optsym::getoptimized()**

getoptimized calls `symobj::optimize` on the optsym object

**returns out** – optimized symbolic object

## Functions

### Function **am\_and**

- Defined in file `_matlab_symbolic_am_and.m`

## Function Documentation

### **mlhsInnerSubst< matlabtypesubstitute > am\_and(::sym a, ::sym b)**

`am_and` is the amici implementation of the symbolic and function

**param a** first input parameter

**param b** second input parameter

**returns fun** – logical value, negative for false, positive for true

### Function **am\_eq**

- Defined in file `_matlab_symbolic_am_eq.m`

## Function Documentation

### **mlhsInnerSubst< matlabtypesubstitute > am\_eq(matlabtypesubstitute varargin)**

`am_eq` is currently a placeholder that simply produces an error message

**param varargin** elements for chain of equalities

**returns fun** – logical value, negative for false, positive for true

## Function `am_ge`

- Defined in `file_matlab_symbolic_am_ge.m`

### Function Documentation

**mlhsInnerSubst**< **matlabtypesubstitute** > **am\_ge**(::sym varargin)

`am_ge` is the amici implementation of the n-ary `mathml greaterorequal` function this is an n-ary function, for more than 2 input parameters it will check whether `and(varargin{1} >= varargin{2}, varargin{2} >= varargin{3}, ...)`

**param varargin** chain of input parameters

**returns fun** – `a >= b` logical value, negative for false, positive for true

## Function `am_gt`

- Defined in `file_matlab_symbolic_am_gt.m`

### Function Documentation

**mlhsInnerSubst**< **matlabtypesubstitute** > **am\_gt**(::sym varargin)

`am_gt` is the amici implementation of the n-ary `mathml greaterthan` function this is an n-ary function, for more than 2 input parameters it will check whether `and(varargin{1} > varargin{2}, varargin{2} > varargin{3}, ...)`

**param varargin** chain of input parameters

**returns fun** – `a > b` logical value, negative for false, positive for true

## Function `am_if`

- Defined in `file_matlab_symbolic_am_if.m`

### Function Documentation

**mlhsInnerSubst**< **matlabtypesubstitute** > **am\_if**(::sym condition, ::sym truepart, ::sym falsepart)

`am_if` is the amici implementation of the symbolic if function

**param condition** logical value

**param truepart** value if condition is true

**param falsepart** value if condition is false

**returns fun** – if condition is true `truepart`, else `falsepart`

## Function am\_le

- Defined in file\_matlab\_symbolic\_am\_le.m

## Function Documentation

**mlhsInnerSubst< matlabtypesubstitute > am\_le(::sym varargin)**

am\_le is the amici implementation of the n-ary mathml lessorequal function this is an n-ary function, for more than 2 input parameters it will check whether and(varargin{1} <= varargin{2}, varargin{2} <= varargin{3},...)

**param varargin** chain of input parameters

**returns fun** – a <= b logical value, negative for false, positive for true

## Function am\_lt

- Defined in file\_matlab\_symbolic\_am\_lt.m

## Function Documentation

**mlhsInnerSubst< matlabtypesubstitute > am\_lt(::sym varargin)**

am\_lt is the amici implementation of the n-ary mathml lessthan function this is an n-ary function, for more than 2 input parameters it will check whether and(varargin{1} < varargin{2}, varargin{2} < varargin{3},...)

**param varargin** chain of input parameters

**returns fun** – a < b logical value, negative for false, positive for true

## Function am\_max

- Defined in file\_matlab\_symbolic\_am\_max.m

## Function Documentation

**mlhsInnerSubst< matlabtypesubstitute > am\_max(::sym a, ::sym b)**

am\_max is the amici implementation of the symbolic max function

**param a** first input parameter

**param b** second input parameter

**returns fun** – maximum of a and b

## Function am\_min

- Defined in file\_matlab\_symbolic\_am\_min.m

### Function Documentation

**mlhsInnerSubst**< **matlabtypesubstitute** > **am\_min**(::sym a, ::sym b)

am\_min is the amici implementation of the symbolic min function

**param a** first input parameter  
**param b** second input parameter  
**returns fun** – minimum of a and b

## Function am\_or

- Defined in file\_matlab\_symbolic\_am\_or.m

### Function Documentation

**mlhsInnerSubst**< **matlabtypesubstitute** > **am\_or**(::sym a, ::sym b)

am\_or is the amici implementation of the symbolic or function

**param a** first input parameter  
**param b** second input parameter  
**returns fun** – logical value, negative for false, positive for true

## Function am\_piecewise

- Defined in file\_matlab\_symbolic\_am\_piecewise.m

### Function Documentation

**mlhsInnerSubst**< **matlabtypesubstitute** > **am\_piecewise**(**matlabtypesubstitute** piece, **matlabtypesubstitute** condition, **matlabtypesubstitute** default)

am\_piecewise is the amici implementation of the mathml piecewise function

**param piece** value if condition is true  
**param condition** logical value  
**param default** value if condition is false  
**returns fun** – return value, piece if condition is true, default if not



### Function `am_spline`

- Defined in `file_matlab_symbolic_am_spline.m`

### Function Documentation

`mlhsInnerSubst< matlabtypesubstitute > am_spline(matlabtypesubstitute varargin)`

### Function `am_spline_pos`

- Defined in `file_matlab_symbolic_am_spline_pos.m`

### Function Documentation

`mlhsInnerSubst< matlabtypesubstitute > am_spline_pos(matlabtypesubstitute varargin)`

### Function `am_stepfun`

- Defined in `file_matlab_symbolic_am_stepfun.m`

### Function Documentation

`mlhsInnerSubst< matlabtypesubstitute > am_stepfun(::sym t, matlabtypesubstitute tstart, matlabtypesubstitute vstart, matlabtypesubstitute tend, matlabtypesubstitute vend)`

`am_stepfun` is the amici implementation of the step function

**param t** input variable

**param tstart** input variable value at which the step starts

**param vstart** value during the step

**param tend** input variable value at which the step end

**param vend** value after the step

**returns fun** – 0 before tstart, vstart between tstart and tend and vend after tend

### Function `am_xor`

- Defined in `file_matlab_symbolic_am_xor.m`

## Function Documentation

**mlhsInnerSubst** < matlabtypesubstitute > **am\_xor**(::sym a, ::sym b)

am\_xor is the amici implementation of the symbolic exclusive or function

**param a** first input parameter

**param b** second input parameter

**returns fun** – logical value, negative for false, positive for true

## Function AMICI2D2D

- Defined in file\_matlab\_AMICI2D2D.m

## Function Documentation

**noret::substitute AMICI2D2D**(matlabtypesubstitute filename,  
matlabtypesubstitute modelname)

## Function amiwrap

- Defined in file\_matlab\_amiwrap.m

## Function Documentation

**noret::substitute amiwrap**(matlabtypesubstitute varargin)

AMIWRAP generates c++ mex files for the simulation of systems of differential equations via CVODES and IDAS.

**param varargin**

amiwrap ( modelname, symfun, tdir, o2flag )

*Required Parameters for varargin:*

- modelname specifies the name of the model which will be later used for the naming of the simulation file
- symfun specifies a function which executes model definition
- tdir target directory where the simulation file should be placed **Default:** \$AMI-CIDIR/models/modelname
- o2flag boolean whether second order sensitivities should be enabled **Default:** false

**returns o2flag** – void

### Function `installAMICI`

- Defined in `file_matlab_installAMICI.m`

### Function Documentation

`noret::substitute installAMICI()`

### Function `SBML2AMICI`

- Defined in `file_matlab_SBML2AMICI.m`

### Function Documentation

`noret::substitute SBML2AMICI(matlabtypesubstitute filename,  
matlabtypesubstitute modelname)`

SBML2AMICI generates AMICI model definition files from SBML.

**param filename** name of the SBML file (withouth extension)

**param modelname** name of the model, this will define the name of the output file (default: input filename)

**returns modelname** – void



## AMICI DEVELOPER'S GUIDE

This document contains information for AMICI developers, not too relevant to regular users.

### 13.1 Branches / releases

AMICI roughly follows the [GitFlow](#). All new contributions are merged into `develop`. These changes are regularly merged into `master` as new releases. For release versioning we are trying to follow [semantic versioning](#). New releases are created on Github and are automatically deployed to [Zenodo](#) for archiving and to obtain a digital object identifier (DOI) to make them citable. Furthermore, our [CI pipeline](#) will automatically create and deploy a new release on [PyPI](#).

We try to keep a clean git history. Therefore, feature pull requests are squash-merged to `develop`. Merging of release branches to master is done via merge commits.

### 13.2 When starting to work on some issue

When starting to work on some Github issue, please assign yourself to let other developers know that you are working on it to avoid duplicate work. If the respective issue is not completely clear, it is generally a good idea to ask for clarification before starting to work on it.

If you want to work on something new, please create a Github issue first.

### 13.3 Code contributions

When making code contributions, please follow our style guide and the process described below:

- Check if you agree to release your contribution under the conditions provided in `LICENSE`. By opening a pull requests you confirm us that you do agree.
- Start a new branch from `develop` (on your fork, or at the main repository if you have access)
- Implement your changes
- Submit a pull request to the `develop` branch
- Make sure your code is documented appropriately
  - Run `scripts/run-doxygen.sh` to check completeness of your documentation
- Make sure your code is compatible with C++14, gcc and clang (our CI pipeline will do this for you)
- When adding new functionality, please also provide test cases (see `tests/cpp/` and [documentation/CI.md](#))

- Write meaningful commit messages
- Run all tests to ensure nothing was broken ([more details](#))
  - Run `scripts/buildAll.sh && scripts/run-cpp-tests.sh`.
  - If you made changes to the Matlab or C++ code and have a Matlab license, please also run `tests/cpp/wrapTestModels.m` and `tests/testModels.m`
  - If you made changes to the Python or C++ code, run `make python-tests` in `build`
- When all tests are passing and you think your code is ready to merge, request a code review (see also our [code review guideline](#))
- Wait for feedback. If you do not receive feedback to your pull request within a week, please give us a friendly reminder.

### 13.3.1 Style guide

#### General

- All files and functions should come with file-level and function-level documentation.
- All new functionality should be covered by unit or integration tests. Runtime of those tests should be kept as short as possible.

#### Python

- We want to be compatible with Python 3.8
- For the Python code we want to follow [PEP8](#). Although this is not the case for all existing code, any new contributions should do so.
- We use Python [type hints](#) for all functions (but not for class attributes, since they are not supported by the current Python doxygen filter). In Python code type hints should be used instead of doxygen `@type`.

For function docstrings, follow this format:

```
"""One-line description.

Possible a more detailed description

Arguments:
    Argument1: This needs to start on the same line, otherwise the current
        doxygen filter will fail.

Returns:
    Return value

Raises:
    SomeError in case of some error.
"""
```

## C++

- We use C++14
- We want to maintain compatibility with g++, clang and the Intel C++ compiler
- For code formatting, we use the settings from `.clang-format` in the root directory
- *Details to be defined*

## Matlab

*To be defined*

# 13.4 Further topics

## 13.4.1 AMICI documentation

This file describes how the AMICI documentation is organized and compiled.

### Building documentation

#### Multi-interface documentation

AMICI documentation hosted at [Read the Docs \(RTD\)](#) is generated using [Sphinx](#) and related packages. The legacy GitHub Pages URL <https://amici-dev.github.io/AMICI/> is set up as a redirect to RTD.

The main configuration file is `documentation/conf.py` and the documentation is generated using `scripts/run-sphinx.sh`. The documentation is written to `documentation/_build/`.

The documentation comprises:

- reStructuredText / Markdown files from `documentation/`
- Python API documentation of native Python modules
- Python API documentation of Python generated via SWIG (doxygen-style comments translated to docstrings by SWIG)
- C++ API documentation (doxygen -> exhale -> breathe -> sphinx)
- Matlab API documentation (mtocpp -> doxygen -> exhale -> breathe -> sphinx)

### Doxygen-only (legacy)

(Parts of the) AMICI documentation can also be directly created using [doxygen](#) directly. It combines Markdown files from the root directory, from `documentation/` and in-source documentation from the C++ and Matlab source files.

The documentation is generated by running

```
scripts/run-doxygen.sh
```

The resulting HTML and PDF documentation will be created in `doc/`. `scripts/run-doxygen.sh` also checks for any missing in-source documentation.

## Doxygen configuration

The main doxygen configuration file is located in `matlab/mtoc/config/Doxyfile.template`. Edit this file for inclusion or exclusion of additional files.

## Matlab documentation

Matlab documentation is processed by `mtoc++`. This is configured in `matlab/mtoc/config`.

## Python documentation

Python documentation is processed by doxygen and doxypy using the script and filters in `scripts/`.

## Writing documentation

### Out-of-source documentation

Out-of-source documentation files should be written in reStructuredText if intended for Read the Docs or in Markdown if intended for rendering on GitHub. Files to be included in the Sphinx/RTD documentation live in `documentation/`. Graphics for documentation are kept in `documentation/gfx/`.

## When using Markdown

- Note that there are some incompatibilities of GitHub Markdown and Doxygen Markdown. Ideally documentation should be written in a format compatible with both. This affects for example images links which currently cause trouble in Doxygen.
- Where possible, relative links are preferred over absolute links. However, they should work with both Github and Doxygen and ideally with local files for offline use.
- Please stick to the limit of 80 characters per line for readability of raw Markdown files where possible.  
However, note that some Markdown interpreters can handle line breaks within links and headings, whereas others cannot. Here, compatibility is preferred over linebreaks.
- Avoid trailing whitespace

## Maintaining the list of publications

We want to maintain a list of publications / projects using AMICI. This is located at `documentation/references.md`. This file is created by `documentation/recreate_reference_list.py` based on the bibtex file `documentation/amici_refs.bib`.

After any changes to `documentation/amici_refs.bib`, please run

`documentation/recreate_reference_list.py`

(requires `biblib`)



### 13.4.2 Code review guide

A guide for reviewing code and having your code reviewed by others.

#### Everyone

- Don't be too protective of your code
- Accept that, to a large extent, coding decisions are a matter of personal preference
- Don't get personal
- Ask for clarification
- Avoid strong language
- Try to understand your counterpart's perspective
- Clarify how strong you feel about each discussion point

#### Reviewing code

- If there are no objective advantages, don't force your style on others
- Ask questions instead of making demands
- Assume the author gave his best
- Mind the scope (many things are nice to have, but might be out of scope of the current change - open a new issue)
- The goal is "good enough", not "perfect"
- Be constructive
- You do not always have to request changes

#### Having your code reviewed

- Don't take it personal - the review is on the code, not on you
- Code reviews take time, appreciate the reviewer's comments
- Assume the reviewer did his best (but might still be wrong)
- Keep code changes small (e.g. separate wide reformatting from actual code changes to facilitate review)
- If the reviewer does not understand your code, probably many others won't either

#### Checklist

- [ ] Adherence to project-specific style guide
- [ ] The code is self-explanatory
- [ ] The code is concise / expressive
- [ ] Meaningful identifiers are used
- [ ] Corner-cases are covered, cases not covered fail loudly
- [ ] The code can be expected to scale well (enough)

- [ ] The code is well documented (e.g., input, operation, output), but without trivial comments
- [ ] The code is **SOLID**
- [ ] New code is added in the most meaningful place (i.e. matches the current architecture)
- [ ] No magic numbers
- [ ] No hard-coded values that should be user inputs
- [ ] No dead code left
- [ ] The changes make sense
- [ ] The changes are not obviously degrading performance
- [ ] There is no duplicated code
- [ ] The API is convenient
- [ ] Code block length and complexity is adequate
- [ ] Spelling okay
- [ ] The code is tested

### 13.4.3 Continuous integration (CI) and tests

AMICI uses a continuous integration pipeline running via <https://github.com/features/actions>. This includes the following steps:

- Checking existence and format of documentation
- Static code analysis (<http://cppcheck.sourceforge.net/>)
- Unit and integration tests
- Memory leak detection

More details are provided in the sections below.

The CI scripts and tests can be found in `tests/` and `scripts/`. Some of the tests are integrated with CMake, see `make help` in the build directory.

#### C++ unit and integration tests

To run C++ tests, build AMICI with `make` or `scripts/buildAll.sh`, then run `scripts/run-cpp-tests.sh`.

#### Python unit and integration tests

To run Python tests, run `../scripts/run-python-tests.sh` from anywhere (assumes build directory is `build/`) or run `make python-tests` in your build directory.

## SBML Test Suite

We test Python-AMICI SBML support using the test cases from the semantic [SBML Test Suite](#). When making changes to the model import functions, make sure to run these tests.

To run the SBML Test Suite test cases, the easiest way is:

1. Running `scripts/installAmiciSource.sh` which creates a virtual Python environment and performs a development installation of AMICI from the current repository. (This needs to be run only once or after AMICI model generation or C++ changes).
2. Running `scripts/run-SBMLTestsuite.sh`. This will download the test cases if necessary and run them all. A subset of test cases can be selected with an optional argument (e.g. `scripts/run-SBMLTestsuite.sh 1, 3-6, 8`, to run cases 1, 3, 4, 5, 6 and 8).

Once the test cases are available locally, for debugging it might be easier to directly use `pytest` with `tests/testSBMLSuite.py`.

## Matlab tests (not included in CI pipeline)

To execute the Matlab test suite, run `tests/testModels.m`.

## Model simulation integration tests

Many of our integration tests are model simulations. The simulation results obtained from the Python and C++ are compared to results saved in an HDF5 file (`tests/cpp/expectedResults.h5`). Settings and data for the test simulations are also specified in this file.

**Note:** The C++ code for the models is included in the repository under `models/`. This code is to be updated whenever `amici::Model` changes.

## Regenerating C++ code of the test models

Regeneration of the model code has to be done whenever `amici::Model` or the Matlab model import routines change.

This is done with

```
tests/cpp/wrapTestModels.m
```

**Note:** This is currently only possible from Matlab < R2018a. This should change as soon as 1) all second-order sensitivity code is ported to C++/Python, 2) a non-SBML import exists for Python and 3) support for events has been added for Python.

## Regenerating expected results

To update test results, run `make test` in the build directory, replace `tests/cpp/expectedResults.h5` by `tests/cpp/writeResults.h5.bak` [ONLY DO THIS AFTER TRIPLE CHECKING CORRECTNESS OF RESULTS] Before replacing the test results, confirm that only expected datasets have changed, e.g. using

```
h5diff -v --relative 1e-8 tests/cpp/expectedResults.h5 tests/cpp/writeResults.h5.bak |
↪ less
```

## Adding/Updating tests

To add new tests add a new corresponding python script (see, e.g., `./tests/generateTestConfig/example_dirac.py`) and add it to and run `tests/generateTestConfigurationForExamples.sh`. Then regenerate the expected test results (see above).

## 13.4.4 Debugging AMICI

This document contains some information on how to debug any issues in AMICI, in particular for C++ Python extensions.

### Caveman debugging / printf-debugging

The simplest approach may often be adding some print-statements to the code, as this does not require any special tools.

Note that after each change of the C++ files, the AMICI extension *as well as the model extension* (if any model functions are called), need to be recompiled. The simplest and safest approach would be re-installation of the amici package and re-import of the model. As this can be very time-consuming, the following shortcut is possible, assuming you are using a development installation (`pip install -e .`):

```
# rebuild the amici base extension, from within the amici root directory
# (note that this only recompiles the amici source files, NOT third-party
# dependencies such as sundials):
cd python/sdist/
python setup.py build_ext --build-lib .

# rebuild the model, from within the model package directory:
python setup.py build_ext --force --build-lib .
```

Note: Be careful when working interactively, Python may not pick up any changes in already imported modules. The safest is to start a new Python process after any changes.

### Using a proper debugger

Debugging with `gdb` (<https://www.sourceware.org/gdb/>) is most convenient with a minimal reproducible example that is directly invoked from `gdb`. For example:

```
# start gdb
gdb --args python -m pytest ../tests/test_sbml_import.py::test_nosensi

# inside gdb, set a meaningful breakpoint and launch:
break amici::runAmiciSimulation
run
# ... (see one of the many gdb tutorials)
```

Alternative, `gdb` can attach to a running process by passing the `--pid` argument.

For many users, it may be more convenient to use `gdb` via some graphical user interface as provided by various C++ IDEs.

---

**Note:** For better debugging experience, but at the cost of runtime performance, consider building the amici and model extension with environment variable `ENABLE_AMICI_DEBUGGING=TRUE`. This will include debugging symbols and disable compiler optimizations.

---



## HANDLING OF DISCONTINUITIES

This document provides guidance and rationale on the implementation of events in AMICI. Events include any discontinuities in the right hand side of the differential equation. There are three types of discontinuities:

- **Solution Jump Discontinuities** can be created by SBML events or delta functions in the right hand side.
- **Right-Hand-Side Jump Discontinuities** result in removable discontinuities in the solution and can be created by Piecewise, Heaviside functions and other logical operators in the right hand side.
- **Right-Hand-Side Removable Discontinuities** do not lead to discontinuities in the solution, but may lead to discontinuous higher order temporal derivatives and can be created by functions such as max or min in the right hand side.

### 14.1 Mathematical Considerations

A detailed mathematical description of the required sensitivity formulas is provided in

- Fröhlich, F., Theis, F. J., Rädler, J. O., & Hasenauer, J. (2017). Parameter estimation for dynamical systems with discrete events and logical operations. *Bioinformatics*, 33(7), 1049-1056. doi:[10.1093/bioinformatics/btw764](https://doi.org/10.1093/bioinformatics/btw764).

### 14.2 Algorithmic Considerations

#### 14.2.1 Solution Jump Discontinuities

SUNDIALS by itself does not support solution jump discontinuities. We implement support by accessing private SUNDIALS API in `amici::Solver::resetState()`, `amici::Solver::reInitPostProcess()` and `amici::Solver::reInitPostProcessB()`. These functions reset interval variables to initial values to simulate a fresh integration start, but keep/update the solution history, which is important for adjoint solutions.

#### 14.2.2 Right-Hand-Side Jump Discontinuities

In principle these discontinuities do not need any special treatment, but empirically, the solver may overstep or completely ignore the discontinuity, leading to poor solution quality. This is particularly problematic when step size is large and changes in step size, which can be caused by parameter changes, inclusion of forward sensitivities or during backward solves, may alter solutions in unexpected ways. Accordingly, finite difference approximations, forward sensitivities as well as adjoint sensitivities will yield poor derivative approximations.

To address these issues, we use the built-in rootfinding functionality in SUNDIALS, which pauses the solver at the locations of discontinuities and avoids overstepping or ignoring of discontinuities.

Another difficulty comes with the evaluation of Heaviside functions. After or during processing of discontinuities, Heaviside functions need to be evaluated at the left and right hand limit of discontinuities. This is challenging as the solver may slightly over- or understep the discontinuity timepoint by a small epsilon and limits have to be correctly computed in both forward and backward passes.

To address this issue, AMICI uses a vector of Heaviside helper variables  $h$  that keeps track of the values of the Heaviside functions that have the respective root function as argument. These will be automatically updated during events and take either 0 or 1 values as appropriate pre/post event limits.

In order to fully support SBML events and Piecewise functions, AMICI uses the SUNDIALS functionality to only track zero crossings from negative to positive. Accordingly, two root functions are necessary to keep track of Heaviside functions and two Heaviside function helper variables will be created, where one corresponds to the value of  $Heaviside(\dots)$  and one to the value of  $1-Heaviside(\dots)$ . To ensure that Heaviside functions are correctly evaluated at the beginning of the simulation, Heaviside functions are implemented as unit steps that evaluate to 1 at 0. The arguments of Heaviside functions are normalized such that respective properties of Piecewise functions are conserved for the first Heaviside function variable. Accordingly, the value of the second helper variable is incorrect when simulation starts when the respective Heaviside function evaluates to zero at initialization and should generally not be used.

### 14.2.3 Right-Hand-Side Removable Discontinuities

Removable discontinuities do not require any special treatment. Numerically, this may be advantageous, but is currently not implemented.



## INDICES AND TABLES

- `genindex`
- `modindex`
- `search`



## PYTHON MODULE INDEX

### a

- [amici](#), 142
- [amici.amici](#), 144
- [amici.bngl\\_import](#), 221
- [amici.conserved\\_quantities\\_demartino](#), 281
- [amici.conserved\\_quantities\\_rref](#), 282
- [amici.gradient\\_check](#), 276
- [amici.import\\_utils](#), 238
- [amici.logging](#), 275
- [amici.ode\\_export](#), 243
- [amici.ode\\_model](#), 256
- [amici.pandas](#), 272
- [amici.parameter\\_mapping](#), 277
- [amici.petab\\_import](#), 221
- [amici.petab\\_import\\_pysb](#), 225
- [amici.petab\\_objective](#), 232
- [amici.petab\\_simulate](#), 236
- [amici.plotting](#), 271
- [amici.pysb\\_import](#), 218
- [amici.sbml\\_import](#), 213



## Symbols

[\\_USE\\_MATH\\_DEFINES](#) (*C macro*), 530  
[\\_\\_init\\_\\_\(\)](#) (*amici.ModelModule method*), 143  
[\\_\\_init\\_\\_\(\)](#) (*amici.add\_path method*), 143  
[\\_\\_init\\_\\_\(\)](#) (*amici.amici.ExpData method*), 150  
[\\_\\_init\\_\\_\(\)](#) (*amici.amici.Model method*), 165  
[\\_\\_init\\_\\_\(\)](#) (*amici.amici.ModelDimensions method*), 181  
[\\_\\_init\\_\\_\(\)](#) (*amici.amici.ReturnData method*), 189  
[\\_\\_init\\_\\_\(\)](#) (*amici.amici.SimulationParameters method*), 196  
[\\_\\_init\\_\\_\(\)](#) (*amici.amici.Solver method*), 200  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_export.ODEExporter method*), 244  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_export.ODEModel method*), 248  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_export.TemplateAmici method*), 253  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_model.ConservationLaw method*), 258  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_model.Constant method*), 259  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_model.Event method*), 260  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_model.Expression method*), 262  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_model.LogLikelihood method*), 263  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_model.ModelQuantity method*), 264  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_model.Observable method*), 265  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_model.Parameter method*), 267  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_model.SigmaY method*), 268  
[\\_\\_init\\_\\_\(\)](#) (*amici.ode\_model.State method*), 270  
[\\_\\_init\\_\\_\(\)](#) (*amici.parameter\_mapping.ParameterMapping method*), 278  
[\\_\\_init\\_\\_\(\)](#) (*amici.parameter\_mapping.ParameterMapping method*), 279  
[\\_\\_init\\_\\_\(\)](#) (*amici.petab\_import\_pysb.PysbPetabProblem method*), 227  
[\\_\\_init\\_\\_\(\)](#) (*amici.petab\_simulate.PetabSimulator method*), 237  
[\\_\\_init\\_\\_\(\)](#) (*amici.sbml\_import.SbmlImporter method*), 215

## A

[add\\_component\(\)](#) (*amici.ode\_export.ODEModel method*), 248  
[add\\_conservation\\_law\(\)](#) (*amici.ode\_export.ODEModel method*), 248  
[add\\_d\\_dt\(\)](#) (*amici.sbml\_import.SbmlImporter method*), 215  
[add\\_local\\_symbol\(\)](#) (*amici.sbml\_import.SbmlImporter method*), 215  
[add\\_noise\(\)](#) (*amici.petab\_simulate.PetabSimulator method*), 237  
[add\\_path](#) (*class in amici*), 143  
[amici](#)  
     *module*, 142  
[amici.amici](#)  
     *module*, 144  
[amici.bngl\\_import](#)  
     *module*, 221  
[amici.conserved\\_quantities\\_demartino](#)  
     *module*, 281  
[amici.conserved\\_quantities\\_rref](#)  
     *module*, 282  
[amici.gradient\\_check](#)  
     *module*, 276  
[amici.import\\_utils](#)  
     *module*, 238  
[amici.logging](#)  
     *module*, 275  
[amici.ode\\_export](#)  
     *module*, 243  
[amici.ode\\_model](#)  
     *module*, 256  
[amici.petab\\_import\\_pysb](#)  
     *module*, 221  
[amici.petab\\_import\\_pysb](#)  
     *module*, 225  
[amici.petab\\_objective](#)

module, 232  
 amici.petab\_simulate  
   module, 236  
 amici.plotting  
   module, 271  
 amici.pysb\_import  
   module, 218  
 amici.sbml\_import  
   module, 213  
 amici::AbstractModel (C++ class), 301  
 amici::AbstractModel::~~AbstractModel (C++ function), 302  
 amici::AbstractModel::fdeltaqB (C++ function), 312  
 amici::AbstractModel::fdeltasx (C++ function), 311  
 amici::AbstractModel::fdeltax (C++ function), 310  
 amici::AbstractModel::fdeltaxB (C++ function), 311  
 amici::AbstractModel::fdJrzdsigma (C++ function), 316  
 amici::AbstractModel::fdJrzdz (C++ function), 315  
 amici::AbstractModel::fdJydsigma (C++ function), 315  
 amici::AbstractModel::fdJydy (C++ function), 314  
 amici::AbstractModel::fdJydy\_colptrs (C++ function), 314  
 amici::AbstractModel::fdJydy\_rowvals (C++ function), 314  
 amici::AbstractModel::fdJzdsigma (C++ function), 315  
 amici::AbstractModel::fdJzdz (C++ function), 315  
 amici::AbstractModel::fdrzdp (C++ function), 310  
 amici::AbstractModel::fdrzdx (C++ function), 310  
 amici::AbstractModel::fdsigmaydp (C++ function), 312  
 amici::AbstractModel::fdsigmaydy (C++ function), 313  
 amici::AbstractModel::fdsigmazdp (C++ function), 313  
 amici::AbstractModel::fdtotal\_cldp (C++ function), 319  
 amici::AbstractModel::fdtotal\_cldx\_rdata (C++ function), 319  
 amici::AbstractModel::fdtotal\_cldx\_rdata\_colptrs (C++ function), 319  
 amici::AbstractModel::fdtotal\_cldx\_rdata\_rowvals (C++ function), 320  
 amici::AbstractModel::fdwdp (C++ function), 316, 317  
 amici::AbstractModel::fdwdp\_colptrs (C++ function), 317  
 amici::AbstractModel::fdwdp\_rowvals (C++ function), 317  
 amici::AbstractModel::fdwdw (C++ function), 318  
 amici::AbstractModel::fdwdw\_colptrs (C++ function), 318  
 amici::AbstractModel::fdwdw\_rowvals (C++ function), 318  
 amici::AbstractModel::fdwdx (C++ function), 317  
 amici::AbstractModel::fdwdx\_colptrs (C++ function), 317  
 amici::AbstractModel::fdwdx\_rowvals (C++ function), 318  
 amici::AbstractModel::fdx0 (C++ function), 306  
 amici::AbstractModel::fdx\_rdatadp (C++ function), 318  
 amici::AbstractModel::fdx\_rdatadtcl (C++ function), 319  
 amici::AbstractModel::fdx\_rdatadtcl\_colptrs (C++ function), 319  
 amici::AbstractModel::fdx\_rdatadtcl\_rowvals (C++ function), 319  
 amici::AbstractModel::fdx\_rdatadx\_solver (C++ function), 318  
 amici::AbstractModel::fdx\_rdatadx\_solver\_colptrs (C++ function), 318  
 amici::AbstractModel::fdx\_rdatadx\_solver\_rowvals (C++ function), 318  
 amici::AbstractModel::fdxdotdp (C++ function), 304  
 amici::AbstractModel::fdydp (C++ function), 307  
 amici::AbstractModel::fdydx (C++ function), 308  
 amici::AbstractModel::fdzdp (C++ function), 309  
 amici::AbstractModel::fdzdx (C++ function), 310  
 amici::AbstractModel::fJ (C++ function), 303  
 amici::AbstractModel::fJB (C++ function), 303  
 amici::AbstractModel::fJDiag (C++ function), 304  
 amici::AbstractModel::fJrz (C++ function), 314  
 amici::AbstractModel::fJSparse (C++ function), 304  
 amici::AbstractModel::fJSparseB (C++ function), 304  
 amici::AbstractModel::fJSparseB\_ss (C++ function), 303  
 amici::AbstractModel::fJv (C++ function), 305  
 amici::AbstractModel::fJy (C++ function), 313  
 amici::AbstractModel::fJz (C++ function), 313  
 amici::AbstractModel::froot (C++ function), 302  
 amici::AbstractModel::frz (C++ function), 309  
 amici::AbstractModel::fsigmay (C++ function), 312  
 amici::AbstractModel::fsigmaz (C++ function), 313  
 amici::AbstractModel::fsrz (C++ function), 309  
 amici::AbstractModel::fstau (C++ function), 306

amici::AbstractModel::fsx0 (C++ function), 306  
 amici::AbstractModel::fsx0\_fixedParameters (C++ function), 306  
 amici::AbstractModel::fsxdot (C++ function), 302  
 amici::AbstractModel::fsz (C++ function), 308  
 amici::AbstractModel::fw (C++ function), 316  
 amici::AbstractModel::fx0 (C++ function), 305  
 amici::AbstractModel::fx0\_fixedParameters (C++ function), 305  
 amici::AbstractModel::fxBdot\_ss (C++ function), 302  
 amici::AbstractModel::fxdot (C++ function), 302  
 amici::AbstractModel::fy (C++ function), 307  
 amici::AbstractModel::fz (C++ function), 308  
 amici::AbstractModel::getAmiciCommit (C++ function), 305  
 amici::AbstractModel::getAmiciVersion (C++ function), 305  
 amici::AbstractModel::getSolver (C++ function), 302  
 amici::AbstractModel::isFixedParameterStateReinitializationAllowed (C++ function), 305  
 amici::AbstractModel::writeSteadystateJB (C++ function), 303  
 amici::AMICI\_CONV\_FAILURE (C++ member), 524  
 amici::AMICI\_DAMPING\_FACTOR\_ERROR (C++ member), 525  
 amici::AMICI\_DATA\_RETURN (C++ member), 525  
 amici::amici\_daxpy (C++ function), 498  
 amici::amici\_dgemm (C++ function), 498  
 amici::amici\_dgemv (C++ function), 499  
 amici::AMICI\_ERR\_FAILURE (C++ member), 525  
 amici::AMICI\_ERROR (C++ member), 525  
 amici::AMICI\_ILL\_INPUT (C++ member), 526  
 amici::AMICI\_MAX\_TIME\_EXCEEDED (C++ member), 526  
 amici::AMICI\_NO\_STEADY\_STATE (C++ member), 526  
 amici::AMICI\_NORMAL (C++ member), 526  
 amici::AMICI\_NOT\_IMPLEMENTED (C++ member), 526  
 amici::AMICI\_ONE\_STEP (C++ member), 527  
 amici::AMICI\_ONEOUTPUT (C++ member), 527  
 amici::AMICI\_PREEQUILIBRATE (C++ member), 527  
 amici::AMICI\_RECOVERABLE\_ERROR (C++ member), 527  
 amici::AMICI\_RHSFUNC\_FAIL (C++ member), 528  
 amici::AMICI\_ROOT\_RETURN (C++ member), 528  
 amici::AMICI\_SINGULAR\_JACOBIAN (C++ member), 528  
 amici::AMICI\_SUCCESS (C++ member), 528  
 amici::AMICI\_TOO\_MUCH\_ACC (C++ member), 528  
 amici::AMICI\_TOO\_MUCH\_WORK (C++ member), 529  
 amici::AMICI\_UNRECOVERABLE\_ERROR (C++ member), 529  
 amici::AmiciApplication (C++ class), 320  
 amici::AmiciApplication::AmiciApplication (C++ function), 320  
 amici::AmiciApplication::checkFinite (C++ function), 321  
 amici::AmiciApplication::error (C++ member), 321  
 amici::AmiciApplication::errorF (C++ function), 321  
 amici::AmiciApplication::runAmiciSimulation (C++ function), 320  
 amici::AmiciApplication::runAmiciSimulations (C++ function), 320  
 amici::AmiciApplication::warning (C++ member), 321  
 amici::AmiciApplication::warningF (C++ function), 321  
 amici::AmiException (C++ class), 322  
 amici::AmiException::AmiException (C++ function), 322  
 amici::AmiException::getBacktrace (C++ function), 322  
 amici::AmiException::storeBacktrace (C++ function), 322  
 amici::AmiException::storeMessage (C++ function), 323  
 amici::AmiException::what (C++ function), 322  
 amici::AmiVector (C++ class), 323  
 amici::AmiVector::~AmiVector (C++ function), 324  
 amici::AmiVector::abs (C++ function), 325  
 amici::AmiVector::AmiVector (C++ function), 323  
 amici::AmiVector::at (C++ function), 325  
 amici::AmiVector::begin (C++ function), 324  
 amici::AmiVector::copy (C++ function), 325  
 amici::AmiVector::data (C++ function), 324  
 amici::AmiVector::end (C++ function), 324  
 amici::AmiVector::getLength (C++ function), 324  
 amici::AmiVector::getNVector (C++ function), 324  
 amici::AmiVector::getVector (C++ function), 324  
 amici::AmiVector::minus (C++ function), 325  
 amici::AmiVector::operator\*= (C++ function), 324  
 amici::AmiVector::operator/= (C++ function), 324  
 amici::AmiVector::operator= (C++ function), 324  
 amici::AmiVector::operator[] (C++ function), 325  
 amici::AmiVector::set (C++ function), 325  
 amici::AmiVector::zero (C++ function), 325  
 amici::AmiVectorArray (C++ class), 325  
 amici::AmiVectorArray::~AmiVectorArray (C++ function), 326  
 amici::AmiVectorArray::AmiVectorArray (C++ function), 326  
 amici::AmiVectorArray::at (C++ function), 326  
 amici::AmiVectorArray::copy (C++ function), 327  
 amici::AmiVectorArray::data (C++ function), 326

`amici::AmiVectorArray::flatten_to_vector` (C++ function), 327

`amici::AmiVectorArray::getLength` (C++ function), 327

`amici::AmiVectorArray::getNVector` (C++ function), 327

`amici::AmiVectorArray::getNVectorArray` (C++ function), 327

`amici::AmiVectorArray::operator=` (C++ function), 326

`amici::AmiVectorArray::operator[]` (C++ function), 327

`amici::AmiVectorArray::zero` (C++ function), 327

`amici::backtraceString` (C++ function), 500

`amici::BackwardProblem` (C++ class), 328

`amici::BackwardProblem::BackwardProblem` (C++ function), 328

`amici::BackwardProblem::getAdjointQuadrature` (C++ function), 328

`amici::BackwardProblem::getAdjointState` (C++ function), 328

`amici::BackwardProblem::getdJydx` (C++ function), 328

`amici::BackwardProblem::gett` (C++ function), 328

`amici::BackwardProblem::getwhich` (C++ function), 328

`amici::BackwardProblem::getwhichptr` (C++ function), 328

`amici::BackwardProblem::workBackwardProblem` (C++ function), 328

`amici::BLASLayout` (C++ enum), 490

`amici::BLASLayout::colMajor` (C++ enumerator), 490

`amici::BLASLayout::rowMajor` (C++ enumerator), 490

`amici::BLASTranspose` (C++ enum), 491

`amici::BLASTranspose::conjTrans` (C++ enumerator), 491

`amici::BLASTranspose::noTrans` (C++ enumerator), 491

`amici::BLASTranspose::trans` (C++ enumerator), 491

`amici::checkBufferSize` (C++ function), 500

`amici::checkSigmaPositivity` (C++ function), 500, 501

`amici::ConditionContext` (C++ class), 329

`amici::ConditionContext::~~ConditionContext` (C++ function), 329

`amici::ConditionContext::applyCondition` (C++ function), 329

`amici::ConditionContext::ConditionContext` (C++ function), 329

`amici::ConditionContext::operator=` (C++ function), 329

`amici::ConditionContext::restore` (C++ function), 329

`amici::const_N_Vector` (C++ type), 534

`amici::ContextManager` (C++ class), 330

`amici::ContextManager::ContextManager` (C++ function), 330

`amici::CvodeException` (C++ class), 331

`amici::CvodeException::CvodeException` (C++ function), 331

`amici::CvodeSolver` (C++ class), 331

`amici::CvodeSolver::~~CvodeSolver` (C++ function), 331

`amici::CvodeSolver::adjInit` (C++ function), 337

`amici::CvodeSolver::allocateSolver` (C++ function), 335

`amici::CvodeSolver::allocateSolverB` (C++ function), 337

`amici::CvodeSolver::binit` (C++ function), 339

`amici::CvodeSolver::boost::serialization::serialize` (C++ function), 340

`amici::CvodeSolver::calcIC` (C++ function), 334

`amici::CvodeSolver::calcICB` (C++ function), 334

`amici::CvodeSolver::clone` (C++ function), 331

`amici::CvodeSolver::diag` (C++ function), 337

`amici::CvodeSolver::diagB` (C++ function), 337

`amici::CvodeSolver::getAdjBmem` (C++ function), 338

`amici::CvodeSolver::getB` (C++ function), 334

`amici::CvodeSolver::getDky` (C++ function), 333

`amici::CvodeSolver::getDkyB` (C++ function), 333

`amici::CvodeSolver::getLastOrder` (C++ function), 338

`amici::CvodeSolver::getModel` (C++ function), 333

`amici::CvodeSolver::getNumErrTestFails` (C++ function), 338

`amici::CvodeSolver::getNumNonlinSolvConvFails` (C++ function), 338

`amici::CvodeSolver::getNumRhsEvals` (C++ function), 338

`amici::CvodeSolver::getNumSteps` (C++ function), 338

`amici::CvodeSolver::getQuad` (C++ function), 334

`amici::CvodeSolver::getQuadB` (C++ function), 334

`amici::CvodeSolver::getQuadDky` (C++ function), 334

`amici::CvodeSolver::getQuadDkyB` (C++ function), 333

`amici::CvodeSolver::getRootInfo` (C++ function), 333

`amici::CvodeSolver::getSens` (C++ function), 334

`amici::CvodeSolver::getSensDky` (C++ function), 333

`amici::CvodeSolver::init` (C++ function), 338

`amici::CvodeSolver::initSteadystate` (C++



*function*), 339  
 amici::CNodeSolver::operator== (C++ *function*), 340  
 amici::CNodeSolver::qbinit (C++ *function*), 339  
 amici::CNodeSolver::quadInit (C++ *function*), 337  
 amici::CNodeSolver::quadReInitB (C++ *function*), 332  
 amici::CNodeSolver::quadSStolerances (C++ *function*), 337  
 amici::CNodeSolver::quadSStolerancesB (C++ *function*), 337  
 amici::CNodeSolver::reInit (C++ *function*), 331  
 amici::CNodeSolver::reInitB (C++ *function*), 332  
 amici::CNodeSolver::reInitPostProcess (C++ *function*), 335  
 amici::CNodeSolver::reInitPostProcessB (C++ *function*), 335  
 amici::CNodeSolver::reInitPostProcessF (C++ *function*), 335  
 amici::CNodeSolver::resetState (C++ *function*), 336  
 amici::CNodeSolver::rootInit (C++ *function*), 339  
 amici::CNodeSolver::sensInit1 (C++ *function*), 339  
 amici::CNodeSolver::sensReInit (C++ *function*), 332  
 amici::CNodeSolver::sensToggleOff (C++ *function*), 332  
 amici::CNodeSolver::setBandJacFn (C++ *function*), 339  
 amici::CNodeSolver::setBandJacFnB (C++ *function*), 340  
 amici::CNodeSolver::setDenseJacFn (C++ *function*), 339  
 amici::CNodeSolver::setDenseJacFnB (C++ *function*), 339  
 amici::CNodeSolver::setErrHandlerFn (C++ *function*), 336  
 amici::CNodeSolver::setId (C++ *function*), 336  
 amici::CNodeSolver::setJacTimesVecFn (C++ *function*), 339  
 amici::CNodeSolver::setJacTimesVecFnB (C++ *function*), 340  
 amici::CNodeSolver::setLinearSolver (C++ *function*), 333  
 amici::CNodeSolver::setLinearSolverB (C++ *function*), 333  
 amici::CNodeSolver::setMaxNumSteps (C++ *function*), 336  
 amici::CNodeSolver::setMaxNumStepsB (C++ *function*), 337  
 amici::CNodeSolver::setNonLinearSolver (C++ *function*), 333  
 amici::CNodeSolver::setNonLinearSolverB (C++ *function*), 334  
 amici::CNodeSolver::setNonLinearSolverSens (C++ *function*), 333  
 amici::CNodeSolver::setQuadErrCon (C++ *function*), 335  
 amici::CNodeSolver::setQuadErrConB (C++ *function*), 335  
 amici::CNodeSolver::setSensErrCon (C++ *function*), 335  
 amici::CNodeSolver::setSensParams (C++ *function*), 336  
 amici::CNodeSolver::setSensSStolerances (C++ *function*), 335  
 amici::CNodeSolver::setSparseJacFn (C++ *function*), 339  
 amici::CNodeSolver::setSparseJacFn\_ss (C++ *function*), 340  
 amici::CNodeSolver::setSparseJacFnB (C++ *function*), 340  
 amici::CNodeSolver::setSStolerances (C++ *function*), 335  
 amici::CNodeSolver::setSStolerancesB (C++ *function*), 337  
 amici::CNodeSolver::setStabLimDet (C++ *function*), 336  
 amici::CNodeSolver::setStabLimDetB (C++ *function*), 336  
 amici::CNodeSolver::setStopTime (C++ *function*), 333  
 amici::CNodeSolver::setSuppressAlg (C++ *function*), 336  
 amici::CNodeSolver::setUserData (C++ *function*), 336  
 amici::CNodeSolver::setUserDataB (C++ *function*), 336  
 amici::CNodeSolver::solve (C++ *function*), 332  
 amici::CNodeSolver::solveB (C++ *function*), 332  
 amici::CNodeSolver::solveF (C++ *function*), 332  
 amici::CNodeSolver::Solver (C++ *function*), 334  
 amici::CNodeSolver::turnOffRootFinding (C++ *function*), 333  
 amici::defaultContext (C++ *member*), 529  
 amici::deserializeFromChar (C++ *function*), 501  
 amici::deserializeFromString (C++ *function*), 501  
 amici::dotProd (C++ *function*), 502  
 amici::ExpData (C++ *class*), 341  
 amici::ExpData::~~ExpData (C++ *function*), 342  
 amici::ExpData::applyDataDimension (C++ *function*), 346  
 amici::ExpData::applyDimensions (C++ *function*), 346  
 amici::ExpData::applyEventDimension (C++ *function*), 346  
 amici::ExpData::checkDataDimension (C++ *function*), 346

tion), 346

`amici::ExpData::checkEventsDimension` (C++ function), 346

`amici::ExpData::ExpData` (C++ function), 341, 342

`amici::ExpData::getObservedData` (C++ function), 343

`amici::ExpData::getObservedDataPtr` (C++ function), 343

`amici::ExpData::getObservedDataStdDev` (C++ function), 344

`amici::ExpData::getObservedDataStdDevPtr` (C++ function), 344

`amici::ExpData::getObservedEvents` (C++ function), 344

`amici::ExpData::getObservedEventsPtr` (C++ function), 344

`amici::ExpData::getObservedEventsStdDev` (C++ function), 345

`amici::ExpData::getObservedEventsStdDevPtr` (C++ function), 345

`amici::ExpData::getTimepoint` (C++ function), 343

`amici::ExpData::getTimepoints` (C++ function), 343

`amici::ExpData::id` (C++ member), 345

`amici::ExpData::isSetObservedData` (C++ function), 343

`amici::ExpData::isSetObservedDataStdDev` (C++ function), 344

`amici::ExpData::isSetObservedEvents` (C++ function), 344

`amici::ExpData::isSetObservedEventsStdDev` (C++ function), 345

`amici::ExpData::nmaxevent` (C++ function), 342

`amici::ExpData::nmaxevent_` (C++ member), 346

`amici::ExpData::nt` (C++ function), 342

`amici::ExpData::nytrue` (C++ function), 342

`amici::ExpData::nytrue_` (C++ member), 346

`amici::ExpData::nztrue` (C++ function), 342

`amici::ExpData::nztrue_` (C++ member), 346

`amici::ExpData::observed_data_` (C++ member), 346

`amici::ExpData::observed_data_std_dev_` (C++ member), 346

`amici::ExpData::observed_events_` (C++ member), 346

`amici::ExpData::observed_events_std_dev_` (C++ member), 346

`amici::ExpData::setObservedData` (C++ function), 343

`amici::ExpData::setObservedDataStdDev` (C++ function), 343, 344

`amici::ExpData::setObservedEvents` (C++ function), 344

`amici::ExpData::setObservedEventsStdDev` (C++ function), 345

`amici::ExpData::setTimepoints` (C++ function), 342

`amici::FinalStateStorer` (C++ class), 347

`amici::FinalStateStorer::~FinalStateStorer` (C++ function), 347

`amici::FinalStateStorer::FinalStateStorer` (C++ function), 347

`amici::FinalStateStorer::operator=` (C++ function), 347

`amici::FixedParameterContext` (C++ enum), 491

`amici::FixedParameterContext::preequilibration` (C++ enumerator), 491

`amici::FixedParameterContext::presimulation` (C++ enumerator), 491

`amici::FixedParameterContext::simulation` (C++ enumerator), 491

`amici::ForwardProblem` (C++ class), 347

`amici::ForwardProblem::~ForwardProblem` (C++ function), 348

`amici::ForwardProblem::edata` (C++ member), 350

`amici::ForwardProblem::ForwardProblem` (C++ function), 347

`amici::ForwardProblem::getAdjointUpdates` (C++ function), 348

`amici::ForwardProblem::getCurrentTimeIteration` (C++ function), 349

`amici::ForwardProblem::getDiscontinuities` (C++ function), 348

`amici::ForwardProblem::getDJdydx` (C++ function), 349

`amici::ForwardProblem::getDJzdx` (C++ function), 349

`amici::ForwardProblem::getEventCounter` (C++ function), 349

`amici::ForwardProblem::getFinalSimulationState` (C++ function), 350

`amici::ForwardProblem::getFinalTime` (C++ function), 349

`amici::ForwardProblem::getInitialSimulationState` (C++ function), 349

`amici::ForwardProblem::getNumberOfRoots` (C++ function), 348

`amici::ForwardProblem::getRHSAtDiscontinuities` (C++ function), 348

`amici::ForwardProblem::getRHSBeforeDiscontinuities` (C++ function), 348

`amici::ForwardProblem::getRootCounter` (C++ function), 349

`amici::ForwardProblem::getRootIndexes` (C++ function), 348

`amici::ForwardProblem::getSimulationStateEvent` (C++ function), 349

`amici::ForwardProblem::getSimulationStateTimepoint`

(C++ function), 349  
 amici::ForwardProblem::getState (C++ function), 348  
 amici::ForwardProblem::getStateDerivative (C++ function), 348  
 amici::ForwardProblem::getStateDerivativePointer (C++ function), 349  
 amici::ForwardProblem::getStateDerivativeSensitivityPointer (C++ function), 349  
 amici::ForwardProblem::getStatePointer (C++ function), 349  
 amici::ForwardProblem::getStatesAtDiscontinuities (C++ function), 348  
 amici::ForwardProblem::getStateSensitivity (C++ function), 348  
 amici::ForwardProblem::getStateSensitivityPointer (C++ function), 349  
 amici::ForwardProblem::getTime (C++ function), 348  
 amici::ForwardProblem::model (C++ member), 350  
 amici::ForwardProblem::solver (C++ member), 350  
 amici::ForwardProblem::workForwardProblem (C++ function), 348  
 amici::getScaledParameter (C++ function), 502  
 amici::getUnscaledParameter (C++ function), 502  
 amici::hdf5::attributeExists (C++ function), 503  
 amici::hdf5::createAndWriteDouble1DDataset (C++ function), 503  
 amici::hdf5::createAndWriteDouble2DDataset (C++ function), 504  
 amici::hdf5::createAndWriteDouble3DDataset (C++ function), 504  
 amici::hdf5::createAndWriteInt1DDataset (C++ function), 505  
 amici::hdf5::createAndWriteInt2DDataset (C++ function), 505  
 amici::hdf5::createGroup (C++ function), 505  
 amici::hdf5::createOrOpenForWriting (C++ function), 506  
 amici::hdf5::getDoubleDataset1D (C++ function), 506  
 amici::hdf5::getDoubleDataset2D (C++ function), 506  
 amici::hdf5::getDoubleDataset3D (C++ function), 507  
 amici::hdf5::getDoubleScalarAttribute (C++ function), 507  
 amici::hdf5::getIntDataset1D (C++ function), 508  
 amici::hdf5::getIntScalarAttribute (C++ function), 508  
 amici::hdf5::getStringAttribute (C++ function), 508  
 amici::hdf5::locationExists (C++ function), 509  
 amici::hdf5::readModelDataFromHDF5 (C++ function), 509, 510  
 amici::hdf5::readSimulationExpData (C++ function), 510  
 amici::hdf5::readSolverSettingsFromHDF5 (C++ function), 511  
 amici::hdf5::writeReturnData (C++ function), 512  
 amici::hdf5::writeReturnDataDiagnosis (C++ function), 512  
 amici::hdf5::writeSimulationExpData (C++ function), 512  
 amici::hdf5::writeSolverSettingsToHDF5 (C++ function), 513  
 amici::IDAException (C++ class), 350  
 amici::IDAException::IDAException (C++ function), 350  
 amici::IDASolver (C++ class), 351  
 amici::IDASolver::~IDASolver (C++ function), 351  
 amici::IDASolver::adjInit (C++ function), 356  
 amici::IDASolver::allocateSolver (C++ function), 355  
 amici::IDASolver::allocateSolverB (C++ function), 357  
 amici::IDASolver::binit (C++ function), 359  
 amici::IDASolver::calcIC (C++ function), 354  
 amici::IDASolver::calcICB (C++ function), 354  
 amici::IDASolver::clone (C++ function), 351  
 amici::IDASolver::diag (C++ function), 357  
 amici::IDASolver::diagB (C++ function), 357  
 amici::IDASolver::getAdjBmem (C++ function), 358  
 amici::IDASolver::getB (C++ function), 353  
 amici::IDASolver::getDky (C++ function), 353  
 amici::IDASolver::getDkyB (C++ function), 353  
 amici::IDASolver::getLastOrder (C++ function), 358  
 amici::IDASolver::getModel (C++ function), 354  
 amici::IDASolver::getNumErrTestFails (C++ function), 358  
 amici::IDASolver::getNumNonlinSolvConvFails (C++ function), 358  
 amici::IDASolver::getNumRhsEvals (C++ function), 357  
 amici::IDASolver::getNumSteps (C++ function), 357  
 amici::IDASolver::getQuad (C++ function), 354  
 amici::IDASolver::getQuadB (C++ function), 353  
 amici::IDASolver::getQuadDky (C++ function), 354  
 amici::IDASolver::getQuadDkyB (C++ function), 353  
 amici::IDASolver::getRootInfo (C++ function), 353  
 amici::IDASolver::getSens (C++ function), 353  
 amici::IDASolver::getSensDky (C++ function), 353

`amici::IDASolver::init (C++ function), 358`  
`amici::IDASolver::initSteadystate (C++ function), 358`  
`amici::IDASolver::qbinit (C++ function), 359`  
`amici::IDASolver::quadInit (C++ function), 357`  
`amici::IDASolver::quadReInitB (C++ function), 352`  
`amici::IDASolver::quadSStolerances (C++ function), 352`  
`amici::IDASolver::quadSStolerancesB (C++ function), 352`  
`amici::IDASolver::reInit (C++ function), 351`  
`amici::IDASolver::reInitB (C++ function), 351`  
`amici::IDASolver::reInitPostProcess (C++ function), 355`  
`amici::IDASolver::reInitPostProcessB (C++ function), 351`  
`amici::IDASolver::reInitPostProcessF (C++ function), 351`  
`amici::IDASolver::resetState (C++ function), 356`  
`amici::IDASolver::rootInit (C++ function), 359`  
`amici::IDASolver::sensInit1 (C++ function), 358`  
`amici::IDASolver::sensReInit (C++ function), 351`  
`amici::IDASolver::sensToggleOff (C++ function), 351`  
`amici::IDASolver::setBandJacFn (C++ function), 359`  
`amici::IDASolver::setBandJacFnB (C++ function), 359`  
`amici::IDASolver::setDenseJacFn (C++ function), 359`  
`amici::IDASolver::setDenseJacFnB (C++ function), 359`  
`amici::IDASolver::setErrHandlerFn (C++ function), 356`  
`amici::IDASolver::setId (C++ function), 356`  
`amici::IDASolver::setJacTimesVecFn (C++ function), 359`  
`amici::IDASolver::setJacTimesVecFnB (C++ function), 359`  
`amici::IDASolver::setLinearSolver (C++ function), 354`  
`amici::IDASolver::setLinearSolverB (C++ function), 354`  
`amici::IDASolver::setMaxNumSteps (C++ function), 356`  
`amici::IDASolver::setMaxNumStepsB (C++ function), 357`  
`amici::IDASolver::setNonLinearSolver (C++ function), 354`  
`amici::IDASolver::setNonLinearSolverB (C++ function), 354`  
`amici::IDASolver::setNonLinearSolverSens (C++ function), 354`  
`amici::IDASolver::setQuadErrCon (C++ function), 355`  
`amici::IDASolver::setQuadErrConB (C++ function), 355`  
`amici::IDASolver::setSensErrCon (C++ function), 355`  
`amici::IDASolver::setSensParams (C++ function), 356`  
`amici::IDASolver::setSensSStolerances (C++ function), 355`  
`amici::IDASolver::setSparseJacFn (C++ function), 359`  
`amici::IDASolver::setSparseJacFn_ss (C++ function), 359`  
`amici::IDASolver::setSparseJacFnB (C++ function), 359`  
`amici::IDASolver::setSStolerances (C++ function), 355`  
`amici::IDASolver::setSStolerancesB (C++ function), 357`  
`amici::IDASolver::setStabLimDet (C++ function), 356`  
`amici::IDASolver::setStabLimDetB (C++ function), 356`  
`amici::IDASolver::setStopTime (C++ function), 354`  
`amici::IDASolver::setSuppressAlg (C++ function), 356`  
`amici::IDASolver::setUserData (C++ function), 356`  
`amici::IDASolver::setUserDataB (C++ function), 356`  
`amici::IDASolver::solve (C++ function), 352`  
`amici::IDASolver::solveB (C++ function), 352`  
`amici::IDASolver::solveF (C++ function), 352`  
`amici::IDASolver::Solver (C++ function), 354, 355`  
`amici::IDASolver::turnOffRootFinding (C++ function), 354`  
`amici::IntegrationFailure (C++ class), 360`  
`amici::IntegrationFailure::error_code (C++ member), 360`  
`amici::IntegrationFailure::IntegrationFailure (C++ function), 360`  
`amici::IntegrationFailure::time (C++ member), 360`  
`amici::IntegrationFailureB (C++ class), 361`  
`amici::IntegrationFailureB::error_code (C++ member), 361`  
`amici::IntegrationFailureB::IntegrationFailureB (C++ function), 361`  
`amici::IntegrationFailureB::time (C++ member), 361`  
`amici::InternalSensitivityMethod (C++ enum), 491`

amici::InternalSensitivityMethod::simultaneous (C++ enumerator), 491  
 amici::InternalSensitivityMethod::staggered (C++ enumerator), 491  
 amici::InternalSensitivityMethod::staggered1 (C++ enumerator), 491  
 amici::InterpolationType (C++ enum), 492  
 amici::InterpolationType::hermite (C++ enumerator), 492  
 amici::InterpolationType::polynomial (C++ enumerator), 492  
 amici::LinearMultistepMethod (C++ enum), 492  
 amici::LinearMultistepMethod::adams (C++ enumerator), 492  
 amici::LinearMultistepMethod::BDF (C++ enumerator), 492  
 amici::LinearSolver (C++ enum), 492  
 amici::LinearSolver::band (C++ enumerator), 492  
 amici::LinearSolver::dense (C++ enumerator), 492  
 amici::LinearSolver::diag (C++ enumerator), 492  
 amici::LinearSolver::KLU (C++ enumerator), 493  
 amici::LinearSolver::LAPACKBand (C++ enumerator), 492  
 amici::LinearSolver::LAPACKDense (C++ enumerator), 492  
 amici::LinearSolver::SPBCG (C++ enumerator), 493  
 amici::LinearSolver::SPGMR (C++ enumerator), 492  
 amici::LinearSolver::SPTFQMR (C++ enumerator), 493  
 amici::LinearSolver::SuperLUMT (C++ enumerator), 493  
 amici::linearSum (C++ function), 513  
 amici::Model (C++ class), 362  
 amici::Model::~~Model (C++ function), 362  
 amici::Model::addAdjointQuadratureEventUpdate (C++ function), 377  
 amici::Model::addAdjointStateEventUpdate (C++ function), 377  
 amici::Model::addEventObjective (C++ function), 375  
 amici::Model::addEventObjectiveRegularization (C++ function), 375  
 amici::Model::addEventObjectiveSensitivity (C++ function), 375  
 amici::Model::addObservableObjective (C++ function), 372  
 amici::Model::addObservableObjectiveSensitivity (C++ function), 372  
 amici::Model::addPartialEventObjectiveSensitivity (C++ function), 375  
 amici::Model::addPartialObservableObjectiveSensitivity (C++ function), 372  
 amici::Model::addStateEventUpdate (C++ function), 376  
 amici::Model::addStateSensitivityEventUpdate (C++ function), 376  
 amici::Model::always\_check\_finite\_ (C++ member), 403  
 amici::Model::any\_state\_non\_negative\_ (C++ member), 402  
 amici::Model::app (C++ member), 394  
 amici::Model::boost::serialization::serialize (C++ function), 403  
 amici::Model::checkFinite (C++ function), 378  
 amici::Model::checkLLHBufferSize (C++ function), 395  
 amici::Model::clone (C++ function), 362  
 amici::Model::computeX\_pos (C++ function), 401, 402  
 amici::Model::derived\_state\_ (C++ member), 402  
 amici::Model::fdeltaqB (C++ function), 379  
 amici::Model::fdeltasx (C++ function), 380  
 amici::Model::fdeltax (C++ function), 380  
 amici::Model::fdeltaxB (C++ function), 381  
 amici::Model::fdJrzdsigma (C++ function), 381, 399  
 amici::Model::fdJrzdz (C++ function), 381, 399  
 amici::Model::fdJydp (C++ function), 396  
 amici::Model::fdJydsigma (C++ function), 382, 396  
 amici::Model::fdJydx (C++ function), 396  
 amici::Model::fdJydy (C++ function), 382, 396  
 amici::Model::fdJydy\_colptrs (C++ function), 382  
 amici::Model::fdJydy\_rowvals (C++ function), 382  
 amici::Model::fdJzdp (C++ function), 399  
 amici::Model::fdJzdsigma (C++ function), 382, 398  
 amici::Model::fdJzdx (C++ function), 399  
 amici::Model::fdJzdz (C++ function), 383, 398  
 amici::Model::fdrzdp (C++ function), 383, 397  
 amici::Model::fdrzdx (C++ function), 383, 397  
 amici::Model::fdsigmaydp (C++ function), 384, 396  
 amici::Model::fdsigmaydy (C++ function), 384, 396  
 amici::Model::fdsigmazdp (C++ function), 384, 398  
 amici::Model::fdtotal\_cldp (C++ function), 394  
 amici::Model::fdtotal\_cldx\_rdata (C++ function), 393  
 amici::Model::fdtotal\_cldx\_rdata\_colptrs (C++ function), 394  
 amici::Model::fdtotal\_cldx\_rdata\_rowvals (C++ function), 394  
 amici::Model::fdwdp (C++ function), 384, 385, 400  
 amici::Model::fdwdp\_colptrs (C++ function), 385  
 amici::Model::fdwdp\_rowvals (C++ function), 385  
 amici::Model::fdwdw (C++ function), 386, 400  
 amici::Model::fdwdw\_colptrs (C++ function), 386  
 amici::Model::fdwdw\_rowvals (C++ function), 386



`amici::Model::fdwdx (C++ function), 385, 400`  
`amici::Model::fdwdx_colptrs (C++ function), 386`  
`amici::Model::fdwdx_rowvals (C++ function), 386`  
`amici::Model::fdx_rdatadp (C++ function), 393`  
`amici::Model::fdx_rdatadtcl (C++ function), 393`  
`amici::Model::fdx_rdatadtcl_colptrs (C++ function), 393`  
`amici::Model::fdx_rdatadtcl_rowvals (C++ function), 393`  
`amici::Model::fdx_rdatadx_solver (C++ function), 392`  
`amici::Model::fdx_rdatadx_solver_colptrs (C++ function), 392`  
`amici::Model::fdx_rdatadx_solver_rowvals (C++ function), 393`  
`amici::Model::fdydp (C++ function), 386, 387, 395`  
`amici::Model::fdydx (C++ function), 387, 395`  
`amici::Model::fdzdp (C++ function), 387, 397`  
`amici::Model::fdzdx (C++ function), 387, 397`  
`amici::Model::fJrz (C++ function), 388, 399`  
`amici::Model::fJy (C++ function), 388, 396`  
`amici::Model::fJz (C++ function), 388, 398`  
`amici::Model::frz (C++ function), 389, 397`  
`amici::Model::fsdx0 (C++ function), 379`  
`amici::Model::fsigmay (C++ function), 389, 395`  
`amici::Model::fsigmaz (C++ function), 389, 398`  
`amici::Model::fsrz (C++ function), 389`  
`amici::Model::fstau (C++ function), 390`  
`amici::Model::fstotal_cl (C++ function), 401`  
`amici::Model::fsx0 (C++ function), 378, 390`  
`amici::Model::fsx0_fixedParameters (C++ function), 379, 390`  
`amici::Model::fsx_rdata (C++ function), 379, 400`  
`amici::Model::fsx_solver (C++ function), 401`  
`amici::Model::fsz (C++ function), 391`  
`amici::Model::ftotal_cl (C++ function), 401`  
`amici::Model::fw (C++ function), 391, 400`  
`amici::Model::fx0 (C++ function), 378, 391`  
`amici::Model::fx0_fixedParameters (C++ function), 378, 391`  
`amici::Model::fx_rdata (C++ function), 379, 400`  
`amici::Model::fx_solver (C++ function), 401`  
`amici::Model::fy (C++ function), 392, 395`  
`amici::Model::fz (C++ function), 392, 397`  
`amici::Model::get_dxdotdp (C++ function), 379`  
`amici::Model::get_dxdotdp_full (C++ function), 379`  
`amici::Model::getAddSigmaResiduals (C++ function), 370`  
`amici::Model::getAdjointStateEventUpdate (C++ function), 376`  
`amici::Model::getAdjointStateObservableUpdate (C++ function), 373`  
`amici::Model::getAlwaysCheckFinite (C++ function), 378`  
`amici::Model::getEvent (C++ function), 373`  
`amici::Model::getEventRegularization (C++ function), 374`  
`amici::Model::getEventRegularizationSensitivity (C++ function), 374`  
`amici::Model::getEventSensitivity (C++ function), 373`  
`amici::Model::getEventSigma (C++ function), 374`  
`amici::Model::getEventSigmaSensitivity (C++ function), 374`  
`amici::Model::getEventTimeSensitivity (C++ function), 376`  
`amici::Model::getExpression (C++ function), 371`  
`amici::Model::getExpressionIds (C++ function), 368`  
`amici::Model::getExpressionNames (C++ function), 367`  
`amici::Model::getFixedParameterById (C++ function), 366`  
`amici::Model::getFixedParameterByName (C++ function), 366`  
`amici::Model::getFixedParameterIds (C++ function), 368`  
`amici::Model::getFixedParameterNames (C++ function), 367`  
`amici::Model::getFixedParameters (C++ function), 366`  
`amici::Model::getInitialStates (C++ function), 370`  
`amici::Model::getInitialStateSensitivities (C++ function), 370`  
`amici::Model::getMinimumSigmaResiduals (C++ function), 369`  
`amici::Model::getModelState (C++ function), 369`  
`amici::Model::getName (C++ function), 367`  
`amici::Model::getObservable (C++ function), 371`  
`amici::Model::getObservableIds (C++ function), 368`  
`amici::Model::getObservableNames (C++ function), 367`  
`amici::Model::getObservableScaling (C++ function), 371`  
`amici::Model::getObservableSensitivity (C++ function), 371`  
`amici::Model::getObservableSigma (C++ function), 372`  
`amici::Model::getObservableSigmaSensitivity (C++ function), 372`  
`amici::Model::getParameterById (C++ function), 364`  
`amici::Model::getParameterByName (C++ function), 365`

amici::Model::getParameterIds (C++ function), 368  
 amici::Model::getParameterList (C++ function), 370  
 amici::Model::getParameterNames (C++ function), 367  
 amici::Model::getParameters (C++ function), 364  
 amici::Model::getParameterScale (C++ function), 364  
 amici::Model::getReinitializationStateIdxs (C++ function), 379  
 amici::Model::getReinitializeFixedParameterInitialStates (C++ function), 371  
 amici::Model::getStateIds (C++ function), 368  
 amici::Model::getStateIdsSolver (C++ function), 368  
 amici::Model::getStateIsNonNegative (C++ function), 369  
 amici::Model::getStateNames (C++ function), 367  
 amici::Model::getStateNamesSolver (C++ function), 367  
 amici::Model::getSteadyStateSensitivityMode (C++ function), 371  
 amici::Model::getTimepoint (C++ function), 369  
 amici::Model::getTimepoints (C++ function), 369  
 amici::Model::getUnobservedEventSensitivity (C++ function), 373  
 amici::Model::getUnscaledParameters (C++ function), 364  
 amici::Model::hasCustomInitialStates (C++ function), 370  
 amici::Model::hasCustomInitialStateSensitivities (C++ function), 370  
 amici::Model::hasExpressionIds (C++ function), 368  
 amici::Model::hasExpressionNames (C++ function), 367  
 amici::Model::hasFixedParameterIds (C++ function), 368  
 amici::Model::hasFixedParameterNames (C++ function), 367  
 amici::Model::hasObservableIds (C++ function), 368  
 amici::Model::hasObservableNames (C++ function), 367  
 amici::Model::hasParameterIds (C++ function), 367  
 amici::Model::hasParameterNames (C++ function), 367  
 amici::Model::hasQuadraticLLH (C++ function), 368  
 amici::Model::hasStateIds (C++ function), 368  
 amici::Model::hasStateNames (C++ function), 367  
 amici::Model::idlist (C++ member), 394  
 amici::Model::initEvents (C++ function), 363  
 amici::Model::initialize (C++ function), 362  
 amici::Model::initializeB (C++ function), 363  
 amici::Model::initializeStates (C++ function), 363  
 amici::Model::initializeStateSensitivities (C++ function), 363  
 amici::Model::initializeVectors (C++ function), 395  
 amici::Model::k (C++ function), 364  
 amici::Model::min\_sigma\_ (C++ member), 403  
 amici::Model::Model (C++ function), 362  
 amici::Model::ncl (C++ function), 364  
 amici::Model::nk (C++ function), 364  
 amici::Model::nMaxEvent (C++ function), 364  
 amici::Model::nmaxevent\_ (C++ member), 402  
 amici::Model::np (C++ function), 363  
 amici::Model::nplist (C++ function), 363  
 amici::Model::nt (C++ function), 364  
 amici::Model::nx\_reinit (C++ function), 364  
 amici::Model::o2mode (C++ member), 394  
 amici::Model::operator= (C++ function), 362  
 amici::Model::operator== (C++ function), 403  
 amici::Model::plist (C++ function), 370  
 amici::Model::pythonGenerated (C++ member), 394  
 amici::Model::requireSensitivitiesForAllParameters (C++ function), 371  
 amici::Model::root\_initial\_values\_ (C++ member), 402  
 amici::Model::setAddSigmaResiduals (C++ function), 369  
 amici::Model::setAllStatesNonNegative (C++ function), 369  
 amici::Model::setAlwaysCheckFinite (C++ function), 378  
 amici::Model::setFixedParameterById (C++ function), 366  
 amici::Model::setFixedParameterByName (C++ function), 366  
 amici::Model::setFixedParameters (C++ function), 366  
 amici::Model::setFixedParametersByIdRegex (C++ function), 366  
 amici::Model::setFixedParametersByNameRegex (C++ function), 366  
 amici::Model::setInitialStates (C++ function), 370  
 amici::Model::setInitialStateSensitivities (C++ function), 370  
 amici::Model::setMinimumSigmaResiduals (C++ function), 369  
 amici::Model::setModelState (C++ function), 369  
 amici::Model::setNMaxEvent (C++ function), 364

amici::Model::setParameterById (C++ function), 365  
 amici::Model::setParameterByName (C++ function), 365  
 amici::Model::setParameterList (C++ function), 370  
 amici::Model::setParameters (C++ function), 365  
 amici::Model::setParametersByIdRegex (C++ function), 365  
 amici::Model::setParametersByNameRegex (C++ function), 365  
 amici::Model::setParameterScale (C++ function), 364  
 amici::Model::setReinitializationStateIdxs (C++ function), 379  
 amici::Model::setReinitializeFixedParameterInitialStates (C++ function), 371  
 amici::Model::setStateIsNonNegative (C++ function), 369  
 amici::Model::setSteadyStateSensitivityMode (C++ function), 370  
 amici::Model::setT0 (C++ function), 369  
 amici::Model::setTimepoints (C++ function), 369  
 amici::Model::setUnscaledInitialStateSensitivities (C++ function), 370  
 amici::Model::sigma\_res\_ (C++ member), 403  
 amici::Model::state\_ (C++ member), 402  
 amici::Model::state\_is\_non\_negative\_ (C++ member), 402  
 amici::Model::steadystate\_sensitivity\_mode\_ (C++ member), 402  
 amici::Model::sx0data\_ (C++ member), 402  
 amici::Model::t0 (C++ function), 369  
 amici::Model::updateHeaviside (C++ function), 377  
 amici::Model::updateHeavisideB (C++ function), 377  
 amici::Model::writeLLHSensitivitySlice (C++ function), 395  
 amici::Model::writeSensitivitySliceEvent (C++ function), 394  
 amici::Model::writeSliceEvent (C++ function), 394  
 amici::Model::x0data\_ (C++ member), 402  
 amici::Model::z2event\_ (C++ member), 402  
 amici::Model\_DAE (C++ class), 404  
 amici::Model\_DAE::fdxdotdp (C++ function), 410, 412  
 amici::Model\_DAE::fJ (C++ function), 404  
 amici::Model\_DAE::fJB (C++ function), 405  
 amici::Model\_DAE::fJDiag (C++ function), 406  
 amici::Model\_DAE::fJSparse (C++ function), 405, 411  
 amici::Model\_DAE::fJSparseB (C++ function), 406  
 amici::Model\_DAE::fJSparseB\_ss (C++ function), 409  
 amici::Model\_DAE::fJv (C++ function), 407  
 amici::Model\_DAE::fJvB (C++ function), 407  
 amici::Model\_DAE::fM (C++ function), 411, 412  
 amici::Model\_DAE::fqBdot (C++ function), 408  
 amici::Model\_DAE::fqBdot\_ss (C++ function), 409  
 amici::Model\_DAE::froot (C++ function), 407, 408, 411  
 amici::Model\_DAE::fsxdot (C++ function), 410  
 amici::Model\_DAE::fxBdot (C++ function), 408  
 amici::Model\_DAE::fxBdot\_ss (C++ function), 409  
 amici::Model\_DAE::fxdot (C++ function), 408, 411  
 amici::Model\_DAE::getSolver (C++ function), 411  
 amici::Model\_DAE::Model\_DAE (C++ function), 404  
 amici::Model\_DAE::writeSteadystateJB (C++ function), 409  
 amici::Model\_ODE (C++ class), 413  
 amici::Model\_ODE::fdxdotdp (C++ function), 421, 422  
 amici::Model\_ODE::fdxdotdp\_explicit (C++ function), 421  
 amici::Model\_ODE::fdxdotdp\_explicit\_colptrs (C++ function), 421  
 amici::Model\_ODE::fdxdotdp\_explicit\_rowvals (C++ function), 421  
 amici::Model\_ODE::fdxdotdw (C++ function), 422  
 amici::Model\_ODE::fdxdotdw\_colptrs (C++ function), 422  
 amici::Model\_ODE::fdxdotdw\_rowvals (C++ function), 422  
 amici::Model\_ODE::fdxdotdx\_explicit (C++ function), 421  
 amici::Model\_ODE::fdxdotdx\_explicit\_colptrs (C++ function), 422  
 amici::Model\_ODE::fdxdotdx\_explicit\_rowvals (C++ function), 422  
 amici::Model\_ODE::fJ (C++ function), 413, 414  
 amici::Model\_ODE::fJB (C++ function), 414  
 amici::Model\_ODE::fJDiag (C++ function), 415, 416  
 amici::Model\_ODE::fJSparse (C++ function), 414, 415, 419  
 amici::Model\_ODE::fJSparse\_colptrs (C++ function), 420  
 amici::Model\_ODE::fJSparse\_rowvals (C++ function), 420  
 amici::Model\_ODE::fJSparseB (C++ function), 415  
 amici::Model\_ODE::fJSparseB\_ss (C++ function), 418  
 amici::Model\_ODE::fJv (C++ function), 416  
 amici::Model\_ODE::fJvB (C++ function), 416  
 amici::Model\_ODE::fqBdot (C++ function), 417  
 amici::Model\_ODE::fqBdot\_ss (C++ function), 418  
 amici::Model\_ODE::froot (C++ function), 417, 420



amici::Model\_ODE::fsxdot (C++ *function*), 419  
 amici::Model\_ODE::fxBdot (C++ *function*), 417  
 amici::Model\_ODE::fxBdot\_ss (C++ *function*), 418  
 amici::Model\_ODE::fxdot (C++ *function*), 417, 420  
 amici::Model\_ODE::getSolver (C++ *function*), 419  
 amici::Model\_ODE::Model\_ODE (C++ *function*), 413  
 amici::Model\_ODE::writeSteadystateJB (C++ *function*), 418  
 amici::model\_quantity\_to\_str (C++ *member*), 529  
 amici::ModelContext (C++ *class*), 423  
 amici::ModelContext::~ModelContext (C++ *function*), 423  
 amici::ModelContext::ModelContext (C++ *function*), 423  
 amici::ModelContext::operator= (C++ *function*), 423  
 amici::ModelContext::restore (C++ *function*), 423  
 amici::ModelDimensions (C++ *struct*), 293  
 amici::ModelDimensions::lbw (C++ *member*), 296  
 amici::ModelDimensions::ModelDimensions (C++ *function*), 294  
 amici::ModelDimensions::ndJydy (C++ *member*), 296  
 amici::ModelDimensions::ndtotal\_cldx\_rdata (C++ *member*), 296  
 amici::ModelDimensions::ndwdp (C++ *member*), 295  
 amici::ModelDimensions::ndwdw (C++ *member*), 295  
 amici::ModelDimensions::ndwdx (C++ *member*), 295  
 amici::ModelDimensions::ndxdotdw (C++ *member*), 295  
 amici::ModelDimensions::ndxrdadtcl (C++ *member*), 296  
 amici::ModelDimensions::ndxrdatadxsolver (C++ *member*), 296  
 amici::ModelDimensions::ne (C++ *member*), 295  
 amici::ModelDimensions::nJ (C++ *member*), 296  
 amici::ModelDimensions::nk (C++ *member*), 295  
 amici::ModelDimensions::nnz (C++ *member*), 296  
 amici::ModelDimensions::np (C++ *member*), 295  
 amici::ModelDimensions::nw (C++ *member*), 295  
 amici::ModelDimensions::nx\_rdata (C++ *member*), 295  
 amici::ModelDimensions::nx\_solver (C++ *member*), 295  
 amici::ModelDimensions::nx\_solver\_reinit (C++ *member*), 295  
 amici::ModelDimensions::nxtrue\_rdata (C++ *member*), 295  
 amici::ModelDimensions::nxtrue\_solver (C++ *member*), 295  
 amici::ModelDimensions::ny (C++ *member*), 295  
 amici::ModelDimensions::nytrue (C++ *member*), 295  
 amici::ModelDimensions::nz (C++ *member*), 295  
 amici::ModelDimensions::nztrue (C++ *member*), 295  
 amici::ModelDimensions::ubw (C++ *member*), 296  
 amici::ModelQuantity (C++ *enum*), 493  
 amici::ModelQuantity::dwdp (C++ *enumerator*), 493  
 amici::ModelQuantity::dwdw (C++ *enumerator*), 493  
 amici::ModelQuantity::dwdx (C++ *enumerator*), 493  
 amici::ModelQuantity::dydp (C++ *enumerator*), 493  
 amici::ModelQuantity::dydx (C++ *enumerator*), 493  
 amici::ModelQuantity::J (C++ *enumerator*), 493  
 amici::ModelQuantity::JB (C++ *enumerator*), 493  
 amici::ModelQuantity::JDiag (C++ *enumerator*), 493  
 amici::ModelQuantity::JSparseB\_ss (C++ *enumerator*), 494  
 amici::ModelQuantity::Jv (C++ *enumerator*), 493  
 amici::ModelQuantity::JvB (C++ *enumerator*), 493  
 amici::ModelQuantity::qBdot (C++ *enumerator*), 494  
 amici::ModelQuantity::qBdot\_ss (C++ *enumerator*), 494  
 amici::ModelQuantity::root (C++ *enumerator*), 494  
 amici::ModelQuantity::ssigmay (C++ *enumerator*), 493  
 amici::ModelQuantity::sx (C++ *enumerator*), 493  
 amici::ModelQuantity::sxdot (C++ *enumerator*), 493  
 amici::ModelQuantity::sy (C++ *enumerator*), 493  
 amici::ModelQuantity::w (C++ *enumerator*), 493  
 amici::ModelQuantity::x (C++ *enumerator*), 493  
 amici::ModelQuantity::x0 (C++ *enumerator*), 493  
 amici::ModelQuantity::x0\_rdata (C++ *enumerator*), 493  
 amici::ModelQuantity::x\_rdata (C++ *enumerator*), 493  
 amici::ModelQuantity::xBdot (C++ *enumerator*), 493  
 amici::ModelQuantity::xBdot\_ss (C++ *enumerator*), 494  
 amici::ModelQuantity::xdot (C++ *enumerator*), 493  
 amici::ModelQuantity::y (C++ *enumerator*), 493  
 amici::ModelState (C++ *struct*), 296  
 amici::ModelState::fixedParameters (C++ *member*), 297

`amici::ModelState::h` (C++ member), 296  
`amici::ModelState::plist` (C++ member), 297  
`amici::ModelState::stotal_cl` (C++ member), 296  
`amici::ModelState::total_cl` (C++ member), 296  
`amici::ModelState::unscaledParameters` (C++ member), 297  
`amici::ModelStateDerived` (C++ struct), 297  
`amici::ModelStateDerived::deltaqB_` (C++ member), 300  
`amici::ModelStateDerived::deltasx_` (C++ member), 300  
`amici::ModelStateDerived::deltax_` (C++ member), 300  
`amici::ModelStateDerived::deltaxB_` (C++ member), 300  
`amici::ModelStateDerived::dJrzdsigma_` (C++ member), 299  
`amici::ModelStateDerived::dJrzdz_` (C++ member), 299  
`amici::ModelStateDerived::dJydp_` (C++ member), 299  
`amici::ModelStateDerived::dJydsigma_` (C++ member), 298  
`amici::ModelStateDerived::dJydx_` (C++ member), 299  
`amici::ModelStateDerived::dJydy_` (C++ member), 298  
`amici::ModelStateDerived::dJydy_matlab_` (C++ member), 298  
`amici::ModelStateDerived::dJzdp_` (C++ member), 299  
`amici::ModelStateDerived::dJzdsigma_` (C++ member), 299  
`amici::ModelStateDerived::dJzdx_` (C++ member), 299  
`amici::ModelStateDerived::dJzdz_` (C++ member), 299  
`amici::ModelStateDerived::drzdp_` (C++ member), 299  
`amici::ModelStateDerived::drzdx_` (C++ member), 299  
`amici::ModelStateDerived::dsigmaydp_` (C++ member), 300  
`amici::ModelStateDerived::dsigmaydy_` (C++ member), 300  
`amici::ModelStateDerived::dsigmazdp_` (C++ member), 300  
`amici::ModelStateDerived::dtotal_cldx_rdata` (C++ member), 298  
`amici::ModelStateDerived::dwdp_` (C++ member), 297  
`amici::ModelStateDerived::dwdx_` (C++ member), 297  
`amici::ModelStateDerived::dx_rdatadtcl` (C++ member), 298  
`amici::ModelStateDerived::dx_rdatadx_solver` (C++ member), 298  
`amici::ModelStateDerived::dxdotdp` (C++ member), 298  
`amici::ModelStateDerived::dxdotdp_explicit` (C++ member), 298  
`amici::ModelStateDerived::dxdotdp_full` (C++ member), 298  
`amici::ModelStateDerived::dxdotdp_implicit` (C++ member), 298  
`amici::ModelStateDerived::dxdotdw_` (C++ member), 297  
`amici::ModelStateDerived::dxdotdx_explicit` (C++ member), 298  
`amici::ModelStateDerived::dxdotdx_implicit` (C++ member), 298  
`amici::ModelStateDerived::dydp_` (C++ member), 299  
`amici::ModelStateDerived::dydx_` (C++ member), 299  
`amici::ModelStateDerived::dzdp_` (C++ member), 299  
`amici::ModelStateDerived::dzdx_` (C++ member), 299  
`amici::ModelStateDerived::J_` (C++ member), 297  
`amici::ModelStateDerived::JB_` (C++ member), 297  
`amici::ModelStateDerived::M_` (C++ member), 298  
`amici::ModelStateDerived::ModelStateDerived` (C++ function), 297  
`amici::ModelStateDerived::rz_` (C++ member), 300  
`amici::ModelStateDerived::sigmay_` (C++ member), 300  
`amici::ModelStateDerived::sigmaz_` (C++ member), 300  
`amici::ModelStateDerived::sx_` (C++ member), 299  
`amici::ModelStateDerived::sx_rdata_` (C++ member), 300  
`amici::ModelStateDerived::w_` (C++ member), 299  
`amici::ModelStateDerived::x_pos_tmp_` (C++ member), 300  
`amici::ModelStateDerived::x_rdata_` (C++ member), 299  
`amici::ModelStateDerived::y_` (C++ member), 300  
`amici::ModelStateDerived::z_` (C++ member), 300  
`amici::N_VGetArrayPointerConst` (C++ function), 514  
`amici::NewtonDampingFactorMode` (C++ enum), 494  
`amici::NewtonDampingFactorMode::off` (C++ enumerator), 494  
`amici::NewtonDampingFactorMode::on` (C++ enumerator), 494

---

```

    merator), 494
amici::NewtonFailure (C++ class), 424
amici::NewtonFailure::error_code (C++ member), 424
amici::NewtonFailure::NewtonFailure (C++ function), 424
amici::NewtonSolver (C++ class), 424
amici::NewtonSolver::~~NewtonSolver (C++ function), 426
amici::NewtonSolver::computeNewtonSensis (C++ function), 425
amici::NewtonSolver::dxB_ (C++ member), 426
amici::NewtonSolver::getSolver (C++ function), 426
amici::NewtonSolver::getStep (C++ function), 425
amici::NewtonSolver::is_singular (C++ function), 425
amici::NewtonSolver::NewtonSolver (C++ function), 425
amici::NewtonSolver::prepareLinearSystem (C++ function), 425
amici::NewtonSolver::prepareLinearSystemB (C++ function), 425
amici::NewtonSolver::reinitialize (C++ function), 425
amici::NewtonSolver::solveLinearSystem (C++ function), 425
amici::NewtonSolver::xB_ (C++ member), 426
amici::NewtonSolver::xB_ (C++ member), 426
amici::NewtonSolver::xdot_ (C++ member), 426
amici::NewtonSolverDense (C++ class), 427
amici::NewtonSolverDense::~~NewtonSolverDense (C++ function), 427
amici::NewtonSolverDense::is_singular (C++ function), 427
amici::NewtonSolverDense::NewtonSolverDense (C++ function), 427
amici::NewtonSolverDense::operator= (C++ function), 427
amici::NewtonSolverDense::prepareLinearSystem (C++ function), 427
amici::NewtonSolverDense::prepareLinearSystemB (C++ function), 427
amici::NewtonSolverDense::reinitialize (C++ function), 427
amici::NewtonSolverDense::solveLinearSystem (C++ function), 427
amici::NewtonSolverSparse (C++ class), 428
amici::NewtonSolverSparse::~~NewtonSolverSparse (C++ function), 428
amici::NewtonSolverSparse::is_singular (C++ function), 428
amici::NewtonSolverSparse::NewtonSolverSparse (C++ function), 428
amici::NewtonSolverSparse::operator= (C++ function), 428
amici::NewtonSolverSparse::prepareLinearSystem (C++ function), 428
amici::NewtonSolverSparse::prepareLinearSystemB (C++ function), 428
amici::NewtonSolverSparse::reinitialize (C++ function), 429
amici::NewtonSolverSparse::solveLinearSystem (C++ function), 428
amici::NonlinearSolverIteration (C++ enum), 494
amici::NonlinearSolverIteration::fixedpoint (C++ enumerator), 494
amici::NonlinearSolverIteration::functional (C++ enumerator), 494
amici::NonlinearSolverIteration::newton (C++ enumerator), 494
amici::ObservableScaling (C++ enum), 495
amici::ObservableScaling::lin (C++ enumerator), 495
amici::ObservableScaling::log (C++ enumerator), 495
amici::ObservableScaling::log10 (C++ enumerator), 495
amici::operator== (C++ function), 514, 515
amici::outputFunctionType (C++ type), 534
amici::ParameterScaling (C++ enum), 495
amici::ParameterScaling::ln (C++ enumerator), 495
amici::ParameterScaling::log10 (C++ enumerator), 495
amici::ParameterScaling::none (C++ enumerator), 495
amici::pi (C++ member), 530
amici::printErrMsgIdAndTxt (C++ function), 515
amici::printfToString (C++ function), 515
amici::printWarnMsgIdAndTxt (C++ function), 516
amici::RDataReporting (C++ enum), 495
amici::RDataReporting::full (C++ enumerator), 495
amici::RDataReporting::likelihood (C++ enumerator), 495
amici::RDataReporting::residuals (C++ enumerator), 495
amici::realtype (C++ type), 534
amici::regexErrorToString (C++ function), 516
amici::ReturnData (C++ class), 429
amici::ReturnData::~~ReturnData (C++ function), 430
amici::ReturnData::applyChainRuleFactorToSimulationResults (C++ function), 437
amici::ReturnData::boost::serialization::serialize (C++ function), 439

```

`amici::ReturnData::chi2` (C++ member), 433  
`amici::ReturnData::computingFSA` (C++ function), 437  
`amici::ReturnData::cpu_time` (C++ member), 432  
`amici::ReturnData::cpu_time_total` (C++ member), 432  
`amici::ReturnData::cpu_timeB` (C++ member), 432  
`amici::ReturnData::dx_solver_` (C++ member), 438  
`amici::ReturnData::fchi2` (C++ function), 436  
`amici::ReturnData::fFIM` (C++ function), 436  
`amici::ReturnData::FIM` (C++ member), 431  
`amici::ReturnData::fres` (C++ function), 436  
`amici::ReturnData::fsres` (C++ function), 436  
`amici::ReturnData::getDataOutput` (C++ function), 437  
`amici::ReturnData::getDataSensisFSA` (C++ function), 437  
`amici::ReturnData::getEventOutput` (C++ function), 437  
`amici::ReturnData::getEventSensisFSA` (C++ function), 437  
`amici::ReturnData::handleSx0Backward` (C++ function), 438  
`amici::ReturnData::handleSx0Forward` (C++ function), 438  
`amici::ReturnData::id` (C++ member), 430  
`amici::ReturnData::initializeFullReporting` (C++ function), 435  
`amici::ReturnData::initializeLikelihoodReporting` (C++ function), 435  
`amici::ReturnData::initializeObjectiveFunction` (C++ function), 435  
`amici::ReturnData::initializeResidualReporting` (C++ function), 435  
`amici::ReturnData::invalidate` (C++ function), 437  
`amici::ReturnData::invalidateLLH` (C++ function), 437  
`amici::ReturnData::invalidateSLLH` (C++ function), 437  
`amici::ReturnData::J` (C++ member), 430  
`amici::ReturnData::llh` (C++ member), 433  
`amici::ReturnData::newton_maxsteps` (C++ member), 434  
`amici::ReturnData::nmaxevent` (C++ member), 434  
`amici::ReturnData::nplist` (C++ member), 434  
`amici::ReturnData::nroots_` (C++ member), 438  
`amici::ReturnData::nt` (C++ member), 434  
`amici::ReturnData::numerrtestfails` (C++ member), 432  
`amici::ReturnData::numerrtestfailsB` (C++ member), 432  
`amici::ReturnData::numnonlinsolvconvfails` (C++ member), 432  
`amici::ReturnData::numnonlinsolvconvfailsB` (C++ member), 432  
`amici::ReturnData::numrhsevals` (C++ member), 432  
`amici::ReturnData::numrhsevalsB` (C++ member), 432  
`amici::ReturnData::numsteps` (C++ member), 432  
`amici::ReturnData::numstepsB` (C++ member), 432  
`amici::ReturnData::nx` (C++ member), 434  
`amici::ReturnData::nxtrue` (C++ member), 434  
`amici::ReturnData::o2mode` (C++ member), 434  
`amici::ReturnData::order` (C++ member), 432  
`amici::ReturnData::posteq_cpu_time` (C++ member), 432  
`amici::ReturnData::posteq_cpu_timeB` (C++ member), 433  
`amici::ReturnData::posteq_numsteps` (C++ member), 433  
`amici::ReturnData::posteq_numstepsB` (C++ member), 433  
`amici::ReturnData::posteq_status` (C++ member), 432  
`amici::ReturnData::posteq_t` (C++ member), 433  
`amici::ReturnData::posteq_wrms` (C++ member), 433  
`amici::ReturnData::preeq_cpu_time` (C++ member), 432  
`amici::ReturnData::preeq_cpu_timeB` (C++ member), 432  
`amici::ReturnData::preeq_numsteps` (C++ member), 433  
`amici::ReturnData::preeq_numstepsB` (C++ member), 433  
`amici::ReturnData::preeq_status` (C++ member), 432  
`amici::ReturnData::preeq_t` (C++ member), 433  
`amici::ReturnData::preeq_wrms` (C++ member), 433  
`amici::ReturnData::processBackwardProblem` (C++ function), 435  
`amici::ReturnData::processForwardProblem` (C++ function), 435  
`amici::ReturnData::processPostEquilibration` (C++ function), 435  
`amici::ReturnData::processPreEquilibration` (C++ function), 435  
`amici::ReturnData::processSimulationObjects` (C++ function), 430  
`amici::ReturnData::processSolver` (C++ function), 436  
`amici::ReturnData::pscale` (C++ member), 434  
`amici::ReturnData::rdata_reporting` (C++ member), 434

---

amici::ReturnData::readSimulationState (C++ function), 436  
 amici::ReturnData::res (C++ member), 431  
 amici::ReturnData::ReturnData (C++ function), 429, 430  
 amici::ReturnData::rz (C++ member), 431  
 amici::ReturnData::s2llh (C++ member), 434  
 amici::ReturnData::s2rz (C++ member), 431  
 amici::ReturnData::sensi (C++ member), 434  
 amici::ReturnData::sensi\_meth (C++ member), 434  
 amici::ReturnData::sigma\_offset (C++ member), 438  
 amici::ReturnData::sigma\_res (C++ member), 434  
 amici::ReturnData::sigmay (C++ member), 431  
 amici::ReturnData::sigmaz (C++ member), 431  
 amici::ReturnData::sllh (C++ member), 433  
 amici::ReturnData::sres (C++ member), 431  
 amici::ReturnData::srz (C++ member), 431  
 amici::ReturnData::ssigmay (C++ member), 431  
 amici::ReturnData::ssigmaz (C++ member), 431  
 amici::ReturnData::status (C++ member), 434  
 amici::ReturnData::storeJacobianAndDerivativeInReturnData (C++ function), 436  
 amici::ReturnData::sx (C++ member), 431  
 amici::ReturnData::sx0 (C++ member), 433  
 amici::ReturnData::sx\_rdata\_ (C++ member), 438  
 amici::ReturnData::sx\_solver\_ (C++ member), 438  
 amici::ReturnData::sx\_ss (C++ member), 433  
 amici::ReturnData::sy (C++ member), 431  
 amici::ReturnData::sz (C++ member), 431  
 amici::ReturnData::t\_ (C++ member), 438  
 amici::ReturnData::ts (C++ member), 430  
 amici::ReturnData::w (C++ member), 430  
 amici::ReturnData::x (C++ member), 431  
 amici::ReturnData::x0 (C++ member), 433  
 amici::ReturnData::x\_rdata\_ (C++ member), 438  
 amici::ReturnData::x\_solver\_ (C++ member), 438  
 amici::ReturnData::x\_ss (C++ member), 433  
 amici::ReturnData::xdot (C++ member), 430  
 amici::ReturnData::y (C++ member), 431  
 amici::ReturnData::z (C++ member), 431  
 amici::runAmiciSimulation (C++ function), 516  
 amici::runAmiciSimulations (C++ function), 517  
 amici::scaleParameters (C++ function), 517  
 amici::SecondOrderMode (C++ enum), 496  
 amici::SecondOrderMode::directional (C++ enumerator), 496  
 amici::SecondOrderMode::full (C++ enumerator), 496  
 amici::SecondOrderMode::none (C++ enumerator), 496  
 amici::SensitivityMethod (C++ enum), 496  
 amici::SensitivityMethod::adjoint (C++ enumerator), 496  
 amici::SensitivityMethod::forward (C++ enumerator), 496  
 amici::SensitivityMethod::none (C++ enumerator), 496  
 amici::SensitivityOrder (C++ enum), 496  
 amici::SensitivityOrder::first (C++ enumerator), 496  
 amici::SensitivityOrder::none (C++ enumerator), 496  
 amici::SensitivityOrder::second (C++ enumerator), 496  
 amici::serializeToChar (C++ function), 518  
 amici::serializeToStdVec (C++ function), 518  
 amici::serializeToString (C++ function), 518  
 amici::SetupFailure (C++ class), 439  
 amici::SetupFailure::SetupFailure (C++ function), 439  
 amici::SimulationParameters (C++ class), 440  
 amici::SimulationParameters::fixedParameters (C++ member), 441  
 amici::SimulationParameters::fixedParametersPresimulation (C++ member), 441  
 amici::SimulationParameters::fixedParametersPreequilibrium (C++ member), 441  
 amici::SimulationParameters::fixedParametersPresimulation (C++ member), 441  
 amici::SimulationParameters::parameters (C++ member), 441  
 amici::SimulationParameters::plist (C++ member), 442  
 amici::SimulationParameters::pscale (C++ member), 442  
 amici::SimulationParameters::reinitialization\_state\_idxsp (C++ member), 442  
 amici::SimulationParameters::reinitialization\_state\_idxss (C++ member), 442  
 amici::SimulationParameters::reinitializeAllFixedParameter (C++ function), 441  
 amici::SimulationParameters::reinitializeAllFixedParameter (C++ function), 441  
 amici::SimulationParameters::reinitializeAllFixedParameter (C++ function), 441  
 amici::SimulationParameters::reinitializeFixedParameterIni (C++ member), 442  
 amici::SimulationParameters::SimulationParameters (C++ function), 440  
 amici::SimulationParameters::sx0 (C++ member), 441  
 amici::SimulationParameters::t\_presim (C++ member), 442  
 amici::SimulationParameters::ts\_ (C++ member), 442  
 amici::SimulationParameters::tstart\_ (C++ member), 442



`amici::SimulationParameters::x0` (C++ member), 441

`amici::SimulationState` (C++ struct), 301

`amici::SimulationState::dx` (C++ member), 301

`amici::SimulationState::state` (C++ member), 301

`amici::SimulationState::sx` (C++ member), 301

`amici::SimulationState::t` (C++ member), 301

`amici::SimulationState::x` (C++ member), 301

`amici::slice` (C++ function), 519

`amici::Solver` (C++ class), 443

`amici::Solver::~~Solver` (C++ function), 443

`amici::Solver::adjInit` (C++ function), 459

`amici::Solver::allocateSolver` (C++ function), 456

`amici::Solver::allocateSolverB` (C++ function), 459

`amici::Solver::app` (C++ member), 454

`amici::Solver::applyQuadTolerances` (C++ function), 462

`amici::Solver::applyQuadTolerancesASA` (C++ function), 462

`amici::Solver::applySensitivityTolerances` (C++ function), 462

`amici::Solver::applyTolerances` (C++ function), 462

`amici::Solver::applyTolerancesASA` (C++ function), 462

`amici::Solver::applyTolerancesFSA` (C++ function), 462

`amici::Solver::binit` (C++ function), 455

`amici::Solver::boost::serialization::serialize` (C++ function), 465

`amici::Solver::calcIC` (C++ function), 444

`amici::Solver::calcICB` (C++ function), 445

`amici::Solver::checkSensitivityMethod` (C++ function), 462

`amici::Solver::clone` (C++ function), 443

`amici::Solver::computingASA` (C++ function), 453

`amici::Solver::computingFSA` (C++ function), 453

`amici::Solver::diag` (C++ function), 461

`amici::Solver::diagB` (C++ function), 461

`amici::Solver::dky_` (C++ member), 464

`amici::Solver::dx_` (C++ member), 464

`amici::Solver::dxB_` (C++ member), 464

`amici::Solver::force_reinit_postprocess_B_` (C++ member), 464

`amici::Solver::force_reinit_postprocess_F_` (C++ member), 464

`amici::Solver::getAbsoluteTolerance` (C++ function), 446

`amici::Solver::getAbsoluteToleranceB` (C++ function), 447

`amici::Solver::getAbsoluteToleranceFSA` (C++ function), 446

`amici::Solver::getAbsoluteToleranceQuadratures` (C++ function), 447

`amici::Solver::getAbsoluteToleranceSteadyState` (C++ function), 448

`amici::Solver::getAbsoluteToleranceSteadyStateSensi` (C++ function), 448

`amici::Solver::getAdjBmem` (C++ function), 462

`amici::Solver::getAdjInitDone` (C++ function), 461

`amici::Solver::getAdjointDerivativeState` (C++ function), 451

`amici::Solver::getAdjointQuadrature` (C++ function), 451

`amici::Solver::getAdjointState` (C++ function), 451

`amici::Solver::getB` (C++ function), 455

`amici::Solver::getCpuTime` (C++ function), 452

`amici::Solver::getCpuTimeB` (C++ function), 452

`amici::Solver::getDerivativeState` (C++ function), 451

`amici::Solver::getDky` (C++ function), 458

`amici::Solver::getDkyB` (C++ function), 458

`amici::Solver::getInitDone` (C++ function), 461

`amici::Solver::getInitDoneB` (C++ function), 461

`amici::Solver::getInternalSensitivityMethod` (C++ function), 450

`amici::Solver::getInterpolationType` (C++ function), 449

`amici::Solver::getLastOrder` (C++ function), 453, 460

`amici::Solver::getLinearMultistepMethod` (C++ function), 449

`amici::Solver::getLinearSolver` (C++ function), 450

`amici::Solver::getMaxSteps` (C++ function), 448

`amici::Solver::getMaxStepsBackwardProblem` (C++ function), 449

`amici::Solver::getMaxTime` (C++ function), 448

`amici::Solver::getModel` (C++ function), 461

`amici::Solver::getNewtonDampingFactorLowerBound` (C++ function), 446

`amici::Solver::getNewtonDampingFactorMode` (C++ function), 445

`amici::Solver::getNewtonMaxSteps` (C++ function), 445

`amici::Solver::getNewtonStepSteadyStateCheck` (C++ function), 453

`amici::Solver::getNonlinearSolverIteration` (C++ function), 449

`amici::Solver::getNumErrTestFails` (C++ function), 453, 460

`amici::Solver::getNumErrTestFailsB` (C++ function), 453

---

`amici::Solver::getNumNonlinSolvConvFails` (C++ function), 453, 460  
`amici::Solver::getNumNonlinSolvConvFailsB` (C++ function), 453  
`amici::Solver::getNumRhsEvals` (C++ function), 453, 460  
`amici::Solver::getNumRhsEvalsB` (C++ function), 453  
`amici::Solver::getNumSteps` (C++ function), 453, 459  
`amici::Solver::getNumStepsB` (C++ function), 453  
`amici::Solver::getQuad` (C++ function), 455  
`amici::Solver::getQuadB` (C++ function), 455  
`amici::Solver::getQuadDky` (C++ function), 459  
`amici::Solver::getQuadDkyB` (C++ function), 458  
`amici::Solver::getQuadInitDone` (C++ function), 461  
`amici::Solver::getQuadInitDoneB` (C++ function), 461  
`amici::Solver::getQuadrature` (C++ function), 451  
`amici::Solver::getRelativeTolerance` (C++ function), 446  
`amici::Solver::getRelativeToleranceB` (C++ function), 447  
`amici::Solver::getRelativeToleranceFSA` (C++ function), 446  
`amici::Solver::getRelativeToleranceQuadratures` (C++ function), 447  
`amici::Solver::getRelativeToleranceSteadyState` (C++ function), 447  
`amici::Solver::getRelativeToleranceSteadyStateSensi` (C++ function), 448  
`amici::Solver::getReturnDataReportingMode` (C++ function), 450  
`amici::Solver::getRootInfo` (C++ function), 444  
`amici::Solver::getSens` (C++ function), 455  
`amici::Solver::getSensDky` (C++ function), 458  
`amici::Solver::getSensInitDone` (C++ function), 461  
`amici::Solver::getSensiSteadyStateCheck` (C++ function), 454  
`amici::Solver::getSensitivityMethod` (C++ function), 445  
`amici::Solver::getSensitivityMethodPreequilibrium` (C++ function), 445  
`amici::Solver::getSensitivityOrder` (C++ function), 446  
`amici::Solver::getStabilityLimitFlag` (C++ function), 450  
`amici::Solver::getState` (C++ function), 451  
`amici::Solver::getStateOrdering` (C++ function), 449  
`amici::Solver::getStateSensitivity` (C++ function), 451  
`amici::Solver::getSteadyStateSensiToleranceFactor` (C++ function), 448  
`amici::Solver::getSteadyStateToleranceFactor` (C++ function), 447  
`amici::Solver::gett` (C++ function), 452  
`amici::Solver::init` (C++ function), 455  
`amici::Solver::initializeLinearSolver` (C++ function), 460  
`amici::Solver::initializeLinearSolverB` (C++ function), 461  
`amici::Solver::initializeNonLinearSolver` (C++ function), 460  
`amici::Solver::initializeNonLinearSolverB` (C++ function), 461  
`amici::Solver::initializeNonLinearSolverSens` (C++ function), 456  
`amici::Solver::initSteadystate` (C++ function), 455  
`amici::Solver::interp_type_` (C++ member), 463  
`amici::Solver::ism_` (C++ member), 463  
`amici::Solver::iter_` (C++ member), 463  
`amici::Solver::linear_solver_` (C++ member), 463  
`amici::Solver::linear_solver_B_` (C++ member), 463  
`amici::Solver::lmm_` (C++ member), 463  
`amici::Solver::maxsteps_` (C++ member), 463  
`amici::Solver::maxtime_` (C++ member), 463  
`amici::Solver::non_linear_solver_` (C++ member), 463  
`amici::Solver::non_linear_solver_B_` (C++ member), 463  
`amici::Solver::non_linear_solver_sens_` (C++ member), 464  
`amici::Solver::nplist` (C++ function), 452  
`amici::Solver::nquad` (C++ function), 452  
`amici::Solver::nx` (C++ function), 452  
`amici::Solver::operator==` (C++ function), 465  
`amici::Solver::qbinit` (C++ function), 456  
`amici::Solver::quadInit` (C++ function), 459  
`amici::Solver::quadReInitB` (C++ function), 452  
`amici::Solver::quadSStolerances` (C++ function), 459  
`amici::Solver::quadSStolerancesB` (C++ function), 459  
`amici::Solver::reInit` (C++ function), 451  
`amici::Solver::reInitB` (C++ function), 452  
`amici::Solver::reInitPostProcessB` (C++ function), 455  
`amici::Solver::reInitPostProcessF` (C++ function), 454  
`amici::Solver::resetDiagnosis` (C++ function), 453  
`amici::Solver::resetMutableMemory` (C++ function), 453

tion), 461  
 amici::Solver::rootInit (C++ function), 456  
 amici::Solver::run (C++ function), 443  
 amici::Solver::runB (C++ function), 443  
 amici::Solver::sdx\_ (C++ member), 464  
 amici::Solver::sens\_initialized\_ (C++ member), 464  
 amici::Solver::sensInit1 (C++ function), 455  
 amici::Solver::sensReInit (C++ function), 452  
 amici::Solver::sensToggleOff (C++ function), 452  
 amici::Solver::setAbsoluteTolerance (C++ function), 446  
 amici::Solver::setAbsoluteToleranceB (C++ function), 447  
 amici::Solver::setAbsoluteToleranceFSA (C++ function), 446  
 amici::Solver::setAbsoluteToleranceQuadratures (C++ function), 447  
 amici::Solver::setAbsoluteToleranceSteadyState (C++ function), 448  
 amici::Solver::setAbsoluteToleranceSteadyStateSensi (C++ function), 448  
 amici::Solver::setAdjInitDone (C++ function), 462  
 amici::Solver::setBandJacFn (C++ function), 456  
 amici::Solver::setBandJacFnB (C++ function), 456  
 amici::Solver::setDenseJacFn (C++ function), 456  
 amici::Solver::setDenseJacFnB (C++ function), 456  
 amici::Solver::setErrHandlerFn (C++ function), 457  
 amici::Solver::setId (C++ function), 458  
 amici::Solver::setInitDone (C++ function), 462  
 amici::Solver::setInitDoneB (C++ function), 462  
 amici::Solver::setInternalSensitivityMethod (C++ function), 450  
 amici::Solver::setInterpolationType (C++ function), 449  
 amici::Solver::setJacTimesVecFn (C++ function), 456  
 amici::Solver::setJacTimesVecFnB (C++ function), 456  
 amici::Solver::setLinearMultistepMethod (C++ function), 449  
 amici::Solver::setLinearSolver (C++ function), 450, 460  
 amici::Solver::setLinearSolverB (C++ function), 460  
 amici::Solver::setMaxNumSteps (C++ function), 457  
 amici::Solver::setMaxNumStepsB (C++ function), 457  
 amici::Solver::setMaxSteps (C++ function), 448  
 amici::Solver::setMaxStepsBackwardProblem (C++ function), 449  
 amici::Solver::setMaxTime (C++ function), 448  
 amici::Solver::setNewtonDampingFactorLowerBound (C++ function), 446  
 amici::Solver::setNewtonDampingFactorMode (C++ function), 445  
 amici::Solver::setNewtonMaxSteps (C++ function), 445  
 amici::Solver::setNewtonStepSteadyStateCheck (C++ function), 454  
 amici::Solver::setNonLinearSolver (C++ function), 460  
 amici::Solver::setNonLinearSolverB (C++ function), 460  
 amici::Solver::setNonlinearSolverIteration (C++ function), 449  
 amici::Solver::setNonLinearSolverSens (C++ function), 461  
 amici::Solver::setQuadErrCon (C++ function), 457  
 amici::Solver::setQuadErrConB (C++ function), 457  
 amici::Solver::setQuadInitDone (C++ function), 462  
 amici::Solver::setQuadInitDoneB (C++ function), 462  
 amici::Solver::setRelativeTolerance (C++ function), 446  
 amici::Solver::setRelativeToleranceB (C++ function), 447  
 amici::Solver::setRelativeToleranceFSA (C++ function), 446  
 amici::Solver::setRelativeToleranceQuadratures (C++ function), 447  
 amici::Solver::setRelativeToleranceSteadyState (C++ function), 447  
 amici::Solver::setRelativeToleranceSteadyStateSensi (C++ function), 448  
 amici::Solver::setReturnDataReportingMode (C++ function), 450  
 amici::Solver::setSensErrCon (C++ function), 457  
 amici::Solver::setSensInitDone (C++ function), 462  
 amici::Solver::setSensInitOff (C++ function), 462  
 amici::Solver::setSensiSteadyStateCheck (C++ function), 454  
 amici::Solver::setSensitivityMethod (C++ function), 445  
 amici::Solver::setSensitivityMethodPreequilibration (C++ function), 445  
 amici::Solver::setSensitivityOrder (C++ function), 446  
 amici::Solver::setSensParams (C++ function), 458  
 amici::Solver::setSensStolerances (C++ function), 448



tion), 457  
 amici::Solver::setSparseJacFn (C++ function), 456  
 amici::Solver::setSparseJacFn\_ss (C++ function), 456  
 amici::Solver::setSparseJacFnB (C++ function), 456  
 amici::Solver::setSSTolerances (C++ function), 456  
 amici::Solver::setSSTolerancesB (C++ function), 459  
 amici::Solver::setStabilityLimitFlag (C++ function), 450  
 amici::Solver::setStabLimDet (C++ function), 457  
 amici::Solver::setStabLimDetB (C++ function), 458  
 amici::Solver::setStateOrdering (C++ function), 449  
 amici::Solver::setSteadyStateSensiToleranceFactor (C++ function), 448  
 amici::Solver::setSteadyStateToleranceFactor (C++ function), 447  
 amici::Solver::setStopTime (C++ function), 454  
 amici::Solver::setSuppressAlg (C++ function), 458  
 amici::Solver::setup (C++ function), 444  
 amici::Solver::setupB (C++ function), 444  
 amici::Solver::setupSteadystate (C++ function), 444  
 amici::Solver::setUserData (C++ function), 457  
 amici::Solver::setUserDataB (C++ function), 457  
 amici::Solver::solve (C++ function), 454  
 amici::Solver::solveB (C++ function), 445  
 amici::Solver::solveF (C++ function), 454  
 amici::Solver::Solver (C++ function), 443  
 amici::Solver::solver\_memory\_ (C++ member), 463  
 amici::Solver::solver\_memory\_B\_ (C++ member), 463  
 amici::Solver::solver\_was\_called\_B\_ (C++ member), 464  
 amici::Solver::solver\_was\_called\_F\_ (C++ member), 464  
 amici::Solver::starttime\_ (C++ member), 463  
 amici::Solver::startTimer (C++ function), 448  
 amici::Solver::step (C++ function), 443  
 amici::Solver::storeDiagnosis (C++ function), 453  
 amici::Solver::storeDiagnosisB (C++ function), 453  
 amici::Solver::switchForwardSensisOff (C++ function), 445  
 amici::Solver::sx\_ (C++ member), 464  
 amici::Solver::t\_ (C++ member), 464  
 amici::Solver::timeExceeded (C++ function), 449  
 amici::Solver::turnOffRootFinding (C++ function), 445  
 amici::Solver::updateAndReinitStatesAndSensitivities (C++ function), 444  
 amici::Solver::user\_data (C++ member), 463  
 amici::Solver::user\_data\_type (C++ type), 443  
 amici::Solver::writeSolution (C++ function), 450  
 amici::Solver::writeSolutionB (C++ function), 450  
 amici::Solver::x\_ (C++ member), 464  
 amici::Solver::xB\_ (C++ member), 464  
 amici::Solver::xQ\_ (C++ member), 464  
 amici::Solver::xQB\_ (C++ member), 464  
 amici::SteadyStateContext (C++ enum), 497  
 amici::SteadyStateContext::newtonSensi (C++ enumerator), 497  
 amici::SteadyStateContext::sensiStorage (C++ enumerator), 497  
 amici::SteadyStateContext::solverCreation (C++ enumerator), 497  
 amici::SteadystateProblem (C++ class), 465  
 amici::SteadystateProblem::checkSteadyStateSuccess (C++ function), 467  
 amici::SteadystateProblem::getAdjointQuadrature (C++ function), 467  
 amici::SteadystateProblem::getAdjointState (C++ function), 467  
 amici::SteadystateProblem::getAdjointUpdates (C++ function), 467  
 amici::SteadystateProblem::getCPUTime (C++ function), 466  
 amici::SteadystateProblem::getCPUTimeB (C++ function), 466  
 amici::SteadystateProblem::getDJydx (C++ function), 466  
 amici::SteadystateProblem::getEquilibrationQuadratures (C++ function), 466  
 amici::SteadystateProblem::getFinalSimulationState (C++ function), 466  
 amici::SteadystateProblem::getNumSteps (C++ function), 466  
 amici::SteadystateProblem::getNumStepsB (C++ function), 466  
 amici::SteadystateProblem::getResidualNorm (C++ function), 466  
 amici::SteadystateProblem::getState (C++ function), 466  
 amici::SteadystateProblem::getStateSensitivity (C++ function), 466  
 amici::SteadystateProblem::getSteadyStateStatus (C++ function), 466  
 amici::SteadystateProblem::getSteadyStateTime (C++ function), 466

amici::SteadystateProblem::hasQuadrature (C++ enumerator), 469  
 amici::SteadystateProblem::SteadystateProblem (C++ function), 467  
 amici::SteadystateProblem::workSteadyStateBackwardProblem (C++ function), 466  
 amici::SteadystateProblem::workSteadyStateProblem (C++ function), 465  
 amici::SteadyStateSensitivityMode (C++ enum), 497  
 amici::SteadyStateSensitivityMode::integrateInTime (C++ enumerator), 497  
 amici::SteadyStateSensitivityMode::integrationOnly (C++ enumerator), 497  
 amici::SteadyStateSensitivityMode::newtonOnly (C++ enumerator), 497  
 amici::SteadyStateStatus (C++ enum), 497  
 amici::SteadyStateStatus::failed (C++ enumerator), 498  
 amici::SteadyStateStatus::failed\_convergence (C++ enumerator), 497  
 amici::SteadyStateStatus::failed\_damping (C++ enumerator), 497  
 amici::SteadyStateStatus::failed\_factorization (C++ enumerator), 497  
 amici::SteadyStateStatus::failed\_too\_long\_simulation (C++ enumerator), 497  
 amici::SteadyStateStatus::not\_run (C++ enumerator), 498  
 amici::SteadyStateStatus::success (C++ enumerator), 498  
 amici::SUNLinSolBand (C++ class), 467  
 amici::SUNLinSolBand::getMatrix (C++ function), 468  
 amici::SUNLinSolBand::SUNLinSolBand (C++ function), 468  
 amici::SUNLinSolDense (C++ class), 468  
 amici::SUNLinSolDense::getMatrix (C++ function), 468  
 amici::SUNLinSolDense::SUNLinSolDense (C++ function), 468  
 amici::SUNLinSolKLU (C++ class), 469  
 amici::SUNLinSolKLU::getMatrix (C++ function), 469  
 amici::SUNLinSolKLU::reInit (C++ function), 470  
 amici::SUNLinSolKLU::setOrdering (C++ function), 470  
 amici::SUNLinSolKLU::StateOrdering (C++ enum), 469  
 amici::SUNLinSolKLU::StateOrdering::AMD (C++ enumerator), 469  
 amici::SUNLinSolKLU::StateOrdering::COLAMD (C++ enumerator), 469  
 amici::SUNLinSolKLU::StateOrdering::natural (C++ enumerator), 469  
 amici::SUNLinSolKLU::SUNLinSolKLU (C++ function), 469  
 amici::SUNLinSolPCG (C++ class), 470  
 amici::SUNLinSolPCG::getNumIters (C++ function), 471  
 amici::SUNLinSolPCG::getResid (C++ function), 471  
 amici::SUNLinSolPCG::getResNorm (C++ function), 471  
 amici::SUNLinSolPCG::setATimes (C++ function), 470  
 amici::SUNLinSolPCG::setPreconditioner (C++ function), 471  
 amici::SUNLinSolPCG::setScalingVectors (C++ function), 471  
 amici::SUNLinSolPCG::SUNLinSolPCG (C++ function), 470  
 amici::SUNLinSolSPBCGS (C++ class), 472  
 amici::SUNLinSolSPBCGS::getNumIters (C++ function), 473  
 amici::SUNLinSolSPBCGS::getResid (C++ function), 473  
 amici::SUNLinSolSPBCGS::getResNorm (C++ function), 473  
 amici::SUNLinSolSPBCGS::setATimes (C++ function), 472  
 amici::SUNLinSolSPBCGS::setPreconditioner (C++ function), 472  
 amici::SUNLinSolSPBCGS::setScalingVectors (C++ function), 472  
 amici::SUNLinSolSPBCGS::SUNLinSolSPBCGS (C++ function), 472  
 amici::SUNLinSolSPFGMR (C++ class), 473  
 amici::SUNLinSolSPFGMR::getNumIters (C++ function), 474  
 amici::SUNLinSolSPFGMR::getResid (C++ function), 474  
 amici::SUNLinSolSPFGMR::getResNorm (C++ function), 474  
 amici::SUNLinSolSPFGMR::setATimes (C++ function), 473  
 amici::SUNLinSolSPFGMR::setPreconditioner (C++ function), 474  
 amici::SUNLinSolSPFGMR::setScalingVectors (C++ function), 474  
 amici::SUNLinSolSPFGMR::SUNLinSolSPFGMR (C++ function), 473  
 amici::SUNLinSolSPGMR (C++ class), 475  
 amici::SUNLinSolSPGMR::getNumIters (C++ function), 475  
 amici::SUNLinSolSPGMR::getResid (C++ function), 476  
 amici::SUNLinSolSPGMR::getResNorm (C++ function), 476

tion), 475  
 amici::SUNLinSolSPGMR::setATimes (C++ function), 475  
 amici::SUNLinSolSPGMR::setPreconditioner (C++ function), 475  
 amici::SUNLinSolSPGMR::setScalingVectors (C++ function), 475  
 amici::SUNLinSolSPGMR::SUNLinSolSPGMR (C++ function), 475  
 amici::SUNLinSolSPTFQMR (C++ class), 476  
 amici::SUNLinSolSPTFQMR::getNumIters (C++ function), 477  
 amici::SUNLinSolSPTFQMR::getResid (C++ function), 477  
 amici::SUNLinSolSPTFQMR::getResNorm (C++ function), 477  
 amici::SUNLinSolSPTFQMR::setATimes (C++ function), 476  
 amici::SUNLinSolSPTFQMR::setPreconditioner (C++ function), 477  
 amici::SUNLinSolSPTFQMR::setScalingVectors (C++ function), 477  
 amici::SUNLinSolSPTFQMR::SUNLinSolSPTFQMR (C++ function), 476  
 amici::SUNLinSolWrapper (C++ class), 478  
 amici::SUNLinSolWrapper::~~SUNLinSolWrapper (C++ function), 478  
 amici::SUNLinSolWrapper::get (C++ function), 478  
 amici::SUNLinSolWrapper::getLastFlag (C++ function), 479  
 amici::SUNLinSolWrapper::getMatrix (C++ function), 479  
 amici::SUNLinSolWrapper::getType (C++ function), 478  
 amici::SUNLinSolWrapper::initialize (C++ function), 479  
 amici::SUNLinSolWrapper::operator= (C++ function), 478  
 amici::SUNLinSolWrapper::setup (C++ function), 479  
 amici::SUNLinSolWrapper::Solve (C++ function), 479  
 amici::SUNLinSolWrapper::solver\_ (C++ member), 480  
 amici::SUNLinSolWrapper::space (C++ function), 479  
 amici::SUNLinSolWrapper::SUNLinSolWrapper (C++ function), 478  
 amici::SUNMatrixWrapper (C++ class), 480  
 amici::SUNMatrixWrapper::~~SUNMatrixWrapper (C++ function), 481  
 amici::SUNMatrixWrapper::capacity (C++ function), 482  
 amici::SUNMatrixWrapper::columns (C++ function), 481  
 amici::SUNMatrixWrapper::data (C++ function), 482  
 amici::SUNMatrixWrapper::get (C++ function), 481  
 amici::SUNMatrixWrapper::get\_data (C++ function), 482  
 amici::SUNMatrixWrapper::get\_indexptr (C++ function), 483  
 amici::SUNMatrixWrapper::get\_indexval (C++ function), 483  
 amici::SUNMatrixWrapper::matrix\_id (C++ function), 486  
 amici::SUNMatrixWrapper::multiply (C++ function), 483, 484  
 amici::SUNMatrixWrapper::num\_indexptrs (C++ function), 482  
 amici::SUNMatrixWrapper::num\_nonzeros (C++ function), 482  
 amici::SUNMatrixWrapper::operator= (C++ function), 481  
 amici::SUNMatrixWrapper::realloc (C++ function), 481  
 amici::SUNMatrixWrapper::reallocate (C++ function), 481  
 amici::SUNMatrixWrapper::refresh (C++ function), 486  
 amici::SUNMatrixWrapper::rows (C++ function), 481  
 amici::SUNMatrixWrapper::scale (C++ function), 483  
 amici::SUNMatrixWrapper::scatter (C++ function), 485  
 amici::SUNMatrixWrapper::set\_data (C++ function), 482  
 amici::SUNMatrixWrapper::set\_indexptr (C++ function), 483  
 amici::SUNMatrixWrapper::set\_indexptrs (C++ function), 483  
 amici::SUNMatrixWrapper::set\_indexval (C++ function), 483  
 amici::SUNMatrixWrapper::set\_indexvals (C++ function), 483  
 amici::SUNMatrixWrapper::sparse\_add (C++ function), 484  
 amici::SUNMatrixWrapper::sparse\_multiply (C++ function), 484  
 amici::SUNMatrixWrapper::sparse\_sum (C++ function), 485  
 amici::SUNMatrixWrapper::sparsetype (C++ function), 483  
 amici::SUNMatrixWrapper::SUNMatrixWrapper (C++ function), 480, 481  
 amici::SUNMatrixWrapper::to\_dense (C++ function), 486

amici::SUNMatrixWrapper::to\_diag (C++ function), 486  
 amici::SUNMatrixWrapper::transpose (C++ function), 485  
 amici::SUNMatrixWrapper::zero (C++ function), 486  
 amici::SUNNonLinSolFixedPoint (C++ class), 486  
 amici::SUNNonLinSolFixedPoint::getSysFn (C++ function), 487  
 amici::SUNNonLinSolFixedPoint::SUNNonLinSolFixedPoint method), 278  
 (C++ function), 486  
 amici::SUNNonLinSolNewton (C++ class), 487  
 amici::SUNNonLinSolNewton::getSysFn (C++ function), 487  
 amici::SUNNonLinSolNewton::SUNNonLinSolNewton (C++ function), 487  
 amici::SUNNonLinSolWrapper (C++ class), 488  
 amici::SUNNonLinSolWrapper::~~SUNNonLinSolWrapper (C++ function), 488  
 amici::SUNNonLinSolWrapper::get (C++ function), 488  
 amici::SUNNonLinSolWrapper::getCurIter (C++ function), 490  
 amici::SUNNonLinSolWrapper::getNumConvFails (C++ function), 490  
 amici::SUNNonLinSolWrapper::getNumIters (C++ function), 490  
 amici::SUNNonLinSolWrapper::getType (C++ function), 488  
 amici::SUNNonLinSolWrapper::initialize (C++ function), 490  
 amici::SUNNonLinSolWrapper::operator= (C++ function), 488  
 amici::SUNNonLinSolWrapper::setConvTestFn (C++ function), 489  
 amici::SUNNonLinSolWrapper::setLSetupFn (C++ function), 489  
 amici::SUNNonLinSolWrapper::setLSolveFn (C++ function), 489  
 amici::SUNNonLinSolWrapper::setMaxIters (C++ function), 489  
 amici::SUNNonLinSolWrapper::setSysFn (C++ function), 489  
 amici::SUNNonLinSolWrapper::setup (C++ function), 489  
 amici::SUNNonLinSolWrapper::Solve (C++ function), 489  
 amici::SUNNonLinSolWrapper::solver (C++ member), 490  
 amici::SUNNonLinSolWrapper::SUNNonLinSolWrapper (C++ function), 488  
 amici::unravel\_index (C++ function), 519, 520  
 amici::unscaleParameters (C++ function), 520  
 amici::wrapErrHandlerFn (C++ function), 520  
 amici::writeSlice (C++ function), 521, 522  
 AMICI\_H5\_RESTORE\_ERROR\_HANDLER (C macro), 530  
 AMICI\_H5\_SAVE\_ERROR\_HANDLER (C macro), 530  
 amici\_to\_petab\_scale() (in module amici.parameter\_mapping), 279  
 AMICI\_VERSION (C macro), 531  
 amievent (built-in class), 546  
 amifun (built-in class), 548  
 append() (amici.parameter\_mapping.ParameterMapping), 278  
 apply\_template() (in module amici.ode\_export), 254  
 assignmentRules2observables() (in module amici.sbml\_import), 218

## B

backtraceString() (in module amici.amici), 211  
 BNGL, 47  
 bngl2amici() (in module amici.bngl\_import), 221  
 BoolVector (class in amici.amici), 145  
 boost::serialization::archiveVector (C++ function), 522  
 boost::serialization::serialize (C++ function), 522–524

## C

cast\_to\_sym() (in module amici.import\_utils), 239  
 check\_derivatives() (in module amici.gradient\_check), 276  
 check\_event\_support() (amici.sbml\_import.SbmlImporter method), 215  
 check\_finite\_difference() (in module amici.gradient\_check), 276  
 check\_support() (amici.sbml\_import.SbmlImporter method), 216  
 clone() (amici.amici.Model method), 166  
 clone() (amici.amici.Solver method), 200  
 colptrs() (amici.ode\_export.ODEModel method), 249  
 compile\_model() (amici.ode\_export.ODEExporter method), 245  
 compiledWithOpenMP() (in module amici.amici), 211  
 compute\_moiety\_conservation\_laws() (in module amici.conservated\_quantities\_demartino), 281  
 computingASA() (amici.amici.Solver method), 200  
 computingFSA() (amici.amici.Solver method), 200  
 conservation\_law\_has\_multispecies() (amici.ode\_export.ODEModel method), 249  
 ConservationLaw (class in amici.ode\_model), 257  
 Constant (class in amici.ode\_model), 259  
 constant\_species\_to\_parameters() (in module amici.petab\_import), 222  
 constructEdataFromDataFrame() (in module amici.pandas), 272

- `count()` (*amici.parameter\_mapping.ParameterMapping* method), 278
- `create_dummy_sbml()` (in module *amici.petab\_import\_pysb*), 231
- `create_edata_for_condition()` (in module *amici.petab\_objective*), 232
- `create_edatas()` (in module *amici.petab\_objective*), 233
- `create_parameter_df()` (*amici.petab\_import\_pysb.PysbPetabProblem* method), 227
- `create_parameter_mapping()` (in module *amici.petab\_objective*), 233
- `create_parameter_mapping_for_condition()` (in module *amici.petab\_objective*), 233
- `create_parameterized_edatas()` (in module *amici.petab\_objective*), 234
- CVODES, 47
- ## D
- DAE, 47
- `DoubleVector` (class in *amici.amici*), 146
- ## E
- `element_is_state()` (in module *amici.petab\_import*), 222
- `enum()` (in module *amici.amici*), 211
- `eq()` (*amici.ode\_export.ODEModel* method), 249
- `Event` (class in *amici.ode\_model*), 260
- `ExpData` (class in *amici.amici*), 146
- `ExpDataPtr` (class in *amici.amici*), 157
- `ExpDataPtrVector` (class in *amici.amici*), 158
- `Expression` (class in *amici.ode\_model*), 261
- `extract_monomers()` (in module *amici.pysb\_import*), 219
- ## F
- `fdsigmaydy()` (*amici.amici.Model* method), 166
- `fdtotal_cldp()` (*amici.amici.Model* method), 166
- `fdtotal_cldx_rdata()` (*amici.amici.Model* method), 166
- `fdx_rdatadp()` (*amici.amici.Model* method), 166
- `fdx_rdatadtc1()` (*amici.amici.Model* method), 167
- `fdx_rdatadx_solver()` (*amici.amici.Model* method), 167
- `fill_in_parameters()` (in module *amici.parameter\_mapping*), 279
- `fill_in_parameters_for_condition()` (in module *amici.parameter\_mapping*), 280
- fixed parameters, 47
- `FixedParameterContext` (class in *amici.amici*), 158
- `free_symbols()` (*amici.ode\_export.ODEModel* method), 249
- `from_combine()` (*amici.petab\_import\_pysb.PysbPetabProblem* static method), 227
- `from_files()` (*amici.petab\_import\_pysb.PysbPetabProblem* static method), 227
- `from_folder()` (*amici.petab\_import\_pysb.PysbPetabProblem* static method), 228
- `from_yaml()` (*amici.petab\_import\_pysb.PysbPetabProblem* static method), 228
- ## G
- `generate_basic_variables()` (*amici.ode\_export.ODEModel* method), 249
- `generate_flux_symbol()` (in module *amici.import\_utils*), 239
- `generate_measurement_symbol()` (in module *amici.import\_utils*), 240
- `generate_model_code()` (*amici.ode\_export.ODEExporter* method), 245
- `get_appearance_counts()` (*amici.ode\_export.ODEModel* method), 249
- `get_conservation_laws()` (*amici.ode\_export.ODEModel* method), 249
- `get_dt()` (*amici.ode\_model.State* method), 270
- `get_dx_rdata_dx_solver()` (*amici.ode\_model.State* method), 270
- `get_expressions_as_dataframe()` (in module *amici.pandas*), 274
- `get_fixed_parameters()` (in module *amici.petab\_import*), 222
- `get_free_symbols()` (*amici.ode\_model.State* method), 270
- `get_function_extern_declaration()` (in module *amici.ode\_export*), 254
- `get_id()` (*amici.ode\_model.ConservationLaw* method), 258
- `get_id()` (*amici.ode\_model.Constant* method), 259
- `get_id()` (*amici.ode\_model.Event* method), 261
- `get_id()` (*amici.ode\_model.Expression* method), 262
- `get_id()` (*amici.ode\_model.LogLikelihood* method), 263
- `get_id()` (*amici.ode\_model.ModelQuantity* method), 264
- `get_id()` (*amici.ode\_model.Observable* method), 266
- `get_id()` (*amici.ode\_model.Parameter* method), 267
- `get_id()` (*amici.ode\_model.SigmaY* method), 268
- `get_id()` (*amici.ode\_model.State* method), 270
- `get_initial_value()` (*amici.ode\_model.Event* method), 261
- `get_lb()` (*amici.petab\_import\_pysb.PysbPetabProblem* method), 228
- `get_logger()` (in module *amici.logging*), 275
- `get_measurement_symbol()` (*amici.ode\_model.Observable* method), 266



`get_model_override_implementation()` (in module `amici.ode_export`), 254  
`get_model_parameters()` (`amici.petab_import_pysb.PysbPetabProblem` method), 228  
`get_name()` (`amici.ode_model.ConservationLaw` method), 258  
`get_name()` (`amici.ode_model.Constant` method), 259  
`get_name()` (`amici.ode_model.Event` method), 261  
`get_name()` (`amici.ode_model.Expression` method), 262  
`get_name()` (`amici.ode_model.LogLikelihood` method), 263  
`get_name()` (`amici.ode_model.ModelQuantity` method), 264  
`get_name()` (`amici.ode_model.Observable` method), 266  
`get_name()` (`amici.ode_model.Parameter` method), 267  
`get_name()` (`amici.ode_model.SigmaY` method), 268  
`get_name()` (`amici.ode_model.State` method), 270  
`get_ncoeff()` (`amici.ode_model.ConservationLaw` method), 258  
`get_noise_distributions()` (`amici.petab_import_pysb.PysbPetabProblem` method), 228  
`get_observable_ids()` (`amici.petab_import_pysb.PysbPetabProblem` method), 229  
`get_observable_transformations()` (`amici.ode_export.ODEModel` method), 249  
`get_observables()` (`amici.petab_import_pysb.PysbPetabProblem` method), 229  
`get_observation_model()` (in module `amici.petab_import`), 223  
`get_optimization_parameter_scales()` (`amici.petab_import_pysb.PysbPetabProblem` method), 229  
`get_optimization_parameters()` (`amici.petab_import_pysb.PysbPetabProblem` method), 229  
`get_optimization_to_simulation_parameter_mapping()` (`amici.petab_import_pysb.PysbPetabProblem` method), 229  
`get_sigmas()` (`amici.petab_import_pysb.PysbPetabProblem` method), 229  
`get_simulation_conditions_from_measurement_df()` (`amici.petab_import_pysb.PysbPetabProblem` method), 229  
`get_solver_indices()` (`amici.ode_export.ODEModel` method), 250  
`get_species_initial()` (in module `amici.sbml_import`), 218  
`get_sunindex_extern_declaration()` (in module `amici.ode_export`), 255  
`get_sunindex_override_implementation()` (in module `amici.ode_export`), 255  
`get_ub()` (`amici.petab_import_pysb.PysbPetabProblem` method), 229  
`get_val()` (`amici.ode_model.ConservationLaw` method), 258  
`get_val()` (`amici.ode_model.Constant` method), 259  
`get_val()` (`amici.ode_model.Event` method), 261  
`get_val()` (`amici.ode_model.Expression` method), 262  
`get_val()` (`amici.ode_model.LogLikelihood` method), 263  
`get_val()` (`amici.ode_model.ModelQuantity` method), 264  
`get_val()` (`amici.ode_model.Observable` method), 266  
`get_val()` (`amici.ode_model.Parameter` method), 267  
`get_val()` (`amici.ode_model.SigmaY` method), 268  
`get_val()` (`amici.ode_model.State` method), 270  
`get_x_ids()` (`amici.petab_import_pysb.PysbPetabProblem` method), 229  
`get_x_nominal()` (`amici.petab_import_pysb.PysbPetabProblem` method), 229  
`get_x_rdata()` (`amici.ode_model.ConservationLaw` method), 258  
`get_x_rdata()` (`amici.ode_model.State` method), 270  
`getAbsoluteTolerance()` (`amici.amici.Solver` method), 200  
`getAbsoluteToleranceB()` (`amici.amici.Solver` method), 200  
`getAbsoluteToleranceFSA()` (`amici.amici.Solver` method), 201  
`getAbsoluteToleranceQuadratures()` (`amici.amici.Solver` method), 201  
`getAbsoluteToleranceSteadyState()` (`amici.amici.Solver` method), 201  
`getAbsoluteToleranceSteadyStateSensi()` (`amici.amici.Solver` method), 201  
`getAddSigmaResiduals()` (`amici.amici.Model` method), 167  
`getAlwaysCheckFinite()` (`amici.amici.Model` method), 167  
`getAmiciCommit()` (`amici.amici.Model` method), 167  
`getAmiciVersion()` (`amici.amici.Model` method), 168  
`getCpuTime()` (`amici.amici.Solver` method), 201  
`getCpuTimeB()` (`amici.amici.Solver` method), 201  
`getDataObservablesAsDataFrame()` (in module `amici.pandas`), 273  
`getEdataFromDataFrame()` (in module `amici.pandas`), 273  
`getExpressionIds()` (`amici.amici.Model` method), 168  
`getExpressionNames()` (`amici.amici.Model` method), 168  
`getFixedParameterById()` (`amici.amici.Model` method), 168  
`getFixedParameterByName()` (`amici.amici.Model`

method), 168

getFixedParameterIds() (amici.amici.Model method), 168

getFixedParameterNames() (amici.amici.Model method), 168

getFixedParameters() (amici.amici.Model method), 168

getInitialStates() (amici.amici.Model method), 169

getInitialStateSensitivities() (amici.amici.Model method), 168

getInternalSensitivityMethod() (amici.amici.Solver method), 201

getInterpolationType() (amici.amici.Solver method), 201

getLastOrder() (amici.amici.Solver method), 201

getLinearMultistepMethod() (amici.amici.Solver method), 201

getLinearSolver() (amici.amici.Solver method), 202

getMaxSteps() (amici.amici.Solver method), 202

getMaxStepsBackwardProblem() (amici.amici.Solver method), 202

getMaxTime() (amici.amici.Solver method), 202

getMinimumSigmaResiduals() (amici.amici.Model method), 169

getModel() (amici.ModelModule method), 143

getName() (amici.amici.Model method), 169

getNewtonDampingFactorLowerBound() (amici.amici.Solver method), 202

getNewtonDampingFactorMode() (amici.amici.Solver method), 202

getNewtonMaxSteps() (amici.amici.Solver method), 202

getNewtonStepSteadyStateCheck() (amici.amici.Solver method), 202

getNonlinearSolverIteration() (amici.amici.Solver method), 202

getNumErrTestFails() (amici.amici.Solver method), 203

getNumErrTestFailsB() (amici.amici.Solver method), 203

getNumNonlinSolvConvFails() (amici.amici.Solver method), 203

getNumNonlinSolvConvFailsB() (amici.amici.Solver method), 203

getNumRhsEvals() (amici.amici.Solver method), 203

getNumRhsEvalsB() (amici.amici.Solver method), 203

getNumSteps() (amici.amici.Solver method), 203

getNumStepsB() (amici.amici.Solver method), 203

getObservableIds() (amici.amici.Model method), 169

getObservableNames() (amici.amici.Model method), 169

getObservableScaling() (amici.amici.Model method), 169

getObservedData() (amici.amici.ExpData method), 152

getObservedDataPtr() (amici.amici.ExpData method), 152

getObservedDataStdDev() (amici.amici.ExpData method), 152

getObservedDataStdDevPtr() (amici.amici.ExpData method), 152

getObservedEvents() (amici.amici.ExpData method), 152

getObservedEventsPtr() (amici.amici.ExpData method), 152

getObservedEventsStdDev() (amici.amici.ExpData method), 152

getObservedEventsStdDevPtr() (amici.amici.ExpData method), 152

getParameterById() (amici.amici.Model method), 169

getParameterByName() (amici.amici.Model method), 169

getParameterIds() (amici.amici.Model method), 169

getParameterList() (amici.amici.Model method), 170

getParameterNames() (amici.amici.Model method), 170

getParameters() (amici.amici.Model method), 170

getParameterScale() (amici.amici.Model method), 170

getReinitializationStateIdxs() (amici.amici.Model method), 170

getReinitializeFixedParameterInitialStates() (amici.amici.Model method), 170

getRelativeTolerance() (amici.amici.Solver method), 203

getRelativeToleranceB() (amici.amici.Solver method), 203

getRelativeToleranceFSA() (amici.amici.Solver method), 204

getRelativeToleranceQuadratures() (amici.amici.Solver method), 204

getRelativeToleranceSteadyState() (amici.amici.Solver method), 204

getRelativeToleranceSteadyStateSensi() (amici.amici.Solver method), 204

getResidualsAsDataFrame() (in module amici.pandas), 273

getReturnDataReportingMode() (amici.amici.Solver method), 204

getScaledParameter() (in module amici.amici), 211

getSensiSteadyStateCheck() (amici.amici.Solver method), 204

getSensitivityMethod() (amici.amici.Solver method), 204

getSensitivityMethodPreequilibration() (amici.amici.Solver method), 204

getSensitivityOrder() (amici.amici.Solver method), 204

[getSimulationObservablesAsDataFrame\(\)](#) (in module *amici.pandas*), 274  
[getSimulationStatesAsDataFrame\(\)](#) (in module *amici.pandas*), 274  
[getSolver\(\)](#) (*amici.amici.Model* method), 170  
[getStabilityLimitFlag\(\)](#) (*amici.amici.Solver* method), 205  
[getStateIds\(\)](#) (*amici.amici.Model* method), 170  
[getStateIdsSolver\(\)](#) (*amici.amici.Model* method), 170  
[getStateIsNonNegative\(\)](#) (*amici.amici.Model* method), 171  
[getStateNames\(\)](#) (*amici.amici.Model* method), 171  
[getStateNamesSolver\(\)](#) (*amici.amici.Model* method), 171  
[getStateOrdering\(\)](#) (*amici.amici.Solver* method), 205  
[getSteadyStateSensitivityMode\(\)](#) (*amici.amici.Model* method), 171  
[getSteadyStateSensiToleranceFactor\(\)](#) (*amici.amici.Solver* method), 205  
[getSteadyStateToleranceFactor\(\)](#) (*amici.amici.Solver* method), 205  
[gett\(\)](#) (*amici.amici.Solver* method), 205  
[getTimepoint\(\)](#) (*amici.amici.ExpData* method), 153  
[getTimepoint\(\)](#) (*amici.amici.Model* method), 171  
[getTimepoints\(\)](#) (*amici.amici.ExpData* method), 153  
[getTimepoints\(\)](#) (*amici.amici.Model* method), 171  
[getUnscaledParameter\(\)](#) (in module *amici.amici*), 212  
[getUnscaledParameters\(\)](#) (*amici.amici.Model* method), 171  
[grouper\(\)](#) (in module *amici.import\_utils*), 240  
[gsl::make\\_span](#) (C++ function), 524

## H

[has\\_conservation\\_law\(\)](#) (*amici.ode\_model.State* method), 270  
[has\\_fixed\\_parameter\\_ic\(\)](#) (in module *amici.pysb\_import*), 219  
[hasCustomInitialStates\(\)](#) (*amici.amici.Model* method), 171  
[hasCustomInitialStateSensitivities\(\)](#) (*amici.amici.Model* method), 171  
[hasExpressionIds\(\)](#) (*amici.amici.Model* method), 171  
[hasExpressionNames\(\)](#) (*amici.amici.Model* method), 172  
[hasFixedParameterIds\(\)](#) (*amici.amici.Model* method), 172  
[hasFixedParameterNames\(\)](#) (*amici.amici.Model* method), 172  
[hasObservableIds\(\)](#) (*amici.amici.Model* method), 172  
[hasObservableNames\(\)](#) (*amici.amici.Model* method), 172  
[hasParameterIds\(\)](#) (*amici.amici.Model* method), 172

[hasParameterNames\(\)](#) (*amici.amici.Model* method), 172  
[hasQuadraticLLH\(\)](#) (*amici.amici.Model* method), 172  
[hasStateIds\(\)](#) (*amici.amici.Model* method), 173  
[hasStateNames\(\)](#) (*amici.amici.Model* method), 173

## I

[IDAS](#), 47  
[import\\_from\\_sbml\\_importer\(\)](#) (*amici.ode\_export.ODEModel* method), 250  
[import\\_model\(\)](#) (in module *amici.petab\_import*), 223  
[import\\_model\\_module\(\)](#) (in module *amici*), 144  
[import\\_model\\_pysb\(\)](#) (in module *amici.petab\_import\_pysb*), 231  
[import\\_model\\_sbml\(\)](#) (in module *amici.petab\_import*), 223  
[import\\_petab\\_problem\(\)](#) (in module *amici.petab\_import*), 224  
[index\(\)](#) (*amici.parameter\_mapping.ParameterMapping* method), 278  
[InternalSensitivityMethod](#) (class in *amici.amici*), 158  
[InterpolationType](#) (class in *amici.amici*), 159  
[IntVector](#) (class in *amici.amici*), 158  
[is\\_assignment\\_rule\\_target\(\)](#) (*amici.sbml\_import.SbmlImporter* method), 216  
[is\\_rate\\_rule\\_target\(\)](#) (*amici.sbml\_import.SbmlImporter* method), 216  
[is\\_valid\\_identifer\(\)](#) (in module *amici.ode\_export*), 255  
[isFixedParameterStateReinitializationAllowed\(\)](#) (*amici.amici.Model* method), 173  
[isSetObservedData\(\)](#) (*amici.amici.ExpData* method), 153  
[isSetObservedDataStdDev\(\)](#) (*amici.amici.ExpData* method), 153  
[isSetObservedEvents\(\)](#) (*amici.amici.ExpData* method), 153  
[isSetObservedEventsStdDev\(\)](#) (*amici.amici.ExpData* method), 153

## K

[k\(\)](#) (*amici.amici.Model* method), 173

## L

[LinearMultistepMethod](#) (class in *amici.amici*), 159  
[LinearSolver](#) (class in *amici.amici*), 159  
[log\\_execution\\_time\(\)](#) (in module *amici.logging*), 275  
[LogLikelihood](#) (class in *amici.ode\_model*), 262

## M

[M\\_1\\_PI](#) (C macro), 531



**M\_2\_PI** (*C macro*), 531  
**M\_2\_SQRTPI** (*C macro*), 531  
**M\_E** (*C macro*), 531  
**M\_LN10** (*C macro*), 532  
**M\_LN2** (*C macro*), 532  
**M\_LOG10E** (*C macro*), 532  
**M\_LOG2E** (*C macro*), 532  
**M\_PI** (*C macro*), 533  
**M\_PI\_2** (*C macro*), 533  
**M\_PI\_4** (*C macro*), 533  
**M\_SQRT1\_2** (*C macro*), 533  
**M\_SQRT2** (*C macro*), 533  
**main()** (*in module amici.petab\_import*), 224  
**Model** (*class in amici.amici*), 160  
**ModelDimensions** (*class in amici.amici*), 178  
**ModelModule** (*class in amici*), 143  
**ModelPtr** (*class in amici.amici*), 182  
**ModelQuantity** (*class in amici.ode\_model*), 264  
**module**

amici, 142  
 amici.amici, 144  
 amici.bngl\_import, 221  
 amici.conservated\_quantities\_demartino, 281  
 amici.conservated\_quantities\_rref, 282  
 amici.gradient\_check, 276  
 amici.import\_utils, 238  
 amici.logging, 275  
 amici.ode\_export, 243  
 amici.ode\_model, 256  
 amici.pandas, 272  
 amici.parameter\_mapping, 277  
 amici.petab\_import, 221  
 amici.petab\_import\_pysb, 225  
 amici.petab\_objective, 232  
 amici.petab\_simulate, 236  
 amici.plotting, 271  
 amici.pysb\_import, 218  
 amici.sbml\_import, 213

## N

**name()** (*amici.ode\_export.ODEModel method*), 250  
**ncl()** (*amici.amici.Model method*), 173  
**NewtonDampingFactorMode** (*class in amici.amici*), 183  
**nk()** (*amici.amici.Model method*), 173  
**nmaxevent()** (*amici.amici.ExpData method*), 154  
**nMaxEvent()** (*amici.amici.Model method*), 173  
**noise\_distribution\_to\_cost\_function()** (*in module amici.import\_utils*), 240  
**noise\_distribution\_to\_observable\_transformation()** (*in module amici.import\_utils*), 241  
**NonlinearSolverIteration** (*class in amici.amici*), 183  
**np()** (*amici.amici.Model method*), 173  
**nplist()** (*amici.amici.Model method*), 173

**nplist()** (*amici.amici.Solver method*), 205  
**nquad()** (*amici.amici.Solver method*), 205  
**nt()** (*amici.amici.ExpData method*), 154  
**nt()** (*amici.amici.Model method*), 174  
**nullspace\_by\_rref()** (*in module amici.conservated\_quantities\_rref*), 282  
**num\_cons\_law()** (*amici.ode\_export.ODEModel method*), 250  
**num\_const()** (*amici.ode\_export.ODEModel method*), 250  
**num\_events()** (*amici.ode\_export.ODEModel method*), 250  
**num\_expr()** (*amici.ode\_export.ODEModel method*), 250  
**num\_obs()** (*amici.ode\_export.ODEModel method*), 250  
**num\_par()** (*amici.ode\_export.ODEModel method*), 250  
**num\_state\_reinits()** (*amici.ode\_export.ODEModel method*), 251  
**num\_states\_rdata()** (*amici.ode\_export.ODEModel method*), 251  
**num\_states\_solver()** (*amici.ode\_export.ODEModel method*), 251  
**nx()** (*amici.amici.Solver method*), 205  
**nx\_reinit()** (*amici.amici.Model method*), 174  
**nytrue()** (*amici.amici.ExpData method*), 154  
**nztrue()** (*amici.amici.ExpData method*), 154

## O

**Observable** (*class in amici.ode\_model*), 265  
**ObservableScaling** (*class in amici.amici*), 183  
**ObservableTransformation** (*class in amici.import\_utils*), 239  
**ODE**, 47  
**ode\_model\_from\_pysb\_importer()** (*in module amici.pysb\_import*), 219  
**ODEExporter** (*class in amici.ode\_export*), 243  
**ODEModel** (*class in amici.ode\_export*), 245

## P

**Parameter** (*class in amici.ode\_model*), 266  
**ParameterMapping** (*class in amici.parameter\_mapping*), 277  
**ParameterMappingForCondition** (*class in amici.parameter\_mapping*), 278  
**ParameterScaling** (*class in amici.amici*), 184  
**parameterScalingFromIntVector()** (*in module amici.amici*), 212  
**ParameterScalingVector** (*class in amici.amici*), 184  
**parse\_events()** (*amici.ode\_export.ODEModel method*), 251  
**PEtab**, 47  
**petab\_noise\_distributions\_to\_amici()** (*in module amici.petab\_import*), 224

petab\_scale\_to\_amici\_scale() (in module amici.petab\_import), 225  
 petab\_to\_amici\_scale() (in module amici.parameter\_mapping), 280  
 PetabSimulator (class in amici.petab\_simulate), 236  
 pivots() (in module amici.conservated\_quantities\_rref), 282  
 plist() (amici.amici.Model method), 174  
 plotObservableTrajectories() (in module amici.plotting), 271  
 plotStateTrajectories() (in module amici.plotting), 271  
 preequilibration, 47  
 presimulation, 47  
 process\_conservation\_laws() (amici.sbml\_import.SbmlImporter method), 216  
 PySB, 47  
 pysb2amici() (in module amici.pysb\_import), 220  
 pysb\_model\_from\_path() (in module amici.pysb\_import), 221  
 PysbPetabProblem (class in amici.petab\_import\_pysb), 225

## R

RDataReporting (class in amici.amici), 184  
 rdatas\_to\_measurement\_df() (in module amici.petab\_objective), 234  
 rdatas\_to\_simulation\_df() (in module amici.petab\_objective), 234  
 reinitializeAllFixedParameterDependentInitialStates() (amici.amici.ExpData method), 154  
 reinitializeAllFixedParameterDependentInitialStates() (amici.amici.SimulationParameters method), 196  
 reinitializeAllFixedParameterDependentInitialStatesForPresimulation() (amici.amici.ExpData method), 154  
 reinitializeAllFixedParameterDependentInitialStatesForPresimulation() (amici.amici.SimulationParameters method), 197  
 reinitializeAllFixedParameterDependentInitialStatesForSimulation() (amici.amici.ExpData method), 154  
 reinitializeAllFixedParameterDependentInitialStatesForSimulation() (amici.amici.SimulationParameters method), 197  
 remove\_typedefs() (in module amici.ode\_export), 255  
 remove\_working\_dir() (amici.petab\_simulate.PetabSimulator method), 237  
 replace\_logx() (in module amici.sbml\_import), 218  
 requireSensitivitiesForAllParameters() (amici.amici.Model method), 174  
 ReturnData (class in amici.amici), 184  
 ReturnDataPtr (class in amici.amici), 190

rowvals() (amici.ode\_export.ODEModel method), 251  
 rref() (in module amici.conservated\_quantities\_rref), 282  
 runAmiciSimulation() (in module amici.amici), 212  
 runAmiciSimulations() (in module amici.amici), 212

## S

safe\_substitute() (amici.ode\_export.TemplateAmici method), 253  
 sample\_parameter\_startpoints() (amici.petab\_import\_pysb.PysbPetabProblem method), 230  
 SBML, 47  
 sbml2amici() (amici.sbml\_import.SbmlImporter method), 216  
 SbmlImporter (class in amici.sbml\_import), 213  
 scale\_parameter() (in module amici.parameter\_mapping), 280  
 scale\_parameters() (amici.petab\_import\_pysb.PysbPetabProblem method), 230  
 scale\_parameters\_dict() (in module amici.parameter\_mapping), 280  
 scaleParameters() (in module amici.amici), 213  
 SecondOrderMode (class in amici.amici), 193  
 SensitivityMethod (class in amici.amici), 193  
 SensitivityOrder (class in amici.amici), 194  
 set\_conservation\_law() (amici.ode\_model.State method), 270  
 set\_dt() (amici.ode\_model.State method), 271  
 set\_log\_level() (in module amici.logging), 276  
 set\_name() (amici.ode\_export.ODEExporter method), 245  
 set\_paths() (amici.ode\_export.ODEExporter method), 245  
 set\_val() (amici.ode\_model.ConservationLaw method), 258  
 set\_val() (amici.ode\_model.Constant method), 259  
 set\_val() (amici.ode\_model.Event method), 261  
 set\_val() (amici.ode\_model.Expression method), 262  
 set\_val() (amici.ode\_model.LogLikelihood method), 263  
 set\_val() (amici.ode\_model.ModelQuantity method), 264  
 set\_val() (amici.ode\_model.Observable method), 266  
 set\_val() (amici.ode\_model.Parameter method), 267  
 set\_val() (amici.ode\_model.SigmaY method), 268  
 set\_val() (amici.ode\_model.State method), 271  
 setAbsoluteTolerance() (amici.amici.Solver method), 205  
 setAbsoluteToleranceB() (amici.amici.Solver method), 206  
 setAbsoluteToleranceFSA() (amici.amici.Solver method), 206

|  |   |     |  |   |
|--|---|-----|--|---|
| setAbsoluteToleranceQuadratures()      | ( <i>amici.amici.Solver</i> method), 206  | 156 | setObservedEventsStdDev()                    | ( <i>amici.amici.ExpData</i> method), 156 |
| setAbsoluteToleranceSteadyState()      | ( <i>amici.amici.Solver</i> method), 206  |     | setParameterById()                           | ( <i>amici.amici.Model</i> method), 176   |
| setAbsoluteToleranceSteadyStateSensi() | ( <i>amici.amici.Solver</i> method), 206  |     | setParameterByName()                         | ( <i>amici.amici.Model</i> method), 176   |
| setAddSigmaResiduals()                 | ( <i>amici.amici.Model</i> method), 174   |     | setParameterList()                           | ( <i>amici.amici.Model</i> method), 177   |
| setAllStatesNonNegative()              | ( <i>amici.amici.Model</i> method), 174   |     | setParameters()                              | ( <i>amici.amici.Model</i> method), 177   |
| setAlwaysCheckFinite()                 | ( <i>amici.amici.Model</i> method), 174   |     | setParametersByIdRegex()                     | ( <i>amici.amici.Model</i> method), 177   |
| setFixedParameterById()                | ( <i>amici.amici.Model</i> method), 174   |     | setParametersByNameRegex()                   | ( <i>amici.amici.Model</i> method), 177   |
| setFixedParameterByName()              | ( <i>amici.amici.Model</i> method), 174   |     | setParameterScale()                          | ( <i>amici.amici.Model</i> method), 177   |
| setFixedParameters()                   | ( <i>amici.amici.Model</i> method), 175   |     | setReinitializationStateIdxs()               | ( <i>amici.amici.Model</i> method), 177   |
| setFixedParametersByIdRegex()          | ( <i>amici.amici.Model</i> method), 175   |     | setReinitializeFixedParameterInitialStates() | ( <i>amici.amici.Model</i> method), 177   |
| setFixedParametersByNameRegex()        | ( <i>amici.amici.Model</i> method), 175   |     | setRelativeTolerance()                       | ( <i>amici.amici.Solver</i> method), 207  |
| setInitialStates()                     | ( <i>amici.amici.Model</i> method), 175   |     | setRelativeToleranceB()                      | ( <i>amici.amici.Solver</i> method), 208  |
| setInitialStateSensitivities()         | ( <i>amici.amici.Model</i> method), 175   |     | setRelativeToleranceFSA()                    | ( <i>amici.amici.Solver</i> method), 208  |
| setInternalSensitivityMethod()         | ( <i>amici.amici.Solver</i> method), 206  |     | setRelativeToleranceQuadratures()            | ( <i>amici.amici.Solver</i> method), 208  |
| setInterpolationType()                 | ( <i>amici.amici.Solver</i> method), 206  |     | setRelativeToleranceSteadyState()            | ( <i>amici.amici.Solver</i> method), 208  |
| setLinearMultistepMethod()             | ( <i>amici.amici.Solver</i> method), 206  |     | setRelativeToleranceSteadyStateSensi()       | ( <i>amici.amici.Solver</i> method), 208  |
| setLinearSolver()                      | ( <i>amici.amici.Solver</i> method), 206  |     | setReturnDataReportingMode()                 | ( <i>amici.amici.Solver</i> method), 208  |
| setMaxSteps()                          | ( <i>amici.amici.Solver</i> method), 207  |     | setSensiSteadyStateCheck()                   | ( <i>amici.amici.Solver</i> method), 208  |
| setMaxStepsBackwardProblem()           | ( <i>amici.amici.Solver</i> method), 207  |     | setSensitivityMethod()                       | ( <i>amici.amici.Solver</i> method), 208  |
| setMaxTime()                           | ( <i>amici.amici.Solver</i> method), 207  |     | setSensitivityMethodPreequilibration()       | ( <i>amici.amici.Solver</i> method), 208  |
| setMinimumSigmaResiduals()             | ( <i>amici.amici.Model</i> method), 175   |     | setSensitivityOrder()                        | ( <i>amici.amici.Solver</i> method), 209  |
| setNewtonDampingFactorLowerBound()     | ( <i>amici.amici.Solver</i> method), 207  |     | setStabilityLimitFlag()                      | ( <i>amici.amici.Solver</i> method), 209  |
| setNewtonDampingFactorMode()           | ( <i>amici.amici.Solver</i> method), 207  |     | setStateIsNonNegative()                      | ( <i>amici.amici.Model</i> method), 178   |
| setNewtonMaxSteps()                    | ( <i>amici.amici.Solver</i> method), 207  |     | setStateOrdering()                           | ( <i>amici.amici.Solver</i> method), 209  |
| setNewtonStepSteadyStateCheck()        | ( <i>amici.amici.Solver</i> method), 207  |     | setSteadyStateSensitivityMode()              | ( <i>amici.amici.Model</i> method), 178   |
| setNMaxEvent()                         | ( <i>amici.amici.Model</i> method), 175   |     | setSteadyStateSensiToleranceFactor()         | ( <i>amici.amici.Solver</i> method), 209  |
| setNonlinearSolverIteration()          | ( <i>amici.amici.Solver</i> method), 207  |     | setSteadyStateToleranceFactor()              | ( <i>amici.amici.Solver</i> method), 209  |
| setObservedData()                      | ( <i>amici.amici.ExpData</i> method), 154 |     | setT0()                                      | ( <i>amici.amici.Model</i> method), 178   |
| setObservedDataStdDev()                | ( <i>amici.amici.ExpData</i> method), 155 |     | setTimepoints()                              | ( <i>amici.amici.ExpData</i> method), 157 |
| setObservedEvents()                    | ( <i>amici.amici.ExpData</i> method),     |     | setTimepoints()                              | ( <i>amici.amici.Model</i> method), 178   |

setUnscaledInitialStateSensitivities() (*amici.amici.Model* method), 178  
 show\_model\_info() (in module *amici.petab\_import*), 225  
 SigmaY (class in *amici.ode\_model*), 267  
 simulate() (*amici.petab\_simulate.PetabSimulator* method), 237  
 simulate\_petab() (in module *amici.petab\_objective*), 234  
 simulate\_without\_noise() (*amici.petab\_simulate.PetabSimulator* method), 238  
 SimulationParameters (class in *amici.amici*), 194  
 smart\_is\_zero\_matrix() (in module *amici.ode\_export*), 255  
 smart\_jacobian() (in module *amici.ode\_export*), 256  
 smart\_multiply() (in module *amici.ode\_export*), 256  
 smart\_subs() (in module *amici.import\_utils*), 242  
 smart\_subs\_dict() (in module *amici.import\_utils*), 242  
 Solver (class in *amici.amici*), 197  
 SolverPtr (class in *amici.amici*), 210  
 sparseeq() (*amici.ode\_export.ODEModel* method), 251  
 sparsesym() (*amici.ode\_export.ODEModel* method), 251  
 species\_to\_parameters() (in module *amici.petab\_import*), 225  
 startTimer() (*amici.amici.Solver* method), 209  
 State (class in *amici.ode\_model*), 269  
 state\_has\_conservation\_law() (*amici.ode\_export.ODEModel* method), 251  
 state\_has\_fixed\_parameter\_initial\_condition() (*amici.ode\_export.ODEModel* method), 252  
 state\_is\_constant() (*amici.ode\_export.ODEModel* method), 252  
 SteadyStateSensitivityMode (class in *amici.amici*), 210  
 SteadyStateStatus (class in *amici.amici*), 210  
 SteadyStateStatusVector (class in *amici.amici*), 211  
 StringDoubleMap (class in *amici.amici*), 211  
 StringVector (class in *amici.amici*), 211  
 strip\_pysb() (in module *amici.import\_utils*), 242  
 subset\_call() (in module *amici.petab\_simulate*), 238  
 subset\_dict() (in module *amici.petab\_objective*), 235  
 substitute() (*amici.ode\_export.TemplateAmici* method), 253  
 SUNDIALS, 47  
 SWIG, 47  
 switchForwardSensisOff() (*amici.amici.Solver* method), 209  
 sym() (*amici.ode\_export.ODEModel* method), 252  
 sym\_names() (*amici.ode\_export.ODEModel* method), 252  
 sym\_or\_eq() (*amici.ode\_export.ODEModel* method), 252  
 symbol\_with\_assumptions() (in module *amici.import\_utils*), 242

## T

t0() (*amici.amici.Model* method), 178  
 TemplateAmici (class in *amici.ode\_export*), 253  
 timeExceeded() (*amici.amici.Solver* method), 209  
 to\_files() (*amici.petab\_import\_pysb.PysbPetabProblem* method), 230  
 to\_files\_generic() (*amici.petab\_import\_pysb.PysbPetabProblem* method), 231  
 toposort\_symbols() (in module *amici.import\_utils*), 242

## U

unscale\_parameter() (in module *amici.parameter\_mapping*), 281  
 unscale\_parameters() (*amici.petab\_import\_pysb.PysbPetabProblem* method), 231  
 unscale\_parameters\_dict() (in module *amici.parameter\_mapping*), 281  
 unscaleParameters() (in module *amici.amici*), 213

## V

val() (*amici.ode\_export.ODEModel* method), 252  
 var\_in\_function\_signature() (in module *amici.ode\_export*), 256