
AMICI Documentation

Release 0.16.1

The AMICI developers

Feb 24, 2023

ABOUT

1	About AMICI	3
1.1	Features	3
1.2	Interfaces & workflow	4
2	Availability	5
2.1	Source code	5
2.2	Python package	5
2.3	Installation instructions	5
3	License conditions	7
3.1	AMICI	7
3.2	AMICI Logo	7
3.3	Dependencies	8
4	How to cite AMICI	9
5	References	11
6	Background	13
6.1	Publications on various features of AMICI	13
6.2	Third-Party numerical algorithms used by AMICI	14
7	Changelog	15
7.1	v0.X Series	15
7.2	What's Changed	20
8	Glossary	53
9	Contributing	55
9.1	Contributing to AMICI	55
9.2	Code of Conduct	55
10	Python interface	57
10.1	Installing the AMICI Python package	57
10.2	Examples	63
10.3	Using AMICI's Python interface	173
10.4	FAQ	176
10.5	AMICI Python API	177
11	C++ interface	283
11.1	Building the C++ library	283

11.2	Using AMICI's C++ interface	284
11.3	AMICI C++ API	286
12	Matlab interface	549
12.1	Installing the AMICI MATLAB toolbox	549
12.2	Using AMICI's MATLAB interface	549
12.3	FAQ	556
12.4	AMICI Matlab API	557
12.5	AMICI developer's guide	590
12.6	Handling of Discontinuities	598
13	Indices and tables	601
	Python Module Index	603
	Index	605

Version: 0.16.1

Source code: <https://github.com/AMICI-dev/amici>

ABOUT AMICI

AMICI provides a multi-language (Python, C++, Matlab) interface to the *SUNDIALS* solvers *CVODES* (for *ODEs*) and *IDAS* (for *DAEs*). AMICI allows the user to read differential equation models specified as *SBML* or *PySB* and automatically compiles such models into Python modules, C++ libraries or *.mex* simulation files (Matlab).

In contrast to the (no longer maintained) *sundialsTB* Matlab interface, all necessary functions are transformed into native C++ code, which allows for a significantly faster simulation.

Beyond forward integration, the compiled simulation file also allows for forward sensitivity analysis, steady state sensitivity analysis and adjoint sensitivity analysis for likelihood-based output functions.


The interface was designed to provide routines for efficient gradient computation in parameter estimation of biochemical reaction models but it is also applicable to a wider range of differential equation constrained optimization problems.

1.1 Features

- *SBML* import
- *PySB* import
- Generation of C++ code for model simulation and sensitivity computation
- Access to and high customizability of *CVODES* and *IDAS* solver
- Python, C++, Matlab interface
- Sensitivity analysis
 - forward
 - steady state
 - adjoint
 - first- and second-order (second-order Matlab-only)
- Pre-equilibration and pre-simulation conditions
- Support for discrete events and logical operations

1.2 Interfaces & workflow

The AMICI workflow starts with importing a model from either *SBML* (Matlab, Python), *PySB* (Python), or a Matlab definition of the model (Matlab-only). From this input, all equations for model simulation are derived symbolically and C++ code is generated. This code is then compiled into a C++ library, a Python module, or a Matlab *.mex* file and is then used for model simulation.

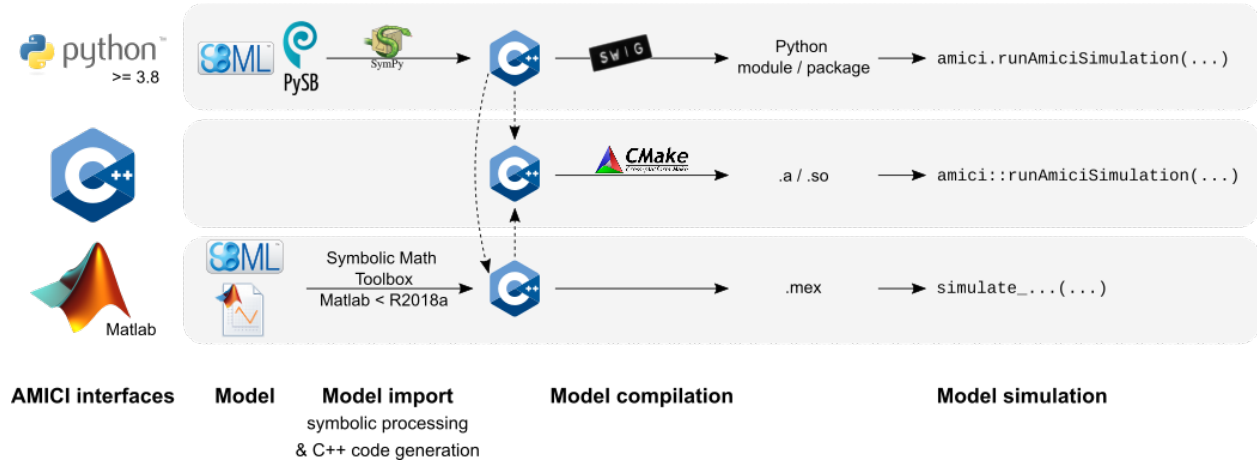

The functionality of the Python, Matlab and C++ interfaces slightly differ, as shown in the following table:

Feature \ Interface	Python	C++	Matlab
<i>SBML</i> import	yes (<i>details</i>)	no	yes ($\leq R2017b$)
<i>PySB</i> import	yes	no	no
<i>DAE</i> import	no	no	yes
Forward sensitivities	yes	yes	yes
Adjoint sensitivities	yes	yes	yes
Steadystate sensitivities	yes	yes	yes
Second-order sensitivities	no	no	yes
Events	yes	yes	yes
<i>preequilibration</i>	yes	yes	yes
<i>presimulation</i>	yes	yes	no

AVAILABILITY

2.1 Source code

The AMICI source code is available as

- [tar archive](#)
- [zip archive](#)
- Git repository on [GitHub](#)

If AMICI was downloaded as an archive, it needs to be unpacked. If AMICI was obtained via cloning the Git repository, no further unpacking is necessary.

2.1.1 Obtaining AMICI via the Git version control system

In order to always stay up-to-date with the latest AMICI versions, simply pull it from our Git repository and recompile it when a new version is available. For more information about Git, check out their [website](#).

The Git repository can currently be found at <https://github.com/AMICI-dev/AMICI> and clone is done via:

```
git clone https://github.com/AMICI-dev/AMICI.git AMICI
```

2.2 Python package

A Python package is available on [PyPI](#).

2.3 Installation instructions

Installation instructions are available for

- *Python*
- *C++*
- *Matlab*

LICENSE CONDITIONS

3.1 AMICI

AMICI is released under the 3-Clause BSD License (BSD-3-Clause) with the following terms:

Copyright (c) 2015-2020, Fabian Fröhlich, Jan Hasenauer, Daniel Weindl and Paul Stapor All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS “AS IS” AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

3.2 AMICI Logo

The AMICI logo is released under the Creative Commons CC0 1.0 Universal (CC0 1.0) license with the terms given in [documentation/gfx/LICENSE.md](#).

3.3 Dependencies

- Parts of the *SUNDIALS* solver suite are redistributed under the BSD 3-Clause License (BSD-3-Clause) with terms given in `ThirdParty/SuiteSparse/LICENSE.txt`
- Parts of *SuiteSparse* are redistributed under the various licenses with the terms given in `ThirdParty/SuiteSparse/LICENSE.txt`
- *gsl-lite* is redistributed under the MIT License (MIT) with the terms given in `ThirdParty/gsl/gsl/gsl-lite.hpp`
- *xml2struct* and *struct2xml* are redistributed under the BSD 2-Clause License (BSD-2-Clause) with terms given in `matlab/auxiliary/xml2struct/license.txt` and `matlab/auxiliary/struct2xml/license.txt`
- *CalcMD5* is redistributed under the BSD 2-Clause License (BSD-2-Clause) with terms given in `matlab/auxiliary/CalcMD5/license.txt`

HOW TO CITE AMICI

Citable DOI for the latest AMICI release:

There is a list of [publications using AMICI](#). If you used AMICI in your work, we are happy to include your project, please let us know via a Github issue.

When using AMICI in your project, please cite

- Fröhlich, F., Weindl, D., Schälte, Y., Pathirana, D., Paszkowski, Ł., Lines, G.T., Stapor, P. and Hasenauer, J., 2021. AMICI: High-Performance Sensitivity Analysis for Large Ordinary Differential Equation Models. *Bioinformatics*, btab227, DOI:10.1093/bioinformatics/btab227.

```
@article{frohlich2020amici,  
  title={AMICI: High-Performance Sensitivity Analysis for Large Ordinary  
↪ Differential Equation Models},  
  author={Fröhlich, Fabian and Weindl, Daniel and Schälte, Yannik and  
↪ Pathirana, Dilan and Paszkowski, Łukasz and Lines, Glenn Terje and Stapor,  
↪ Paul and Hasenauer, Jan},  
  journal = {Bioinformatics},  
  year = {2021},  
  month = {04},  
  issn = {1367-4803},  
  doi = {10.1093/bioinformatics/btab227},  
  note = {btab227},  
  eprint = {https://academic.oup.com/bioinformatics/advance-article-pdf/doi/10.1093/  
↪ bioinformatics/btab227/36866220/btab227.pdf},  
}
```

When presenting work that employs AMICI, feel free to use one of the icons in [documentation/gfx/](#), which are available under a [CC0](#) license:



REFERENCES

List of publications using AMICI. Total number is 74.

If you applied AMICI in your work and your publication is missing, please let us know via a new Github issue.

BACKGROUND

This section is to be extended.

6.1 Publications on various features of AMICI

Some mathematical background for AMICI is provided in the following publications:

- Fröhlich, F., Kaltenbacher, B., Theis, F. J., & Hasenauer, J. (2017). **Scalable Parameter Estimation for Genome-Scale Biochemical Reaction Networks.** PLOS Computational Biology, 13(1), e1005331. doi:[10.1371/journal.pcbi.1005331](https://doi.org/10.1371/journal.pcbi.1005331).
- Fröhlich, F., Theis, F. J., Rädler, J. O., & Hasenauer, J. (2017). **Parameter estimation for dynamical systems with discrete events and logical operations.** Bioinformatics, 33(7), 1049-1056. doi:[10.1093/bioinformatics/btw764](https://doi.org/10.1093/bioinformatics/btw764).
- Terje Lines, Glenn, Łukasz Paszkowski, Leonard Schmiester, Daniel Weindl, Paul Stapor, and Jan Hasenauer. 2019. **Efficient Computation of Steady States in Large-Scale ODE Models of Biochemical Reaction Networks.** IFAC-PapersOnLine 52 (26): 32–37. DOI: [10.1016/j.ifacol.2019.12.232](https://doi.org/10.1016/j.ifacol.2019.12.232).
- Stapor, Paul, Fabian Fröhlich, and Jan Hasenauer. 2018. **Optimization and Profile Calculation of ODE Models Using Second Order Adjoint Sensitivity Analysis.** Bioinformatics 34 (13): i151–i159. DOI: [10.1093/bioinformatics/bty230](https://doi.org/10.1093/bioinformatics/bty230).
- Lakrisenko, Polina, Paul Stapor, Stephan Grein, Łukasz Paszkowski, Dilan Pathirana, Fabian Fröhlich, Glenn Terje Lines, Daniel Weindl, and Jan Hasenauer. 2022. **Efficient Computation of Adjoint Sensitivities at Steady-State in ODE Models of Biochemical Reaction Networks.** bioRxiv 2022.08.08.503176. DOI: [10.1101/2022.08.08.503176](https://doi.org/10.1101/2022.08.08.503176).

Note: Implementation details of the latest AMICI versions may differ from the ones given in the references manuscripts.

6.2 Third-Party numerical algorithms used by AMICI

AMICI uses the following packages from SUNDIALS:

- CVODES:

The sensitivity-enabled ODE solver in SUNDIALS. Radu Serban and Alan C. Hindmarsh. *ASME 2005 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference*. American Society of Mechanical Engineers, 2005. [PDF](#)

- IDAS

AMICI uses the following packages from SuiteSparse:

- Algorithm 907: **KLU** A Direct Sparse Solver for Circuit Simulation Problems. Timothy A. Davis, Ekanathan Palamadai Natarajan, *ACM Transactions on Mathematical Software*, Vol 37, Issue 6, 2010, pp 36:1-36:17. [PDF](#)
- Algorithm 837: **AMD**, an approximate minimum degree ordering algorithm, Patrick R. Amestoy, Timothy A. Davis, Iain S. Duff, *ACM Transactions on Mathematical Software*, Vol 30, Issue 3, 2004, pp 381-388. [PDF](#)
- Algorithm 836: **COLAMD**, a column approximate minimum degree ordering algorithm, Timothy A. Davis, John R. Gilbert, Stefan I. Larimore, Esmond G. Ng *ACM Transactions on Mathematical Software*, Vol 30, Issue 3, 2004, pp 377-380. [PDF](#)

Others:

- SuperLU_MT

“A general purpose library for the direct solution of large, sparse, nonsymmetric systems of linear equations” (https://crd-legacy.lbl.gov/~xiaoye/SuperLU/#superlu_mt). SuperLU_MT is optional and is so far only available from the C++ interface.

CHANGELOG

7.1 v0.X Series

7.1.1 v0.16.1 (2023-02-24)

Fixes:

- Additional package names for finding blas via pkg-config by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1959>
- Changed default interpolation type from hermite to polynomial by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1960>
- PySB import: Change default simplify to work with multiprocessing by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1961>
- Add `--no-validate` to `amici_import_petab` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1963>
- Fix `get_model` for direct import of swig interface by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1969>
- Fix `PytestReturnNotNoneWarning` in `test_conserved_quantities_demartino.py` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1968>
- Fix MSVC builds / remove `-W*` flags by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1972>
- Add option to use IDs when plotting trajectories by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1974>
- Fix `assignmentRules2observables` - skip non-assignment-rule targets by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1973>
- Use `std::clock` for measuring solver time by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1982> (*Note that this uses cpu-time consumed by all threads*)
- Fix `narrowing-conversion-warning` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1983>
- PETab import: allow specifying default values for output parameters by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1987>
- Print stacktraces only with debug logging level by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1985>
- Change default `ReturnData::status` to `AMICI_NOT_RUN` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1984>
- Reduce time-tracking overhead by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1988>
- Fix equilibration status discrepancy by @plakrisenko in <https://github.com/AMICI-dev/AMICI/pull/1991>

- Pass `model_name` to `_create_model_output_dir_name` by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1994>
- CMake: Build with OpenMP support if available by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/2000>
- Fix SuiteSparse Makefiles for compiler-paths by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/2003>
- CMake: Build with HDF5 support if available by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1999>
- CMake: Fix reading version file on Windows by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/2001>
- CMake: raise minimum required version to 3.15 by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/2002>
- Fix/extend runtime logging by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/2005>
- Fix error logging in steadystate solver by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/2008>
- Don't pass `-py3` to swig after 4.1.0 by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/2010>
- SWIG `__repr__`s for different templated vector classes by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/2009>
- Matlab: If mex fails, print mex arguments by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/2013>
- Simplify OpenBLAS installation on Windows by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/2016>
- Remove model name prefix in generated model files by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/2015>
- ...

Documentation:

- Restructure sphinx doc by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1978>
- Instructions for AMICI with singularity by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1964>
- Illustrate options for potentially speeding up model import/simulation by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1965>
- ...

Dependencies:

- Updated SuiteSparse to v7.0.1 by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/2018>

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.16.0...v0.16.1>

7.1.2 v0.16.0 (2023-01-25)

Features

- Python 3.11 compatibility by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1876>
- AMICI now runs on binder (<https://mybinder.org/v2/gh/AMICI-dev/AMICI/develop?labpath=binder%2Foverview.ipynb>) by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1935>, <https://github.com/AMICI-dev/AMICI/pull/1937>, <https://github.com/AMICI-dev/AMICI/pull/1939>
- More informative `Solver.__repr__` and `ExpData.__repr__` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1928> and @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1948>
- `simulate_petab` returns the generated/used `ExpDatas` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1933>

- Model module is now accessible from model instance by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1932>
- Added `plot_jacobian` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1930>
- Now logs all nested execution times as debug by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1947>
- Always check for finite initial states, not only with `Model.setAlwaysCheckFinite(True)` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1955>

Fixes

- `ReturnDataView.status` now returns `int` instead of `float` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1929>
- Updated simulation status codes by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1931>
- Skip irrelevant frames in stacktraces by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1934>
- Fixed compiler warning (matlab) by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1954>

Documentation:

- Added a notebook demonstrating common simulation failures and show how to analyze / fix them by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1946>
- various minor fixes / updates

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.15.0...v0.16.0>

7.1.3 v0.15.0 (2023-01-11)

Features

- Improved logging by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1907>

For Python: Don't print messages to stdout, but collect them in `ReturnData` and forward them to python logging, making it easier to filter specific messages or to disable output completely. Messages are also available via `ReturnData.messages`.

breaking change for C++ interface: Messages aren't printed to stdout by default, but are collected in `ReturnData`. The user has to decide what to do with them.

- MultiArch docker build by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1903>
- Added cmake target for cmake-format by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1909>
- Updated clang-format style, fixed clang-format target by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1908>
- Subsetting `ReturnData` fields by ID via `ReturnDataView.by_id` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1911> <https://github.com/AMICI-dev/AMICI/pull/1916>

Fixes

- PETab import: fixed handling of fixed parameters for rule targets by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1915>
- Fixed compiler warnings for matlab interface by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1919>
- Fixed pandas DeprecationWarning for `Series.iteritems()` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1921>

- Fixed circular import in amici.petab_import_pysb by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1922>
- Fixed 'operator ==' swig warning by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1923>
- Prevent swig4.0.1 segfault by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1924>

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.14.0...v0.15.0>

7.1.4 v0.14.0 (2022-11-23)

Features:

- Added optional functionality to apply C99 math optimization to generated C++ code by @dweindl and @lcontento in <https://github.com/AMICI-dev/AMICI/pull/1377>, <https://github.com/AMICI-dev/AMICI/pull/1878>
- Added option to treat fixed parameters as constants in Petab import by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1877>
- Added equality operator for ExpData by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1881>
- Updated base image for Dockerfile to Ubuntu 22.04/Python 3.10 by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1896>

Fixes:

- Fixed deprecation warnings by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1873>, <https://github.com/AMICI-dev/AMICI/pull/1893>
- Fixes/updates to GitHub actions by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1885>, <https://github.com/AMICI-dev/AMICI/pull/1893>, <https://github.com/AMICI-dev/AMICI/pull/1889>, <https://github.com/AMICI-dev/AMICI/pull/1891>
- Added hdf5 search directories for arm64 architecture (M1/M2 macs) by @Doresic in <https://github.com/AMICI-dev/AMICI/pull/1894>
- Fixed missing return in generated non-void functions by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1892>
- Fixed import failure for pre-compiled models by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1897>

Documentation:

- Update reference list by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1874>, <https://github.com/AMICI-dev/AMICI/pull/1884>

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.13.0...v0.14.0>

7.1.5 v0.13.0 (2022-10-04)

- Fixed extraction of common subexpressions by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1865>
- Added function to convert `ReturnData::status` flags to string by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1864>

And further contributions by @dweindl, @FFroehlich

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.12.0...v0.13.0>

7.1.6 v0.12.0 (2022-08-26)

Features:

- Support for event observables via the Python interface by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1845>
- Treat non-estimated parameters as constants during SBML-PEtab import by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1810>
- Updated SUNDIALS to v5.8.0 by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1836>
- Option to extract common subexpressions by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1852>, <https://github.com/AMICI-dev/AMICI/pull/1856> **not available in this release, use v0.13.0**
- Parallelize matrix simplification by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1778>
- Validate Peta problems before attempting import by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1842>
- Improved type annotations for the swig interface by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1860>

Fixes:

- Fixed an issue with potentially infinite loops during conservation law processing by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1833>
- Fixed potential deadlocks during parallel simplification by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1844>
- Fix resetting `ReturnData::numstepsB` when re-using Solver by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1841>

And further contributions by @dilpath, @dweindl, @FFroehlich

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.11.32...v0.12.0>

7.1.7 v0.11.32 (2022-07-15)

Fixes:

- Fixed `ImportErrors` during package installation with recent `setuptools` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1830>

7.1.8 v0.11.31 (2022-07-12)

Fixes:

- Fixed `ParameterMapping.__getitem__` to either return a `ParameterMappingForCondition` or a new `ParameterMapping`, but not a list by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1826>

7.1.9 v0.11.30 (2022-07-07)

Features:

- Allow overriding model name during PySB import by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1801>
- Added **repr** for parameter mapping classes by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1799>
- More informative warning messages for NaNs/Infs by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1798>
- Moved `sim_steps` increment by @plakrisenko in <https://github.com/AMICI-dev/AMICI/pull/1806>
- Re-arranged application of parameters from `ExpData` to avoid initial sensitivities error by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1805>
- Checking for unused parameters in `simulate_petab` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1816>
- Add `create_parameter_mapping` kwarg forwarding by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1820>

Other

- Remove `constant_species_to_parameters` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1809>

Fixes

- Fixed handling of SBML models given as `pathlib.Path` in ``petab_import.import_model_sbml` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1808>
- Fixed missing CPU time reset by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1814>
- Raise in `simulate_petab` with `scaled_parameters=True` problem `parameters=None` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1819>

...

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.11.29...v0.11.30>

7.1.10 v0.11.29 (2022-05-06)

7.2 What's Changed

Features:

- Performance: Limit newton step convergence check by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1780>
- More informative NaN/Inf warnings by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1640>
- SBML import can now handle initial events by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1789>

Fixes:

- Avoid error if no measurements in PETab problem; fixed type handling in PETab parameter mapping by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1783>
- Fixed substitution of expressions in root and stau by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1784>
- Workaround for PETab problems with state-dependent noise models by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1791>

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.11.28...v0.11.29>

7.2.1 v0.11.28 (2022-04-08)

New features:

- Added `Solver.setSteadyStateToleranceFactor` and `Solver.setSteadyStateSensiToleranceFactor` to specify a steady state tolerance factor by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1758>

NOTE: This also relaxed the default steady state (sensitivity) tolerances by a factor of 100.

- Added support for `pathlib.Path` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1769>
- Allow specifying initial timepoint with `ExpData` by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1776>

Performance:

- Speedup for models with conservation laws by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1765>
- Improved efficiency of newton step convergence check by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1775>

Fixes:

- Fixed deprecation warning for `pandas.DataFrame.append` in `rdatas_to_measurement_df` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1770>
- Fixed Rule-target handling in PETab import by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1753>

Removed functionality:

- Removed long deprecated `sbml2amici` arguments `modelName` and `constantParameters` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1774>

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.11.27...v0.11.28>

7.2.2 v0.11.27 (2022-04-04)

New features:

- Checking condition number when computing sensitivities via Newton by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1730>
- Removed SPBCG solver by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1729>
- Added Newton step convergence checks to steadystate solver by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1737>
- Removed legacy options/members `amioption.newton_preeq` and ``Solver::r...` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1744>

- Added `ReturnData::cpu_time_total` to track total time spent in `runAmiciSimulation` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1743>
- SBML import: Alternative algorithm for identifying conservation laws by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1748>
- Use `amici.AmiciVersionError` to indicate version mismatch by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1764>

Performance:

- Optional parallel computation of derivatives during model import by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1740>
- Sparsify jacobian by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1766>
- Speedup conservation law computation by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1754>
- Exploit stoichiometric matrix in pysb import by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1761>
- Speedup edata construction from petab problems by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1746>

Fixes:

- Fixed `get_model_settings` that would to setting incorrect initial states and initial state sensitivities for models with parameter-dependent initial states by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1751>
- Use correct tolerances for convergence check in Newton solver by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1728>
- Harmonized convergence checks by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1731>
- Made sundials' `KLU_INDEXTYPE` match actual klu index type by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1733>
- Fixed `Model::setStateIsNonNegative` logic that would raise exceptions in cases where it shouldn't by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1736>
- Fixed undefined reference to `dladdr` by @kristianmeyerr in <https://github.com/AMICI-dev/AMICI/pull/1738>
- Fixed HDF5 OSX intermediate group creation errors by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1741>
- Fixed recent cmake-based build issues due to changed sundials library directory by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1756>
- Updated Windows installation instructions by @paulflang in <https://github.com/AMICI-dev/AMICI/pull/1763>

... and other contributions by @FFroehlich, @dweindl

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.11.26...v0.11.27>

7.2.3 v0.11.26 (2022-03-14)

New features:

- Import of BioNetGenLanguage (BNGL) models by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1709>
- Added support for observable-dependent sigmas by @dweindl, @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1692>
- Added support for pysb local functions by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1666>
- Added experimental support for conservation laws for non-constant species to SBML import: conservation laws for non-constant species by @stephanmg, @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1669> Enable this feature by setting environment variable `AMICI_EXPERIMENTAL_SBML_NONCONST_CLS` to any value
 - Allow using states eliminated by conservation laws to be used in root functions by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1677>
 - Added support for parameter-dependent conservation laws by @dweindl, @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1678>
- Added optional caching for symbolic simplifications in ODE export by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1672>
- Added CLI option `--no-sensitivities` to `amici_import_petab` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1688>

Fixes:

- SBML import: Raise in case of nested observables by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1690>
- Sympy 1.10 compatibility by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1694>

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.11.25...v0.11.26>

7.2.4 v0.11.25 (2022-02-09)

- Fixed a bug where `Model::setStateIsNonNegative(Model::getStateIsNonNegative())` would raise an exception in case conservation laws were enabled - by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1648>
- Fixed a bug where `Model::setStateIsNonNegative` would be ignored in certain model expressions - by @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1650>
- Fixed a bug where special function parsing inside `min()` and `max()` would not be parsed correctly - by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1655>
- Fixed a numpy dependency issues for Mac+ARM systems - by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1657>
- Fixed convergence check in Newton method - by @plakrisenko in <https://github.com/AMICI-dev/AMICI/pull/1663>
- Add `AMICI_CXX_OPTIONS` to pass libamici-specific compiler options during CMake-based builds - by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1664>
- Fixed various warnings and updated documentation - by @dweindl

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.11.24...v0.11.25>

7.2.5 v0.11.24 (2022-02-01)

Features:

- Introduced environment variable `AMICI_DLL_DIRS` to control DLL directories on Windows (useful for setting BLAS library directory, as required by Python \geq 3.8) by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1637>
- Dropped Python3.7 support by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1635>
- Include header files in CMake targets for better IDE integration by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1639>

Fixes:

- Fixed an issue in PETab import where all-integer parameters would previously result in a `TypeError` by @stephanmg in <https://github.com/AMICI-dev/AMICI/pull/1634>
- Fixed tempdir deletion issues for test suite on Windows by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1636>
- Added functions to provide state IDs/names for `x_solver` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1638>
- Fixed docs on RTD by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1643>

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.11.23...v0.11.24>

7.2.6 v0.11.23 (2022-01-11)

Features:

- Added overload for `Model::setParameterScale` with vector by @dilpath in <https://github.com/AMICI-dev/AMICI/pull/1614>
- Removed `assert_fun` argument from gradient checking, improve output by @dweindl, @FFroehlich in <https://github.com/AMICI-dev/AMICI/pull/1609>
- Added `get_expressions_as_dataframe` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1621>
- Added `id` field to `ExpData` and `ReturnData` by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1622>
- Included condition `id` in dataframes by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1623>

Fixes:

- C++: Fixed `SUNMatrixWrapper` ctor for size 0 matrices by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1608>
- Python: Handle `TemporaryDirectory` cleanup failures on Windows by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1617>
- Python: `pysb.Model.initial_conditions` throws a `DeprecationWarning` by @PaulJonasJost in <https://github.com/AMICI-dev/AMICI/pull/1620>
- Fixed wrong array size in warnings by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1624>

NOTE: AMICI 0.11.23 requires `numpy<1.22.0`

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.11.22...v0.11.23>

7.2.7 v0.11.22 (2021-12-02)

- **Require sympy>=1.9,pysb>=1.13.1* by @FFroehlich, @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1599>
- Fixed sympy deprecation warning by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1600>
- Updated Windows installation instructions for Python>=3.8 by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1597>
- Fixed plot labels by @dweindl in <https://github.com/AMICI-dev/AMICI/pull/1598>

Full Changelog: <https://github.com/AMICI-dev/AMICI/compare/v0.11.21...v0.11.22>

7.2.8 v0.11.21 (2021-11-21)

Fixes:

- Fixed a bug in recursion depth computation for model expressions. This may have resulted in incorrect sensitivities for models with expressions nested more than 2 levels. (#1595)
- Fixed improper handling of Piecewise functions in PySB import which may have produced incorrect simulation results. (#1594)
- Fixed changed googletest reference which broke the CMake-based build if tests were enabled (#1592)

New:

- It's now possible to build AMICI using Ninja (#1593)

7.2.9 v0.11.20 (2021-11-12)

New:

- Changed parameter mappings such that unassigned values have non-nan default values. This fixes erroneous evaluation of 11h as NaN in some situations (#1574)
- Added support for Python 3.10 (#1555)

Fixes:

- Fixed a bug when simulation start time was not transferred when copying a solver instance (#1573)
- Fixed a bug which led to incorrect sensitivities for models with multiple assignment rules or rate rules (#1584)

Other:

- Update CI and documentation settings (#1569, #1527, #1572, #1575, #1579, #1580, #1589, #1581)
- Extend set of validated benchmark models that is checked during CI (#1571, #1577)
- Fixed string formatting in derivative checks (#1585)
- Added helper methods to save and restore model instance-only settings (#1576)

7.2.10 v0.11.19 (2021-10-13)

New:

- Added support for observable transformations (lin/log/log10) (#1567). Thereby supporting additional noise distributions in combination with least squares solvers.

Fixes:

- Fixed a bug when Newton sensitivity computation was activated despite specifying `newton_steps == 0`. The error occurs when simulation converges to a steadystate but simulation sensitivities are not converged according to convergence criteria. In that case simulation returned failure, but the newton rootfinding “finds” a steadystate even before the iteration check, leading to the erroneous computation of sensitivities via Newton/IFT. For singular jacobians this means the overall simulation still fails, but a different, more informative error message is displayed. (#1541)
- Fixed a bug where argument “outdir” in `ODEExporter.init` would not be used (#1543)

Other:

- Improve checking support for SBML extensions (#1546)
- SBML import: Use more descriptive IDs for flux expressions (#1551)
- Optimized `SUNMatrixWrapper` functions (#1538)
- C++: Changed test suite from `CppUTest` to `gtest` (#1532)
- Add `CITATION.cff` (#1559)
- Updated documentation (#1563, #1554, #1536)
- Removed `distutils` dependency (#1557)
- Require `sympy<1.9`

7.2.11 v0.11.18 (2021-07-12)

New:

- Allow specifying maximum integration time via `amici::Solver::setMaxTime()` (#1530)
- Py: Add `failfast` and `num_threads` argument to `simulate_petab` (#1528, #1524)
- Enable typehints / static type checking for AMICI-generated model modules (#1514) (`amici.ModelModule`, available with `Python>=3.8`)

Fixes:

- Python: Fix unused argument `generate_sensitivity_code` in `pysb2amici` (#1526)
- Python: Fix C(++) stdout redirection which could have led to deadlocks in exotic situations (#1529)
- Py: Fixed deprecation warning (#1525)
- Py: Proper typehints for SWIG interface (#1523), enabling better static type checking and IDE integration (available with `Python>=3.9`)
- C++: Fixed clang compiler warning (#1521)
- C++: Fix inherited variadic ctor in exception class (#1520)
- PETab: More informative output for unhandled species overrides (#1519)
- Return `SbmlImporter` from PETab model import (#1517)

7.2.12 v0.11.17 (2021-05-30)

Fixes:

- Fix “maybe-uninitialized” compiler warning (#1495)
- Fix substitution of expressions in ``drootdt_total`` (#1512)
- C++: Fix serialization and `==` operator (#1493)
- C++: Avoid `w` in `root` and `stau` headers (refactor) (#1503)

Documentation:

- Updated OpenBLAS Windows installation instructions (#1496)
- Updated how-to-cite to Bioinformatics paper (#1499)
- Updated list of papers using AMICI (#1509)

Other:

- Remove `sllh` computation from `petab_objective.simulate_petab` (#1498)
- Add `main.py` to Python package to provide info on AMICI installation via `python -m amici` (#1500)

7.2.13 v0.11.16 (2021-04-13)

Fixes:

- Fixed serialization bug (#1490)

New:

- Construction of condition specific plist for parameter mappings (#1487, #1488)
- **Add support for error residuals** (#1489)

7.2.14 v0.11.15 (2021-03-31)

Fixes:

- Fixed initial state sensitivities in adjoint preequilibration (#1468)
- Fixed various model import / parameter mapping issues (#1469, #1473, #1475)

New:

- New AMICI releases will automatically trigger releases at <https://biosimulators.org/simulators/amici/latest>
- Transparent logo

7.2.15 v0.11.14 (2021-03-16)

New features:

- **Python import now supports SBML Events** (#1443)
- Implement support for compilation without sensitivities (#1454)

Fixes:

- Issue #1446: Check whether constant parameters are valid targets (#1450)
- Issue #1422: Fix Steadystate solver failing if preequilibration starts in steadystate (#1461)
- Issue #1401: Ensure diagnostics variables in ReturnData are always of expected length (#1438, #1447)
- Fix FIM approximation for parameter dependent sigma (#1441)
- Fix invalid SBML in PETab/PySB import (#1433)
- Fix: No context for inspect.getouterframes (#1432)

Documentation:

- Added this CHANGELOG
- Added feature request issue template (#1437)
- Updated reference list (#1430)
- Overhauled experimental conditions notebook (#1460)

CI:

- Test Matlab interface on GHA (#1451)
- Include componentTags in SBML test suite output (#1462)
- Split SBML semantic test suite into multiple jobs (#1452)
- Fix Crauste ref val, fixes #1458 (#1459)

Misc:

- Various cleanup (#1465, #1448, #1455)
- Micro-optimize SUNMatrixWrapper::transpose (#1439)
- Remove constant triggers from roots in Heaviside (#1440)

7.2.16 v0.11.13 (2021-02-20)

Breaking changes:

- AMICI requires Python \geq 3.7
- Updated package installation (PEP517/518): Creating source distributions requires <https://github.com/pypa/build> (#1384) (but now handles all package building dependencies properly)

Features:

- More flexible state reinitialization (#1417)

Updated dependencies:

- Upgrade to sundials 5.7.0 (#1392)

Fixes:

- Python: account for heaviside functions in expressions (#1382)
- Python: allow loading of existing models in `import_petab_problem` (#1383)
- Python: Don't override user-provided compiler/linker flags (#1389)
- Python: PETab import reinitialization fixes (#1417)
- Python: Fix PETab observables for pysb models (#1390)
- Python: Substitute expressions in event condition expressions (#1404)
- Python: Unspecified initial states in PETab conditions table default to SBML initial value (#1397)
- C++: Fix timepoint out of bounds access (#1402)
- C++: Fix exported CMake config (#1388)
- Fixed Dockerfile: add python3-venv (#1398, #1408)

Other:

- Slim exported swig interface (#1425)
- Updated documentation
 - Getting started tutorial (#1423)
 - List supported SBML test tags (#1428)
 - Add AMICI C++/Python/Matlab feature comparison (#1409)
 - ...
- Various minor CI improvements
- ...

7.2.17 v0.11.12 (2021-01-26)

Features:

- Add expression IDs and names to generated models (#1374)

Fixes:

- Raise minimum sympy version to 1.7.1 (Closes #1367)
- Fix species assignment rules in reactions (#1372)
- Fix id vector for DAEs (#1376)

Docs:

- Update how-to-cite (#1378)

7.2.18 v0.11.11 (2020-12-15)

Python

- Restore support for species references (#1358)
- Add support for noise models in pysb (#1360)
- Proper handling of discontinuities in the ODE rhs (#1352)
- Fix directly calling AMICI from snakemake (#1348)
- Extend mathml function support, particularly for numerical arguments (#1357)
- Restore support for sympy 1.6 (#1356)

C++

- Fix some compiler related warnings (#1349, #1362)
- Fix a rare segfault for adjoint sensitivities (#1351)

CI

- Move windows tests to GHA (#1354)
- Pin breathe to 4.24.1

Docker

- Update ubuntu to 20.04

7.2.19 v0.11.10 (2020-11-30)

Bugfix release that restores compatibility with sympy 1.7

7.2.20 v0.11.9 (2020-11-29)

Python

- General improvements to SBML import (#1312, #1316, #1315, #1322 , #1324 #1333, #1329)
- Small bugfixes and improvements (#1321)
- Improve derivative computation for instances of `power` (#1320)

C++

- Fix FIM and residual computation for models with parameter dependent sigma. (#1338)
- Disable chi2/residual/FIM computation for non-gaussian objective functions. (#1338)
- Bugfix for integration failure during adjoint solve (#1327)

Doc

- Update references (#1331, #1336)

CI

- Update OpenBLAS for windows (#1334)

7.2.21 v0.11.8 (2020-10-21)

Python

- Fix pysb-petab support (#1288)
- Fix ExpData constructor overloading (#1299)
- Fix support for positivity enforcement (#1306)
- **Refactor SBML import, adds support for parameter rate rules and initial assignments** (#1284, #1296, #1304)
- Improve model generation for models with many parameters (#1300)
- Add support for PETab based synthetic data generation (#1283)

C++

- Make HDF5 an optional dependency (#1285)

Doc

- General Improvements to Documentation (#1289, #1291, #1292, #1293, #1294, #1286, #1277, #1281)

CI

- Add python 3.9 support test (#1282)
- Allow manual triggering of GitHub actions (#1287)
- Remove appveyor config (#1295)
- Update GHA env and path management (#1302)

7.2.22 v0.11.7 (2020-09-22)

Python

- Improve and extend available objective functions (#1235)
- Fix processing of compartment definitions (#1223)
- Fix replacement of reserved symbols (#1265)
- Use Hierarchical Derivatives for Expressions (#1224, #1246)
- Fix duplicate running of swig (#1216)
- Overload python interface functions for amici.{Model,Solver,ExpData} and amici.{Model,Solver,ExpData}Ptr (#1271)

C++

- Fix and extend use of sparse matrix operations (#1230, #1240, #1244, #1247, #1271)
- **Fix application of maximal number of steps**, MaxNumStep parameter now limit total number of steps, not number of steps between output times. (#1267)

Doc

- Move all Documentation to RTD (#1229, #1241)
- General Improvements to Documentation (#1225, #1227, #1219, #1228, #1232, #1233, #1234, #1237, #1238, #1239, #1243, #1253, #1255, #1262)

CI

- Better check for doc building (#1226)
- Add more gradient checks (#1213)
- Update GHA to Ubuntu 20.04 (#1268)

7.2.23 v0.11.6 (2020-08-20)

Python

- Bugfix for piecewise functions (#1199)
- Refactor swigging - generate one single wrapper (#1213)

C++

- Fix warnings: account for zero indexing in nan/inf error (#1112)

Doc

- Update Windows build instructions (#1200, #1202)
- Update README: Projects using AMICI (#1209)
- Add CODE_OF_CONDUCT.md (#1210)
- Update documentation for Python interface (#1208)

CI

- Create sdist on GHA using swig4.0.1 (#1204) (Fixing broken pypi package)
- Fix links after repository move
- Speed-up swig build: disable all languages except python (#1211)
- Fix doc generation on readthedocs (#1196)

7.2.24 v0.11.5 (2020-08-07)

General

- Move repo to new organization (#1193)
- Update Bibliography

Python

- Fix bug for energyPySB models (#1191)

CI

- Fix release deployment (#1189)

7.2.25 v0.11.4 (2020-08-06)

Python

- Skip unnecessary expressions in pysb models (#1185)
- MSVC compiler support (this time for real... #1152)

CI

- Implement MSVC tests (#1152)
- Rename and group GitHub actions (#1186)
- Fix release deployment (#1186)

7.2.26 v0.11.3 (2020-08-06)

Python

- Fix simplification for pysb models (#1168)
- Pass verbosity flags to pysb network generation (#1173)
- Enable experimental pysb-petab support (#1175)
- Add installation instructions for Fedora (#1177)
- Implement support for SBML rate-references (#1180)

C++

- Refactoring (#1162, #1163)

CI

- Move majority of tests to Github Actions (#1166, #1160)
- Improve reporting of skipped tests in SBML testsuite (#1183)

7.2.27 v0.11.2 (2020-07-17)

Python

- Speed up model import, compilation (#1123, #1112)
- Improve/Add steady-state solver documentation (#1102)
- Improve extension import (#1141)
- Bugfixes SBML import (#1135, #1134, #1145, #1154)
- Fixed issue that prevented simplification (#1158)

C++

- Bugfixes (#1121, #1125, #1131, #1132, #1136)
- Enable openMP by default (#1118)
- Improve memory footprint for simulations with replicates (#1153)
- Improve steady-state solver and add option to to adjoint-steadystate hybrid (#1143, #1099, #1129, #1146)

CI

- Store build artifacts from github actions (#1138)

7.2.28 v0.11.1 (2020-06-05)

Python

- Upgrade to sympy 1.6.0, which is now required minimum version (#1098, #1103)
- Speed up model import
 - Speed-up computation of `sx0`, reduce file size (#1109)
 - Replace terribly slow `sympy.MutableDenseMatrix.is_zero_matrix` by custom implementation (#1104)
- speedup dataframe creation in `get*AsDataFrame` (#1088)
- Allow caching edatas for `simulate_petab` (#1106)
- Fix wrong deprecation warning (Fixes #1093)
- Fix segmentation faults in `NewtonSolver` under certain conditions (#1089, #1090, #1097)
- fix wrong power function call in `unscale_parameter` (#1094)
- Fix MathML conversion (#1086)
- Fix deepcopy of SymPy objects (#1091)

Matlab

- handle empty `rdata->{pre|post}eq_numlinsteps` (Closes #1113), which previously made the matlab interface unusable
- Fix generation of `compileMexFile.m` for matlab compilation of python code (#1115)

C++

- Reduce memory requirements and speedup compilation of large models (#1105)
- Place generated code into own namespace (#937) (#1112)
- Fix several msvc compiler warnings (#1116) (Note that MSVC support is still experimental) **breaking change for users of C++ interface**
- Fix swig warning: ensure base class `ContextManager` is known before use (Fixes #1092) (#1101)

CI

- Don't install/run valgrind on travis CI (done with github actions... (#1111)

7.2.29 v0.11.0 (2020-05-10)

Python:

- **Implement support for variable compartments (#1036)**
- Better handling of constant species (#1047)
- **Better handling of C++ enums, this makes `amici.SensitivityMethod_forward` available as `amici.SensitivityMethod.forward` (#1042)**
- Improve installation routines (#1055, #1056, #1058, #1076)
- Add option to reduce memory usage (#1044)
- **Fix handling of symbolic expressions in nested rules (#1081, 1069)**

Library:

- Update Sundials to 5.2.0 (#1039)
- Update SuiteSparse to 5.4.0 (#1040)
- Refactor use of ReturnData, now completely created post-hoc (#1002)
- **Fix propagation of reinitialization in ExpData constructor (#1041)**
- **Fix issue where InternalSensitivityParameter was sometimes not set (#1075)**
- **Fix or disable certain combinations of equilibration, presimulation and adjoint sensitivity analysis**

CI:

- Move from Codacy to Sonarcloud (#1065)
- Run SBML Testsuite when appropriate (#1058)

7.2.30 v0.10.21 (2020-04-04)

Library:

- Fix: Handle paths with blanks in build scripts
- Feature: Add function to write `amici::Solver` settings to HDF5 (#1023)
- Fix: typehints (#1018, #1022)
- Refactor: Move creation of parameter mapping for objective<->simulation to classes (#1020)

CI:

- Refactor: Cleanup and reorganize tests (#1026)
- Fix: benchmark problem test should fail on missing files (Closes #1015)

7.2.31 v0.10.20 (2020-03-18)

- Fixed (re)initialization of sensitivities if `ExpData::fixedParametersPreequilibration` is set (#994)
- Fixed sensitivities for parameters in sigma expressions for Python/SBML in case provided expression was not just a single parameter ID
- Enable parallel compilation of model files from Python (#997) based on `AMICI_PARALLEL_COMPILE` environment variable
- Fixed computation of log-likelihood for log10-normal distributed noise
- Added `reinitializeFixedParameterInitialStates` to `ExpData` (#1000) (**breaking change**: overrides settings in `amici::Model`)
- Python model import now verifies that chosen model name is a valid identifier (Closes #928)
- Made `w` available in `ReturnData` (Closes #990) (#992)
- Fixed setting of log level when passing boolean values to `verbose` (#991)
- Documentation now on ReadTheDocs <https://amici.readthedocs.io/en/>
- Use proper state/observable names in plotting functions (#979)
- PETab support:
 - Adapt to most recent PETab (0.1.5)
 - Extended support for import of PETab models
 - Added support for computing cost function based on PETab problem
 - Implemented handling of species in condition table
 - `petab_import.import_model` now provides reproducible parameter list (Closes #976)
 - Fix python import error in `import_petab_problem`: Add absolute paths to python path, invalidate caches and reload (#970)
 - Added example notebook
- CI: PETab test suite integrated in CI workflow
- Added AMICI dockerfile and image deployment to dockerhub (#948)
- Removed mention of ‘mex’ in warning/error ids (#968)
- More informative errors on SWIG interface import failures (#959)

7.2.32 v0.10.19 (2020-02-13)

Python:

- Fix logo display on pypi
- Fix deadlocks in multithreaded python environments when using openMP parallelization

Matlab:

- Fix compilation errors due to switch to C++14

7.2.33 v0.10.18 (2020-02-11)

General:

- AMICI now comes with a logo
- implement getName function for models
- Updated documentation / examples

Python:

- Enable MSVC compilation of Python extensions (#847)
- Always recompile clibs and extensions (Closes #700)
- Extended PETab support (Running
- enable multithreading in swig (#938)
- Fixes pysb (#902) (#907)

C++

- Build optimized AMICI and sundials by default (Closes #934)

Matlab:

- Fix(matlab) Compile CalcMD5 on demand (Fixes #914)
- Don't pass empty include strings to mex
- Fix Matlab compilation error if AMICI or model path contains blanks

CI:

- Running additional test models

... and various minor fixes/updates

7.2.34 v0.10.17 (2020-01-15)

- **added python 3.8 support, dropped python 3.6 support** (#898)
- Added logging functionality (#900)
- Fixes PySB import (#879, #902)
- Fixes symbolic processing (#899)
- Improved build scripts (#894,
- Improved petab support (#886, #888, #891)
- CI related fixes (#865, #896)

7.2.35 v0.10.16 (2019-12-11)

- **Sparsify dwdp to reduce computation time for adjoints (#858)**
- Fix(matlab) update example name example_dae_events->example_calvetti (Closes #866)
- Fix nullptr deferencing for simulations with events when no measurements are provided (Fixes #866)
- Fix accessing empty vector during adjoint state event update (Closes #866)
- Fix pysb_import (fixes #878)

7.2.36 v0.10.15 (2019-12-03)

Bugfix release due to incorrect sensitivities w.r.t. sigmas introduced in 0.10.14.

No other changes.

7.2.37 v0.10.14 (2019-12-02)

NOTE: For Python-imported SBML-models this release may compute incorrect sensitivities w.r.t. sigma. Bug introduced in 0.10.14, fixed in 0.10.15.

Python:

- Don't require use of ModelPtr.get to call ExpData(Model)
- Fix import in generated model Python package
- Setup AMICI standalone scripts as setuptools entrypoints
- Simplify symbolic sensitivity expressions during Python SBML import Fixes Infs in the Jacobian when using Hill-functions with states of 0.0.
- Extended Newton solver #848The changes that allow performing Newton tests from the paper:G. T. Lines, L. Paszkowski, L. Schmiester, D. Weindl, P. Stapor, and J. Hasenauer. Efficient computation of steady states in large-scale ODE models of biochemical reaction networks. accepted for Proceedings of the 8th IFAC Conference on Foundations of Systems Biology in Engineering (FOSBE), Valencia, Spain, October 2019.
- Use SWIG>=4.0 on travis to include PyDoc in sdist / pypi package (#841)
- **Fix choice of likelihood formula; failed if observable names were not equal to observable IDs**
- Fix(sbml-import) Compartment IDs in right-hand side of Rules are not replaced and lead to undefined identifiers in c++ files
- Fix invalid logging level
- Speed up sympy simplification (#871)

C++:

- Performance: Avoid unnecessary repeated function calls for SUNMatrixWrapper dimensions
- Add AmiciApplication class as context for handling so far global settings. This allows for example setting custom logging functions for concurrent AMICI runs, e.g. in multi-thread applications (Closes #576).

Misc:

- Setup performance test on github actions (#853)
- Update documentation and FAQ for CBLAS requirement and others
- Update reference list

7.2.38 v0.10.13 (2019-10-09)

- BREAKING CHANGE: Renaming {get|set}tNewtonPreequilibration to {get|set}Preequilibration (Closes #720)
- Make wurlitzer non-optional requirement for AMICI python package (Fixes missing AMICI errors when running from jupyter notebooks)
- Compute initial state for Model::getInitialStates if not already set (Fixes #818)
- Make swig generate pydoc comments from doxygen comments #830 (Closes #745) to provide Python docstrings for C++ wrapper functions
- feature(cmake) Add option to disable compiler optimizations for wrapfunctions.cpp (Fixes #828) (#829)
- Change SBML test suite to pytest to allow for parallel test execution. . . (#824)
- Fix(cmake): -E option is not available in all sed versions. Neither is the equivalent -r. Use --regexp-extended instead (Closes #826)
- Refactor(python) Move PETab import code from command line script. . . (#825)
- Fix(core) Fix regular expressions for intel compiler (Closes #754) (#822)
- Update workflow figure to include PySB (Closes #799)
- Fix compiler warnings

7.2.39 v0.10.12 (2019-09-28)

- Fix handling of species specified in PETab condition table (#813)
- Fix some Visual C++ issues, update cppcheck handling, cleanup (VisualC++ still not fully supported)
- Minor fixups (#801)
- Create SBML test suite result files for upload to <http://sbml.org/Facilities/Database/> (#798)

7.2.40 v0.10.11 (2019-08-31)

- Fixed setting initial conditions for preequilibration (#784)
- Fixed species->parameter conversion during PETab import (#782)
- Set correct Matlab include directories in CMake (#793)
- Extended and updated documentation (#785, #787)
- Fix various SBML import issues
- Run SBML test suite using github actions instead of travisCI (#789)

7.2.41 v0.10.10 (2019-08-07)

- Simplify/fix AMICI installation
 - If available use environment modules to detect dependencies
 - Add SWIG installation script
- Update list of publication
- Update documentation
 - Update doc for SWIG build and custom SWIG location.
 - Add AMICI interface overview / workflow figure and show in README
 - Document environment variables for model/core compilation (Closes #737)
- Added handling of abs function, since there seem to be problems with case sensitivity (#713) Closes #770

Details: * cmake: Use package_ROOT environment variables * fix(cmake) Fix finding version.txt * cmake: Auto-detect loaded MKL environment module * cmake: Use new FindPython3 modules where possible * fix(python) Restore python3.6 compatibility * Inside venv, use pip instead of pip3 which should point to the correct version * fix(python) Workaround for missing ensurepip during venv creation [ci skip] * feature(python) Use MKL from environment modules to provide cblas * fix(python) Fix define_macros not being passed to setuptools for Extension * fix(python) Fix define_macros not being passed to setuptools for clibs * Do not always add 'cblas' library since users may want to override that by a cblas-compatible library with a different name (closes #736)* Update HDF5 path hints; use shared library if static is not available. * Check for HDF5_BASE from environment module * Fix system-dependent sundials library directory (Fixes #749) (#750) * Handle OSTYPE==linux in scripts/buildBNGL.sh (Fixes #751) * Add SWIG download and build script * Improve finding swig executable and allow user override via SWIG environment variable * Provide installation hints if no SWIG found (Closes #724) * Allow overriding cmake executable with environment variables in build scripts (Closes #738)

7.2.42 v0.10.9 (2019-07-24)

Fixup for missing version bump in v0.10.8 release. No code changes compared to v0.10.8.

7.2.43 v0.10.8 (2019-07-24)

Changes in this release:

All:

- Updated / extended documentation
- Fix reuse of Solver instances (#541)

C++:

- Check for correct AMICI version for model in CMake
- Add reporting of computation times (#699)

Python:

- Fix manifest file (#698)
- Fix initial amounts/concentrations in SBML import

... and various other minor fixes/improvements

7.2.44 v0.10.7 (2019-05-01)

Python

- fix unset noise distribution when automatically generating observables in case None are passed (#691)

7.2.45 v0.10.6 (2019-04-19)

C++

- Add SuperLUMT support (#681)
- Sparsified dJydy (#686)
- Enabled support of impulse-free events for DAE models (#687) - thanks to Sebastien Sten for providing a testcase for this

Python

- Enabled support for piecewise functions in SBML import (#662)
- Fix numeric type when constructing ExpData from Dataframes (#690)
- Fix dynamic override in PETab

7.2.46 v0.10.5 (2019-04-08)

Bugfix release

Doc

- Update documentation of Windows installation

C++

- Fix missing source files in CMakeLists.txt (#658)
- Set CMake policies to prevent warnings (Closes #676) (#677)
- Start using gsl::span instead of raw pointers (#393) (#678)

Python

- PySB parsing fix (#669)
- Fix failure to propagate BLAS_LIBS contents (#665)
- Require setuptools at setup (#673)
- Updated PETab import to allow for different noise models

7.2.47 v0.10.4 (2019-03-21)

Features / improvements:

- Implement ReturnData and ExpData wrappers as more efficient views (#657)
- Add list of references using AMICI (#659)
- Custom llh (normal/laplace, lin/log/log10) (#656)

Bugfixes:

- Speedup and fix travis build

7.2.48 v0.10.3 (2019-03-13)

Features / improvements:

- adds the option for early termination on integration failures for `runAmiciSimulations`
- improve runtime of `SUNMatrixWrapper::multiply`
- expose finite difference routines in public API
- enable parallel compilation of clib source files

Bugfixes:

- fixed symbolic processing for unreleased pysb features

7.2.49 v0.10.2 (2019-03-07)

Features / improvements:

- extended `ExpData` interface to allow for condition specific parameters, parameter scales, parameter lists, initial conditions and initial condition sensitivities.

Bugfixes:

- fixed output values of `ReturnData::x_ss` and `ReturnData::sx_ss`

7.2.50 v0.10.1 (2019-03-04)

- travis-ci.com migration
- fix problem with `has{variable}` functions
- allow to import sbml model from string, not only file

7.2.51 v0.10.0 (2019-03-01)

Features / improvements:

- updated sundials to 4.1.0
- updated SuiteSparse to 5.4.0
- added generic implementations for symbolic expressions that were sparse matrix vector products

Bugfixes:

- fixed return value of `rz` when no data is provided.

7.2.52 v0.9.5 (2019-02-26)

Features / improvements:

- allow python installations without compilation of c++ extension
- improvements to ExpData <-> pandas.DataFrame interface
- allow generation of matlab models from python
- implement CLI interface for PETab
- improve computation time for conservation laws from pysb import

Bugfixes:

- Fix sign in undamped Newton step.

Maintenance:

- use newer CI images

7.2.53 v0.9.4 (2019-02-11)

Minor fixes only:

- fix(core) Get solver diagnostics for first(last) timepoint (#588) (Closes #586)
- fix(ci) Fix autodeploy (Closes #589)

7.2.54 v0.9.3 (2019-02-07)

CRITICAL FIXES

- **fix(python) fix symbolic computations for adjoint (#583)**

Features

- feature(python) Check for matching AMICI versions when importing model (Closes #556). Set exact AMICI version as model package requirement.
- feature(core) Add option to rethrow AMICI exception (Closes #552)
- feature(python) Redirect C/C++ output in stdout is redirected (e.g. in ipython notebooks) (Closes #456)

Minor fixes

- fix(python) Fix doc and rename sys_pipes to something more meaningful
- fix(ci) Fix premature exit of scripts/runNotebook.sh
- fix(deploy) Update pyenv shims to find twine

7.2.55 v0.9.2 (2019-01-30)

Bugfixes:

- fixes a critical bug in the newton solver
- fixes multiple bugs in sbml import for degenerate models, empty stoichiometry assignments and conversion factors
- improved error messages for sbml import
- #560
- #557
- #559

7.2.56 v0.9.1 (2019-01-21)

Features / improvements:

- make pure steadystate results available as `rdata['x_ss']` and `rdata['sx_ss']`
- add option to specify integration tolerances for the adjoint problem via `atolB` and `rtolB`

Bugfixes:

- improved conservation law identification to also account for constant species.
- fixed a bug where simulation results were written into results of the second newton solver attempt
- fixed an openMP related warning

Maintenance:

- attempt to fix automatic deploy to pypi via travis

7.2.57 v0.9.0 (2019-01-18)

Features / improvements:

- Allow computation and application of conservation laws for pysb importet models. This enables use of Newton-Solver for preequilibration for models where it was previously not possible.
- Use `klu_refactor` in the sparse Newton solver instead of always using `klu_factor` and only perform symbolic factorization once (#421)
- Allow more detailed finiteness checks (#514)

Bugfixes:

- #491

Maintenance:

- Several improvements to travis log sizes and folding
- Use default copy constructor for Model by implementing class wrappers for sundials matrix types (#516)
- Reenable run of SBML testsuite

7.2.58 v0.8.2 (2019-01-07)

Features / improvements:

- Speedup symbolic processing for ODE generation in python

Bugfixes:

- Fix(python) Add missing deepcopy (introduced in 6847ba675f2088854db583199b8754aaa6e01576)
- Fix(core) Prevent parameter scaling length mismatch (#488)
- Fix(python) Set distutils dependency to current version to fix `</usr/lib/python3.6/distutils/dist.py:261: UserWarning: Unknown distribution option: 'long_description_content_type'>`
- fix(python) add symlink to version.txt to be included in package

Backwards-compatibility:

- Replace 'newline' by literal to restore <R2016b compatibility (Fixes #493)

Maintenance:

- Remove obsolete swig library build via cmake and related file copying
- Provide issue template for bug reports
- Providing valid SBML document to import is not optional anymore
- Update documentation and tests
- Add python version check and raise required version to 3.6 to prevent cryptic error messages when encountering f-strings

7.2.59 v0.8.1 (2018-11-25)

- [all] **critical** Fix long standing bugs in solving steadystate problems (including preequilibration) (#471)
- [all] Fix AmiVector constructor from `std::vector` (#471)
- [python] Reenable Solver and Model copy constructors
- Update documentation

7.2.60 v0.8.0 (2018-11-25)

- replaced symengine by sympy for symbolic processing in python *which fixes several critical bugs* that were due to bugs in symengine (#467)

7.2.61 v0.7.13 (2018-11-18)

- fixes a critical bug in objective function computation for models compiled using `sbml2amici` and `pysb2amici` that was introduced in v0.7.12
- fixes a critical bug in sensitivity computation when `model.reinitializeFixedParameterInitialStates` was set to true
- readds the python interface to the `ExpData` copy constructor that was inadvertently removed in 0.7.12 and streamlines the respective convenience wrapper to provide access to the full range of constructors.

7.2.62 v0.7.12 (2018-11-17)

- fixed a critical bug in `amici.constructEdataFromDataFrame`
- enabled multithreaded simulation of multiple experiments (requires compilation with openMP)
- modularized sbml import and added pysb import

7.2.63 v0.7.11 (2018-10-15)

- [python] Added numpy and python wrappers that provide a more user friendly python API
- [python] Enable import of SBML models with non-float assignment rules
- [python] Enable handling of exceptions in python
- [python] Enable native python access to `std::vector` data-structures
- [core] Provide an API for more fine-grained control over sensitivity tolerances and steady-state tolerances
- [core] Provide an API to specify non-negative state variables (this feature is still preliminary)

7.2.64 v0.7.10 (2018-08-29)

- Fixed python SBML import `log()` issues (#412)

7.2.65 v0.7.9 (2018-08-24)

- fixes MATLAB compilation of models
- adds option to perform steady state sensitivity analysis via FSA
- condition dependent initial conditions are now newly set after preequilibration is done

7.2.66 v0.7.8 (2018-08-19)

- bugfixes for the ExpData interface
- created build configuration that enables debugging of c++ extensions on os x
- fixed python sbml import when stoichiometry is empty

7.2.67 v0.7.7 (2018-08-17)

Fixes a couple of bugs just introduced in v0.7.6

7.2.68 v0.7.6 (2018-08-13)

Important: Use AMICI v0.7.7 due to <https://github.com/ICB-DCM/AMICI/pull/403/commits/3a495d3db2fdbba70c2b0d52a3d465>

Bug fixes:

- Python import: Fix log10 issues in observables (#382)
- Matlab: Fix broken model compilation (#392)
- Fixed simulation for models without observables (#390)
- Fixed potential matlab memory leaks (#392)

Breaking C++ API changes:

- Revised ExpData interface (#388)

7.2.69 v0.7.5 (2018-07-30)

Features/enhancements:

- Add computation of residuals, residuals sensitivity, Fisher information matrix (#223)
- More efficient conversion of std::vector to numpy ndarray (#375)
- Allow specifying timepoints in ExpData (#370)

Minor fixes:

- Condition parameters in ExpData now only temporarily override Model parameters (#371)
- Ensure non-negative states for Newton solver (#378)

7.2.70 v0.7.4 (2018-07-27)

Features/enhancements:

- Check SBML model validity (#343)
- Allow per-parameter setting of amioptions::pscale from matlab interface (#350)
- Documentation

Major fixes:

- Don't compile main.cpp into python model module which broke modules if amici was compiled without libhdf5 (#363)

Minor fixes:

- Fix compiler warnings (#353)
- Plotting, SBML example mode, ...

7.2.71 v0.7.3 (2018-07-13)

Features:

- Added symbol names to python-wrapped models and make available via `Model.getParameterNames()`, `model.getStateNames()`, ...
- Extended Python interface example

Python package available via pypi: <https://pypi.org/project/amici/0.7.3/>

7.2.72 v0.7.2 (2018-07-03)

Features:

- Python package: more flexible HDF5 library localization
- Extended CI: python tests, preequilibration tests, run in venv

Major bugfixes:

- Fix python sbml model import / compilation error (undefined function)
- Fix model preequilibration

Minor fixes:

- Various fixes for mingw compilation of python source distribution
- Cmake compatibility with < 3.8 restored

7.2.73 v0.7.1 (2018-06-12)

Features:

- Allow specifying sigma-parameters from Python interface

Major bugfixes:

- Fix `dsigma_y/dp` and downstream sensitivity errors

7.2.74 v0.7.0 (2018-06-09)

- Major revision of documentation
- Improved Python interface
- More comprehensive Python interface example
- Fixed sensitivity computation in Python-generated models
- Various other bug fixes

WARNING:

- For models with sigma-parameters and `dsigma_y/dp != 0`, `dsigma_y/dp` was computed incorrectly. This propagates to all dependent sensitivities. This applies also to some older releases and has been fixed in v0.7.1.

7.2.75 v0.6.0 (2018-05-22)

Implement experimental support for python via swig. Python interface is now usable, but API will still receive some updates in the future.

WARNING:

- There is a bug in sensitivity computation for Python-generated models
- Matlab C++ compilation will fail due to undefined M_PI -> Please use v0.7.0

7.2.76 v0.5.0 (2018-03-15)

Main new features are:

- Reimplemented support for DAE equations
- Added newton solver for steady state calculation and preequilibration
- Better caching for recompilation of models
- Blas support to allow compilation of large models with many observables
- Improved SBML support
- Added c++ interface
- Added support for second order adjoint computation
- Rewrote large parts of the code as proper c++11 code to allow easier code maintenance
- Substantially extended testing in continuous integration to assure code quality

7.2.77 v0.4.0 (2017-05-15)

- First citable version of AMICI (via zenodo integration).
- Better support for standalone compilation
- Improved SBML import scripts
- General Code Cleanup

7.2.78 v0.3.0 (2016-09-05)

This update comes with many improvements, bug fixes and several new features. Most notably:

1. AMICI should now run on older versions of MATLAB (back to R2014a)
2. AMICI now compiles using older versions of Visual Studio
3. AMICI now also supports second order adjoint sensitivities (full (via the o2flag = 1 and as a vector product via o2flag = 2)
4. AMICI now supports more SBML, SBML v2 and rate rules

7.2.79 0.2.1 (2016-05-09)

Bugfix release. This release also includes some changes that should improve the performance on the new R2016a release of MATLAB.

7.2.80 v0.2 (2016-03-17)

This update comes with many improvements to the computation time for both compilation and simulation. Moreover several new features were included:

1. Hessian Vector products for second order forward sensitivities
2. Correct treatment of parameter/state dependent discontinuities for both forward and adjoint sensitivities

7.2.81 v0.1 (2015-11-05)

This is the initial release of the toolbox

GLOSSARY

BNGL **BioNetGenLanguage** is a language for modular, structure-based modeling of biochemical reaction networks.

CVODES **CVODES** is a solver for stiff and non-stiff *ODE* systems with sensitivity analysis capabilities and is used by AMICI. It is part of the *SUNDIALS* solver suite.

DAE Differential-Algebraic Equation

fixed parameters In AMICI, *fixed parameters* are parameters with respect to which no sensitivities are computed. They usually correspond to experimental conditions. For fixed parameters, different values can be set for *preequilibration*, *presimulation* and simulation.

IDAS **IDAS** is a solver *DAE* systems with sensitivity analysis capabilities and is used by AMICI. It is part of the *SUNDIALS* solver suite.

ODE Ordinary Differential Equation

PEtab **PEtab** is a format for specifying parameter estimation problems. It is based on an *SBML* model and tab-separated value files specifying the observation model and experimental conditions.

preequilibration Simulating or solving the dynamical system for the steadystate.

presimulation Simulation for a fixed time before the regular simulation. Can be used to specify pretreatments.

PySB **PySB** is a tool for specifying rule-based systems biology models as Python code.

SBML The **Systems Biology Markup Language** is a commonly used format for specifying systems biology models.

SUNDIALS **SUNDIALS**: **SU**ite of **N**onlinear and **D**ifferential/**AL**gebraic equation **S**olvers. Provides the *CVODES* and *IDAS* solvers used by AMICI.

SWIG **SWIG** is a tool that creates interfaces for C(++) code to a variety of languages. Much of the AMICI Python interface is generated by SWIG.

CONTRIBUTING

9.1 Contributing to AMICI

We are happy about contributions to AMICI in any form, be it new functionality, documentation, bug reports, or anything else.

If you would to contribute to AMICI, a good start is looking for issues tagged `good first issue` or `help wanted`. For other ideas or questions, just post an issue.

For code contributions, please read our `developer's guide` first.

9.2 Code of Conduct

9.2.1 Our Pledge

In the interest of fostering an open and welcoming environment, we as contributors and maintainers pledge to making participation in our project and our community a harassment-free experience for everyone, regardless of age, body size, disability, ethnicity, sex characteristics, gender identity and expression, level of experience, education, socio-economic status, nationality, personal appearance, race, religion, or sexual identity and orientation.

9.2.2 Our Standards

Examples of behavior that contributes to creating a positive environment include:

- Using welcoming and inclusive language
- Being respectful of differing viewpoints and experiences
- Gracefully accepting constructive criticism
- Focusing on what is best for the community
- Showing empathy towards other community members

Examples of unacceptable behavior by participants include:

- The use of sexualized language or imagery and unwelcome sexual attention or advances
- Trolling, insulting/derogatory comments, and personal or political attacks
- Public or private harassment
- Publishing others' private information, such as a physical or electronic address, without explicit permission
- Other conduct which could reasonably be considered inappropriate in a professional setting

9.2.3 Our Responsibilities

Project maintainers are responsible for clarifying the standards of acceptable behavior and are expected to take appropriate and fair corrective action in response to any instances of unacceptable behavior.

Project maintainers have the right and responsibility to remove, edit, or reject comments, commits, code, wiki edits, issues, and other contributions that are not aligned to this Code of Conduct, or to ban temporarily or permanently any contributor for other behaviors that they deem inappropriate, threatening, offensive, or harmful.

9.2.4 Scope

This Code of Conduct applies both within project spaces and in public spaces when an individual is representing the project or its community. Examples of representing a project or community include using an official project e-mail address, posting via an official social media account, or acting as an appointed representative at an online or offline event. Representation of a project may be further defined and clarified by project maintainers.

9.2.5 Enforcement

Instances of abusive, harassing, or otherwise unacceptable behavior may be reported by contacting the project team at froehlichfab@gmail.com. All complaints will be reviewed and investigated and will result in a response that is deemed necessary and appropriate to the circumstances. The project team is obligated to maintain confidentiality with regard to the reporter of an incident. Further details of specific enforcement policies may be posted separately.

Project maintainers who do not follow or enforce the Code of Conduct in good faith may face temporary or permanent repercussions as determined by other members of the project's leadership.

9.2.6 Attribution

This Code of Conduct is adapted from the [Contributor Covenant](https://www.contributor-covenant.org/version/1/4/code-of-conduct.html), version 1.4, available at <https://www.contributor-covenant.org/version/1/4/code-of-conduct.html>

For answers to common questions about this code of conduct, see <https://www.contributor-covenant.org/faq>

PYTHON INTERFACE

10.1 Installing the AMICI Python package

10.1.1 Short guide

Installation of the AMICI Python package has the following prerequisites:

- Python \geq 3.8
- *SWIG* \geq 3.0
- CBLAS compatible BLAS library (e.g., OpenBLAS, CBLAS, Atlas, Accelerate, Intel MKL)
- a C++14 compatible C++ compiler and a C compiler (e.g., g++, clang, Intel C++ compiler, mingw)

If these requirements are fulfilled and all relevant paths are setup properly, AMICI can be installed using:

```
pip3 install amici
```

If this worked, you can now import the Python module via:

```
import amici
```

If this does not work for you, please follow the full instructions below.

10.1.2 Installation on Linux

Ubuntu 20.04

Install the AMICI dependencies via apt (this requires superuser privileges):

```
sudo apt install libatlas-base-dev swig  
  
# optionally for HDF5 support:  
sudo apt install libhdf5-serial-dev
```

Install AMICI:

```
pip3 install amici
```

Fedora 32

Install the AMICI dependencies via apt (this requires superuser privileges):

```
sudo dnf install blas-devel swig
```

Install AMICI:

```
pip3 install amici
```

10.1.3 Installation on OSX

Install the AMICI dependencies using homebrew:

```
brew install swig

# optionally for HDF5 support:
brew install hdf5

# optionally for parallel simulations:
brew install libomp
```

Install AMICI:

```
pip3 install amici
```

10.1.4 Installation on Windows

Some general remarks:

- Install all libraries in a path not containing white spaces, e.g. directly under C:.
- Replace the following paths according to your installation.
- Slashes can be preferable to backslashes for some environment variables.
- See also [#425](<https://github.com/AMICI-dev/amici/issues/425>) for further discussion.

Using the MinGW compilers

- Install [MinGW-W64](#) (the 32bit version will succeed to compile, but fail during linking).
MinGW-W64 GCC-8.1.0 for x86_64-posix-sjlj ([direct link](#)) has been shown to work on Windows 7 and 10 test systems.
- Add the following directory to your PATH: C:\mingw-w64\x86_64-8.1.0-posix-sjlj-rt_v6-rev0\mingw64\bin
- Make sure that this is the compiler that is found by the system (e.g. where gcc in a cmd should point to this installation).
- Download CBLAS headers and libraries, e.g. [OpenBLAS](#), binary distribution 0.2.19.

Set the following environment variables:

```
– BLAS_CFLAGS=-IC:/OpenBLAS-v0.2.19-Win64-int32/include
```

```
- BLAS_LIBS=-Wl,-Bstatic -LC:/OpenBLAS-v0.2.19-Win64-int32/lib -lopenblas -Wl,  
-Bdynamic
```

- Install [SWIG](#) and add the SWIG directory to PATH (e.g. C:\swigwin-3.0.12 for version 3.0.12)
- Install AMICI using:

```
pip install --global-option="build_clib" \  
            --global-option="--compiler=mingw32" \  
            --global-option="build_ext" \  
            --global-option="--compiler=mingw32" \  
amici --no-cache-dir --verbose`
```

Note: Possible sources of errors:

- On recent Windows versions, `anaconda3\Lib\distutils\cygwinccompiler.py` fails linking `msvcr140.dll` with `[...] x86_64-w64-mingw32/bin/ld.exe: cannot find -lmsvcr140`. This is not required for amici, so in `cygwinccompiler.py` return `['msvcr140']` can be changed to return `[]`.
- If you use a python version where `python/cpython#880` has not been fixed yet, you need to disable `define_hypot_hypot` in `anaconda3\include\pyconfig.h` yourself.
- `import amici` in Python resulting in the very informative

ImportError: DLL load failed: The specified module could not be found.

means that some amici module dependencies were not found (not the AMICI module itself). [DependencyWalker](#) can show you which ones.

Using the Microsoft Visual Studio

Note: Support for MSVC is experimental.

We assume that Visual Studio (not to be confused with Visual Studio Code) is already installed. Using Visual Studio Installer, the following components need to be included:

- Microsoft Visual C++ (MSVC). This is part of multiple packages, including Desktop Development with C++.
- Windows Universal C Runtime. This is an individual component and installs some DLLs that we need.

OpenBLAS

There are prebuilt OpenBLAS binaries available, but they did not seem to work well here. Therefore, we recommend building OpenBLAS from scratch.

To build OpenBLAS, download the following scripts from the AMICI repository:

- <https://github.com/AMICI-dev/AMICI/blob/master/scripts/installOpenBLAS.ps1>
- <https://github.com/AMICI-dev/AMICI/blob/master/scripts/compileBLAS.cmd>

The first script needs to be called in Powershell, and it needs to call `compileBLAS.cmd`, so you will need to modify line 11:

```
cmd /c "scriptscompileBLAS.cmd $version"
```

so that it matches your directory structure. This will download OpenBLAS and compile it, creating

```
C:\BLAS\lib\openblas.lib C:\BLAS\bin\openblas.dll
```

You will also need to define two environment variables:

```
BLAS_LIBS="/LIBPATH:C:\BLAS\lib openblas.lib"
BLAS_CFLAGS="/IC:/BLAS/OpenBLAS-0.3.19/OpenBLAS-0.3.19"
```

One way to do that is to run a PowerShell script with the following commands:

```
[System.Environment]::SetEnvironmentVariable("BLAS_LIBS", "/LIBPATH:C:/BLAS/lib openblas.
↪lib", [System.EnvironmentVariableTarget]::User)
[System.Environment]::SetEnvironmentVariable("BLAS_LIBS", "/LIBPATH:C:/BLAS/lib openblas.
↪lib", [System.EnvironmentVariableTarget]::Process)
[System.Environment]::SetEnvironmentVariable("BLAS_CFLAGS", "-IC:/BLAS/OpenBLAS-0.3.19/
↪OpenBLAS-0.3.19", [System.EnvironmentVariableTarget]::User)
[System.Environment]::SetEnvironmentVariable("BLAS_CFLAGS", "-IC:/BLAS/OpenBLAS-0.3.19/
↪OpenBLAS-0.3.19", [System.EnvironmentVariableTarget]::Process)
```

The call ending in `Process` sets the environment variable in the current process, and it is no longer in effect in the next process. The call ending in `User` is permanent, and takes effect the next time the user logs on.

Now you need to make sure that all required DLLs are within the scope of the `PATH` variable. In particular, the following directories need to be included in `PATH`:

```
C:\BLAS\bin C:\Program Files (x86)\Windows Kits\10\Redist\ucrt\DLLs\x64
```

The first one is needed for `openblas.dll` and the second is needed for the Windows Universal C Runtime.

If any DLLs are missing in the `PATH` variable, Python will return the following error upon `import amici`:

```
ImportError: DLL load failed: The specified module could not be found.
```

Almost all of the DLLs are standard Windows DLLs and should be included in either Windows or Visual Studio. But, in case it is necessary to test this, here is a list of some DLLs required by AMICI (when compiled with MSVC):

- `openblas.dll`
- `python37.dll`
- `MSVCP140.dll`
- `KERNEL32.dll`
- `VCRUNTIME140_1.dll`
- `VCRUNTIME140.dll`
- `api-ms-win-crt-convert-l1-1-0.dll`
- `api-ms-win-crt-heap-l1-1-0.dll`
- `api-ms-win-crt-stdio-l1-1-0.dll`
- `api-ms-win-crt-string-l1-1-0.dll`
- `api-ms-win-crt-runtime-l1-1-0.dll`
- `api-ms-win-crt-time-l1-1-0.dll`
- `api-ms-win-crt-math-l1-1-0.dll`

MSVCP140.dll, VCRUNTIME140.dll, and VCRUNTIME140_1.dll are needed by MSVC (see Visual Studio above). KERNEL32.dll is part of Windows and in C:\Windows\System32. The api-ms-win-crt-XXX-l1-1-0.dll are needed by openblas.dll and are part of the Windows Universal C Runtime.

Note: Since Python 3.8, the library directory needs to be set either from Python:

```
import os
# directory containing `openblas.dll`
os.add_dll_directory("C:\\BLAS\\bin")
import amici
```

or via the environment variable AMICI_DLL_DIRS.

If Python returns the following error upon `import amici`, try updating to the latest Python version.

OSError: [WinError 87] The parameter is incorrect: “

10.1.5 Further topics

Installation of development versions

To install development versions which have not been released to PyPI yet, you can install AMICI with pip directly from GitHub using:

```
pip3 install -e git+https://github.com/AMICI-dev/amici.git@develop#egg=amici\&
↪subdirectory=python/sdist
```

Replace develop by the branch or commit you want to install.

Note that this will only work on Windows if you have enabled developer mode, because symlinks are not supported by default ([more information](#)).

Light installation

In case you only want to use the AMICI Python package for generating model code for use with Matlab or C++ and don't want to be bothered with any unnecessary dependencies, you can run

```
pip3 install --install-option --no-libs amici
```

Note: Following this installation, you will not be able to simulate the imported models in Python.

Note: If you run into an error with above installation command, install all AMICI dependencies listed in [setup.py](#) manually, and try again. (This is because `pip --install-option` is applied to *all* installed packages, including dependencies.)

Custom installation

Installation of the AMICI Python package can be customized using a number of environment variables:

Variable	Purpose	Example
SWIG	Path to the <i>SWIG</i> executable	SWIG=\$HOME/bin/swig4.0
CC	Setting the C(++) compiler	CC=/usr/bin/g++
CFLAGS	Extra compiler flags used in every compiler invocation	
BLAS_CFLAGS	Compiler flags for, e.g. BLAS include directories	
BLAS_LIBS	Flags for linking BLAS	
ENABLE_GCOV_COVERAGE	Set to build AMICI to generate code coverage information	ENABLE_GCOV_COVERAGE=TRUE
ENABLE_AMICI_DEBUGGING	Set to build AMICI with debugging symbols	ENABLE_AMICI_DEBUGGING=TRUE
AMICI_PARALLEL_COMPILE	Set to the number of parallel processes to be used for C(++) compilation (defaults to 1)	AMICI_PARALLEL_COMPILE=4

Installation under Anaconda

To use an Anaconda installation of Python <https://www.anaconda.com/distribution/>, Python>=3.7), proceed as follows:

Since Anaconda provides own versions of some packages which might not work with AMICI (in particular the gcc compiler), create a minimal virtual environment via:

```
conda create --name ENV_NAME pip python
```

Here, replace ENV_NAME by some name for the environment.

To activate the environment, run:

```
source activate ENV_NAME
```

(and `conda deactivate` later to deactivate it again).

SWIG must be installed and available in your PATH, and a CBLAS-compatible BLAS must be available. You can also use conda to install the latter locally, using:

```
conda install -c conda-forge openblas
```

To make AMICI use openblas, set the following environment variable:

```
export BLAS_LIBS=-lopenblas
```

BLAS_LIBS needs to be set during installation of the AMICI package, as well as during any future model import.

To install AMICI, now run:

```
pip install amici
```

The pip option `--no-cache` may be helpful here to make sure the installation is done completely anew.

Now, you are ready to use AMICI in the virtual environment.

Note: Anaconda on Mac

If the above installation does not work for you, try installing AMICI via:

```
CFLAGS="-stdlib=libc++" CC=clang CXX=clang pip3 install --verbose amici
```

This will use the clang compiler.

You will have to pass the same options when compiling any model later on. This can be done by inserting the following code before model import:

```
import os
os.environ['CC'] = 'clang'
os.environ['CXX'] = 'clang'
os.environ['CFLAGS'] = '-stdlib=libc++'
```

(For further discussion see <https://github.com/AMICI-dev/AMICI/issues/357>)

Optional Boost support

Boost is an optional C++ dependency only required for special functions (including e.g. gamma derivatives) in the Python interface. Boost can be installed via package managers via

```
apt-get install libboost-math-dev
```

or

```
brew install boost
```

As only headers are required, also a [source code](#) download suffices. The compiler must be able to find the module in the search path.

10.2 Examples

Various example notebooks.

10.2.1 Getting Started in AMICI

This notebook is a brief tutorial for new users that explains the first steps necessary for model simulation in AMICI, including pointers to documentation and more advanced notebooks.

Model Compilation

Before simulations can be run, the model must be imported and compiled. In this process, AMICI performs all symbolic manipulations that later enable scalable simulations and efficient sensitivity computation. The first step towards model compilation is the creation of an `SbmlImporter` instance, which requires an SBML Document that specifies the model using the [Systems Biology Markup Language \(SBML\)](#).

For the purpose of this tutorial, we will use `model_steadystate_scaled.xml`, which is contained in the same directory as this notebook.

```
[1]: import amici
sbml_importer = amici.SbmlImporter('model_steadystate_scaled.xml')
```

Next, we will compile the model as python extension using the `amici.SBMLImporter.sbml2amici` method. The first two arguments of this method are the name of the model, which will also be the name of the generated python module, and the model directory, which defines the directory in which the model module will be placed. Compilation will take a couple of seconds.

```
[2]: model_name = 'model_steadystate'
model_dir = 'model_dir'
sbml_importer.sbml2amici(model_name, model_dir)
```

Loading the model module

To run simulations, we need to instantiate `amici.Model` and `amici.Solver` instances. As simulations require instances matching the imported model, they have to be imported from the generated model module.

```
[3]: # load the model module
model_module = amici.import_model_module(model_name, model_dir)
# instantiate model
model = model_module.getModel()
# instantiate solver
solver = model.getSolver()
```

The model allows the user to manipulate model related properties of simulations. This includes the values of model parameters that can be set by using `amici.Model.setParameterByName`. Here, we set the model parameter `p1` to a value of `1e-3`.

```
[4]: model.setParameterByName('p1', 1e-3)
```

In contrast, the solver instance allows the specification of simulation related properties. This includes setting options for the SUNDIALS solver such as absolute tolerances via `amici.Solver.setAbsoluteTolerance`. Here we set the absolute integration tolerances to `1e-10`.

```
[5]: solver.setAbsoluteTolerance(1e-10)
```

Running Model Simulations

Model simulations can be executed using the `amici.runAmiciSimulations` routine. By default the model does not contain any timepoints for which the model is to be simulated. Here we define a simulation timecourse with two timepoints at 0 and 1 and then run the simulation.

```
[6]: # set timepoints
model.setTimepoints([0,1])
rdata = amici.runAmiciSimulation(model, solver)
```

Simulation results are returned as `ReturnData` instance. The simulated SBML species are stored as `x` attribute, where rows correspond to the different timepoints and columns correspond to different species.

```
[7]: rdata.x
[7]: array([[0.1      , 0.4      , 0.7      ],
          [0.98208413, 0.51167992, 0.10633388]])
```

All results attributes are always ordered according to the model. For species, this means that the columns of `rdata.x` match the ordering of species in the model, which can be accessed as `amici.Model.getStateNames`

```
[8]: model.getStateNames()
[8]: ('x1', 'x2', 'x3')
```

This notebook only explains the basics of AMICI simulations. In general, AMICI simulations are highly customizable and can also be used to simulate sensitivities. The [ExampleSteadystate](#) notebook in this folder gives more detail about the model employed here and goes into the basics of sensitivity analysis. The [ExampleEquilibrationLogic](#) notebook, builds on this by using a modified version of this model to give detailed insights into the methods and options to compute steady states before and after simulations, as well as respective sensitivities. The [ExampleExperimentalConditions](#) notebook, goes into the details of how even more complex experimental setups, such as addition of drugs at predefined timepoints, can be simulated in AMICI. Finally, the [petab](#) notebook explains how standardized definitions of experimental data and conditions in the [PEtab](#) format can be imported in AMICI.

10.2.2 AMICI Python example “steadystate”

This is an example using the `[model_steadystate_scaled.sbml]` model to demonstrate and test SBML import and AMICI Python interface.

```
[1]: # SBML model we want to import
sbml_file = 'model_steadystate_scaled_without_observables.xml'
# Name of the model that will also be the name of the python module
model_name = 'model_steadystate_scaled'
# Directory to which the generated model code is written
model_output_dir = model_name

import libsbml
import importlib
import amici
import os
import sys
import numpy as np
import matplotlib.pyplot as plt
```

The example model

Here we use libsbml to show the reactions and species described by the model (this is independent of AMICI).

```
[2]: sbml_reader = libsbml.SBMLReader()
sbml_doc = sbml_reader.readSBML(sbml_file)
sbml_model = sbml_doc.getModel()
dir(sbml_doc)

print('Species: ', [s.getId() for s in sbml_model.getListOfSpecies()])

print('\nReactions:')
for reaction in sbml_model.getListOfReactions():
    reactants = ' + '.join(['%s %s'%(int(r.getStoichiometry()) if r.getStoichiometry() > 1
→1 else '', r.getSpecies()) for r in reaction.getListOfReactants()])
    products = ' + '.join(['%s %s'%(int(r.getStoichiometry()) if r.getStoichiometry() > 1
→1 else '', r.getSpecies()) for r in reaction.getListOfProducts()])
    reversible = '<' if reaction.getReversible() else ''
    print('%3s: %10s %1s->%10s\t\t[%s]' % (reaction.getId(),
        reactants,
        reversible,
        products,
        libsbml.formulaToL3String(reaction.getKineticLaw().getMath())))
```

Species: ['x1', 'x2', 'x3']

Reactions:

r1:	2 x1	->	x2	[p1 * x1^2]
r2:	x1 + x2	->	x3	[p2 * x1 * x2]
r3:	x2	->	2 x1	[p3 * x2]
r4:	x3	->	x1 + x2	[p4 * x3]
r5:	x3	->		[k0 * x3]
r6:		->	x1	[p5]

Importing an SBML model, compiling and generating an AMICI module

Before we can use AMICI to simulate our model, the SBML model needs to be translated to C++ code. This is done by `amici.SbmlImporter`.

```
[3]: # Create an SbmlImporter instance for our SBML model
sbml_importer = amici.SbmlImporter(sbml_file)
```

In this example, we want to specify fixed parameters, observables and a σ parameter. Unfortunately, the latter two are not part of the [SBML standard](#). However, they can be provided to `amici.SbmlImporter.sbml2amici` as demonstrated in the following.

Constant parameters

Constant parameters, i.e. parameters with respect to which no sensitivities are to be computed (these are often parameters specifying a certain experimental condition) are provided as a list of parameter names.

```
[4]: constantParameters = ['k0']
```

Observables

Specifying observables is beyond the scope of SBML. Here we define them manually.

If you are looking for a more scalable way for defining observables, then checkout [PEtab](https://sbml.org/software/libsbml/5.18.0/docs/formatted/python-api/classlibsbml_1_1_assignment_rule.html). Another possibility is using SBML's `AssignmentRules` <https://sbml.org/software/libsbml/5.18.0/docs/formatted/python-api/classlibsbml_1_1_assignment_rule.html> to specify model outputs within the SBML file.

```
[5]: # Define observables
observables = {
    'observable_x1': {'name': '', 'formula': 'x1'},
    'observable_x2': {'name': '', 'formula': 'x2'},
    'observable_x3': {'name': '', 'formula': 'x3'},
    'observable_x1_scaled': {'name': '', 'formula': 'scaling_x1 * x1'},
    'observable_x2_offsetted': {'name': '', 'formula': 'offset_x2 + x2'},
    'observable_x1withsigma': {'name': '', 'formula': 'x1'}
}
```

σ parameters

To specify measurement noise as a parameter, we simply provide a dictionary with (preexisting) parameter names as keys and a list of observable names as values to indicate which sigma parameter is to be used for which observable.

```
[6]: sigmas = {'observable_x1withsigma': 'observable_x1withsigma_sigma'}
```

Generating the module

Now we can generate the python module for our model. `amici.SbmlImporter.sbml2amici` will symbolically derive the sensitivity equations, generate C++ code for model simulation, and assemble the python module. Standard logging verbosity levels can be passed to this function to see timestamped progression during code generation.

```
[7]: import logging
      sbml_importer.sbml2amici(model_name,
                              model_output_dir,
                              verbose=logging.INFO,
                              observables=observables,
                              constant_parameters=constantParameters,
                              sigmas=sigmas)

2021-11-30 16:57:57.997 - amici.sbml_import - INFO - Finished gathering local SBML
→ symbols + (8.05E-03s)
2021-11-30 16:57:58.047 - amici.sbml_import - INFO - Finished processing SBML parameters
→ + (4.64E-02s)
```

(continues on next page)

(continued from previous page)

```

2021-11-30 16:57:58.054 - amici.sbml_import - INFO - Finished processing SBML
↳ compartments + (2.69E-04s)
2021-11-30 16:57:58.063 - amici.sbml_import - INFO - Finished processing SBML species
↳ initials ++ (1.47E-03s)
2021-11-30 16:57:58.067 - amici.sbml_import - INFO - Finished processing SBML rate rules
↳ ++ (7.65E-05s)
2021-11-30 16:57:58.068 - amici.sbml_import - INFO - Finished processing SBML species
↳ + (9.09E-03s)
2021-11-30 16:57:58.076 - amici.sbml_import - INFO - Finished processing SBML reactions
↳ + (4.32E-03s)
2021-11-30 16:57:58.086 - amici.sbml_import - INFO - Finished processing SBML rules
↳ + (6.88E-03s)
2021-11-30 16:57:58.093 - amici.sbml_import - INFO - Finished processing SBML initial
↳ assignments + (5.51E-05s)
2021-11-30 16:57:58.097 - amici.sbml_import - INFO - Finished processing SBML species
↳ references + (8.19E-04s)
2021-11-30 16:57:58.105 - amici.sbml_import - INFO - Finished processing SBML events
↳ + (1.00E-04s)
2021-11-30 16:57:58.105 - amici.sbml_import - INFO - Finished importing SBML
↳ (1.19E-01s)
2021-11-30 16:57:58.180 - amici.sbml_import - INFO - Finished processing SBML
↳ observables (6.99E-02s)
2021-11-30 16:57:58.202 - amici.ode_export - INFO - Finished running smart_multiply
↳ + (3.40E-03s)
2021-11-30 16:57:58.210 - amici.ode_export - INFO - Finished importing SbmlImporter
↳ (1.42E-02s)
2021-11-30 16:57:58.286 - amici.ode_export - INFO - Finished simplifying Jy
↳ +++ (6.10E-02s)
2021-11-30 16:57:58.288 - amici.ode_export - INFO - Finished computing Jy
↳ ++ (6.69E-02s)
2021-11-30 16:57:58.299 - amici.ode_export - INFO - Finished simplifying y
↳ +++ (6.08E-04s)
2021-11-30 16:57:58.300 - amici.ode_export - INFO - Finished computing y
↳ ++ (5.38E-03s)
2021-11-30 16:57:58.308 - amici.ode_export - INFO - Finished simplifying sigmay
↳ +++ (1.19E-04s)
2021-11-30 16:57:58.310 - amici.ode_export - INFO - Finished computing sigmay
↳ ++ (5.58E-03s)
2021-11-30 16:57:58.351 - amici.ode_export - INFO - Finished writing Jy.cpp
↳ + (1.33E-01s)
2021-11-30 16:57:58.421 - amici.ode_export - INFO - Finished running smart_jacobian
↳ +++ (5.81E-02s)
2021-11-30 16:57:58.452 - amici.ode_export - INFO - Finished simplifying dJydsigma
↳ +++ (2.69E-02s)
2021-11-30 16:57:58.453 - amici.ode_export - INFO - Finished computing dJydsigma
↳ ++ (9.43E-02s)
2021-11-30 16:57:58.466 - amici.ode_export - INFO - Finished writing dJydsigma.cpp
↳ + (1.09E-01s)
2021-11-30 16:57:58.505 - amici.ode_export - INFO - Finished running smart_jacobian
↳ +++ (2.48E-02s)
2021-11-30 16:57:58.559 - amici.ode_export - INFO - Finished simplifying dJydy
↳ +++ (4.86E-02s)

```

(continues on next page)

(continued from previous page)

```

2021-11-30 16:57:58.560 - amici.ode_export - INFO - Finished computing dJydy
↳      ++ (8.27E-02s)
2021-11-30 16:57:58.586 - amici.ode_export - INFO - Finished writing dJydy.cpp
↳      + (1.12E-01s)
2021-11-30 16:57:58.599 - amici.ode_export - INFO - Finished simplifying root
↳      +++ (5.50E-05s)
2021-11-30 16:57:58.600 - amici.ode_export - INFO - Finished computing root
↳      ++ (4.63E-03s)
2021-11-30 16:57:58.601 - amici.ode_export - INFO - Finished writing root.cpp
↳      + (8.96E-03s)
2021-11-30 16:57:58.624 - amici.ode_export - INFO - Finished simplifying w
↳      ++++ (7.65E-03s)
2021-11-30 16:57:58.626 - amici.ode_export - INFO - Finished computing w
↳      +++ (1.21E-02s)
2021-11-30 16:57:58.641 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (1.04E-02s)
2021-11-30 16:57:58.647 - amici.ode_export - INFO - Finished simplifying dwdp
↳      +++ (1.45E-03s)
2021-11-30 16:57:58.648 - amici.ode_export - INFO - Finished computing dwdp
↳      ++ (3.77E-02s)
2021-11-30 16:57:58.658 - amici.ode_export - INFO - Finished writing dwdp.cpp
↳      + (5.28E-02s)
2021-11-30 16:57:58.680 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (1.15E-02s)
2021-11-30 16:57:58.687 - amici.ode_export - INFO - Finished simplifying dwdx
↳      +++ (1.95E-03s)
2021-11-30 16:57:58.687 - amici.ode_export - INFO - Finished computing dwdx
↳      ++ (2.17E-02s)
2021-11-30 16:57:58.696 - amici.ode_export - INFO - Finished writing dwdx.cpp
↳      + (3.37E-02s)
2021-11-30 16:57:58.705 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (1.05E-04s)
2021-11-30 16:57:58.710 - amici.ode_export - INFO - Finished simplifying dwdw
↳      +++ (6.07E-04s)
2021-11-30 16:57:58.711 - amici.ode_export - INFO - Finished computing dwdw
↳      ++ (8.67E-03s)
2021-11-30 16:57:58.713 - amici.ode_export - INFO - Finished writing dwdw.cpp
↳      + (1.25E-02s)
2021-11-30 16:57:58.729 - amici.ode_export - INFO - Finished simplifying xdot
↳      ++++ (5.40E-03s)
2021-11-30 16:57:58.729 - amici.ode_export - INFO - Finished computing xdot
↳      +++ (8.78E-03s)
2021-11-30 16:57:58.746 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (1.30E-02s)
2021-11-30 16:57:58.752 - amici.ode_export - INFO - Finished simplifying dxdotdw
↳      +++ (2.97E-04s)
2021-11-30 16:57:58.753 - amici.ode_export - INFO - Finished computing dxdotdw
↳      ++ (3.42E-02s)
2021-11-30 16:57:58.765 - amici.ode_export - INFO - Finished writing dxdotdw.cpp
↳      + (4.89E-02s)
2021-11-30 16:57:58.777 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (9.65E-05s)

```

(continues on next page)

(continued from previous page)

```

2021-11-30 16:57:58.780 - amici.ode_export - INFO - Finished simplifying dxdotdx_
↳explicit      +++ (7.85E-05s)
2021-11-30 16:57:58.781 - amici.ode_export - INFO - Finished computing dxdotdx_explicit
↳      ++ (8.68E-03s)
2021-11-30 16:57:58.782 - amici.ode_export - INFO - Finished writing dxdotdx_explicit.
↳cpp      + (1.24E-02s)
2021-11-30 16:57:58.793 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (9.18E-05s)
2021-11-30 16:57:58.797 - amici.ode_export - INFO - Finished simplifying dxdotdp_
↳explicit      +++ (1.22E-04s)
2021-11-30 16:57:58.798 - amici.ode_export - INFO - Finished computing dxdotdp_explicit
↳      ++ (8.08E-03s)
2021-11-30 16:57:58.799 - amici.ode_export - INFO - Finished writing dxdotdp_explicit.
↳cpp      + (1.36E-02s)
2021-11-30 16:57:58.816 - amici.ode_export - INFO - Finished running smart_jacobian
↳      ++++ (1.92E-03s)
2021-11-30 16:57:58.821 - amici.ode_export - INFO - Finished simplifying dydx
↳      ++++ (1.55E-04s)
2021-11-30 16:57:58.822 - amici.ode_export - INFO - Finished computing dydx
↳      +++ (1.20E-02s)
2021-11-30 16:57:58.832 - amici.ode_export - INFO - Finished running smart_jacobian
↳      ++++ (1.11E-04s)
2021-11-30 16:57:58.837 - amici.ode_export - INFO - Finished simplifying dydw
↳      ++++ (4.09E-04s)
2021-11-30 16:57:58.837 - amici.ode_export - INFO - Finished computing dydw
↳      +++ (9.68E-03s)
2021-11-30 16:57:58.844 - amici.ode_export - INFO - Finished simplifying dydx
↳      +++ (1.97E-04s)
2021-11-30 16:57:58.845 - amici.ode_export - INFO - Finished computing dydx
↳      ++ (3.77E-02s)
2021-11-30 16:57:58.849 - amici.ode_export - INFO - Finished writing dydx.cpp
↳      + (4.51E-02s)
2021-11-30 16:57:58.862 - amici.ode_export - INFO - Finished running smart_jacobian
↳      ++++ (1.74E-03s)
2021-11-30 16:57:58.866 - amici.ode_export - INFO - Finished simplifying dydp
↳      ++++ (3.88E-04s)
2021-11-30 16:57:58.867 - amici.ode_export - INFO - Finished computing dydp
↳      +++ (9.93E-03s)
2021-11-30 16:57:58.872 - amici.ode_export - INFO - Finished simplifying dydp
↳      +++ (1.78E-04s)
2021-11-30 16:57:58.873 - amici.ode_export - INFO - Finished computing dydp
↳      ++ (1.84E-02s)
2021-11-30 16:57:58.876 - amici.ode_export - INFO - Finished writing dydp.cpp
↳      + (2.33E-02s)
2021-11-30 16:57:58.887 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (1.58E-03s)
2021-11-30 16:57:58.892 - amici.ode_export - INFO - Finished simplifying dsigmaydp
↳      +++ (2.41E-04s)
2021-11-30 16:57:58.893 - amici.ode_export - INFO - Finished computing dsigmaydp
↳      ++ (1.08E-02s)
2021-11-30 16:57:58.894 - amici.ode_export - INFO - Finished writing dsigmaydp.cpp
↳      + (1.50E-02s)

```

(continues on next page)

(continued from previous page)

```

2021-11-30 16:57:58.901 - amici.ode_export - INFO - Finished writing sigmay.cpp
↳      + (2.68E-03s)
2021-11-30 16:57:58.909 - amici.ode_export - INFO - Finished computing stau
↳      ++ (1.35E-04s)
2021-11-30 16:57:58.910 - amici.ode_export - INFO - Finished writing stau.cpp
↳      + (4.10E-03s)
2021-11-30 16:57:58.916 - amici.ode_export - INFO - Finished computing deltax
↳      ++ (1.34E-04s)
2021-11-30 16:57:58.916 - amici.ode_export - INFO - Finished writing deltax.cpp
↳      + (3.34E-03s)
2021-11-30 16:57:58.924 - amici.ode_export - INFO - Finished computing deltasx
↳      ++ (1.99E-04s)
2021-11-30 16:57:58.925 - amici.ode_export - INFO - Finished writing deltasx.cpp
↳      + (3.88E-03s)
2021-11-30 16:57:58.934 - amici.ode_export - INFO - Finished writing w.cpp
↳      + (5.23E-03s)
2021-11-30 16:57:58.945 - amici.ode_export - INFO - Finished simplifying x0
↳      +++ (7.68E-05s)
2021-11-30 16:57:58.946 - amici.ode_export - INFO - Finished computing x0
↳      ++ (4.22E-03s)
2021-11-30 16:57:58.949 - amici.ode_export - INFO - Finished writing x0.cpp
↳      + (1.04E-02s)
2021-11-30 16:57:58.961 - amici.ode_export - INFO - Finished simplifying x0_
↳fixedParameters      +++ (4.96E-05s)
2021-11-30 16:57:58.962 - amici.ode_export - INFO - Finished computing x0_
↳fixedParameters      ++ (4.51E-03s)
2021-11-30 16:57:58.963 - amici.ode_export - INFO - Finished writing x0_fixedParameters.
↳cpp      + (8.84E-03s)
2021-11-30 16:57:58.982 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (2.15E-04s)
2021-11-30 16:57:58.987 - amici.ode_export - INFO - Finished simplifying sx0
↳      +++ (1.20E-04s)
2021-11-30 16:57:58.988 - amici.ode_export - INFO - Finished computing sx0
↳      ++ (9.27E-03s)
2021-11-30 16:57:58.989 - amici.ode_export - INFO - Finished writing sx0.cpp
↳      + (2.26E-02s)
2021-11-30 16:57:58.999 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (3.06E-05s)
2021-11-30 16:57:59.003 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (2.44E-05s)
2021-11-30 16:57:59.008 - amici.ode_export - INFO - Finished simplifying sx0_
↳fixedParameters      +++ (6.08E-05s)
2021-11-30 16:57:59.009 - amici.ode_export - INFO - Finished computing sx0_
↳fixedParameters      ++ (1.28E-02s)
2021-11-30 16:57:59.009 - amici.ode_export - INFO - Finished writing sx0_fixedParameters.
↳cpp      + (1.59E-02s)
2021-11-30 16:57:59.021 - amici.ode_export - INFO - Finished writing xdot.cpp
↳      + (7.26E-03s)
2021-11-30 16:57:59.028 - amici.ode_export - INFO - Finished writing y.cpp
↳      + (2.13E-03s)
2021-11-30 16:57:59.036 - amici.ode_export - INFO - Finished simplifying x_rdata
↳      +++ (5.62E-05s)

```

(continues on next page)

(continued from previous page)

```

2021-11-30 16:57:59.038 - amici.ode_export - INFO - Finished computing x_rdata
↳      ++ (5.16E-03s)
2021-11-30 16:57:59.041 - amici.ode_export - INFO - Finished writing x_rdata.cpp
↳      + (9.60E-03s)
2021-11-30 16:57:59.050 - amici.ode_export - INFO - Finished simplifying total_cl
↳      +++ (4.08E-05s)
2021-11-30 16:57:59.051 - amici.ode_export - INFO - Finished computing total_cl
↳      ++ (3.64E-03s)
2021-11-30 16:57:59.052 - amici.ode_export - INFO - Finished writing total_cl.cpp
↳      + (7.19E-03s)
2021-11-30 16:57:59.064 - amici.ode_export - INFO - Finished simplifying x_solver
↳      +++ (7.69E-05s)
2021-11-30 16:57:59.065 - amici.ode_export - INFO - Finished computing x_solver
↳      ++ (4.62E-03s)
2021-11-30 16:57:59.068 - amici.ode_export - INFO - Finished writing x_solver.cpp
↳      + (1.13E-02s)
2021-11-30 16:57:59.079 - amici.ode_export - INFO - Finished generating cpp code
↳      (8.66E-01s)
2021-11-30 16:58:07.834 - amici.ode_export - INFO - Finished compiling cpp code
↳      (8.75E+00s)

```

Importing the module and loading the model

If everything went well, we need to add the previously selected model output directory to our PYTHON_PATH and are then ready to load newly generated model:

```
[8]: sys.path.insert(0, os.path.abspath(model_output_dir))
model_module = importlib.import_module(model_name)
```

And get an instance of our model from which we can retrieve information such as parameter names:

```
[9]: model = model_module.getModel()

print("Model name:", model.getName())
print("Model parameters:", model.getParameterIds())
print("Model outputs:  ", model.getObservableIds())
print("Model states:   ", model.getStateIds())

Model name: model_steadystate_scaled
Model parameters: ('p1', 'p2', 'p3', 'p4', 'p5', 'scaling_x1', 'offset_x2', 'observable_
↳ x1withsigma_sigma')
Model outputs:    ('observable_x1', 'observable_x2', 'observable_x3', 'observable_x1_
↳ scaled', 'observable_x2_offsetted', 'observable_x1withsigma')
Model states:     ('x1', 'x2', 'x3')
```

Running simulations and analyzing results

After importing the model, we can run simulations using `amici.runAmiciSimulation`. This requires a `Model` instance and a `Solver` instance. Optionally you can provide measurements inside an `ExpData` instance, as shown later in this notebook.

```
[10]: # Create Model instance
model = model_module.getModel()

# set timepoints for which we want to simulate the model
model.setTimepoints(np.linspace(0, 60, 60))

# Create solver instance
solver = model.getSolver()

# Run simulation using default model parameters and solver options
rdata = amici.runAmiciSimulation(model, solver)

[11]: print('Simulation was run using model default parameters as specified in the SBML model:
      ↪')
print(model.getParameters())

Simulation was run using model default parameters as specified in the SBML model:
(1.0, 0.5, 0.4, 2.0, 0.1, 2.0, 3.0, 0.2)
```

Simulation results are provided as `numpy.ndarrays` in the returned dictionary:

```
[12]: #np.set_printoptions(threshold=8, edgeitems=2)
for key, value in rdata.items():
    print('%12s: ' % key, value)

      ts: [ 0.          1.01694915  2.03389831  3.05084746  4.06779661  5.08474576
  6.10169492  7.11864407  8.13559322  9.15254237 10.16949153 11.18644068
12.20338983 13.22033898 14.23728814 15.25423729 16.27118644 17.28813559
18.30508475 19.3220339 20.33898305 21.3559322 22.37288136 23.38983051
24.40677966 25.42372881 26.44067797 27.45762712 28.47457627 29.49152542
30.50847458 31.52542373 32.54237288 33.55932203 34.57627119 35.59322034
36.61016949 37.62711864 38.6440678 39.66101695 40.6779661 41.69491525
42.71186441 43.72881356 44.74576271 45.76271186 46.77966102 47.79661017
48.81355932 49.83050847 50.84745763 51.86440678 52.88135593 53.89830508
54.91525424 55.93220339 56.94915254 57.96610169 58.98305085 60.          ]
      x: [[0.1          0.4          0.7          ]
[0.57995052 0.73365809 0.0951589 ]
[0.55996496 0.71470091 0.0694127 ]
[0.5462855  0.68030366 0.06349394]
[0.53561883 0.64937432 0.05923555]
[0.52636487 0.62259567 0.05568686]
[0.51822013 0.59943346 0.05268079]
[0.51103767 0.57935661 0.05012037]
[0.5047003  0.56191592 0.04793052]
[0.49910666 0.54673518 0.0460508 ]
[0.49416809 0.53349812 0.04443205]
[0.48980687 0.52193767 0.04303399]
[0.48595476 0.51182731 0.04182339]
```

(continues on next page)

(continued from previous page)

```

[0.48255176 0.50297412 0.04077267]
[0.47954511 0.49521318 0.03985882]
[0.47688833 0.48840304 0.03906254]
[0.47454049 0.48242198 0.03836756]
[0.47246548 0.47716502 0.0377601 ]
[0.47063147 0.47254128 0.03722844]
[0.46901037 0.46847202 0.03676259]
[0.46757739 0.46488881 0.03635397]
[0.46631065 0.46173207 0.03599523]
[0.46519082 0.45894987 0.03568002]
[0.46420083 0.45649684 0.03540285]
[0.4633256  0.45433332 0.03515899]
[0.4625518  0.45242457 0.03494429]
[0.46186768 0.45074016 0.03475519]
[0.46126282 0.44925337 0.03458856]
[0.46072804 0.44794075 0.03444166]
[0.46025521 0.44678168 0.03431212]
[0.45983714 0.44575804 0.03419784]
[0.45946749 0.44485388 0.03409701]
[0.45914065 0.44405514 0.03400802]
[0.45885167 0.44334947 0.03392946]
[0.45859615 0.44272595 0.03386009]
[0.45837021 0.44217497 0.03379883]
[0.45817043 0.44168805 0.03374473]
[0.45799379 0.44125772 0.03369693]
[0.4578376  0.44087738 0.03365471]
[0.45769949 0.44054121 0.0336174 ]
[0.45757737 0.44024405 0.03358444]
[0.45746939 0.43998137 0.03355531]
[0.45737391 0.43974917 0.03352956]
[0.45728948 0.43954389 0.03350681]
[0.45721483 0.43936242 0.0334867 ]
[0.45714882 0.43920198 0.03346892]
[0.45709045 0.43906014 0.03345321]
[0.45703884 0.43893474 0.03343932]
[0.4569932  0.43882387 0.03342704]
[0.45695285 0.43872584 0.03341618]
[0.45691717 0.43863917 0.03340658]
[0.45688561 0.43856254 0.0333981 ]
[0.45685771 0.43849478 0.0333906 ]
[0.45683304 0.43843488 0.03338397]
[0.45681123 0.4383819  0.0333781 ]
[0.45679194 0.43833507 0.03337292]
[0.45677488 0.43829365 0.03336833]
[0.4567598  0.43825703 0.03336428]
[0.45674646 0.43822466 0.0333607 ]
[0.45673467 0.43819603 0.03335753]]
    x0:  [0.1 0.4 0.7]
    x_ss: [nan nan nan]
    sx:   None
    sx0:  None
    sx_ss: None

```

(continues on next page)

(continued from previous page)

```

y:  [[0.1      0.4      0.7      0.2      3.4      0.1      ]
[0.57995052 0.73365809 0.0951589 1.15990103 3.73365809 0.57995052]
[0.55996496 0.71470091 0.0694127 1.11992992 3.71470091 0.55996496]
[0.5462855  0.68030366 0.06349394 1.092571  3.68030366 0.5462855  ]
[0.53561883 0.64937432 0.05923555 1.07123766 3.64937432 0.53561883]
[0.52636487 0.62259567 0.05568686 1.05272975 3.62259567 0.52636487]
[0.51822013 0.59943346 0.05268079 1.03644027 3.59943346 0.51822013]
[0.51103767 0.57935661 0.05012037 1.02207533 3.57935661 0.51103767]
[0.5047003  0.56191592 0.04793052 1.00940059 3.56191592 0.5047003  ]
[0.49910666 0.54673518 0.0460508  0.99821331 3.54673518 0.49910666]
[0.49416809 0.53349812 0.04443205 0.98833618 3.53349812 0.49416809]
[0.48980687 0.52193767 0.04303399 0.97961374 3.52193767 0.48980687]
[0.48595476 0.51182731 0.04182339 0.97190952 3.51182731 0.48595476]
[0.48255176 0.50297412 0.04077267 0.96510352 3.50297412 0.48255176]
[0.47954511 0.49521318 0.03985882 0.95909022 3.49521318 0.47954511]
[0.47688833 0.48840304 0.03906254 0.95377667 3.48840304 0.47688833]
[0.47454049 0.48242198 0.03836756 0.94908097 3.48242198 0.47454049]
[0.47246548 0.47716502 0.0377601  0.94493095 3.47716502 0.47246548]
[0.47063147 0.47254128 0.03722844 0.94126293 3.47254128 0.47063147]
[0.46901037 0.46847202 0.03676259 0.93802074 3.46847202 0.46901037]
[0.46757739 0.46488881 0.03635397 0.93515478 3.46488881 0.46757739]
[0.46631065 0.46173207 0.03599523 0.9326213  3.46173207 0.46631065]
[0.46519082 0.45894987 0.03568002 0.93038164 3.45894987 0.46519082]
[0.46420083 0.45649684 0.03540285 0.92840166 3.45649684 0.46420083]
[0.4633256  0.45433332 0.03515899 0.92665119 3.45433332 0.4633256  ]
[0.4625518  0.45242457 0.03494429 0.9251036  3.45242457 0.4625518  ]
[0.46186768 0.45074016 0.03475519 0.92373536 3.45074016 0.46186768]
[0.46126282 0.44925337 0.03458856 0.92252564 3.44925337 0.46126282]
[0.46072804 0.44794075 0.03444166 0.92145608 3.44794075 0.46072804]
[0.46025521 0.44678168 0.03431212 0.92051041 3.44678168 0.46025521]
[0.45983714 0.44575804 0.03419784 0.91967427 3.44575804 0.45983714]
[0.45946749 0.44485388 0.03409701 0.91893498 3.44485388 0.45946749]
[0.45914065 0.44405514 0.03400802 0.91828131 3.44405514 0.45914065]
[0.45885167 0.44334947 0.03392946 0.91770333 3.44334947 0.45885167]
[0.45859615 0.44272595 0.03386009 0.91719229 3.44272595 0.45859615]
[0.45837021 0.44217497 0.03379883 0.91674042 3.44217497 0.45837021]
[0.45817043 0.44168805 0.03374473 0.91634087 3.44168805 0.45817043]
[0.45799379 0.44125772 0.03369693 0.91598758 3.44125772 0.45799379]
[0.4578376  0.44087738 0.03365471 0.9156752  3.44087738 0.4578376  ]
[0.45769949 0.44054121 0.0336174  0.91539898 3.44054121 0.45769949]
[0.45757737 0.44024405 0.03358444 0.91515474 3.44024405 0.45757737]
[0.45746939 0.43998137 0.03355531 0.91493878 3.43998137 0.45746939]
[0.45737391 0.43974917 0.03352956 0.91474782 3.43974917 0.45737391]
[0.45728948 0.43954389 0.03350681 0.91457897 3.43954389 0.45728948]
[0.45721483 0.43936242 0.0334867  0.91442966 3.43936242 0.45721483]
[0.45714882 0.43920198 0.03346892 0.91429764 3.43920198 0.45714882]
[0.45709045 0.43906014 0.03345321 0.91418091 3.43906014 0.45709045]
[0.45703884 0.43893474 0.03343932 0.91407768 3.43893474 0.45703884]
[0.4569932  0.43882387 0.03342704 0.91398641 3.43882387 0.4569932  ]
[0.45695285 0.43872584 0.03341618 0.9139057  3.43872584 0.45695285]
[0.45691717 0.43863917 0.03340658 0.91383433 3.43863917 0.45691717]
[0.45688561 0.43856254 0.0333981  0.91377123 3.43856254 0.45688561]

```

(continues on next page)

(continued from previous page)

[illegible]

(continues on next page)

(continues on next page)

(continued from previous page)

```

[3.73365809 0.57995052 1.15990103 0.73365809 0.57995052 0.0951589
 0.3363426 0.21274269 0.29346324 0.1903178 0.0951589 0.1 ]
[3.71470091 0.55996496 1.11992992 0.71470091 0.55996496 0.0694127
 0.31356076 0.20010373 0.28588036 0.13882541 0.0694127 0.1 ]
[3.68030366 0.5462855 1.092571 0.68030366 0.5462855 0.06349394
 0.29842785 0.18582001 0.27212146 0.12698788 0.06349394 0.1 ]
[3.64937432 0.53561883 1.07123766 0.64937432 0.53561883 0.05923555
 0.28688753 0.17390856 0.25974973 0.1184711 0.05923555 0.1 ]
[3.62259567 0.52636487 1.05272975 0.62259567 0.52636487 0.05568686
 0.27705998 0.16385625 0.24903827 0.11137372 0.05568686 0.1 ]
[3.59943346 0.51822013 1.03644027 0.59943346 0.51822013 0.05268079
 0.26855211 0.15531924 0.23977338 0.10536158 0.05268079 0.1 ]
[3.57935661 0.51103767 1.02207533 0.57935661 0.51103767 0.05012037
 0.2611595 0.14803652 0.23174264 0.10024074 0.05012037 0.1 ]
[3.56191592 0.5047003 1.00940059 0.56191592 0.5047003 0.04793052
 0.25472239 0.14179957 0.22476637 0.09586103 0.04793052 0.1 ]
[3.54673518 0.49910666 0.99821331 0.54673518 0.49910666 0.0460508
 0.24910746 0.13643958 0.21869407 0.0921016 0.0460508 0.1 ]
[3.53349812 0.49416809 0.98833618 0.53349812 0.49416809 0.04443205
 0.2442021 0.13181887 0.21339925 0.08886411 0.04443205 0.1 ]
[3.52193767 0.48980687 0.97961374 0.52193767 0.48980687 0.04303399
 0.23991077 0.12782433 0.20877507 0.08606799 0.04303399 0.1 ]
[3.51182731 0.48595476 0.97190952 0.51182731 0.48595476 0.04182339
 0.23615203 0.12436246 0.20473093 0.08364678 0.04182339 0.1 ]
[3.50297412 0.48255176 0.96510352 0.50297412 0.48255176 0.04077267
 0.2328562 0.12135552 0.20118965 0.08154533 0.04077267 0.1 ]
[3.49521318 0.47954511 0.95909022 0.49521318 0.47954511 0.03985882
 0.22996351 0.11873853 0.19808527 0.07971763 0.03985882 0.1 ]
[3.48840304 0.47688833 0.95377667 0.48840304 0.47688833 0.03906254
 0.22742248 0.11645686 0.19536122 0.07812507 0.03906254 0.1 ]
[3.48242198 0.47454049 0.94908097 0.48242198 0.47454049 0.03836756
 0.22518867 0.11446438 0.19296879 0.07673511 0.03836756 0.1 ]
[3.47716502 0.47246548 0.94493095 0.47716502 0.47246548 0.0377601
 0.22322363 0.112722 0.19086601 0.0755202 0.0377601 0.1 ]
[3.47254128 0.47063147 0.94126293 0.47254128 0.47063147 0.03722844
 0.22149398 0.1111964 0.18901651 0.07445688 0.03722844 0.1 ]
[3.46847202 0.46901037 0.93802074 0.46847202 0.46901037 0.03676259
 0.21997073 0.10985912 0.18738881 0.07352518 0.03676259 0.1 ]
[3.46488881 0.46757739 0.93515478 0.46488881 0.46757739 0.03635397
 0.21862862 0.10868575 0.18595552 0.07270794 0.03635397 0.1 ]
[3.46173207 0.46631065 0.9326213 0.46173207 0.46631065 0.03599523
 0.21744562 0.10765529 0.18469283 0.07199046 0.03599523 0.1 ]
[3.45894987 0.46519082 0.93038164 0.45894987 0.46519082 0.03568002
 0.2164025 0.10674963 0.18357995 0.07136003 0.03568002 0.1 ]
[3.45649684 0.46420083 0.92840166 0.45649684 0.46420083 0.03540285
 0.21548241 0.10595311 0.18259874 0.0708057 0.03540285 0.1 ]
[3.45433332 0.4633256 0.92665119 0.45433332 0.4633256 0.03515899
 0.21467061 0.10525213 0.18173333 0.07031797 0.03515899 0.1 ]
[3.45242457 0.4625518 0.9251036 0.45242457 0.4625518 0.03494429
 0.21395417 0.1046349 0.18096983 0.06988859 0.03494429 0.1 ]
[3.45074016 0.46186768 0.92373536 0.45074016 0.46186768 0.03475519
 0.21332175 0.10409116 0.18029606 0.06951039 0.03475519 0.1 ]

```

(continues on next page)

(continued from previous page)

```

[3.44925337 0.46126282 0.92252564 0.44925337 0.46126282 0.03458856
 0.21276339 0.10361194 0.17970135 0.06917712 0.03458856 0.1      ]
[3.44794075 0.46072804 0.92145608 0.44794075 0.46072804 0.03444166
 0.21227033 0.10318943 0.1791763  0.06888332 0.03444166 0.1      ]
[3.44678168 0.46025521 0.92051041 0.44678168 0.46025521 0.03431212
 0.21183485 0.1028168  0.17871267 0.06862424 0.03431212 0.1      ]
[3.44575804 0.45983714 0.91967427 0.44575804 0.45983714 0.03419784
 0.21145019 0.10248805 0.17830322 0.06839569 0.03419784 0.1      ]
[3.44485388 0.45946749 0.91893498 0.44485388 0.45946749 0.03409701
 0.21111037 0.10219795 0.17794155 0.06819402 0.03409701 0.1      ]
[3.44405514 0.45914065 0.91828131 0.44405514 0.45914065 0.03400802
 0.21081014 0.10194188 0.17762206 0.06801603 0.03400802 0.1      ]
[3.44334947 0.45885167 0.91770333 0.44334947 0.45885167 0.03392946
 0.21054485 0.10171582 0.17733979 0.06785891 0.03392946 0.1      ]
[3.44272595 0.45859615 0.91719229 0.44272595 0.45859615 0.03386009
 0.21031042 0.10151621 0.17709038 0.06772018 0.03386009 0.1      ]
[3.44217497 0.45837021 0.91674042 0.44217497 0.45837021 0.03379883
 0.21010325 0.10133992 0.17686999 0.06759766 0.03379883 0.1      ]
[3.44168805 0.45817043 0.91634087 0.44168805 0.45817043 0.03374473
 0.20992015 0.1011842  0.17667522 0.06748945 0.03374473 0.1      ]
[3.44125772 0.45799379 0.91598758 0.44125772 0.45799379 0.03369693
 0.20975831 0.10104665 0.17650309 0.06739386 0.03369693 0.1      ]
[3.44087738 0.4578376  0.9156752  0.44087738 0.4578376  0.03365471
 0.20961527 0.10092512 0.17635095 0.06730942 0.03365471 0.1      ]
[3.44054121 0.45769949 0.91539898 0.44054121 0.45769949 0.0336174
 0.20948882 0.10081774 0.17621648 0.0672348  0.0336174  0.1      ]
[3.44024405 0.45757737 0.91515474 0.44024405 0.45757737 0.03358444
 0.20937705 0.10072286 0.17609762 0.06716887 0.03358444 0.1      ]
[3.43998137 0.45746939 0.91493878 0.43998137 0.45746939 0.03355531
 0.20927824 0.10063901 0.17599255 0.06711061 0.03355531 0.1      ]
[3.43974917 0.45737391 0.91474782 0.43974917 0.45737391 0.03352956
 0.20919089 0.1005649  0.17589967 0.06705912 0.03352956 0.1      ]
[3.43954389 0.45728948 0.91457897 0.43954389 0.45728948 0.03350681
 0.20911367 0.1004994  0.17581756 0.06701361 0.03350681 0.1      ]
[3.43936242 0.45721483 0.91442966 0.43936242 0.45721483 0.0334867
 0.2090454  0.10044151 0.17574497 0.06697339 0.0334867  0.1      ]
[3.43920198 0.45714882 0.91429764 0.43920198 0.45714882 0.03346892
 0.20898505 0.10039033 0.17568079 0.06693784 0.03346892 0.1      ]
[3.43906014 0.45709045 0.91418091 0.43906014 0.45709045 0.03345321
 0.20893168 0.1003451  0.17562406 0.06690641 0.03345321 0.1      ]
[3.43893474 0.45703884 0.91407768 0.43893474 0.45703884 0.03343932
 0.2088845  0.10030511 0.1755739  0.06687863 0.03343932 0.1      ]
[3.43882387 0.4569932  0.91398641 0.43882387 0.4569932  0.03342704
 0.20884279 0.10026976 0.17552955 0.06685407 0.03342704 0.1      ]
[3.43872584 0.45695285 0.9139057  0.43872584 0.45695285 0.03341618
 0.20880591 0.10023851 0.17549034 0.06683236 0.03341618 0.1      ]
[3.43863917 0.45691717 0.91383433 0.43863917 0.45691717 0.03340658
 0.2087733  0.10021088 0.17545567 0.06681317 0.03340658 0.1      ]
[3.43856254 0.45688561 0.91377123 0.43856254 0.45688561 0.0333981
 0.20874446 0.10018646 0.17542502 0.0667962  0.0333981  0.1      ]
[3.43849478 0.45685771 0.91371543 0.43849478 0.45685771 0.0333906
 0.20871897 0.10016486 0.17539791 0.0667812  0.0333906  0.1      ]

```

(continues on next page)

(continued from previous page)



[illegible]

```
[13]: print(model.getParameters())
(1.0, 0.5, 0.4, 2.0, 0.1, 2.0, 3.0, 0.2)
```

Plotting trajectories

The simulation results above did not look too appealing. Let's plot the trajectories of the model states and outputs them using `matplotlib.pyplot`:

```
[14]: import amici.plotting
      amici.plotting.plotStateTrajectories(rdata, model = None)
      amici.plotting.plotObservableTrajectories(rdata, model = None)
```

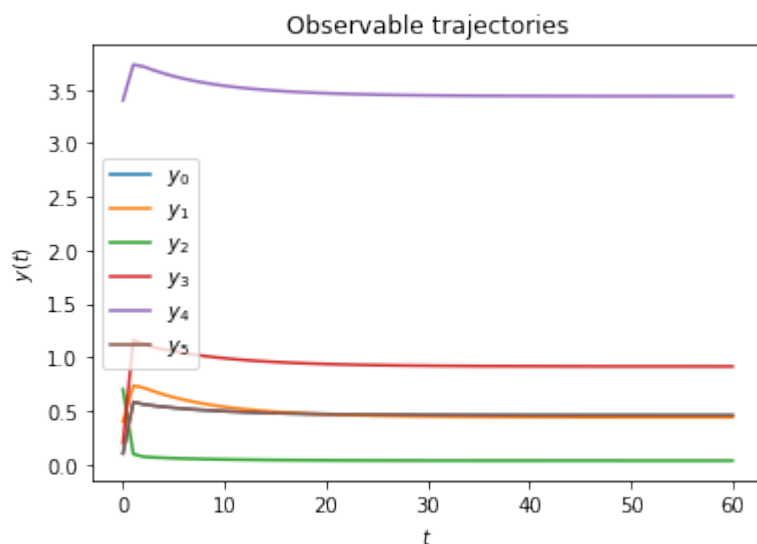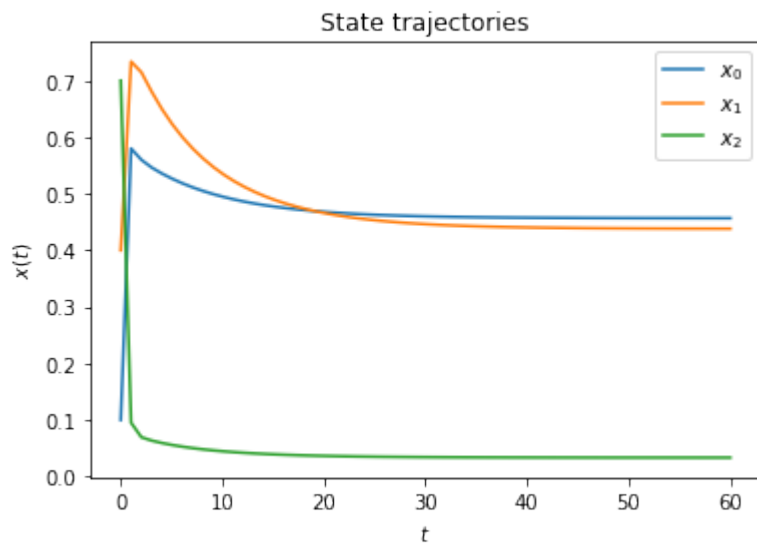

Computing likelihood

Often model parameters need to be inferred from experimental data. This is commonly done by maximizing the likelihood of observing the data given to current model parameters. AMICI will compute this likelihood if experimental data is provided to `amici.runAmiciSimulation` as optional third argument. Measurements along with their standard deviations are provided through an `amici.ExpData` instance.

```
[15]: # Create model instance and set time points for simulation
model = model_module.getModel()
model.setTimepoints(np.linspace(0, 10, 11))

# Create solver instance, keep default options
solver = model.getSolver()

# Run simulation without experimental data
rdata = amici.runAmiciSimulation(model, solver)

# Create ExpData instance from simulation results
edata = amici.ExpData(rdata, 1.0, 0.0)

# Re-run simulation, this time passing "experimental data"
rdata = amici.runAmiciSimulation(model, solver, edata)

print('Log-likelihood %f' % rdata['llh'])

Log-likelihood -97.118555
```

Simulation tolerances

Numerical error tolerances are often critical to get accurate results. For the state variables, integration errors can be controlled using `setRelativeTolerance` and `setAbsoluteTolerance`. Similar functions exist for sensitivities, steadystates and quadratures. We initially compute a reference solution using extremely low tolerances and then assess the influence on integration error for different levels of absolute and relative tolerance.

```
[16]: solver.setRelativeTolerance(1e-16)
solver.setAbsoluteTolerance(1e-16)
solver.setSensitivityOrder(amici.SensitivityOrder.none)
rdata_ref = amici.runAmiciSimulation(model, solver, edata)

def get_simulation_error(solver):
    rdata = amici.runAmiciSimulation(model, solver, edata)
    return np.mean(np.abs(rdata['x']-rdata_ref['x'])), np.mean(np.abs(rdata['llh']-rdata_
    ref['llh']))

def get_errors(tolfun, tols):
    solver.setRelativeTolerance(1e-16)
    solver.setAbsoluteTolerance(1e-16)
    x_errs = []
    llh_errs = []
    for tol in tols:
        getattr(solver, tolfun)(tol)
        x_err, llh_err = get_simulation_error(solver)
```

(continues on next page)

(continued from previous page)

```

        x_errs.append(x_err)
        llh_errs.append(llh_err)
    return x_errs, llh_errs

atols = np.logspace(-5, -15, 100)
atol_x_errs, atol_llh_errs = get_errors('setAbsoluteTolerance', atols)

rtols = np.logspace(-5, -15, 100)
rtol_x_errs, rtol_llh_errs = get_errors('setRelativeTolerance', rtols)


fig, axes = plt.subplots(1, 2, figsize=(15, 5))

def plot_error(tols, x_errs, llh_errs, tolname, ax):
    ax.plot(tols, x_errs, 'r-', label='x')
    ax.plot(tols, llh_errs, 'b-', label='llh')
    ax.set_xscale('log')
    ax.set_yscale('log')
    ax.set_xlabel(f'{tolname} tolerance')
    ax.set_ylabel('average numerical error')
    ax.legend()

plot_error(atols, atol_x_errs, atol_llh_errs, 'absolute', axes[0])
plot_error(rtols, rtol_x_errs, rtol_llh_errs, 'relative', axes[1])

# reset relative tolerance to default value
solver.setRelativeTolerance(1e-8)
solver.setRelativeTolerance(1e-16)

```

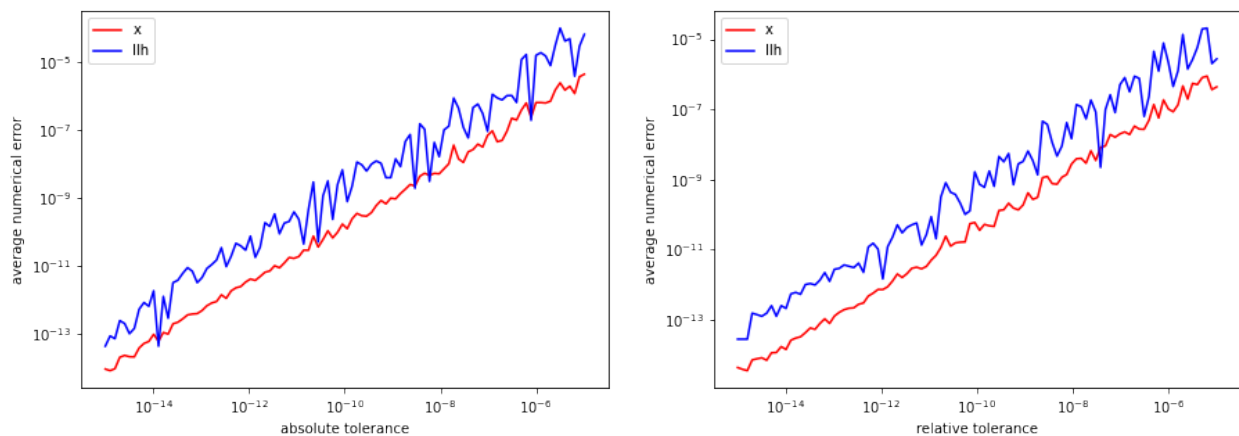

Sensitivity analysis

AMICI can provide first- and second-order sensitivities using the forward- or adjoint-method. The respective options are set on the Model and Solver objects.

Forward sensitivity analysis

```
[17]: model = model_module.getModel()
model.setTimepoints(np.linspace(0, 10, 11))
model.requireSensitivitiesForAllParameters()           # sensitivities w.r.t. all_
↳ parameters
# model.setParameterList([1, 2])                       # sensitivities
# w.r.t. the specified parameters
model.setParameterScale(amici.ParameterScaling.none)   # parameters are used as-is_
↳ (not log-transformed)

solver = model.getSolver()
solver.setSensitivityMethod(amici.SensitivityMethod.forward) # forward_
↳ sensitivity analysis
solver.setSensitivityOrder(amici.SensitivityOrder.first) # first-order sensitivities

rdata = amici.runAmiciSimulation(model, solver)

# print sensitivity-related results
for key, value in rdata.items():
    if key.startswith('s'):
        print('%12s: ' % key, value)

          sx: [[[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]

[[-2.00747250e-01  1.19873139e-01 -9.44167985e-03]
[-1.02561396e-01 -1.88820454e-01  1.01855972e-01]
[ 4.66193077e-01 -2.86365372e-01  2.39662449e-02]
[ 4.52560294e-02  1.14631370e-01 -3.34067919e-02]
[ 4.00672911e-01  1.92564093e-01  4.98877759e-02]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]

[[-2.23007240e-01  1.53979022e-01 -1.26885280e-02]
[-1.33426939e-01 -3.15955239e-01  9.49575030e-02]
[ 5.03470377e-01 -3.52731535e-01  2.81567412e-02]
[ 3.93630714e-02  1.10770683e-01 -1.05673869e-02]
[ 5.09580304e-01  4.65255489e-01  9.24843702e-02]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
```

(continues on next page)

(continued from previous page)

```

[ 0.00000000e+00 0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00]]

[[-2.14278104e-01 1.63465064e-01 -1.03268418e-02]
 [-1.60981967e-01 -4.00490452e-01 7.54810648e-02]
 [ 4.87746419e-01 -3.76014315e-01 2.30919334e-02]
 [ 4.28733680e-02 1.15473583e-01 -6.63571687e-03]
 [ 6.05168647e-01 7.07226039e-01 1.23870914e-01]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]]

[[-2.05888038e-01 1.69308689e-01 -7.93085660e-03]
 [-1.84663809e-01 -4.65451966e-01 5.95026117e-02]
 [ 4.66407064e-01 -3.87612079e-01 1.76410128e-02]
 [ 4.52451104e-02 1.19865712e-01 -4.73313094e-03]
 [ 6.90798449e-01 9.20396633e-01 1.49475827e-01]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]]

[[-1.98803165e-01 1.73327268e-01 -6.03008179e-03]
 [-2.04303740e-01 -5.16111388e-01 4.68785776e-02]
 [ 4.47070326e-01 -3.94304029e-01 1.32107437e-02]
 [ 4.69732048e-02 1.22961727e-01 -3.35899442e-03]
 [ 7.68998995e-01 1.10844286e+00 1.70889328e-01]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]]

[[-1.92789113e-01 1.75978657e-01 -4.54517629e-03]
 [-2.20500138e-01 -5.55540705e-01 3.68776526e-02]
 [ 4.30424855e-01 -3.97907706e-01 9.75257113e-03]
 [ 4.82793652e-02 1.24952071e-01 -2.30991637e-03]
 [ 8.40805131e-01 1.27504628e+00 1.89020151e-01]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]]

[[-1.87672774e-01 1.77588334e-01 -3.38318222e-03]
 [-2.33807210e-01 -5.86081383e-01 2.89236334e-02]
 [ 4.16201399e-01 -3.99295277e-01 7.06598588e-03]
 [ 4.92546648e-02 1.26089711e-01 -1.50412006e-03]
 [ 9.06806543e-01 1.42334018e+00 2.04522708e-01]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]
 [ 0.00000000e+00 0.00000000e+00 0.00000000e+00]]

[[-1.83320440e-01 1.78410042e-01 -2.47240692e-03]
 [-2.44690164e-01 -6.09568485e-01 2.25774266e-02]
 [ 4.04061655e-01 -3.99063012e-01 4.97908386e-03]
 [ 4.99612484e-02 1.26581014e-01 -8.85891342e-04]

```

(continues on next page)

(continued from previous page)

```

[ 9.67473970e-01  1.55589415e+00  2.17895305e-01]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]

[[-1.79620591e-01  1.78640114e-01 -1.75822439e-03]
 [-2.53540123e-01 -6.27448857e-01  1.75019839e-02]
 [ 3.93704970e-01 -3.97656641e-01  3.35895484e-03]
 [ 5.04492282e-02  1.26586733e-01 -4.13401240e-04]
 [ 1.02322336e+00  1.67481439e+00  2.29524046e-01]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]

[[-1.76478441e-01  1.78430281e-01 -1.19867662e-03]
 [-2.60686971e-01 -6.40868686e-01  1.34365068e-02]
 [ 3.84873835e-01 -3.95414931e-01  2.10369522e-03]
 [ 5.07601805e-02  1.26231631e-01 -5.46465317e-05]
 [ 1.07443160e+00  1.78183962e+00  2.39710937e-01]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00]]]
    sx0:  [[0. 0. 0.]
[0. 0. 0.]
[0. 0. 0.]
[0. 0. 0.]
[0. 0. 0.]
[0. 0. 0.]
[0. 0. 0.]]
    sx_ss:  [[nan nan nan]
[nan nan nan]
[nan nan nan]
[nan nan nan]
[nan nan nan]
[nan nan nan]
[nan nan nan]]
    sigmay:  [[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]
[1. 1. 1. 1. 1. 0.2]]
    sy:  [[[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
 0.00000000e+00  0.00000000e+00]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00

```

(continues on next page)

(continued from previous page)

```

0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
  0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
  0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
  0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 1.00000000e-01
  0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
  1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
  0.00000000e+00 0.00000000e+00]]

[[-2.00747250e-01 1.19873139e-01 -9.44167985e-03 -4.01494500e-01
  1.19873139e-01 -2.00747250e-01]
[-1.02561396e-01 -1.88820454e-01 1.01855972e-01 -2.05122791e-01
  -1.88820454e-01 -1.02561396e-01]
[ 4.66193077e-01 -2.86365372e-01 2.39662449e-02 9.32386154e-01
  -2.86365372e-01 4.66193077e-01]
[ 4.52560294e-02 1.14631370e-01 -3.34067919e-02 9.05120589e-02
  1.14631370e-01 4.52560294e-02]
[ 4.00672911e-01 1.92564093e-01 4.98877759e-02 8.01345822e-01
  1.92564093e-01 4.00672911e-01]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 5.80072436e-01
  0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
  1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
  0.00000000e+00 0.00000000e+00]]

[[-2.23007240e-01 1.53979022e-01 -1.26885280e-02 -4.46014480e-01
  1.53979022e-01 -2.23007240e-01]
[-1.33426939e-01 -3.15955239e-01 9.49575030e-02 -2.66853878e-01
  -3.15955239e-01 -1.33426939e-01]
[ 5.03470377e-01 -3.52731535e-01 2.81567412e-02 1.00694075e+00
  -3.52731535e-01 5.03470377e-01]
[ 3.93630714e-02 1.10770683e-01 -1.05673869e-02 7.87261427e-02
  1.10770683e-01 3.93630714e-02]
[ 5.09580304e-01 4.65255489e-01 9.24843702e-02 1.01916061e+00
  4.65255489e-01 5.09580304e-01]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 5.60534516e-01
  0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
  1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
  0.00000000e+00 0.00000000e+00]]

[[-2.14278104e-01 1.63465064e-01 -1.03268418e-02 -4.28556209e-01
  1.63465064e-01 -2.14278104e-01]
[-1.60981967e-01 -4.00490452e-01 7.54810648e-02 -3.21963935e-01
  -4.00490452e-01 -1.60981967e-01]

```

(continues on next page)

(continued from previous page)

```

[ 4.87746419e-01 -3.76014315e-01 2.30919334e-02 9.75492839e-01
 -3.76014315e-01 4.87746419e-01]
[ 4.28733680e-02 1.15473583e-01 -6.63571687e-03 8.57467361e-02
 1.15473583e-01 4.28733680e-02]
[ 6.05168647e-01 7.07226039e-01 1.23870914e-01 1.21033729e+00
 7.07226039e-01 6.05168647e-01]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 5.46870655e-01
 0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 0.00000000e+00 0.00000000e+00]

[[-2.05888038e-01 1.69308689e-01 -7.93085660e-03 -4.11776077e-01
 1.69308689e-01 -2.05888038e-01]
[-1.84663809e-01 -4.65451966e-01 5.95026117e-02 -3.69327617e-01
 -4.65451966e-01 -1.84663809e-01]
[ 4.66407064e-01 -3.87612079e-01 1.76410128e-02 9.32814128e-01
 -3.87612079e-01 4.66407064e-01]
[ 4.52451104e-02 1.19865712e-01 -4.73313094e-03 9.04902208e-02
 1.19865712e-01 4.52451104e-02]
[ 6.90798449e-01 9.20396633e-01 1.49475827e-01 1.38159690e+00
 9.20396633e-01 6.90798449e-01]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 5.36280366e-01
 0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 0.00000000e+00 0.00000000e+00]

[[-1.98803165e-01 1.73327268e-01 -6.03008179e-03 -3.97606330e-01
 1.73327268e-01 -1.98803165e-01]
[-2.04303740e-01 -5.16111388e-01 4.68785776e-02 -4.08607480e-01
 -5.16111388e-01 -2.04303740e-01]
[ 4.47070326e-01 -3.94304029e-01 1.32107437e-02 8.94140651e-01
 -3.94304029e-01 4.47070326e-01]
[ 4.69732048e-02 1.22961727e-01 -3.35899442e-03 9.39464097e-02
 1.22961727e-01 4.69732048e-02]
[ 7.68998995e-01 1.10844286e+00 1.70889328e-01 1.53799799e+00
 1.10844286e+00 7.68998995e-01]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 5.27091252e-01
 0.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 1.00000000e+00 0.00000000e+00]
[ 0.00000000e+00 0.00000000e+00 0.00000000e+00 0.00000000e+00
 0.00000000e+00 0.00000000e+00]

[[-1.92789113e-01 1.75978657e-01 -4.54517629e-03 -3.85578227e-01
 1.75978657e-01 -1.92789113e-01]
[-2.20500138e-01 -5.55540705e-01 3.68776526e-02 -4.41000277e-01
 -5.55540705e-01 -2.20500138e-01]
[ 4.30424855e-01 -3.97907706e-01 9.75257113e-03 8.60849709e-01

```

(continues on next page)

(continued from previous page)

```

-3.97907706e-01  4.30424855e-01]
[ 4.82793652e-02  1.24952071e-01 -2.30991637e-03  9.65587304e-02
 1.24952071e-01  4.82793652e-02]
[ 8.40805131e-01  1.27504628e+00  1.89020151e-01  1.68161026e+00
 1.27504628e+00  8.40805131e-01]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  5.18989205e-01
 0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
 1.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
 0.00000000e+00  0.00000000e+00]]

[[-1.87672774e-01  1.77588334e-01 -3.38318222e-03 -3.75345548e-01
 1.77588334e-01 -1.87672774e-01]
[-2.33807210e-01 -5.86081383e-01  2.89236334e-02 -4.67614420e-01
 -5.86081383e-01 -2.33807210e-01]
[ 4.16201399e-01 -3.99295277e-01  7.06598588e-03  8.32402797e-01
 -3.99295277e-01  4.16201399e-01]
[ 4.92546648e-02  1.26089711e-01 -1.50412006e-03  9.85093296e-02
 1.26089711e-01  4.92546648e-02]
[ 9.06806543e-01  1.42334018e+00  2.04522708e-01  1.81361309e+00
 1.42334018e+00  9.06806543e-01]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  5.11829985e-01
 0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
 1.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
 0.00000000e+00  0.00000000e+00]]

[[-1.83320440e-01  1.78410042e-01 -2.47240692e-03 -3.66640879e-01
 1.78410042e-01 -1.83320440e-01]
[-2.44690164e-01 -6.09568485e-01  2.25774266e-02 -4.89380329e-01
 -6.09568485e-01 -2.44690164e-01]
[ 4.04061655e-01 -3.99063012e-01  4.97908386e-03  8.08123310e-01
 -3.99063012e-01  4.04061655e-01]
[ 4.99612484e-02  1.26581014e-01 -8.85891342e-04  9.99224969e-02
 1.26581014e-01  4.99612484e-02]
[ 9.67473970e-01  1.55589415e+00  2.17895305e-01  1.93494794e+00
 1.55589415e+00  9.67473970e-01]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  5.05500234e-01
 0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
 1.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
 0.00000000e+00  0.00000000e+00]]

[[-1.79620591e-01  1.78640114e-01 -1.75822439e-03 -3.59241183e-01
 1.78640114e-01 -1.79620591e-01]
[-2.53540123e-01 -6.27448857e-01  1.75019839e-02 -5.07080247e-01
 -6.27448857e-01 -2.53540123e-01]
[ 3.93704970e-01 -3.97656641e-01  3.35895484e-03  7.87409940e-01
 -3.97656641e-01  3.93704970e-01]

```

(continues on next page)

(continued from previous page)

```

[ 5.04492282e-02  1.26586733e-01 -4.13401240e-04  1.00898456e-01
 1.26586733e-01  5.04492282e-02]
[ 1.02322336e+00  1.67481439e+00  2.29524046e-01  2.04644672e+00
 1.67481439e+00  1.02322336e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  4.99901907e-01
 0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
 1.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
 0.00000000e+00  0.00000000e+00]]

[[-1.76478441e-01  1.78430281e-01 -1.19867662e-03 -3.52956882e-01
 1.78430281e-01 -1.76478441e-01]
[-2.60686971e-01 -6.40868686e-01  1.34365068e-02 -5.21373942e-01
 -6.40868686e-01 -2.60686971e-01]
[ 3.84873835e-01 -3.95414931e-01  2.10369522e-03  7.69747670e-01
 -3.95414931e-01  3.84873835e-01]
[ 5.07601805e-02  1.26231631e-01 -5.46465317e-05  1.01520361e-01
 1.26231631e-01  5.07601805e-02]
[ 1.07443160e+00  1.78183962e+00  2.39710937e-01  2.14886320e+00
 1.78183962e+00  1.07443160e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  4.94949118e-01
 0.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
 1.00000000e+00  0.00000000e+00]
[ 0.00000000e+00  0.00000000e+00  0.00000000e+00  0.00000000e+00
 0.00000000e+00  0.00000000e+00]]]
ssigmay: [[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 1.]]

[[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 1.]]

[[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]
[0. 0. 0. 0. 0. 0.]

```

(continues on next page)

(continued from previous page)

```
[0. 0. 0. 0. 0. 1.]
```

```
[[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 1.]
```

```
[[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 1.]
```

```
[[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 1.]
```

```
[[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 1.]
```

```
[[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 1.]
```

```
[[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]  
[0. 0. 0. 0. 0. 0.]
```

(continues on next page)

(continued from previous page)

[illegible]

(continues on next page)

[illegible]

Adjoint sensitivity analysis

```
[18]: # Set model options
model = model_module.getModel()
p_orig = np.array(model.getParameters())
p_orig[list(model.getParameterIds()).index('observable_x1withsigma_sigma')] = 0.1 #_
↳ Change default parameter
model.setParameters(p_orig)
model.setParameterScale(amici.ParameterScaling.none)
model.setTimepoints(np.linspace(0, 10, 21))

solver = model.getSolver()
solver.setMaxSteps(10**4) # Set maximum number of steps for the solver

# simulate time-course to get artificial data
rdata = amici.runAmiciSimulation(model, solver)
edata = amici.ExpData(rdata, 1.0, 0)
edata.fixedParameters = model.getFixedParameters()
# set sigma to 1.0 except for observable 5, so that p[7] is used instead
# (if we have sigma parameterized, the corresponding ExpData entries must NaN, otherwise_
↳ they will override the parameter)
edata.setObservedDataStdDev(rdata['t']*0+np.nan,
                             list(model.getObservableIds()).index('observable_x1withsigma
↳ '''))

# enable sensitivities
solver.setSensitivityOrder(amici.SensitivityOrder.first) # First-order ...
solver.setSensitivityMethod(amici.SensitivityMethod.adjoint) # ... adjoint_
↳ sensitivities
model.requireSensitivitiesForAllParameters() # ... w.r.t. all parameters

# compute adjoint sensitivities
rdata = amici.runAmiciSimulation(model, solver, edata)
#print(rdata['sigmay'])
print('Log-likelihood: %f\nGradient: %s' % (rdata['llh'], rdata['sllh']))
```

Log-likelihood: -1190.452734
Gradient: [-8.18063367e+01 -7.40378749e+01 1.87640047e+02 2.07890554e+01
2.62573207e+02 1.77402064e-01 1.15646253e+01 2.11221869e+04]

Finite differences gradient check

Compare AMICI-computed gradient with finite differences

```
[19]: from scipy.optimize import check_grad

def func(x0, symbol='llh', x0full=None, plist=[], verbose=False):
    p = x0[:]
    if len(plist):
        p = x0full[:]
        p[plist] = x0
```

(continues on next page)

(continued from previous page)

```

verbose and print('f: p=%s' % p)

old_parameters = model.getParameters()
solver.setSensitivityOrder(amici.SensitivityOrder.none)
model.setParameters(p)
rdata = amici.runAmiciSimulation(model, solver, edata)

model.setParameters(old_parameters)

res = np.sum(rdata[symbol])
verbose and print(res)
return res

def grad(x0, symbol='llh', x0full=None, plist=[], verbose=False):
    p = x0[:]
    if len(plist):
        model.setParameterList(plist)
        p = x0full[:]
        p[plist] = x0
    else:
        model.requireSensitivitiesForAllParameters()
    verbose and print('g: p=%s' % p)

    old_parameters = model.getParameters()
    solver.setSensitivityMethod(amici.SensitivityMethod.forward)
    solver.setSensitivityOrder(amici.SensitivityOrder.first)
    model.setParameters(p)
    rdata = amici.runAmiciSimulation(model, solver, edata)

    model.setParameters(old_parameters)

    res = rdata['s%s' % symbol]
    if not isinstance(res, float):
        if len(res.shape) == 3:
            res = np.sum(res, axis=(0, 2))
    verbose and print(res)
    return res

epsilon = 1e-4
err_norm = check_grad(func, grad, p_orig, 'llh', epsilon=epsilon)
print('sllh: |error|_2: %f' % err_norm)
# assert err_norm < 1e-6
print()

for ip in range(model.np()):
    plist = [ip]
    p = p_orig.copy()
    err_norm = check_grad(func, grad, p[plist], 'llh', p, [ip], epsilon=epsilon)
    print('sllh: p[%d]: |error|_2: %f' % (ip, err_norm))

print()
for ip in range(model.np()):

```

(continues on next page)

(continued from previous page)

```

plist = [ip]
p = p_orig.copy()
err_norm = check_grad(func, grad, p[plist], 'y', p, [ip], epsilon=epsilon)
print('sy: p[%d]: |error|_2: %f' % (ip, err_norm))

print()
for ip in range(model.np()):
    plist = [ip]
    p = p_orig.copy()
    err_norm = check_grad(func, grad, p[plist], 'x', p, [ip], epsilon=epsilon)
    print('sx: p[%d]: |error|_2: %f' % (ip, err_norm))

print()
for ip in range(model.np()):
    plist = [ip]
    p = p_orig.copy()
    err_norm = check_grad(func, grad, p[plist], 'sigmay', p, [ip], epsilon=epsilon)
    print('ssigmay: p[%d]: |error|_2: %f' % (ip, err_norm))

```

sllh: |error|_2: 31.850873

sllh: p[0]: |error|_2: 0.006287
sllh: p[1]: |error|_2: 0.016510
sllh: p[2]: |error|_2: 0.017028
sllh: p[3]: |error|_2: 0.009608
sllh: p[4]: |error|_2: 0.083404
sllh: p[5]: |error|_2: 0.000280
sllh: p[6]: |error|_2: 0.001050
sllh: p[7]: |error|_2: 31.850739

sy: p[0]: |error|_2: 0.002974
sy: p[1]: |error|_2: 0.002717
sy: p[2]: |error|_2: 0.001308
sy: p[3]: |error|_2: 0.000939
sy: p[4]: |error|_2: 0.006106
sy: p[5]: |error|_2: 0.000000
sy: p[6]: |error|_2: 0.000000
sy: p[7]: |error|_2: 0.000000

sx: p[0]: |error|_2: 0.001033
sx: p[1]: |error|_2: 0.001076
sx: p[2]: |error|_2: 0.000121
sx: p[3]: |error|_2: 0.000439
sx: p[4]: |error|_2: 0.001569
sx: p[5]: |error|_2: 0.000000
sx: p[6]: |error|_2: 0.000000
sx: p[7]: |error|_2: 0.000000

ssigmay: p[0]: |error|_2: 0.000000
ssigmay: p[1]: |error|_2: 0.000000
ssigmay: p[2]: |error|_2: 0.000000

(continues on next page)

(continued from previous page)

```
ssigmay: p[3]: |error|_2: 0.000000
ssigmay: p[4]: |error|_2: 0.000000
ssigmay: p[5]: |error|_2: 0.000000
ssigmay: p[6]: |error|_2: 0.000000
ssigmay: p[7]: |error|_2: 0.000000
```

```
[20]: eps=1e-4
op=model.getParameters()

solver.setSensitivityMethod(amici.SensitivityMethod.forward) # forward sensitivity_
↳analysis
solver.setSensitivityOrder(amici.SensitivityOrder.first) # first-order sensitivities
model.requireSensitivitiesForAllParameters()
solver.setRelativeTolerance(1e-12)
rdata = amici.runAmiciSimulation(model, solver, edata)

def fd(x0, ip, eps, symbol='llh'):
    p = list(x0[:])
    old_parameters = model.getParameters()
    solver.setSensitivityOrder(amici.SensitivityOrder.none)
    p[ip]+=eps
    model.setParameters(p)
    rdata_f = amici.runAmiciSimulation(model, solver, edata)
    p[ip]-=2*eps
    model.setParameters(p)
    rdata_b = amici.runAmiciSimulation(model, solver, edata)

    model.setParameters(old_parameters)
    return (rdata_f[symbol]-rdata_b[symbol])/(2*eps)


def plot_sensitivities(symbol, eps):
    fig, axes = plt.subplots(4,2, figsize=(15,10))
    for ip in range(4):
        fd_approx = fd(model.getParameters(), ip, eps, symbol=symbol)

        axes[ip,0].plot(edata.getTimepoints(), rdata[f's{symbol}'][:,ip,:], 'r-')
        axes[ip,0].plot(edata.getTimepoints(), fd_approx, 'k--')
        axes[ip,0].set_ylabel(f'sensitivity {symbol}')
        axes[ip,0].set_xlabel('time')


        axes[ip,1].plot(edata.getTimepoints(), np.abs(rdata[f's{symbol}'][:,ip,:]-fd_
↳approx), 'k-')
        axes[ip,1].set_ylabel('difference to fd')
        axes[ip,1].set_xlabel('time')
        axes[ip,1].set_yscale('log')

    plt.tight_layout()
    plt.show()
```

```
[21]: plot_sensitivities('x', eps)
```

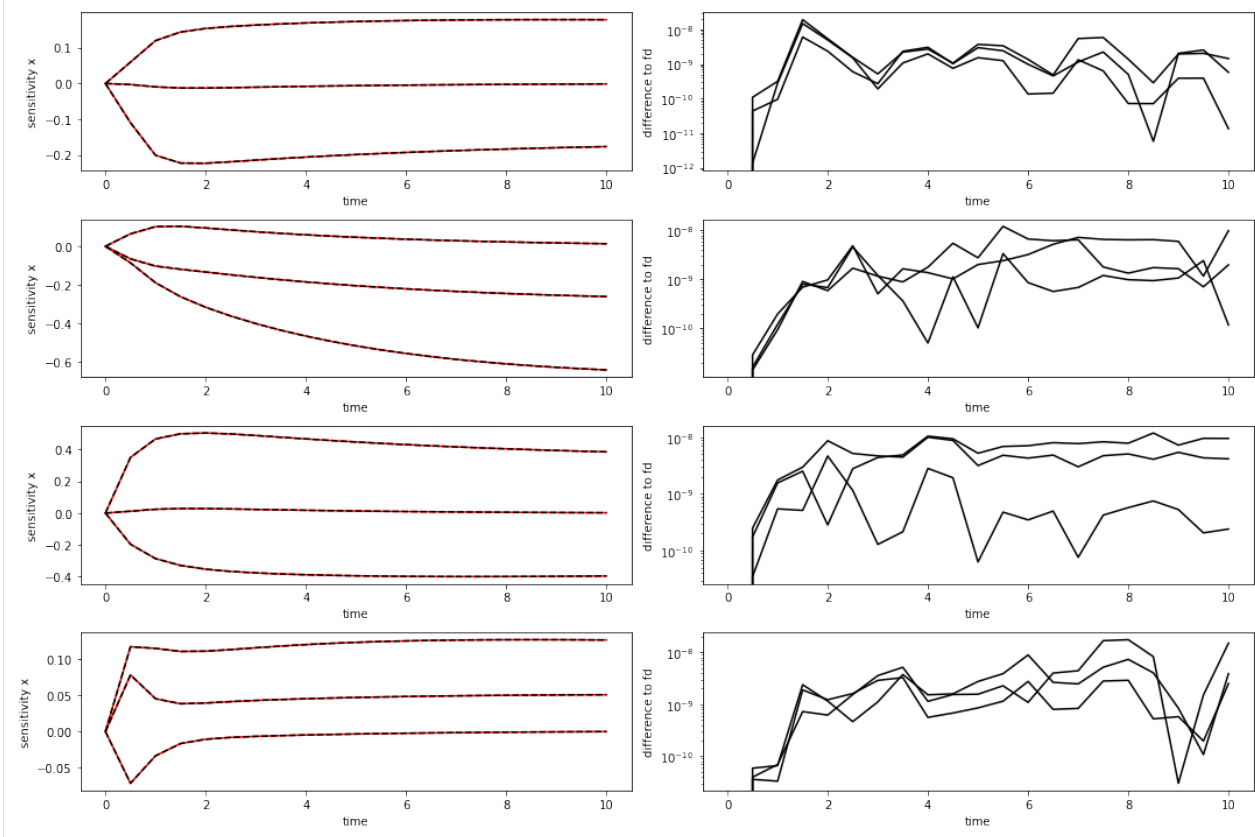

```
[22]: plot_sensitivities('y', eps)
```

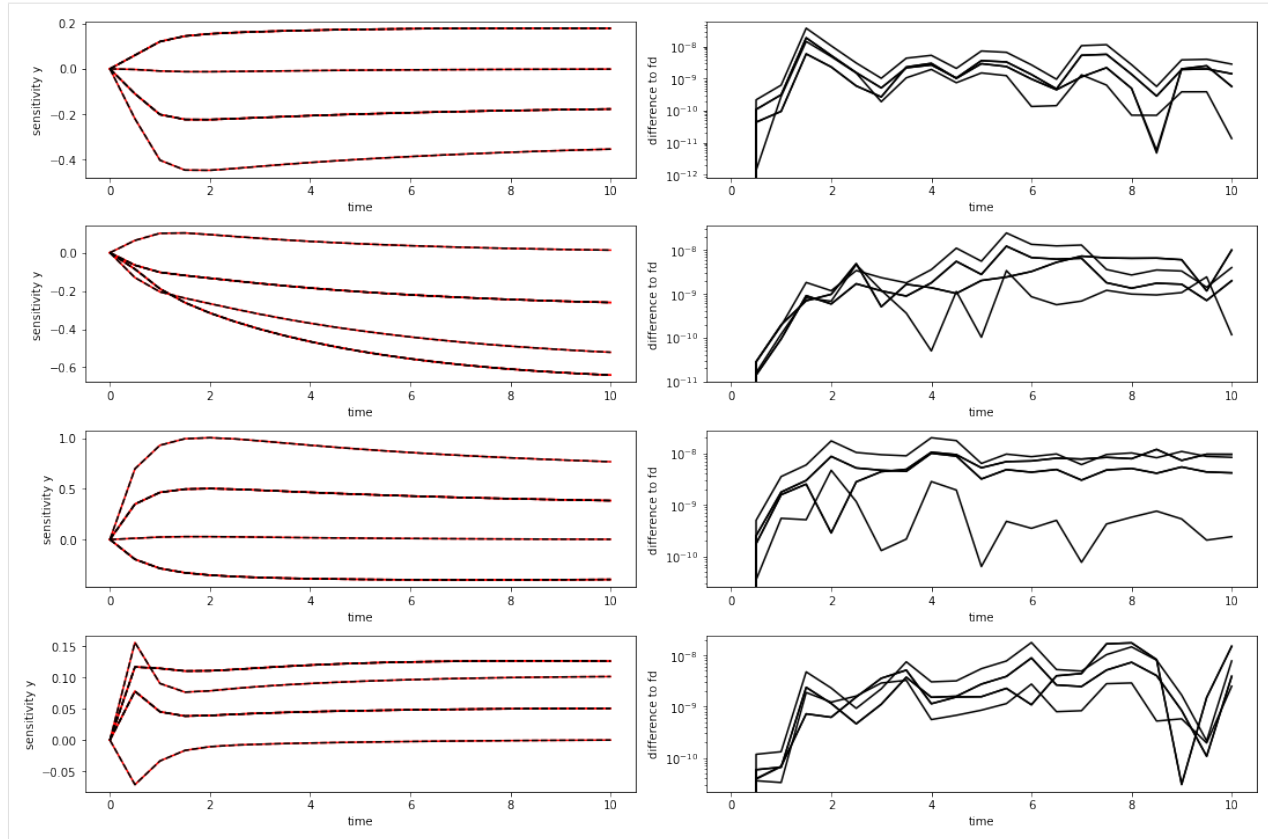

Export as DataFrame

Experimental data and simulation results can both be exported as pandas DataFrame to allow for an easier inspection of numeric values

```
[23]: # run the simulation
rdata = amici.runAmiciSimulation(model, solver, edata)
```

```
[24]: # look at the ExpData as DataFrame
df = amici.getDataObservablesAsDataFrame(model, [edata])
df
```

```
[24]:
```

	time	datatype	t_presim	k0	k0_preeq	k0_presim	observable_x1	\
0	0.0	data	0.0	1.0	NaN	NaN	-1.191094	
1	0.5	data	0.0	1.0	NaN	NaN	-1.599410	
2	1.0	data	0.0	1.0	NaN	NaN	1.522095	
3	1.5	data	0.0	1.0	NaN	NaN	2.455856	
4	2.0	data	0.0	1.0	NaN	NaN	-0.600864	
5	2.5	data	0.0	1.0	NaN	NaN	1.422341	
6	3.0	data	0.0	1.0	NaN	NaN	-0.672523	
7	3.5	data	0.0	1.0	NaN	NaN	2.278515	
8	4.0	data	0.0	1.0	NaN	NaN	0.078411	
9	4.5	data	0.0	1.0	NaN	NaN	0.074017	
10	5.0	data	0.0	1.0	NaN	NaN	0.537820	
11	5.5	data	0.0	1.0	NaN	NaN	0.498204	

(continues on next page)

(continued from previous page)

12	6.0	data	0.0	1.0	NaN	NaN	2.345616
13	6.5	data	0.0	1.0	NaN	NaN	0.995109
14	7.0	data	0.0	1.0	NaN	NaN	1.363276
15	7.5	data	0.0	1.0	NaN	NaN	0.190180
16	8.0	data	0.0	1.0	NaN	NaN	-0.362771
17	8.5	data	0.0	1.0	NaN	NaN	0.884408
18	9.0	data	0.0	1.0	NaN	NaN	-1.554260
19	9.5	data	0.0	1.0	NaN	NaN	0.492781
20	10.0	data	0.0	1.0	NaN	NaN	-0.964663
	observable_x2	observable_x3	observable_x1_scaled		\		
0	0.281469	0.033354	1.645144				
1	1.140165	1.368902	1.535490				
2	2.020846	1.109229	0.594295				
3	0.961785	0.052925	1.839501				
4	0.021845	0.220294	-0.110990				
5	0.045064	1.361070	0.945899				
6	0.873615	1.560601	2.677974				
7	-0.005105	0.799689	1.240916				
8	0.979531	1.745795	0.858134				
9	0.226267	0.604246	-0.091356				
10	1.233766	0.194859	-0.345351				
11	3.218945	0.190730	0.462838				
12	0.956306	-1.770517	0.761754				
13	-0.151091	0.805937	2.929645				
14	1.622225	0.030980	-0.082327				
15	0.962294	1.425918	1.106591				
16	-0.251576	0.540826	1.507657				
17	0.930074	0.510605	2.012371				
18	1.449906	-1.477985	0.871124				
19	0.700873	0.242116	0.279648				
20	-0.485664	2.087815	2.328707				
	observable_x2_offsetted	observable_x1withsigma	observable_x1_std		\		
0	3.900680	-0.518642	1.0				
1	5.678167	0.694825	1.0				
2	3.230374	1.275482	1.0				
3	2.783796	0.085480	1.0				
4	5.003351	2.020780	1.0				
5	4.589646	-0.593535	1.0				
6	2.187698	1.054870	1.0				
7	4.268726	0.491755	1.0				
8	4.609529	0.620844	1.0				
9	3.652345	0.261807	1.0				
10	4.477322	3.378227	1.0				
11	5.946970	1.310100	1.0				
12	3.894865	1.546055	1.0				
13	4.348557	0.234915	1.0				
14	3.761730	0.724608	1.0				
15	4.175984	0.245791	1.0				
16	3.871633	2.260562	1.0				
17	2.593086	-0.654355	1.0				

(continues on next page)

(continued from previous page)

18	5.497123	0.232772	1.0
19	4.236658	-0.889212	1.0
20	4.787617	0.395106	1.0
	observable_x2_std	observable_x3_std	observable_x1_scaled_std \
0	1.0	1.0	1.0
1	1.0	1.0	1.0
2	1.0	1.0	1.0
3	1.0	1.0	1.0
4	1.0	1.0	1.0
5	1.0	1.0	1.0
6	1.0	1.0	1.0
7	1.0	1.0	1.0
8	1.0	1.0	1.0
9	1.0	1.0	1.0
10	1.0	1.0	1.0
11	1.0	1.0	1.0
12	1.0	1.0	1.0
13	1.0	1.0	1.0
14	1.0	1.0	1.0
15	1.0	1.0	1.0
16	1.0	1.0	1.0
17	1.0	1.0	1.0
18	1.0	1.0	1.0
19	1.0	1.0	1.0
20	1.0	1.0	1.0
	observable_x2_offsetted_std	observable_x1withsigma_std	
0	1.0	NaN	
1	1.0	NaN	
2	1.0	NaN	
3	1.0	NaN	
4	1.0	NaN	
5	1.0	NaN	
6	1.0	NaN	
7	1.0	NaN	
8	1.0	NaN	
9	1.0	NaN	
10	1.0	NaN	
11	1.0	NaN	
12	1.0	NaN	
13	1.0	NaN	
14	1.0	NaN	
15	1.0	NaN	
16	1.0	NaN	
17	1.0	NaN	
18	1.0	NaN	
19	1.0	NaN	
20	1.0	NaN	

```
[25]: # from the exported dataframe, we can actually reconstruct a copy of the ExpData instance
reconstructed_edata = amici.getEdataFromDataFrame(model, df)
```

```
[26]: # look at the States in rdata as DataFrame
```

```
amici.getResidualsAsDataFrame(model, [edata], [rdata])
```

```
[26]:
```

	time	t_presim	k0	k0_preeq	k0_presim	observable_x1	observable_x2	\
0	0.0	0.0	1.0	NaN	NaN	1.291094	0.118531	
1	0.5	0.0	1.0	NaN	NaN	2.138777	0.455486	
2	1.0	0.0	1.0	NaN	NaN	0.942023	1.287558	
3	1.5	0.0	1.0	NaN	NaN	1.885457	0.231133	
4	2.0	0.0	1.0	NaN	NaN	1.161398	0.693991	
5	2.5	0.0	1.0	NaN	NaN	0.869285	0.653687	
6	3.0	0.0	1.0	NaN	NaN	1.219394	0.191652	
7	3.5	0.0	1.0	NaN	NaN	1.737155	0.671214	
8	4.0	0.0	1.0	NaN	NaN	0.457870	0.328229	
9	4.5	0.0	1.0	NaN	NaN	0.457522	0.411248	
10	5.0	0.0	1.0	NaN	NaN	0.010728	0.609084	
11	5.5	0.0	1.0	NaN	NaN	0.024710	2.606212	
12	6.0	0.0	1.0	NaN	NaN	1.826626	0.354703	
13	6.5	0.0	1.0	NaN	NaN	0.479809	0.742320	
14	7.0	0.0	1.0	NaN	NaN	0.851446	1.040670	
15	7.5	0.0	1.0	NaN	NaN	0.318388	0.389765	
16	8.0	0.0	1.0	NaN	NaN	0.868271	0.815679	
17	8.5	0.0	1.0	NaN	NaN	0.381793	0.373840	
18	9.0	0.0	1.0	NaN	NaN	2.054162	0.901024	
19	9.5	0.0	1.0	NaN	NaN	0.004569	0.158864	
20	10.0	0.0	1.0	NaN	NaN	1.459612	1.021246	

	observable_x3	observable_x1_scaled	observable_x2_offsetted	\
0	0.666646	1.445144	0.500680	
1	1.177412	0.456756	1.993488	
2	1.012805	0.565850	0.502913	
3	0.023151	0.698703	0.946856	
4	0.150600	1.232059	1.287515	
5	1.294769	0.160213	0.890895	
6	1.496868	1.584233	1.494264	
7	0.738182	0.158196	0.602617	
8	1.686301	0.214427	0.958227	
9	0.546593	1.154432	0.014831	
10	0.138899	1.399534	0.852641	
11	0.136330	0.582991	2.334237	
12	1.823477	0.276225	0.293262	
13	0.754307	1.899046	0.757328	
14	0.019418	1.105987	0.180175	
15	1.376658	0.089456	0.603455	
16	0.492622	0.496656	0.307529	
17	0.463381	1.007140	0.963148	
18	1.524300	0.128680	1.948242	
19	0.196646	0.715052	0.694649	
20	2.043129	1.338809	1.252036	

	observable_x1withsigma
0	6.186425
1	1.554579
2	6.954092

(continues on next page)

(continued from previous page)

```

3          4.849190
4          14.602456
5          11.465911
6          5.079991
7          0.496051
8          0.845638
9          2.697316
10         28.511357
11          7.871853
12         10.270655
13          2.803840
14          2.127777
15          2.627767
16         17.550614
17         11.569706
18          2.671303
19         13.865618
20          0.998435

```

```

[27]: # look at the Observables in rdata as DataFrame
      amici.getSimulationObservablesAsDataFrame(model, [edata], [rdata])

```

```

[27]:    time    datatype  t_presim  k0  k0_preeq  k0_presim  observable_x1  \
0    0.0  simulation      0.0  1.0      NaN      NaN      0.100000
1    0.5  simulation      0.0  1.0      NaN      NaN      0.539367
2    1.0  simulation      0.0  1.0      NaN      NaN      0.580072
3    1.5  simulation      0.0  1.0      NaN      NaN      0.570399
4    2.0  simulation      0.0  1.0      NaN      NaN      0.560535
5    2.5  simulation      0.0  1.0      NaN      NaN      0.553056
6    3.0  simulation      0.0  1.0      NaN      NaN      0.546871
7    3.5  simulation      0.0  1.0      NaN      NaN      0.541360
8    4.0  simulation      0.0  1.0      NaN      NaN      0.536280
9    4.5  simulation      0.0  1.0      NaN      NaN      0.531538
10   5.0  simulation      0.0  1.0      NaN      NaN      0.527091
11   5.5  simulation      0.0  1.0      NaN      NaN      0.522914
12   6.0  simulation      0.0  1.0      NaN      NaN      0.518989
13   6.5  simulation      0.0  1.0      NaN      NaN      0.515299
14   7.0  simulation      0.0  1.0      NaN      NaN      0.511830
15   7.5  simulation      0.0  1.0      NaN      NaN      0.508568
16   8.0  simulation      0.0  1.0      NaN      NaN      0.505500
17   8.5  simulation      0.0  1.0      NaN      NaN      0.502615
18   9.0  simulation      0.0  1.0      NaN      NaN      0.499902
19   9.5  simulation      0.0  1.0      NaN      NaN      0.497350
20  10.0  simulation      0.0  1.0      NaN      NaN      0.494949

      observable_x2  observable_x3  observable_x1_scaled  \
0          0.400000      0.700000      0.200000
1          0.684679      0.191491      1.078734
2          0.733287      0.096424      1.160145
3          0.730652      0.076076      1.140799
4          0.715836      0.069694      1.121069
5          0.698751      0.066301      1.106112

```

(continues on next page)

(continued from previous page)

6	0.681963	0.063733	1.093741
7	0.666109	0.061506	1.082720
8	0.651302	0.059495	1.072561
9	0.637515	0.057653	1.063076
10	0.624681	0.055960	1.054183
11	0.612733	0.054400	1.045829
12	0.601603	0.052960	1.037978
13	0.591229	0.051629	1.030598
14	0.581555	0.050399	1.023660
15	0.572529	0.049259	1.017136
16	0.564103	0.048203	1.011000
17	0.556234	0.047224	1.005231
18	0.548881	0.046315	0.999804
19	0.542008	0.045471	0.994700
20	0.535581	0.044686	0.989898

	observable_x2_offsetted	observable_x1withsigma	observable_x1_std \
0	3.400000	0.100000	1.0
1	3.684679	0.539367	1.0
2	3.733287	0.580072	1.0
3	3.730652	0.570399	1.0
4	3.715836	0.560535	1.0
5	3.698751	0.553056	1.0
6	3.681963	0.546871	1.0
7	3.666109	0.541360	1.0
8	3.651302	0.536280	1.0
9	3.637515	0.531538	1.0
10	3.624681	0.527091	1.0
11	3.612733	0.522914	1.0
12	3.601603	0.518989	1.0
13	3.591229	0.515299	1.0
14	3.581555	0.511830	1.0
15	3.572529	0.508568	1.0
16	3.564103	0.505500	1.0
17	3.556234	0.502615	1.0
18	3.548881	0.499902	1.0
19	3.542008	0.497350	1.0
20	3.535581	0.494949	1.0

	observable_x2_std	observable_x3_std	observable_x1_scaled_std \
0	1.0	1.0	1.0
1	1.0	1.0	1.0
2	1.0	1.0	1.0
3	1.0	1.0	1.0
4	1.0	1.0	1.0
5	1.0	1.0	1.0
6	1.0	1.0	1.0
7	1.0	1.0	1.0
8	1.0	1.0	1.0
9	1.0	1.0	1.0
10	1.0	1.0	1.0
11	1.0	1.0	1.0

(continues on next page)

(continued from previous page)

12	1.0	1.0	1.0
13	1.0	1.0	1.0
14	1.0	1.0	1.0
15	1.0	1.0	1.0
16	1.0	1.0	1.0
17	1.0	1.0	1.0
18	1.0	1.0	1.0
19	1.0	1.0	1.0
20	1.0	1.0	1.0
	observable_x2_offsetted_std	observable_x1withsigma_std	
0	1.0	0.1	
1	1.0	0.1	
2	1.0	0.1	
3	1.0	0.1	
4	1.0	0.1	
5	1.0	0.1	
6	1.0	0.1	
7	1.0	0.1	
8	1.0	0.1	
9	1.0	0.1	
10	1.0	0.1	
11	1.0	0.1	
12	1.0	0.1	
13	1.0	0.1	
14	1.0	0.1	
15	1.0	0.1	
16	1.0	0.1	
17	1.0	0.1	
18	1.0	0.1	
19	1.0	0.1	
20	1.0	0.1	

```
[28]: # look at the States in rdata as DataFrame
      amici.getSimulationStatesAsDataFrame(model, [edata], [rdata])
```

```
[28]:
```

	time	t_presim	k0	k0_preeq	k0_presim	x1	x2	x3
0	0.0	0.0	1.0	NaN	NaN	0.100000	0.400000	0.700000
1	0.5	0.0	1.0	NaN	NaN	0.539367	0.684679	0.191491
2	1.0	0.0	1.0	NaN	NaN	0.580072	0.733287	0.096424
3	1.5	0.0	1.0	NaN	NaN	0.570399	0.730652	0.076076
4	2.0	0.0	1.0	NaN	NaN	0.560535	0.715836	0.069694
5	2.5	0.0	1.0	NaN	NaN	0.553056	0.698751	0.066301
6	3.0	0.0	1.0	NaN	NaN	0.546871	0.681963	0.063733
7	3.5	0.0	1.0	NaN	NaN	0.541360	0.666109	0.061506
8	4.0	0.0	1.0	NaN	NaN	0.536280	0.651302	0.059495
9	4.5	0.0	1.0	NaN	NaN	0.531538	0.637515	0.057653
10	5.0	0.0	1.0	NaN	NaN	0.527091	0.624681	0.055960
11	5.5	0.0	1.0	NaN	NaN	0.522914	0.612733	0.054400
12	6.0	0.0	1.0	NaN	NaN	0.518989	0.601603	0.052960
13	6.5	0.0	1.0	NaN	NaN	0.515299	0.591229	0.051629

(continues on next page)

(continued from previous page)

14	7.0	0.0	1.0	NaN	NaN	0.511830	0.581555	0.050399
15	7.5	0.0	1.0	NaN	NaN	0.508568	0.572529	0.049259
16	8.0	0.0	1.0	NaN	NaN	0.505500	0.564103	0.048203
17	8.5	0.0	1.0	NaN	NaN	0.502615	0.556234	0.047224
18	9.0	0.0	1.0	NaN	NaN	0.499902	0.548881	0.046315
19	9.5	0.0	1.0	NaN	NaN	0.497350	0.542008	0.045471
20	10.0	0.0	1.0	NaN	NaN	0.494949	0.535581	0.044686

10.2.3 Using PETab

This notebook illustrates how to use `PETab` with AMICI.

```
[1]: from amici.petab_import import import_petab_problem
    from amici.petab_objective import simulate_petab
    import petab

    import os
```

We use an example model from the `benchmark` collection:

```
[2]: !git clone --depth 1 https://github.com/Benchmarking-Initiative/Benchmark-Models-PETab.
    ↪ git tmp/benchmark-models || (cd tmp/benchmark-models && git pull)
```

```
Cloning into 'tmp/benchmark-models'...
remote: Enumerating objects: 142, done.
remote: Counting objects: 100% (142/142), done.
remote: Compressing objects: 100% (122/122), done.
remote: Total 142 (delta 41), reused 104 (delta 18), pack-reused 0
Receiving objects: 100% (142/142), 648.29 KiB | 1.23 MiB/s, done.
Resolving deltas: 100% (41/41), done.
```

```
[3]: folder_base = "tmp/benchmark-models/Benchmark-Models/"
    !ls -l $folder_base
```

```
total 68
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Alkan_SciSignal2018
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Beer_MolBioSystems2014
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Boehm_JProteomeRes2014
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Borghans_BiophysChem1997
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Brannmark_JBC2010
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Bruno_JExpBio2016
-rwxr-xr-x 1 yannik yannik  654 Mär 17 15:27 checkBenchmarkModels.py
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Chen_MSB2009
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Crauste_CellSystems2017
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Elowitz_Nature2000
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Fiedler_BMC2016
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Fujita_SciSignal2010
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Perelson_Science1996
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Rahman_MBS2016
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Sneyd_PNAS2002
```

(continues on next page)

(continued from previous page)

```
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Weber_BMC2015
drwxr-xr-x 2 yannik yannik 4096 Mär 17 15:27 Zheng_PNAS2012
```

We import a model to PETab from a provided yaml file:

```
[4]: model_name = "Boehm_JProteomeRes2014"
      yaml_file = os.path.join(folder_base, model_name, model_name + ".yaml")
      petab_problem = petab.Problem.from_yaml(yaml_file)
```

Next, we import the model to amici, compile it and obtain a function handle:

```
[5]: amici_model = import_petab_problem(petab_problem)

2020-03-17 15:27:27.586 - amici.petab_import - INFO - Importing model ...
2020-03-17 15:27:27.593 - amici.petab_import - INFO - Model name is 'Boehm_
↳ JProteomeRes2014'. Writing model code to '/home/yannik/amici/python/examples/amici_
↳ models/Boehm_JProteomeRes2014'.
2020-03-17 15:27:27.598 - amici.petab_import - INFO - Species: 8
2020-03-17 15:27:27.599 - amici.petab_import - INFO - Global parameters: 9
2020-03-17 15:27:27.599 - amici.petab_import - INFO - Reactions: 9
2020-03-17 15:27:27.715 - amici.petab_import - INFO - Observables: 3
2020-03-17 15:27:27.715 - amici.petab_import - INFO - Sigmas: 3
2020-03-17 15:27:27.722 - amici.petab_import - DEBUG - Adding output parameters to model:
↳ OrderedDict([('noiseParameter1_pSTAT5A_rel', None), ('noiseParameter1_pSTAT5B_rel',
↳ None), ('noiseParameter1_rSTAT5A_rel', None)])
2020-03-17 15:27:27.725 - amici.petab_import - DEBUG - Condition table: (1, 1)
2020-03-17 15:27:27.726 - amici.petab_import - DEBUG - Fixed parameters are []
2020-03-17 15:27:27.728 - amici.petab_import - INFO - Overall fixed parameters: 0
2020-03-17 15:27:27.729 - amici.petab_import - INFO - Variable parameters: 12
2020-03-17 15:27:27.735 - amici.sbml_import - INFO - Finished processing SBML parameters
↳ (1.25E-03s)
2020-03-17 15:27:27.749 - amici.sbml_import - INFO - Finished processing SBML species
↳ (1.26E-02s)
2020-03-17 15:27:27.829 - amici.sbml_import - INFO - Finished processing SBML reactions
↳ (7.41E-02s)
2020-03-17 15:27:27.833 - amici.sbml_import - INFO - Finished processing SBML
↳ compartments (4.23E-04s)
2020-03-17 15:27:27.898 - amici.sbml_import - INFO - Finished processing SBML rules
↳ (6.47E-02s)
2020-03-17 15:27:28.012 - amici.sbml_import - INFO - Finished processing SBML
↳ observables (6.77E-02s)
2020-03-17 15:27:28.139 - amici.ode_export - INFO - Finished writing J.cpp
↳ (1.14E-01s)
2020-03-17 15:27:28.160 - amici.ode_export - INFO - Finished writing JB.cpp
↳ (2.04E-02s)
2020-03-17 15:27:28.167 - amici.ode_export - INFO - Finished writing JDiag.cpp
↳ (6.41E-03s)
2020-03-17 15:27:28.187 - amici.ode_export - INFO - Finished writing JSparse.cpp
↳ (1.91E-02s)
2020-03-17 15:27:28.217 - amici.ode_export - INFO - Finished writing JSparseB.cpp
↳ (2.73E-02s)
2020-03-17 15:27:28.236 - amici.ode_export - INFO - Finished writing Jy.cpp
↳ (1.65E-02s)
```

(continues on next page)

(continued from previous page)

```

2020-03-17 15:27:28.344 - amici.ode_export - INFO - Finished writing dJydsigmay.cpp
↳ (1.07E-01s)
2020-03-17 15:27:28.389 - amici.ode_export - INFO - Finished writing dJydy.cpp
↳ (3.99E-02s)
2020-03-17 15:27:28.466 - amici.ode_export - INFO - Finished writing dwdp.cpp
↳ (7.61E-02s)
2020-03-17 15:27:28.473 - amici.ode_export - INFO - Finished writing dwdx.cpp
↳ (5.87E-03s)
2020-03-17 15:27:28.497 - amici.ode_export - INFO - Finished writing dxdotdw.cpp
↳ (2.32E-02s)
2020-03-17 15:27:28.533 - amici.ode_export - INFO - Finished writing dxdotdp_explicit.
↳ cpp (3.38E-02s)
2020-03-17 15:27:28.756 - amici.ode_export - INFO - Finished writing dydx.cpp
↳ (1.98E-01s)
2020-03-17 15:27:28.910 - amici.ode_export - INFO - Finished writing dydp.cpp
↳ (1.53E-01s)
2020-03-17 15:27:28.926 - amici.ode_export - INFO - Finished writing dsigmaydp.cpp
↳ (1.40E-02s)
2020-03-17 15:27:28.931 - amici.ode_export - INFO - Finished writing sigmay.cpp
↳ (2.46E-03s)
2020-03-17 15:27:28.950 - amici.ode_export - INFO - Finished writing w.cpp
↳ (1.55E-02s)
2020-03-17 15:27:28.967 - amici.ode_export - INFO - Finished writing x0.cpp
↳ (1.57E-02s)
2020-03-17 15:27:28.975 - amici.ode_export - INFO - Finished writing x0_fixedParameters.
↳ cpp (4.78E-03s)
2020-03-17 15:27:29.027 - amici.ode_export - INFO - Finished writing sx0.cpp
↳ (5.01E-02s)
2020-03-17 15:27:29.069 - amici.ode_export - INFO - Finished writing sx0_fixedParameters.
↳ cpp (3.14E-02s)
2020-03-17 15:27:29.104 - amici.ode_export - INFO - Finished writing xdot.cpp
↳ (3.43E-02s)
2020-03-17 15:27:29.129 - amici.ode_export - INFO - Finished writing y.cpp
↳ (2.16E-02s)
2020-03-17 15:27:29.136 - amici.ode_export - INFO - Finished writing x_rdata.cpp
↳ (4.95E-03s)
2020-03-17 15:27:29.138 - amici.ode_export - INFO - Finished writing total_cl.cpp
↳ (6.59E-04s)
2020-03-17 15:27:29.147 - amici.ode_export - INFO - Finished writing x_solver.cpp
↳ (7.72E-03s)
2020-03-17 15:27:29.166 - amici.ode_export - INFO - Finished generating cpp code
↳ (1.14E+00s)
2020-03-17 15:27:46.200 - amici.ode_export - INFO - Finished compiling cpp code
↳ (1.70E+01s)
2020-03-17 15:27:46.204 - amici.petab_import - INFO - Finished Importing PETab model
↳ (1.86E+01s)
2020-03-17 15:27:46.209 - amici.petab_import - INFO - Successfully loaded model Boehm_
↳ JProteomeRes2014 from /home/yannik/amici/python/examples/amici_models/Boehm_
↳ JProteomeRes2014.

```

```

running build_ext
building 'Boehm_JProteomeRes2014._Boehm_JProteomeRes2014' extension

```

(continues on next page)

(continued from previous page)

```

swigging swig/Boehm_JProteomeRes2014.i to swig/Boehm_JProteomeRes2014_wrap.cpp
swig -python -c++ -modern -outdir Boehm_JProteomeRes2014 -I/home/yannik/amici/python/
↳ sdist/amici/swig -I/home/yannik/amici/python/sdist/amici/include -o swig/Boehm_
↳ JProteomeRes2014_wrap.cpp swig/Boehm_JProteomeRes2014.i
creating build
creating build/temp.linux-x86_64-3.7
creating build/temp.linux-x86_64-3.7/swig
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c swig/Boehm_JProteomeRes2014_wrap.cpp -o build/temp.linux-x86_64-
↳ 3.7/swig/Boehm_JProteomeRes2014_wrap.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdw.cpp -o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_dxdotdw.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_total_cl.cpp -o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_total_cl.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_x_rdata.cpp -o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_x_rdata.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdp_implicit_colptrs.cpp -o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_implicit_colptrs.o -std=c++14

```

(continued from previous page)

```

cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dsigmaydp.cpp -o build/temp.linux-x86_64-
↳ 3.7/Boehm_JProteomeRes2014_dsigmaydp.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_y.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_y.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dydp.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dydp.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_w.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_w.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JSparseB_rowvals.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_JSparseB_rowvals.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++

```

(continues on next page)

(continued from previous page)

```

gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdw_rowvals.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_dxdotdw_rowvals.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dwdx_rowvals.cpp -o build/temp.linux-x86_
↳ 64-3.7/Boehm_JProteomeRes2014_dwdx_rowvals.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_x0.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_x0.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dwdx.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dwdx.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dJydy_colptrs.cpp -o build/temp.linux-x86_
↳ 64-3.7/Boehm_JProteomeRes2014_dJydy_colptrs.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JSparseB.cpp -o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_JSparseB.o -std=c++14

```

(continued from previous page)

```

cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JSparseB_colptrs.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_JSparseB_colptrs.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdp_explicit_colptrs.cpp -o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_explicit_colptrs.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_sx0_fixedParameters.cpp -o build/temp.
↳ linux-x86_64-3.7/Boehm_JProteomeRes2014_sx0_fixedParameters.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JSparse_rowvals.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_JSparse_rowvals.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdp_explicit.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_explicit.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++

```

(continues on next page)

(continued from previous page)

```

gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dJydy.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dJydy.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dwdp_colptrs.cpp -o build/temp.linux-x86_
↳ 64-3.7/Boehm_JProteomeRes2014_dwdp_colptrs.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_x0_fixedParameters.cpp -o build/temp.
↳ linux-x86_64-3.7/Boehm_JProteomeRes2014_x0_fixedParameters.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdw_colptrs.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_dxdotdw_colptrs.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dJydsigmay.cpp -o build/temp.linux-x86_64-
↳ 3.7/Boehm_JProteomeRes2014_dJydsigmay.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdp_implicit_rowvals.cpp -o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_implicit_rowvals.o -std=c++14

```


(continued from previous page)

```

cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dwdp.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dwdp.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_sx0.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_sx0.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JB.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_JB.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dwdx_colptrs.cpp -o build/temp.linux-x86_
↳ 64-3.7/Boehm_JProteomeRes2014_dwdx_colptrs.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c wrapfunctions.cpp -o build/temp.linux-x86_64-3.7/wrapfunctions.o
↳ -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++

```

(continues on next page)

(continued from previous page)

```

gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_x_solver.cpp -o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_x_solver.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JSparse.cpp -o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_JSparse.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_xdot.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_xdot.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dJdy_rowvals.cpp -o build/temp.linux-x86_
↳ 64-3.7/Boehm_JProteomeRes2014_dJdy_rowvals.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dwdp_rowvals.cpp -o build/temp.linux-x86_
↳ 64-3.7/Boehm_JProteomeRes2014_dwdp_rowvals.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JSparse_colptrs.cpp -o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_JSparse_colptrs.o -std=c++14

```

(continued from previous page)

```

cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_J.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_J.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dydx.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dydx.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_JDiag.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_JDiag.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_Jy.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_Jy.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_sigmay.cpp -o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_sigmay.o -std=c++14
cc1plus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++

```

(continues on next page)

(continued from previous page)

```

gcc -pthread -B /home/yannik/anaconda3/compiler_compat -Wl,--sysroot=/ -Wsign-compare -
↳ DNDEBUG -g -fwrapv -O3 -Wall -Wstrict-prototypes -fPIC -I/home/yannik/amici/python/
↳ examples/amici_models/Boehm_JProteomeRes2014 -I/home/yannik/amici/python/sdist/amici/
↳ include -I/home/yannik/amici/python/sdist/amici/ThirdParty/gsl -I/home/yannik/amici/
↳ python/sdist/amici/ThirdParty/sundials/include -I/home/yannik/amici/python/sdist/amici/
↳ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/home/yannik/anaconda3/
↳ include/python3.7m -c Boehm_JProteomeRes2014_dxdotdp_explicit_rowvals.cpp -o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_explicit_rowvals.o -std=c++14
cclplus: warning: command line option '-Wstrict-prototypes' is valid for C/ObjC but not
↳ for C++
g++ -pthread -shared -B /home/yannik/anaconda3/compiler_compat -L/home/yannik/anaconda3/
↳ lib -Wl,-rpath=/home/yannik/anaconda3/lib -Wl,--no-as-needed -Wl,--sysroot=/ build/
↳ temp.linux-x86_64-3.7/swig/Boehm_JProteomeRes2014_wrap.o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dxdotdw.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_
↳ total_cl.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_x_rdata.o build/temp.
↳ linux-x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_implicit_colptrs.o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_dsigmaydp.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_y.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dydp.o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_w.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_JSparseB_rowvals.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_
↳ dxdotdw_rowvals.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dwdx_rowvals.o
↳ build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_x0.o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dwdx.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dJydy_
↳ colptrs.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_JSparseB.o build/temp.
↳ linux-x86_64-3.7/Boehm_JProteomeRes2014_JSparseB_colptrs.o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dxdotdp_explicit_colptrs.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_sx0_fixedParameters.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_JSparse_rowvals.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_
↳ dxdotdp_explicit.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dJydy.o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dwdp_colptrs.o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_x0_fixedParameters.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_dxdotdw_colptrs.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_
↳ dJydsigmay.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dxdotdp_implicit_
↳ rowvals.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dwdp.o build/temp.linux-
↳ x86_64-3.7/Boehm_JProteomeRes2014_sx0.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_JB.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_dwdx_colptrs.
↳ o build/temp.linux-x86_64-3.7/wrapfunctions.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_x_solver.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_JSparse.
↳ o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_xdot.o build/temp.linux-x86_64-3.
↳ 7/Boehm_JProteomeRes2014_dJydy_rowvals.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_dwdp_rowvals.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_
↳ JSparse_colptrs.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_J.o build/temp.
↳ linux-x86_64-3.7/Boehm_JProteomeRes2014_dydx.o build/temp.linux-x86_64-3.7/Boehm_
↳ JProteomeRes2014_JDiag.o build/temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_Jy.o build/
↳ temp.linux-x86_64-3.7/Boehm_JProteomeRes2014_sigmay.o build/temp.linux-x86_64-3.7/
↳ Boehm_JProteomeRes2014_dxdotdp_explicit_rowvals.o -L/usr/lib/x86_64-linux-gnu/hdf5/
↳ serial -L/home/yannik/amici/python/sdist/amici/libs -lamici -lsundials -lsuitesparse -
↳ lcbblas -lhdf5_hl_cpp -lhdf5_hl -lhdf5_cpp -lhdf5 -o /home/yannik/amici/python/examples/
↳ amici_models/Boehm_JProteomeRes2014/Boehm_JProteomeRes2014/_Boehm_JProteomeRes2014.
↳ cpython-37m-x86_64-linux-gnu.so

```

That's it. Now, we can use the model to perform simulations. For more involved purposes, consider using the objective

function provided by `pyPESTO`. For simple simulations, a function `simulate_petab` is available:

```
[6]: simulate_petab(petab_problem, amici_model)

[6]: {'llh': -138.22199570334107,
      'sllh': None,
      'rdatas': [<amici.numpy.ReturnDataView at 0x7f030e1a0fd0>]}
```

This performs a simulation at the nominal parameters. Parameters can also be directly specified, both scaled and unscaled:

```
[7]: parameters = {
      x_id: x_val for x_id, x_val in
      zip(petab_problem.x_ids, petab_problem.x_nominal_scaled)
    }
    simulate_petab(petab_problem, amici_model, problem_parameters=parameters, scaled_
    ↪ parameters=True)

[7]: {'llh': -138.22199570334107,
      'sllh': None,
      'rdatas': [<amici.numpy.ReturnDataView at 0x7f030e198590>]}
```

For further information, see the [documentation](#).

10.2.4 AMICI Python example “Experimental Conditions”

In this example we will explore some more options for the initialization of experimental conditions, including how to reset initial conditions based on changing values for `fixedParameters` as well as an additional presimulation phase on top of preequilibration. This notebook is expected to run from the `python/example_presimulation` directory.

```
[1]: # SBML model we want to import
      sbml_file = 'model_presimulation.xml'
      # Name of the model that will also be the name of the python module
      model_name = 'model_presimulation'
      # Directory to which the generated model code is written
      model_output_dir = model_name

      import libsbml
      import amici
      import amici.plotting
      import os
      import sys
      import importlib
      import numpy as np
      import pandas as pd
      import matplotlib.pyplot as plt
      from pprint import pprint
```

Model Loading

Here we load a simple model of protein phosphorylation that can be inhibited by a drug. This model was created using PySB (see `createModel.py`)

```
[2]: sbml_reader = libsbml.SBMLReader()
sbml_doc = sbml_reader.readSBML(sbml_file)
sbml_model = sbml_doc.getModel()

print('Species:')
pprint([(s.getId(),s.getName()) for s in sbml_model.getListOfSpecies()])

print('\nReactions:')
for reaction in sbml_model.getListOfReactions():
    reactants = ' + '.join(['%s %s'%(int(r.getStoichiometry()) if r.getStoichiometry() > 1
↪1 else '', r.getSpecies()) for r in reaction.getListOfReactants()])
    products = ' + '.join(['%s %s'%(int(r.getStoichiometry()) if r.getStoichiometry() > 1
↪1 else '', r.getSpecies()) for r in reaction.getListOfProducts()])
    reversible = '<' if reaction.getReversible() else ''
    print('%3s: %10s %1s->%10s\t\t[%s]' % (reaction.getName(),
        reactants,
        reversible,
        products,
        libsbml.formulaToL3String(reaction.getKineticLaw().getMath()))

print('Parameters:')
pprint([(p.getId(),p.getName()) for p in sbml_model.getListOfParameters()])

Species:
[('__s0', "PROT(kin=None, drug=None, phospho='u')"),
 ('__s1', 'DRUG(bound=None)'),
 ('__s2', 'KIN(bound=None)'),
 ('__s3', "DRUG(bound=1) ._br_PROT(kin=None, drug=1, phospho='u')"),
 ('__s4', "KIN(bound=1) ._br_PROT(kin=1, drug=None, phospho='u')"),
 ('__s5', "PROT(kin=None, drug=None, phospho='p')")]

Reactions:
PROT_DRUG_bind: __s0 + __s1 <-> __s3          [-(koff_prot_drug * __s3) + kon_
↪prot_drug * __s0 * __s1]
PROT_KIN_bind: __s0 + __s2 -> __s4          [kon_prot_kin * __s0 * __s2]
PROT_KIN_phospho: __s4 -> __s2 + __s5      [kphospho_prot_kin * __s4]
PROT_dephospho: __s5 -> __s0              [kdephospho_prot * __s5]

Parameters:
[('initProt', 'initProt'),
 ('initDrug', 'initDrug'),
 ('initKin', 'initKin'),
 ('pPROT_obs', 'pPROT_obs'),
 ('PROT_0', 'PROT_0'),
 ('DRUG_0', 'DRUG_0'),
 ('KIN_0', 'KIN_0'),
 ('kon_prot_drug', 'kon_prot_drug'),
 ('koff_prot_drug', 'koff_prot_drug'),
 ('kon_prot_kin', 'kon_prot_kin'),
 ('kphospho_prot_kin', 'kphospho_prot_kin'),
```

(continues on next page)

(continued from previous page)

```
( 'kdephospho_prot', 'kdephospho_prot'),
( '__obs0', 'pPROT'),
( '__obs1', 'tPROT')]
```

```
[3]: # Create an SbmlImporter instance for our SBML model
sbml_importer = amici.SbmlImporter(sbml_file)
```

For this example we want specify the initial drug and kinase concentrations as experimental conditions. Accordingly we specify them as `fixedParameters`. The meaning of `fixedParameters` is defined in the [Glossary](https://amici.readthedocs.io/en/latest/glossary.html#term-fixed-parameters), which we display here for convenience.

```
[4]: from IPython.display import IFrame
IFrame('https://amici.readthedocs.io/en/latest/glossary.html#term-fixed-parameters',
      ↪width=600, height=175)
```

```
[4]: <IPython.lib.display.IFrame at 0x10ce15b50>
```

```
[5]: fixedParameters = ['DRUG_0', 'KIN_0']
```

The SBML model specifies a single observable named `pPROT` which describes the fraction of phosphorylated Protein. We load this observable using `amici.assignmentRules2observables`.

```
[6]: # Retrieve model output names and formulae from AssignmentRules and remove the
      ↪respective rules
observables = amici.assignmentRules2observables(
    sbml_importer.sbml, # the libsbml model object
    filter_function=lambda variable: variable.getName() == 'pPROT'
)
print('Observables:')
pprint(observables)
```

```
Observables:
{'__obs0': {'formula': '__s5', 'name': 'pPROT'}}
```

Now the model is ready for compilation using `sbml2amici`. Note that we here pass `fixedParameters` as arguments to `constant_parameters`, which ensures that `amici` is aware that we want to have them as `fixedParameters`:

```
[7]: sbml_importer.sbml2amici(model_name,
                             model_output_dir,
                             verbose=False,
                             observables=observables,
                             constant_parameters=fixedParameters)
# load the generated module
model_module = amici.import_model_module(model_name, model_output_dir)
```


To simulate the model we need to create an instance via the `getModel()` method in the generated model module.

```
[8]: # Create Model instance
model = model_module.getModel()

# Create solver instance
solver = model.getSolver()
```


The only thing we need to simulate the model is a timepoint vector, which can be specified using the `setTimepoints` method. If we do not specify any additional options, the default values for `fixedParameters` and `parameters` that were specified in the SBML file will be used.

```
[9]: # Run simulation using default model parameters and solver options
model.setTimepoints(np.linspace(0, 60, 60))
rdata = amici.runAmiciSimulation(model, solver)
amici.plotting.plotObservableTrajectories(rdata)
```

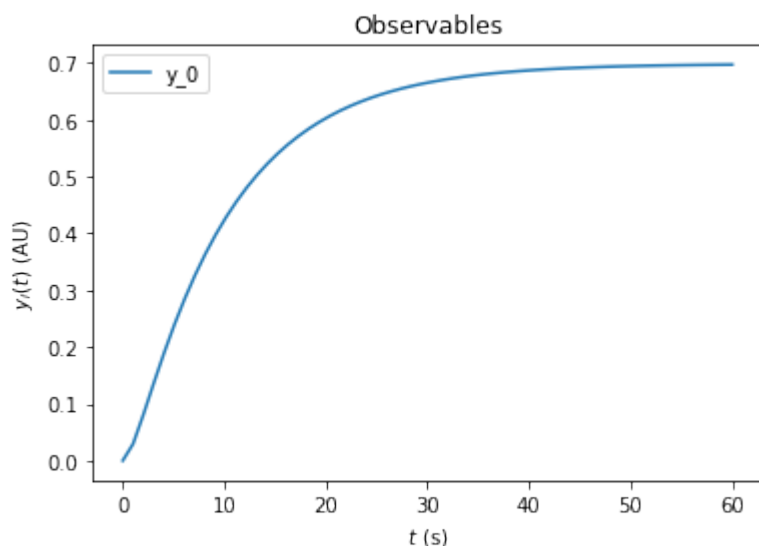


Simulation options can be specified either in the `Model` or in an `ExpData` instance. The `ExpData` instance can also carry experimental data. To initialize an `ExpData` instance from simulation results, amici offers some [convenient constructors](#). In the following we will initialize an `ExpData` object from simulation results, but add noise with standard deviation 0.1 and specify the standard deviation accordingly. Moreover, we will specify custom values for `DRUG_0=0` and `KIN_0=2`. If `fixedParameter` is specified in an `ExpData` instance, `runAmiciSimulation` will use those parameters instead of the ones specified in the `Model` instance.

```
[10]: edata = amici.ExpData(rdata, 0.1, 0.0)
edata.fixedParameters = [0,2]
rdata = amici.runAmiciSimulation(model, solver, edata)
amici.plotting.plotObservableTrajectories(rdata)
```

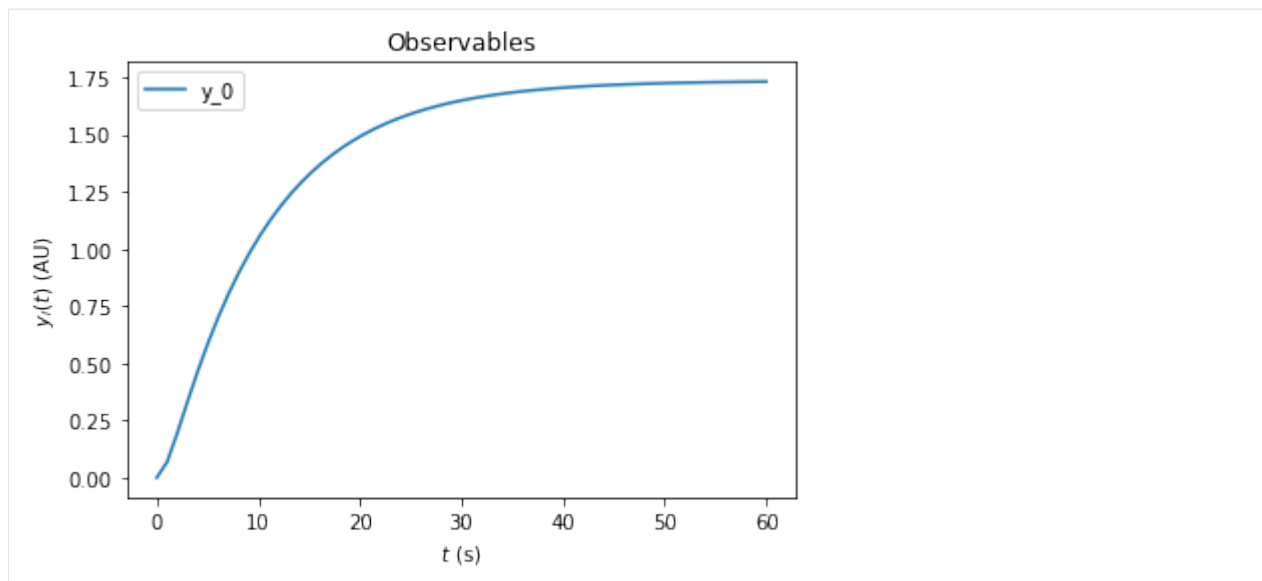

For many biological systems, it is reasonable to assume that they start in a steady state. In this example we want to specify an experiment where a pretreatment with a drug is performed *before* the kinase is added. We assume that the pretreatment is sufficiently long such that the system reaches steady state before the kinase is added. To implement this in amici, we can specify `fixedParametersPreequilibration` in the `ExpData` object. This automatically adds a preequilibration phase where the model is run to steady state, before regular simulation starts. Here we set `DRUG_0=3` and `KIN_0=0` for the preequilibration. This means that there is no kinase available in the preequilibration phase.

```
[11]: edata.fixedParametersPreequilibration = [3,0]
      rdata = amici.runAmiciSimulation(model, solver, edata)
      amici.plotting.plotObservableTrajectories(rdata)
```

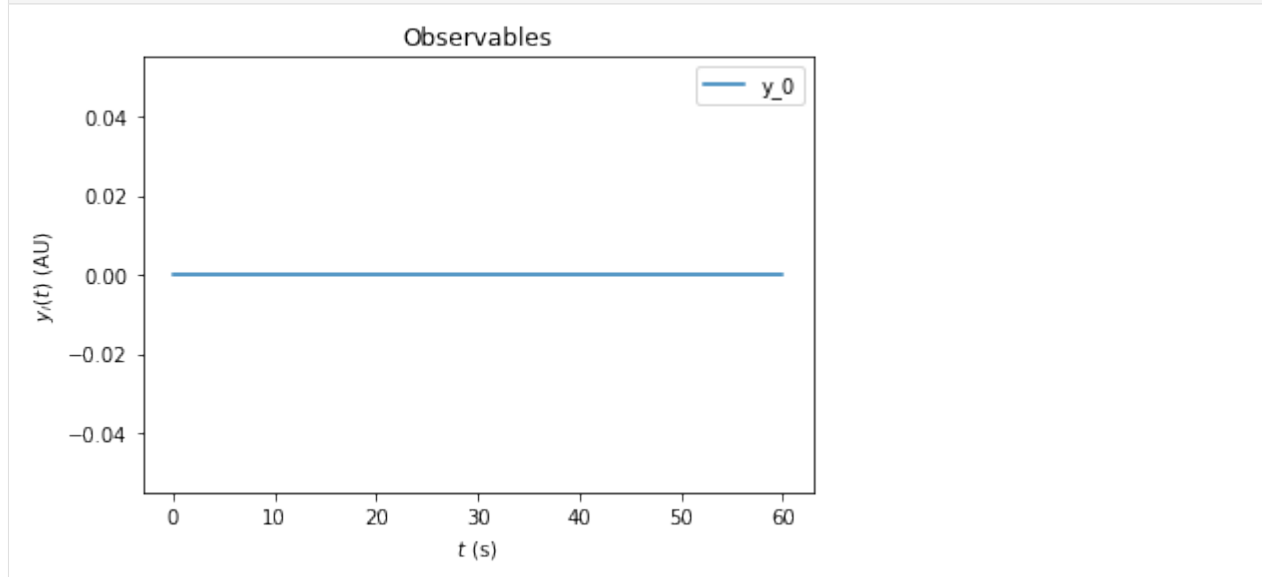


The resulting trajectory is definitely not what one may expect. The problem is that the `DRUG_0` and `KIN_0` set initial conditions for species in the model. By default these initial conditions are only applied at the very beginning of the simulation, i.e., before the preequilibration. Accordingly, the `fixedParameters` that we specified do not have any effect. To fix this, we need to set the `reinitializeFixedParameterInitialStates` attribute to `True`, to specify that AMICI reinitializes all states that have `fixedParameter`-dependent initial states.

```
[12]: edata.reinitializeFixedParameterInitialStates = True
```

With this option activated, the kinase concentration will be reinitialized after the preequilibration and we will see the expected change in fractional phosphorylation:


```
[13]: rdata = amici.runAmiciSimulation(model, solver, edata)
      amici.plotting.plotObservableTrajectories(rdata)
```

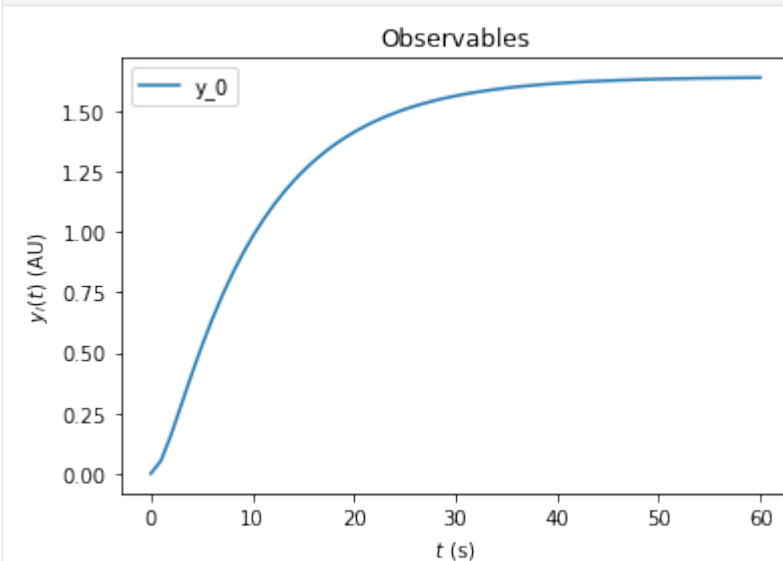

On top of preequilibration, we can also specify presimulation. This option can be used to specify pretreatments where the system is not assumed to reach steadystate. Presimulation can be activated by specifying `t_presim` and `edata.fixedParametersPresimulation`. If both `fixedParametersPresimulation` and `fixedParametersPreequilibration` are specified, preequilibration will be performed first, followed by presimulation, followed by regular simulation. For this example we specify `DRUG_0=10` and `KIN_0=0` for the presimulation and `DRUG_0=10` and `KIN_0=2` for the regular simulation. We do not overwrite the `DRUG_0=3` and `KIN_0=0` that was previously specified for preequilibration.

```
[14]: edata.t_presim = 10
      edata.fixedParametersPresimulation = [10.0, 0.0]
      edata.fixedParameters = [10.0, 2.0]
      print(edata.fixedParametersPreequilibration)
      print(edata.fixedParametersPresimulation)
      print(edata.fixedParameters)
      rdata = amici.runAmiciSimulation(model, solver, edata)
      amici.plotting.plotObservableTrajectories(rdata)
```

```
(3.0, 0.0)
(10.0, 0.0)
(10.0, 2.0)
```

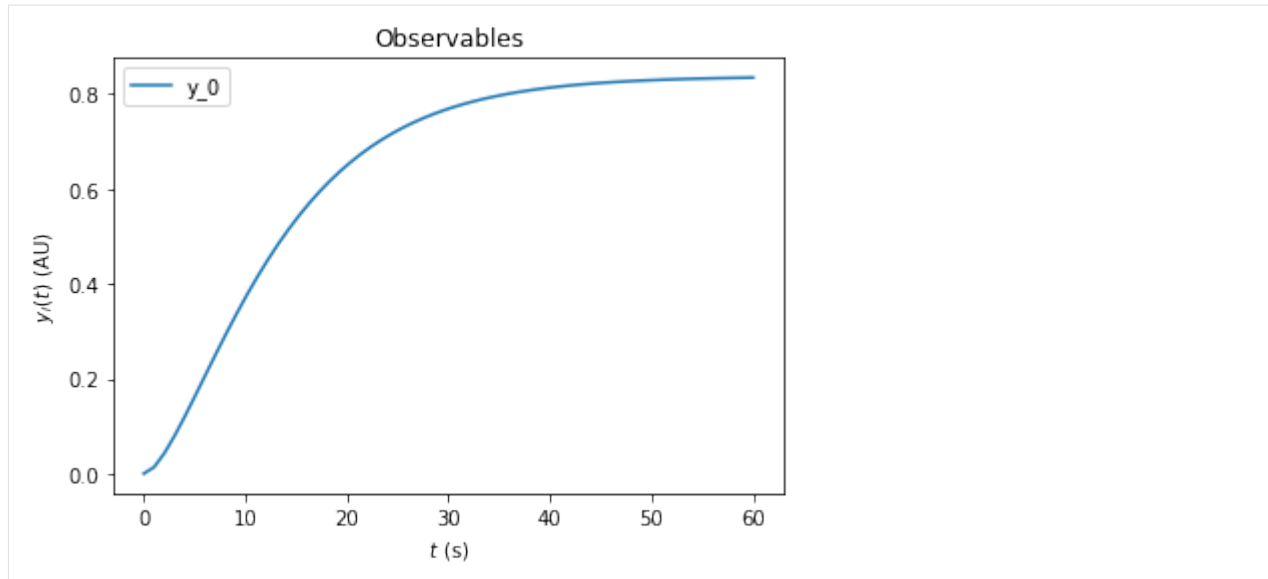

10.2.5 AMICI documentation example of the steady state solver logic

This is an example to document the internal logic of the steady state solver, which is used in preequilibration and postequilibration.

Steady states of dynamical system

Not every dynamical system needs to run into a steady state. Instead, it may exhibit

- continuous growth, e.g.,

$$\dot{x} = x, \quad x_0 = 1$$

- a finite-time blow up, e.g.,

$$\dot{x} = x^2, \quad x_0 = 1$$

- oscillations, e.g.,

$$\ddot{x} = -x, \quad x_0 = 1$$

- chaotic behaviour, e.g., the Lorentz attractor

If the considered dynamical system has a steady state for positive times, then integrating the ODE long enough will equilibrate the system to this steady state. However, this may be computationally more demanding than other approaches and may fail, if the maximum number of integration steps is exceeded before reaching the steady state.

In general, Newton's method will find the steady state faster than forward simulation. However, it only converges if started close enough to the steady state. Moreover, it will not work, if the dynamical system has conserved quantities which were not removed prior to steady state computation: Conserved quantities will cause singularities in the Jacobian of the right hand side of the system, such that the linear problem within each step of Newton's method can not be solved.


Logic of the steady state solver

If AMICI has to equilibrate a dynamical system, it can do this either via simulating until the right hand side of the system becomes small, or it can try to find the steady state directly by Newton's method. Amici decides automatically which approach is chosen and how forward or adjoint sensitivities are computed, if requested. However, the user can influence this behavior, if prior knowledge about the dynamical is available.

The logic which AMICI will follow to equilibrate the system works as follows:

```
[1]: from IPython.display import Image
fig = Image(filename='../documentation/gfx/steadystate_solver_workflow.png')
fig
```

[1]:

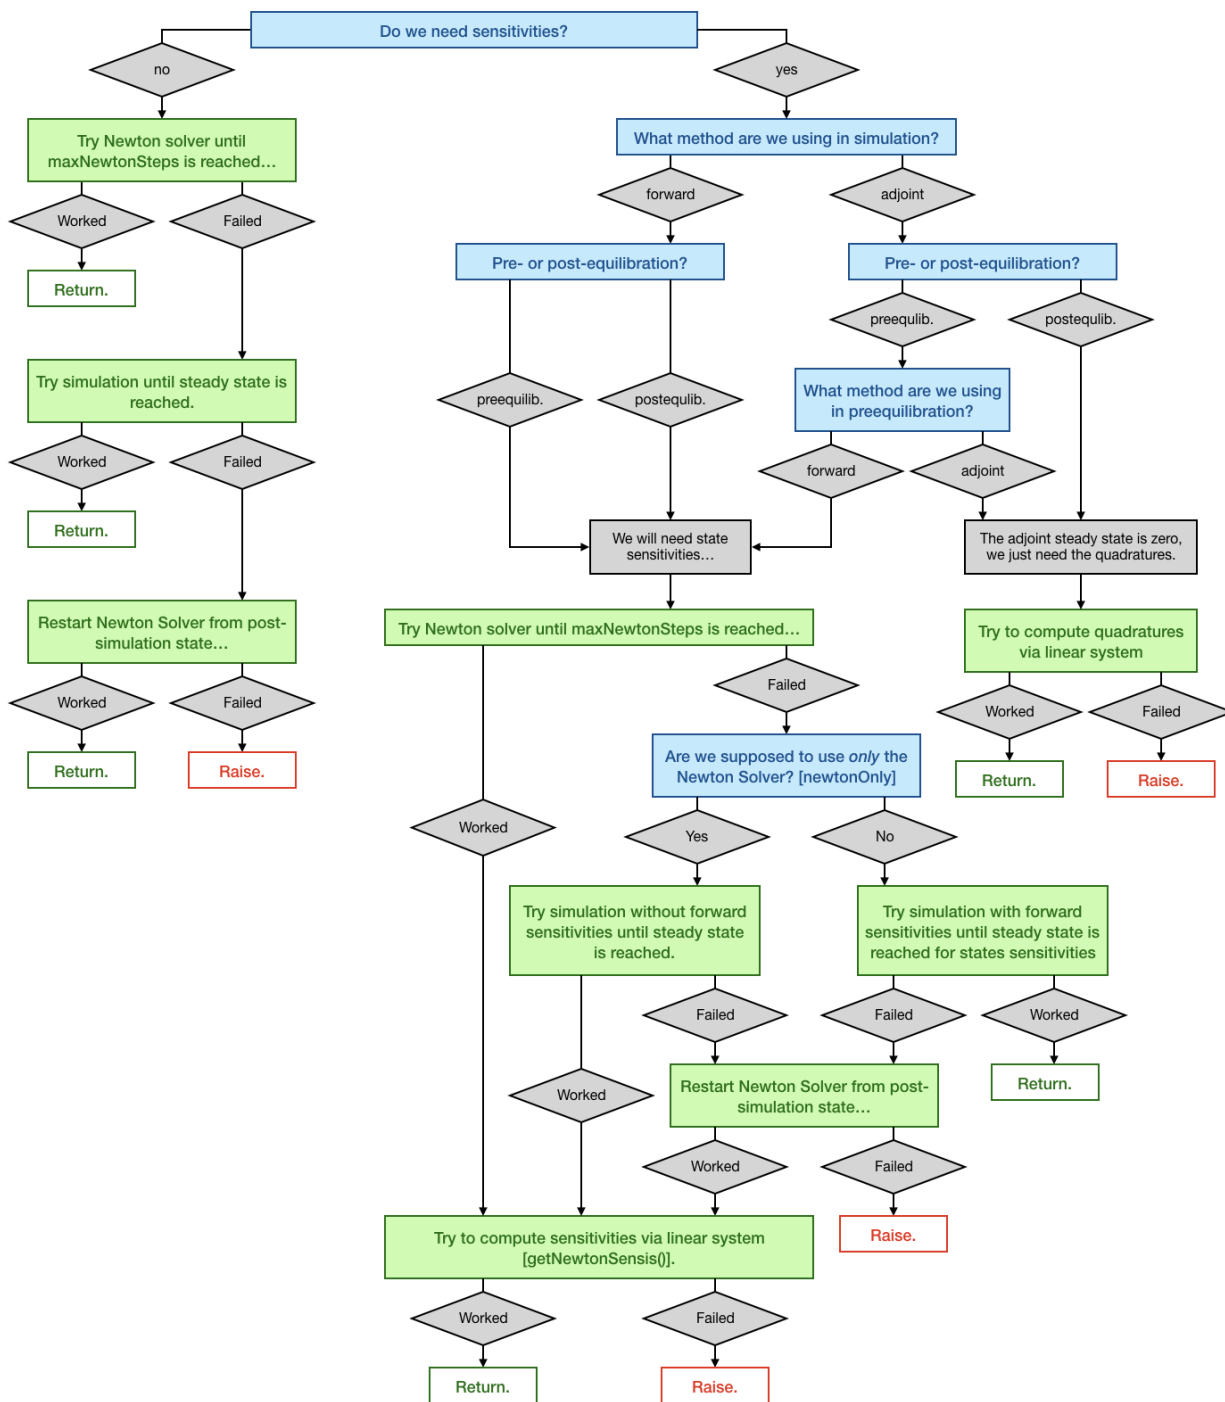

The example model

We will use the example model `model_constant_species.xml`, which has conserved species. Those are automatically removed in the SBML import of AMICI, but they can also be kept in the model to demonstrate the failure of Newton's method due to a singular right hand side Jacobian.

```
[2]: import libsbml
import importlib
import amici
import os
import sys
import numpy as np
import matplotlib.pyplot as plt

# SBML model we want to import
sbml_file = 'model_constant_species.xml'

# Name of the models that will also be the name of the python module
model_name = 'model_constant_species'
model_reduced_name = model_name + '_reduced'

# Directories to which the generated model code is written
model_output_dir = model_name
model_reduced_output_dir = model_reduced_name

# Read the model and give some output
sbml_reader = libsbml.SBMLReader()
sbml_doc = sbml_reader.readSBML(sbml_file)
sbml_model = sbml_doc.getModel()
dir(sbml_doc)

print('Species: ', [s.getId() for s in sbml_model.getListOfSpecies()])

print('\nReactions:')
for reaction in sbml_model.getListOfReactions():
    reactants = ' + '.join(['%s %s'%(int(r.getStoichiometry()) if r.getStoichiometry() >
→ 1 else '', r.getSpecies()) for r in reaction.getListOfReactants()])
    products = ' + '.join(['%s %s'%(int(r.getStoichiometry()) if r.getStoichiometry() >
→ 1 else '', r.getSpecies()) for r in reaction.getListOfProducts()])
    reversible = '<' if reaction.getReversible() else ''
    print('%3s: %10s %1s->%10s\t\t[%s]' % (reaction.getId(),
→ reactants,
→ reversible,
→ products,
→ libsbml.formulaToL3String(reaction.getKineticLaw().getMath()))

Species:  ['substrate', 'enzyme', 'complex', 'product']

Reactions:
creation:          -> substrate          [compartment * (synthesis_substrate + k_
→ create)]
binding:  substrate +  enzyme <->  complex          [compartment * (k_bind *
→ substrate * enzyme - k_unbind * complex)]
conversion:  complex -> enzyme + product          [compartment * k_convert *
→ complex]
```

(continues on next page)

(continued from previous page)

```
decay:      product  ->                [compartment * k_decay * product]
```

```
[3]: # Create an SbmlImporter instance for our SBML model
sbml_importer = amici.SbmlImporter(sbml_file)

# specify observables and constant parameters
constantParameters = ['synthesis_substrate', 'init_enzyme']
observables = {
    'observable_product': {'name': '', 'formula': 'product'},
    'observable_substrate': {'name': '', 'formula': 'substrate'},
}
sigmas = {'observable_product': 1.0, 'observable_substrate': 1.0}

# import the model
sbml_importer.sbml2amici(model_reduced_name,
                          model_reduced_output_dir,
                          observables=observables,
                          constant_parameters=constantParameters,
                          sigmas=sigmas)
sbml_importer.sbml2amici(model_name,
                          model_output_dir,
                          observables=observables,
                          constant_parameters=constantParameters,
                          sigmas=sigmas,
                          compute_conservation_laws=False)

[4]: # import the models and run some test simulations
model_reduced_module = amici.import_model_module(model_reduced_name, os.path.
↳ abspath(model_reduced_output_dir))
model_reduced = model_reduced_module.getModel()


model_module = amici.import_model_module(model_name, os.path.abspath(model_output_dir))
model = model_module.getModel()


# simulate model with conservation laws
model_reduced.setTimepoints(np.linspace(0, 2, 100))
solver_reduced = model_reduced.getSolver()
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced)

# simulate model without conservation laws
model.setTimepoints(np.linspace(0, 2, 100))
solver = model.getSolver()
rdata = amici.runAmiciSimulation(model, solver)

# plot trajectories
import amici.plotting
amici.plotting.plotStateTrajectories(rdata_reduced, model=model_reduced)
amici.plotting.plotObservableTrajectories(rdata_reduced, model=model_reduced)

amici.plotting.plotStateTrajectories(rdata, model=model)
amici.plotting.plotObservableTrajectories(rdata, model=model)
```

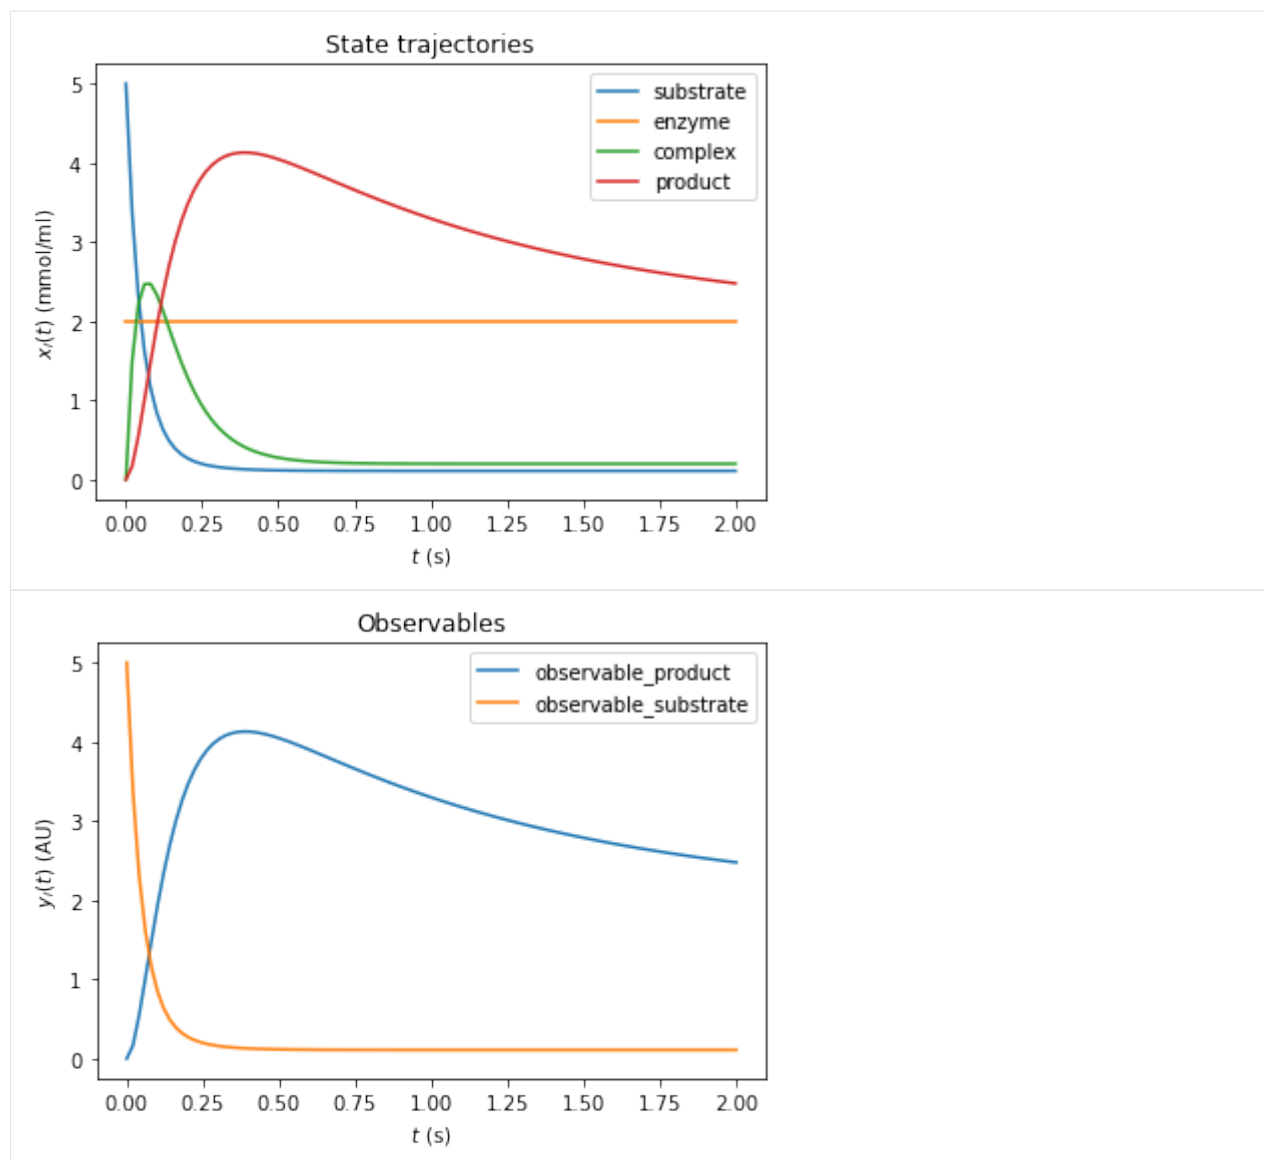

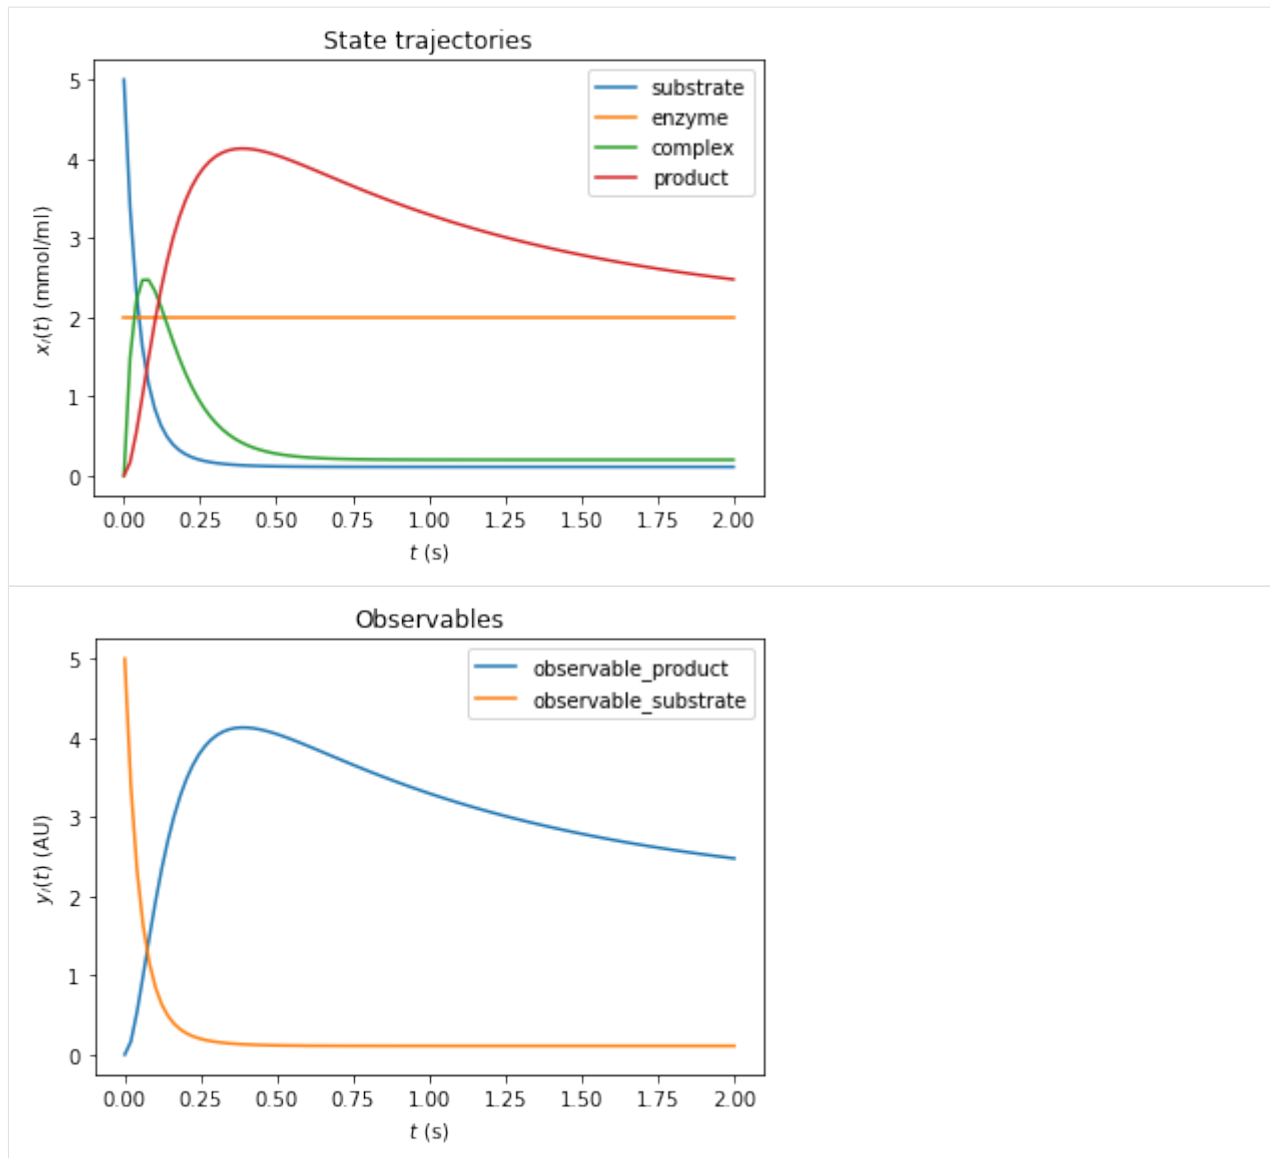

Inferring the steady state of the system (postequilibration)

First, we want to demonstrate that Newton's method will fail with the unreduced model due to a singular right hand side Jacobian.

```
[5]: # Call postequilibration by setting an infinity timepoint
model.setTimepoints(np.full(1, np.inf))

# set the solver
solver = model.getSolver()
solver.setNewtonMaxSteps(10)
solver.setMaxSteps(1000)
rdata = amici.runAmiciSimulation(model, solver)

#np.set_printoptions(threshold=8, edgeitems=2)
```

(continues on next page)

(continued from previous page)

```

for key, value in rdata.items():
    print('%12s: ' % key, value)

    ts: [inf]
    x: [[0.11      2.          0.2          2.000000002]]
    x0: [5. 2. 0. 0.]
    x_ss: [nan nan nan nan]
    sx: None
    sx0: None
    sx_ss: None
    y: [[2.000000002 0.11      ]]
    sigmay: [[1. 1.]]
    sy: None
    ssigmay: None
    z: None
    rz: None
    sigmaz: None
    sz: None
    srz: None
    ssigmaz: None
    sllh: None
    s2llh: None
    J: [[-20.    0.   20.    0. ]
[-1.1  0.    1.1  0. ]
[ 1.    0.  -11.  10. ]
[ 0.    0.    0.  -1. ]]
    xdot: [ 0.000000000e+00  0.000000000e+00  2.22044605e-16 -2.24170307e-08]
    status: 0.0
    llh: nan
    chi2: nan
    res: [0. 0.]
    sres: None
    FIM: None
    w: [[2.          2.          2.          2.000000002]]
    preeq_wrms: nan
    preeq_t: nan
    preeq_numlinsteps: None
    preeq_numsteps: [[0 0 0]]
    preeq_numstepsB: 12.0
    preeq_status: [[0 0 0]]
    preeq_cpu_time: 0.0
    preeq_cpu_timeB: 0.0
    posteq_wrms: 0.5604257578208488
    posteq_t: 19.2252094591474
    posteq_numlinsteps: None
    posteq_numsteps: [[ 0 417  0]]
    posteq_numstepsB: 0.0
    posteq_status: [[-3 1 0]]
    posteq_cpu_time: 2.315
    posteq_cpu_timeB: 0.0
    numsteps: None
    numrhsevals: None

```

(continues on next page)

(continued from previous page)

```

numerrtestfails: None
numnonlinsolvconvfails: None
    order: None
    cpu_time: 0.0
    numstepsB: None
numrhsevalsB: None
numerrtestfailsB: None
numnonlinsolvconvfailsB: None
    cpu_timeB: 0.0

```

The fields `posteq_status` and `posteq_numsteps` in `rdata` tells us how postequilibration worked:

- the first entry informs us about the status/number of steps in Newton's method (here 0, as Newton's method did not work)
- the second entry tells us, the status/how many integration steps were taken until steady state was reached
- the third entry informs us about the status/number of Newton steps in the second launch, after simulation

The status is encoded as an Integer flag with the following meanings:

- 1: Successful run
- 0: Did not run
- -1: Error: No further specification is given, the error message should give more information.
- -2: Error: The method did not converge to a steady state within the maximum number of steps (Newton's method or simulation).
- -3: Error: The Jacobian of the right hand side is singular (only Newton's method)
- -4: Error: The damping factor in Newton's method was reduced until it met the lower bound without success (Newton's method only)
- -5: Error: The model was simulated past the timepoint $t=1e100$ without finding a steady state. Therefore, it is likely that the model has not steady state for the given parameter vector.

Here, only the second entry of `posteq_status` contains a positive integer: The first run of Newton's method failed due to a Jacobian, which could not be factorized, but the second run (simulation) contains the entry 1 (success). The third entry is 0, thus Newton's method was not launched for a second time. More information can be found in `posteq_numsteps`: Also here, only the second entry contains a positive integer, which is smaller than the maximum number of steps taken (<1000). Hence steady state was reached via simulation, which corresponds to the simulated time written to `posteq_time`.

We want to demonstrate a complete failure if inferring the steady state by reducing the number of integration steps to a lower value:

```

[6]: # reduce maxsteps for integration
solver.setMaxSteps(100)
rdata = amici.runAmiciSimulation(model, solver)
print('Status of postequilibration:', rdata['posteq_status'])
print('Number of steps employed in postequilibration:', rdata['posteq_numsteps'])

```

```

Status of postequilibration: [[-3 -2 -3]]
Number of steps employed in postequilibration: [[ 0 100  0]]

```

```

[Warning] AMICI:simulation: AMICI simulation failed:
Steady state computation failed. First run of Newton solver failed: RHS could not be
↪factorized. Simulation to steady state failed: No convergence was achieved. Second run_
↪of Newton solver failed: RHS could not be factorized.

```

(continues on next page)

(continued from previous page)

Error occurred in:

```

0      0x1060f7913 amici::SteadystateProblem::handleSteadyStateFailure(amici::Solver_
↳const*, amici::Model*) + 531
1      0x1060f6b3c amici::SteadystateProblem::findSteadyState(amici::Solver*, amici::
↳NewtonSolver*, amici::Model*, int) + 332
2      0x1060f6882 amici::SteadystateProblem::workSteadyStateProblem(amici::Solver*,
↳amici::Model*, int) + 322
3      0x1060a4615 amici::AmiciApplication::runAmiciSimulation(amici::Solver&, amici:
↳:ExpData const*, amici::Model&, bool) + 405
4

```

However, the same logic works, if we use the reduced model. For sufficiently many Newton steps, postequilibration is achieved by Newton's method in the first run. In this specific example, the steady state is found within one step.

```

[7]: # Call postequilibration by setting an infinity timepoint
model_reduced.setTimepoints(np.full(1, np.inf))

# set the solver
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
solver_reduced.setMaxSteps(100)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced)

print('Status of postequilibration:', rdata_reduced['posteq_status'])
print('Number of steps employed in postequilibration:', rdata_reduced['posteq_numsteps'])

Status of postequilibration: [[1 0 0]]
Number of steps employed in postequilibration: [[2 0 0]]

```

Postequilibration with sensitivities

Equilibration is possible with forward and adjoint sensitivity analysis. As for the main simulation part, adjoint sensitivity analysis yields less information than forward sensitivity analysis, since no state sensitivities are computed. However, it has a better scaling behavior towards large model sizes.

Postequilibration with forward sensitivities

If forward sensitivity analysis is used, then state sensitivities at the timepoint `np.inf` will be computed. This can be done in (currently) two different ways:

1. If the Jacobian $\nabla_x f$ of the right hand side f is not (close to) singular, the most efficient approach will be solving the linear system of equations, which defines the steady state sensitivities:

$$0 = \dot{s}^x = (\nabla_x f) s^x + \frac{\partial f}{\partial \theta} \quad \Rightarrow \quad (\nabla_x f) s^x = -\frac{\partial f}{\partial \theta}$$

This approach will always be chosen by AMICI, if the option `model.SteadyStateSensitivityMode` is set to `SteadyStateSensitivityMode.newtonOnly`. Furthermore, it will also be chosen, if the steady state was found by Newton's method, as in this case, the Jacobian is at least not singular (but may still be poorly conditioned). A check for the condition number of the Jacobian is currently missing, but will soon be implemented.

2. If the Jacobian is poorly conditioned or singular, then the only way to obtain a reliable result will be integrating the state variables with state sensitivities until the norm of the right hand side becomes small. This

approach will be chosen by AMICI, if the steady state was found by simulation and the option `model.SteadyStateSensitivityMode` is set to `SteadyStateSensitivityMode.simulationFSA`. This approach is numerically more stable, but the computation time for large models may be substantial.

Side remark:

A possible third way may consist in a (relaxed) Richardson iteration type approach, which interprets the entries of the right hand side f as residuals and minimizes the squared residuals $\|f\|^2$ by a Levenberg-Marquart-type algorithm. This approach would also work for poorly conditioned (and even for singular Jacobians if additional constraints are implemented as Lagrange multipliers) while being faster than a long forward simulation.

We want to demonstrate both possibilities to find the steady state sensitivities, as well as the failure of their computation if the Jacobian is singular and the `newtonOnly` setting was used.

```
[8]: # Call simulation with singular Jacobian and integrateIfNewtonFails mode
model.setTimepoints(np.full(1, np.inf))
model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.
    ↪integrateIfNewtonFails)
solver = model.getSolver()
solver.setNewtonMaxSteps(10)
solver.setSensitivityMethod(amici.SensitivityMethod.forward)
solver.setSensitivityOrder(amici.SensitivityOrder.first)
solver.setMaxSteps(10000)
rdata = amici.runAmiciSimulation(model, solver)

print('Status of postequilibration:', rdata['posteq_status'])
print('Number of steps employed in postequilibration:', rdata['posteq_numsteps'])
print('Computed state sensitivities:')
print(rdata['sx'][0,:,:])
```

```
Status of postequilibration: [[-3  1  0]]
Number of steps employed in postequilibration: [[ 0 1026  0]]
Computed state sensitivities:
[[-1.10000000e-02  0.00000000e+00 -6.70507402e-18 -1.20114408e-11]
 [ 1.00000000e-02  0.00000000e+00 -8.22965063e-19  1.20114329e-11]
 [-1.00000000e-03  0.00000000e+00 -2.00000000e-02 -2.40228711e-11]
 [ 5.50000000e-02  0.00000000e+00  1.00000000e-01  9.99999999e-01]
 [ 0.00000000e+00  0.00000000e+00  0.00000000e+00 -2.00000004e+00]]
```

```
[9]: # Call simulation with singular Jacobian and newtonOnly mode (will fail)
model.setTimepoints(np.full(1, np.inf))
model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.newtonOnly)
solver = model.getSolver()
solver.setSensitivityMethod(amici.SensitivityMethod.forward)
solver.setSensitivityOrder(amici.SensitivityOrder.first)
solver.setMaxSteps(10000)
rdata = amici.runAmiciSimulation(model, solver)

print('Status of postequilibration:', rdata['posteq_status'])
print('Number of steps employed in postequilibration:', rdata['posteq_numsteps'])
print('Computed state sensitivities:')
print(rdata['sx'][0,:,:])
```

```
Status of postequilibration: [[-2 -1  1]]
Number of steps employed in postequilibration: [[ 0 543  0]]
Computed state sensitivities:
```

(continues on next page)

(continued from previous page)

```
[[0. 0. 0. 0.]
 [0. 0. 0. 0.]
 [0. 0. 0. 0.]
 [0. 0. 0. 0.]
 [0. 0. 0. 0.]]
```

```
[Warning] AMICI:simulation: AMICI simulation failed:
Steady state sensitivitiy computation failed due to unsuccessful factorization of RHS
↳ Jacobian
Error occured in:
0      0x1060f698b amici::SteadystateProblem::workSteadyStateProblem(amici::Solver*,
↳ amici::Model*, int) + 587
1      0x1060a4615 amici::AmiciApplication::runAmiciSimulation(amici::Solver&, amici:
↳ :ExpData const*, amici::Model&, bool) + 405
2      0x1060a4474 amici::runAmiciSimulation(amici::Solver&, amici::ExpData const*,
↳ amici::Model&, bool) + 36
3      0x106061005 _wrap_runAmiciSimulation(_object*, _object*) + 549
4      0x1021b2309 cfunction_call_varargs + 320
5
```

```
[10]: # Call postequilibration by setting an infinity timepoint
model_reduced.setTimepoints(np.full(1, np.inf))
model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.newtonOnly)
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.forward)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)
solver_reduced.setMaxSteps(1000)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced)

print('Status of postequilibration:', rdata_reduced['posteq_status'])
print('Number of steps employed in postequilibration:', rdata_reduced['posteq_numsteps'])
print('Computed state sensitivities:')
print(rdata_reduced['sx'][0,:,:])

Status of postequilibration: [[1 0 0]]
Number of steps employed in postequilibration: [[2 0 0]]
Computed state sensitivities:
[[-1.1e-02  0.0e+00 -0.0e+00 -0.0e+00]
 [ 1.0e-02  0.0e+00 -0.0e+00 -0.0e+00]
 [-1.0e-03  0.0e+00 -2.0e-02 -0.0e+00]
 [ 5.5e-02  0.0e+00  1.0e-01  1.0e+00]
 [-0.0e+00  0.0e+00 -0.0e+00 -2.0e+00]]
```

Postequilibration with adjoint sensitivities

Postequilibration also works with adjoint sensitivities. In this case, it is exploited that the ODE of the adjoint state p will always have the steady state 0, since it's a linear ODE:

$$\frac{d}{dt}p(t) = J(x^*, \theta)^T p(t),$$

where x^* denotes the steady state of the system state. Since the Eigenvalues of the Jacobian are negative and since the Jacobian at steady state is a fixed matrix, this system has a simple algebraic solution:

$$p(t) = e^{tJ(x^*, \theta)^T} p_{\text{end}}.$$

As a consequence, the quadratures in adjoint computation also reduce to a matrix-vector product:

$$Q(x, \theta) = Q(x^*, \theta) = p_{\text{integral}} * \frac{\partial f}{\partial \theta}$$

with

$$p_{\text{integral}} = \int_0^\infty p(s) ds = (J(x^*, \theta)^T)^{-1} p_{\text{end}}.$$

However, this solution is given in terms of a linear system of equations defined by the transposed Jacobian of the right hand side. Hence, if the (transposed) Jacobian is singular, it is not applicable. In this case, standard integration must be carried out.

```
[11]: # Call adjoint postequilibration by setting an infinity timepoint
# and create an edata object, which is needed for adjoint computation
edata = amici.ExpData(2, 0, 0, np.array([float('inf')]))
edata.setObservedData([1.8] * 2)
edata.fixedParameters = np.array([3., 5.])

model_reduced.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.newtonOnly)
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.adjoint)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)
solver_reduced.setMaxSteps(1000)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

print('Status of postequilibration:', rdata_reduced['posteq_status'])
print('Number of steps employed in postequilibration:', rdata_reduced['posteq_numsteps'])
print('Number of backward steps employed in postequilibration:', rdata_reduced['posteq_
↳ numstepsB'])
print('Computed gradient:', rdata_reduced['sllh'])

Status of postequilibration: [[1 0 0]]
Number of steps employed in postequilibration: [[2 0 0]]
Number of backward steps employed in postequilibration: 0.0
Computed gradient: [-1.859000e-02  1.690000e-02 -1.690000e-03 -3.16282e+00  1.600000e+01]
```

If we carry out the same computation with a system that has a singular Jacobian, then `posteq_numstepsB` will not be 0 any more (which indicates that the linear system solve was used to compute backward postequilibration). Now, integration is carried out and hence `posteq_numstepsB > 0`

```
[12]: # Call adjoint postequilibration with model with singular Jacobian
model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.newtonOnly)
solver = model.getSolver()
solver.setNewtonMaxSteps(10)
solver.setSensitivityMethod(amici.SensitivityMethod.adjoint)
solver.setSensitivityOrder(amici.SensitivityOrder.first)
rdata = amici.runAmiciSimulation(model, solver, edata)

print('Status of postequilibration:', rdata['posteq_status'])
print('Number of steps employed in postequilibration:', rdata['posteq_numsteps'])
print('Number of backward steps employed in postequilibration:', rdata['posteq_numstepsB
↪'])
print('Computed gradient:', rdata['sllh'])

Status of postequilibration: [[-3 -1  1]]
Number of steps employed in postequilibration: [[ 0 479  0]]
Number of backward steps employed in postequilibration: 3076.0
Computed gradient: [-1.85899987e-02  1.68999988e-02 -1.69000055e-03 -3.16282001e+00
 1.60000000e+01]
```


Preequilibrating the model

Sometimes, we want to launch a solver run from a steady state which was inferred numerically, i.e., the system was preequilibrated. In order to do this with AMICI, we need to pass an ExpData object, which contains fixed parameter for the actual simulation and for preequilibration of the model.

```
[13]: # create edata, with 3 timepoints and 2 observables:
edata = amici.ExpData(2, 0, 0,
                      np.array([0., 0.1, 1.]))
edata.setObservedData([1.8] * 6)
edata.fixedParameters = np.array([3., 5.])
edata.fixedParametersPreequilibration = np.array([0., 2.])
edata.reinitializeFixedParameterInitialStates = True
```

```
[14]: # create the solver object and run the simulation
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

amici.plotting.plotStateTrajectories(rdata_reduced, model = model_reduced)
amici.plotting.plotObservableTrajectories(rdata_reduced, model = model_reduced)
```

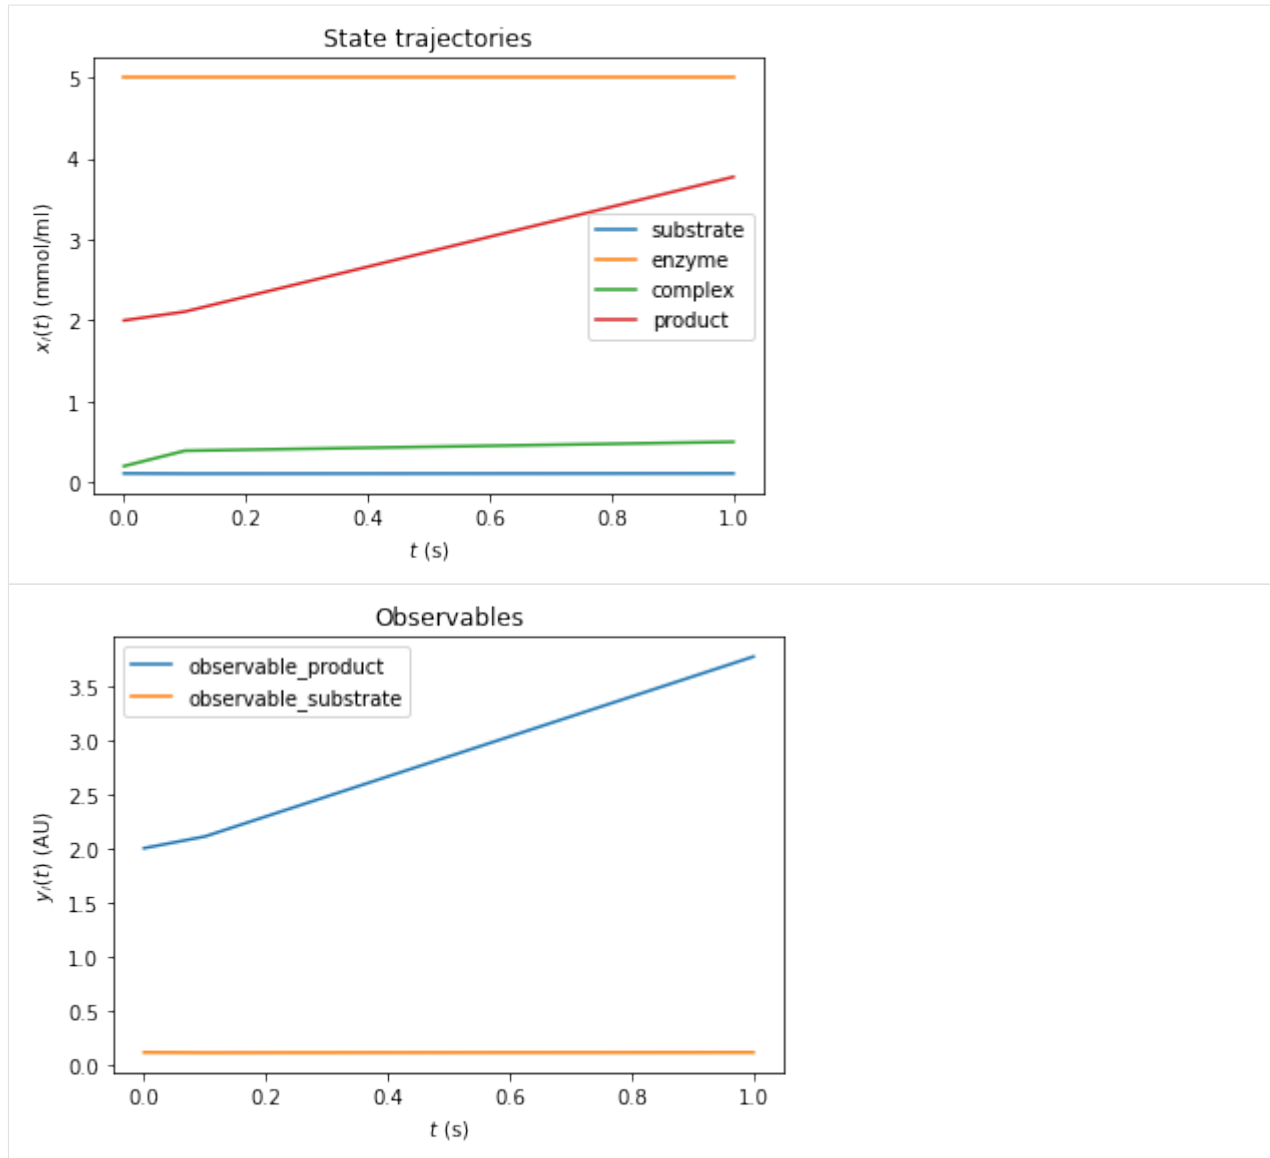

We can also combine pre- and postequilibration.

```
[15]: # Change the last timepoint to an infinity timepoint.
edata.setTimepoints(np.array([0., 0.1, float('inf')]))

# run the simulation
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)
```

Preequilibration with sensitivities

Beyond the need for an ExpData object, the steady state solver logic in preequilibration is the same as in postequilibration, also if sensitivities are requested. The computation will fail for singular Jacobians, if SteadyStateSensitivityMode is set to newtonOnly, or if not enough steps can be taken. However, if forward simulation with steady state sensitivities is allowed, or if the Jacobian is not singular, it will work.

Prequilibration with forward sensitivities

```
[16]: # No postequilibration this time.
edata.setTimepoints(np.array([0., 0.1, 1.]))

# create the solver object and run the simulation, singular Jacobian, enforce Newton
↳ solver for sensitivities
model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.newtonOnly)
solver = model.getSolver()
solver.setNewtonMaxSteps(10)
solver.setSensitivityMethod(amici.SensitivityMethod.forward)
solver.setSensitivityOrder(amici.SensitivityOrder.first)
rdata = amici.runAmiciSimulation(model, solver, edata)

for key, value in rdata.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)

        preeq_wrms: 0.5604257578208488
        preeq_t: 19.2252094591474
        preeq_numlinsteps: None
        preeq_numsteps: [[ 0 417 0]]
        preeq_numstepsB: 0.0
        preeq_status: [[-3 1 0]]
        preeq_cpu_time: 1.723
        preeq_cpu_timeB: 0.0

[Warning] AMICI:simulation: AMICI simulation failed:
Steady state sensitivity computation failed due to unsuccessful factorization of RHS
↳ Jacobian
Error occurred in:
0      0x1060f698b amici::SteadystateProblem::workSteadyStateProblem(amici::Solver*,
↳ amici::Model*, int) + 587
1      0x1060a456f amici::AmiciApplication::runAmiciSimulation(amici::Solver&, amici:
↳ :ExpData const*, amici::Model&, bool) + 239
2      0x1060a4474 amici::runAmiciSimulation(amici::Solver&, amici::ExpData const*,
↳ amici::Model&, bool) + 36
3      0x106061005 _wrap_runAmiciSimulation(_object*, _object*) + 549
4      0x1021b2309 cfunction_call_varargs + 320
5
```

```
[17]: # Singular Jacobian, use simulation
model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.
↳ integrateIfNewtonFails)
solver = model.getSolver()
solver.setNewtonMaxSteps(10)
```

(continues on next page)

(continued from previous page)

```

solver.setSensitivityMethod(amici.SensitivityMethod.forward)
solver.setSensitivityOrder(amici.SensitivityOrder.first)
rdata = amici.runAmiciSimulation(model, solver, edata)

```

```

for key, value in rdata.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)

```

```

        preeq_wrms: 0.9920376238481097
        preeq_t: 21.270502326483026
preeq_numlinsteps: None
        preeq_numsteps: [[ 0 1026 0]]
        preeq_numstepsB: 0.0
        preeq_status: [[-3 1 0]]
        preeq_cpu_time: 12.439
        preeq_cpu_timeB: 0.0

```

```
[18]: # Non-singular Jacobian, use Newton solver
```

```

solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.forward)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

```

```

for key, value in rdata_reduced.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)

```

```

        preeq_wrms: 0.0
        preeq_t: nan
preeq_numlinsteps: None
        preeq_numsteps: [[2 0 0]]
        preeq_numstepsB: 0.0
        preeq_status: [[1 0 0]]
        preeq_cpu_time: 0.036
        preeq_cpu_timeB: 0.0

```

Preequilibration with adjoint sensitivities

When using preequilibration, adjoint sensitivity analysis can be used for simulation. This is a particularly interesting case: Standard adjoint sensitivity analysis requires the initial state sensitivities `sx0` to work, at least if data is given for finite (i.e., not exclusively postequilibration) timepoints: For each parameter, a contribution to the gradient is given by the scalar product of the corresponding state sensitivity vector at timepoint $t = 0$, (column in `sx0`), with the adjoint state ($p(t = 0)$). Hence, the matrix `sx0` is needed. This scalar product “closes the loop” from forward to adjoint simulation.

By default, if adjoint sensitivity analysis is called with preequilibration, the initial state sensitivities are computed in just the same way as if this way done for forward sensitivity analysis. The only difference in the internal logic is that, if the steady state gets inferred via simulation, a separate solver object is used in order to ensure that the steady state simulation does not interfere with the snapshotting of the forward trajectory from the actual time course.

However, also an adjoint version of preequilibration is possible: In this case, the “loop” from forward to adjoint simulation needs no closure: The simulation time is extended by preequilibration: forward from $t = -\infty$ to $t = 0$, and

after adjoint simulation also backward from $t = 0$ to $t = -\infty$. Similar to adjoint postequilibration, the steady state of the adjoint state (at $t = -\infty$) is $p = 0$, hence the scalar product (at $t = -\infty$) for the initial state sensitivities of preequilibration with the adjoint state vanishes. Instead, this gradient contribution is covered by additional quadratures $\int_{-\infty}^0 p(s) ds \cdot \frac{\partial f}{\partial \theta}$. In order to compute these quadratures correctly, the adjoint state from the main adjoint simulation must be passed on to the initial adjoint state of backward preequilibration.

However, as the adjoint state must be passed on from backward computation to preequilibration, it is currently not allowed to alter (reinitialize) states of the model at $t = 0$, unless these states are constant, as otherwise this alteration would lead to a discontinuity in the adjoints state as well and hence to an incorrect gradient.

```
[19]: # Non-singular Jacobian, use Newton solver and adjoints with initial state sensitivities
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.adjoint)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

for key, value in rdata_reduced.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)
print('Gradient:', rdata_reduced['sllh'])

      preeq_wrms:  0.0
      preeq_t:    nan
preeq_numlinsteps: None
      preeq_numsteps:  [[2  0  0]]
      preeq_numstepsB:  0.0
      preeq_status:    [[1  0  0]]
      preeq_cpu_time:  0.039
      preeq_cpu_timeB:  0.0
Gradient: [-0.05528395  0.0461776 -0.03354519 -2.34602219  6.314481  ]
```

```
[20]: # Non-singular Jacobian, use simulation solver and adjoints with initial state_
      ↪sensitivities
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(0)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.adjoint)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

for key, value in rdata_reduced.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)
print('Gradient:', rdata_reduced['sllh'])

      preeq_wrms:  0.8470065245264354
      preeq_t:    19.213162474372176
preeq_numlinsteps: None
      preeq_numsteps:  [[  0 426  0]]
      preeq_numstepsB:  0.0
      preeq_status:    [[-2  1  0]]
      preeq_cpu_time:  1.753
      preeq_cpu_timeB:  0.0
Gradient: [-0.05528395  0.0461776 -0.03354519 -2.34602226  6.3144812  ]
```

```
[21]: # Non-singular Jacobian, use Newton solver and adjoints with fully adjoint_
↳preequilibration
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(10)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.adjoint)
solver_reduced.setSensitivityMethodPreequilibration(amici.SensitivityMethod.adjoint)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)
rdata_reduced = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

for key, value in rdata_reduced.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)
print('Gradient:', rdata_reduced['sllh'])

      preeq_wrms:  0.0
      preeq_t:    nan
preeq_numlinsteps: None
      preeq_numsteps: [[2 0 0]]
      preeq_numstepsB: 0.0
      preeq_status: [[1 0 0]]
      preeq_cpu_time: 0.042
      preeq_cpu_timeB: 0.009
Gradient: [-0.05528395  0.0461776 -0.03354519 -2.34602219  6.314481  ]
```

As for postquilibration, adjoint preequilibration has an analytic solution (via the linear system), which will be preferred. If used for models with singular Jacobian, numerical integration will be carried out, which is indicated by `preeq_numstepsB`.

```
[22]: # Non-singular Jacobian, use Newton solver and adjoints with fully adjoint_
↳preequilibration
solver = model.getSolver()
solver.setNewtonMaxSteps(10)
solver.setSensitivityMethod(amici.SensitivityMethod.adjoint)
solver.setSensitivityMethodPreequilibration(amici.SensitivityMethod.adjoint)
solver.setSensitivityOrder(amici.SensitivityOrder.first)
rdata = amici.runAmiciSimulation(model, solver, edata)

for key, value in rdata.items():
    if key[0:6] == 'preeq_':
        print('%20s: ' % key, value)
print('Gradient:', rdata['sllh'])

      preeq_wrms:  0.9986067660342685
      preeq_t:    36.94272314329062
preeq_numlinsteps: None
      preeq_numsteps: [[ 0 417  0]]
      preeq_numstepsB: 1371.0
      preeq_status: [[-3 1 0]]
      preeq_cpu_time: 2.488
      preeq_cpu_timeB: 5.016
Gradient: [-0.05528395  0.04617759 -0.03354518 -2.34602224  6.3144811  ]
```

Controlling the error tolerances in pre- and postequilibration

When solving ODEs or DAEs, AMICI uses the default logic of CVODES and IDAS to control error tolerances. This means that error weights are computed based on the absolute error tolerances and the product of current state variables of the system and their respective relative error tolerances. If this error combination is then controlled.

The respective tolerances for equilibrating a system with AMICI can be controlled by the user via the getter/setter functions `[get|set][Absolute|Relative]ToleranceSteadyState[Sensi]`:

```
[23]: # Non-singular Jacobian, use simulaiton
model_reduced.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.
    ↳integrateIfNewtonFails)
solver_reduced = model_reduced.getSolver()
solver_reduced.setNewtonMaxSteps(0)
solver_reduced.setSensitivityMethod(amici.SensitivityMethod.forward)
solver_reduced.setSensitivityOrder(amici.SensitivityOrder.first)

# run with lax tolerances
solver_reduced.setRelativeToleranceSteadyState(1e-2)
solver_reduced.setAbsoluteToleranceSteadyState(1e-3)
solver_reduced.setRelativeToleranceSteadyStateSensi(1e-2)
solver_reduced.setAbsoluteToleranceSteadyStateSensi(1e-3)
rdata_reduced_lax = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

# run with strict tolerances
solver_reduced.setRelativeToleranceSteadyState(1e-12)
solver_reduced.setAbsoluteToleranceSteadyState(1e-16)
solver_reduced.setRelativeToleranceSteadyStateSensi(1e-12)
solver_reduced.setAbsoluteToleranceSteadyStateSensi(1e-16)
rdata_reduced_strict = amici.runAmiciSimulation(model_reduced, solver_reduced, edata)

# compare ODE outputs
print('\nODE solver steps, which were necessary to reach steady state:')
print('lax tolerances: ', rdata_reduced_lax['preeq_numsteps'])
print('strict tolerances: ', rdata_reduced_strict['preeq_numsteps'])

print('\nsimulation time corresponding to steady state:')
print(rdata_reduced_lax['preeq_t'])
print(rdata_reduced_strict['preeq_t'])

print('\ncomputation time to reach steady state:')
print(rdata_reduced_lax['preeq_cpu_time'])
print(rdata_reduced_strict['preeq_cpu_time'])
```

ODE solver steps, which were necessary to reach steady state:

lax tolerances: [[0 733 0]]

strict tolerances: [[0 1031 0]]

simulation time corresponding to steady state:

6.002011407974004

31.0689293433781

computation time to reach steady state:

(continues on next page)

(continued from previous page)

7.646
7.837

10.2.6 Debugging simulation failures

Objective: Demonstrate common simulation failures and give some hints for interpreting, debugging, and fixing them.

```
[1]: %matplotlib inline
import os
import amici
from amici.petab_import import import_petab_problem
from amici.petab_objective import simulate_petab, RDATAS, EDATAS
from amici.plotting import plot_state_trajectories, plot_jacobian
import petab
import numpy as np
import matplotlib.pyplot as plt
from pathlib import Path
from contextlib import suppress

try:
    import benchmark_models_petab
except ModuleNotFoundError:
    # install `benchmark_models_petab` if necessary
    %pip install -q -e "git+https://github.com/Benchmarking-Initiative/Benchmark-Models-
    ↪PEtab.git@master#subdirectory=src/python&egg=benchmark_models_petab"
    try:
        import benchmark_models_petab
    except ModuleNotFoundError:
        print("*** Please restart the kernel. ***")
```

Overview

In the following, we will simulate models contained in the [PEtab Benchmark Collection](#) to demonstrate a number of simulation failures to analyze and fix them. We use the P_{ET}ab format, as it makes model import and simulation much easier, but everything illustrated here, also applies to plain SBML or PySB import.

Note that, due to numerical issues, the examples below may not be fully reproducible on every system.

If any simulation failures occur, they will be printed via Python logging.

Programmatically, simulation success can be checked via `ReturnDataView.status`. In case of a successful simulation, and only then, this value corresponds to `amici.AMICI_SUCCESS`. In case of a simulation error, all quantities in `ReturnData/ReturnDataView` will be reported up to the time of failure, the rest will be NaN. The likelihood and it's gradient will always be NaN in case of failure.

AMICI_TOO_MUCH_WORK - mxstep steps taken before reaching tout

Let's run a simulation:

```
[2]: petab_problem = benchmark_models_petab.get_problem("Fujita_SciSignal2010")
    amici_model = import_petab_problem(petab_problem, verbose=False, force_compile=False)

    np.random.seed(2991)
    problem_parameters = dict(
        zip(
            petab_problem.x_free_ids,
            petab_problem.sample_parameter_startpoints(n_starts=1)[0],
        )
    )
    res = simulate_petab(
        petab_problem=petab_problem,
        amici_model=amici_model,
        problem_parameters=problem_parameters,
        scaled_parameters=True
    )
    print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])
    assert [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]] == [
        ↪ 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_TOO_MUCH_WORK', 'AMICI_NOT_
        ↪ RUN', 'AMICI_NOT_RUN']

2023-02-24 13:20:55.780 - amici.swig_wrappers - DEBUG - [condition_step_03_0][CVODES:
    ↪ CNode:TOO_MUCH_WORK] AMICI ERROR: in module CVODES in function CNode : At t = 3031.8,
    ↪ mxstep steps taken before reaching tout.
2023-02-24 13:20:55.781 - amici.swig_wrappers - ERROR - [condition_step_03_0][FORWARD_
    ↪ FAILURE] AMICI forward simulation failed at t = 3031.8: AMICI failed to integrate the
    ↪ forward problem

Status: ['AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_TOO_MUCH_WORK',
    ↪ 'AMICI_NOT_RUN', 'AMICI_NOT_RUN']
```

What happened?

AMICI failed to integrate the forward problem. The problem occurred for only one simulation condition, `condition_step_03_0`. The issue occurred at $t = 3031.8$, where the CVODES reached the maximum number of steps.

How to address?

The number of steps the solver has to take is closely related to the chosen error tolerance. More accurate results, more steps. Therefore, this problem can be solved in two ways:

1. Increasing the maximum number of steps via `amici.Solver.setMaxSteps`. Note that this will increase the time required for simulation, and that simulation may still fail eventually. Sometimes it may be preferable to not increase this limit but rather fail fast. Also note that increasing the number of allowed steps increase RAM requirements (even if fewer steps are actually taken), so don't set this to ridiculously large values in order to avoid this error.
2. Reducing the number of steps CVODES has to take. This is determined by the required error tolerance. There are various solver error tolerances than can be adjusted. The most relevant ones are those controlled via `amici.Solver.setRelativeTolerance()` and `amici.Solver.setAbsoluteTolerance()`.

So, let's fix that:

```
[3]: # let's increase the allowed number of steps by 10x:
print("Increasing allowed number of steps ...")
amici_solver = amici_model.getSolver()
amici_solver.setMaxSteps(10 * amici_solver.getMaxSteps())

res = simulate_petab(
    petab_problem=petab_problem,
    amici_model=amici_model,
    problem_parameters=problem_parameters,
    scaled_parameters=True,
    solver=amici_solver
)

print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])
assert all(rdata.status == amici.AMICI_SUCCESS for rdata in res[RDATAS])
print("Simulations finished succesfully.")
print()

# let's relax the relative error tolerance by a factor of 50
print("Relaxing relative error tolerance ...")
amici_solver = amici_model.getSolver()
amici_solver.setRelativeTolerance(50 * amici_solver.getRelativeTolerance())

res = simulate_petab(
    petab_problem=petab_problem,
    amici_model=amici_model,
    problem_parameters=problem_parameters,
    scaled_parameters=True,
    solver=amici_solver
)
print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])
assert all(rdata.status == amici.AMICI_SUCCESS for rdata in res[RDATAS])
print("Simulations finished succesfully.")
```

```
Increasing allowed number of steps ...
Status: ['AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_
→SUCCESS', 'AMICI_SUCCESS']
Simulations finished succesfully.
```

```
Relaxing relative error tolerance ...
Status: ['AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_
→SUCCESS', 'AMICI_SUCCESS']
Simulations finished succesfully.
```

Internal $t = [...]$ and $h = [...]$ are such that $t + h = t$ on the next step

Let's run a simulation:

```
[4]: petab_problem = benchmark_models_petab.get_problem("Crauste_CellSystems2017")
    amici_model = import_petab_problem(petab_problem, verbose=False)

np.random.seed(1)
problem_parameters = dict(
    zip(
        petab_problem.x_free_ids,
        petab_problem.sample_parameter_startpoints(n_starts=1)[0],
    )
)
res = simulate_petab(
    petab_problem=petab_problem,
    amici_model=amici_model,
    problem_parameters=problem_parameters,
    scaled_parameters=True
)
print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])
assert [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]] == [
    'AMICI_TOO_MUCH_WORK']
```

```
2023-02-24 13:20:56.376 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:Cvode:
→WARNING] AMICI ERROR: in module CVODES in function Cvode : Internal t = 0.330112 and h_
→= 2.06577e-17 are such that t + h = t on the next step. The solver will continue_
→anyway.
2023-02-24 13:20:56.376 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:Cvode:
→WARNING] AMICI ERROR: in module CVODES in function Cvode : Internal t = 0.330112 and h_
→= 2.06577e-17 are such that t + h = t on the next step. The solver will continue_
→anyway.
2023-02-24 13:20:56.378 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:Cvode:
→WARNING] AMICI ERROR: in module CVODES in function Cvode : Internal t = 0.330112 and h_
→= 2.06577e-17 are such that t + h = t on the next step. The solver will continue_
→anyway.
2023-02-24 13:20:56.379 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:Cvode:
→WARNING] AMICI ERROR: in module CVODES in function Cvode : Internal t = 0.330112 and h_
→= 2.06577e-17 are such that t + h = t on the next step. The solver will continue_
→anyway.
2023-02-24 13:20:56.381 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:Cvode:
→WARNING] AMICI ERROR: in module CVODES in function Cvode : Internal t = 0.330112 and h_
→= 2.06577e-17 are such that t + h = t on the next step. The solver will continue_
→anyway.
2023-02-24 13:20:56.382 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:Cvode:
→WARNING] AMICI ERROR: in module CVODES in function Cvode : Internal t = 0.330112 and h_
→= 2.06577e-17 are such that t + h = t on the next step. The solver will continue_
→anyway.
2023-02-24 13:20:56.383 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:Cvode:
→WARNING] AMICI ERROR: in module CVODES in function Cvode : Internal t = 0.330112 and h_
→= 2.06577e-17 are such that t + h = t on the next step. The solver will continue_
→anyway.
2023-02-24 13:20:56.384 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:Cvode:
→WARNING] AMICI ERROR: in module CVODES in function Cvode : Internal t = 0.330112 and h_
→= 2.06577e-17 are such that t + h = t on the next step. The solver will continue_
→anyway.
```

(continued from previous page)

```

2023-02-24 13:20:56.386 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:CNode:
↳WARNING] AMICI ERROR: in module CVODES in function CNode : Internal t = 0.330112 and h_
↳= 2.06577e-17 are such that t + h = t on the next step. The solver will continue_
↳anyway.
2023-02-24 13:20:56.387 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:CNode:
↳WARNING] AMICI ERROR: in module CVODES in function CNode : Internal t = 0.330112 and h_
↳= 2.06577e-17 are such that t + h = t on the next step. The solver will continue_
↳anyway.
2023-02-24 13:20:56.388 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:CNode:
↳WARNING] AMICI ERROR: in module CVODES in function CNode : The above warning has been_
↳issued mxhnil times and will not be issued again for this problem.
2023-02-24 13:20:56.389 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:CNode:TOO_
↳MUCH_WORK] AMICI ERROR: in module CVODES in function CNode : At t = 0.330112, mxstep_
↳steps taken before reaching tout.
2023-02-24 13:20:56.390 - amici.swig_wrappers - ERROR - [model1_data1][FORWARD_FAILURE]_
↳AMICI forward simulation failed at t = 0.330112: AMICI failed to integrate the forward_
↳problem

```

```
Status: ['AMICI_TOO_MUCH_WORK']
```

What happened?

The forward simulation failed because the AMICI solver exceeded the maximum number of steps. Unlike in the previous case of `mxstep` steps taken before reaching `tout` (see above), here we got several additional warnings that the current step size h is numerically zero.

How to address?

The warning `Internal t = [...] and h = [...] are such that t + h = t on the next step` tells us that the solver is not able to move forward. The solver may be able to recover from that, but not always.


Let's look at the state trajectories to see what's going on. Such a tiny step size is usually related to very fast dynamics. We repeat the simulation with additional timepoints before the point of failure:

```

[5]: # Create a copy of this simulation condition
edata = amici.ExpData(res[EDATAS][0])
edata.setTimepoints(np.linspace(0, 0.33011, 5000))
amici_solver = amici_model.getSolver()
rdata = amici.runAmiciSimulation(amici_model, amici_solver, edata)


# Visualize state trajectories
plot_state_trajectories(rdata, model=amici_model)
plt.yscale("log")

```

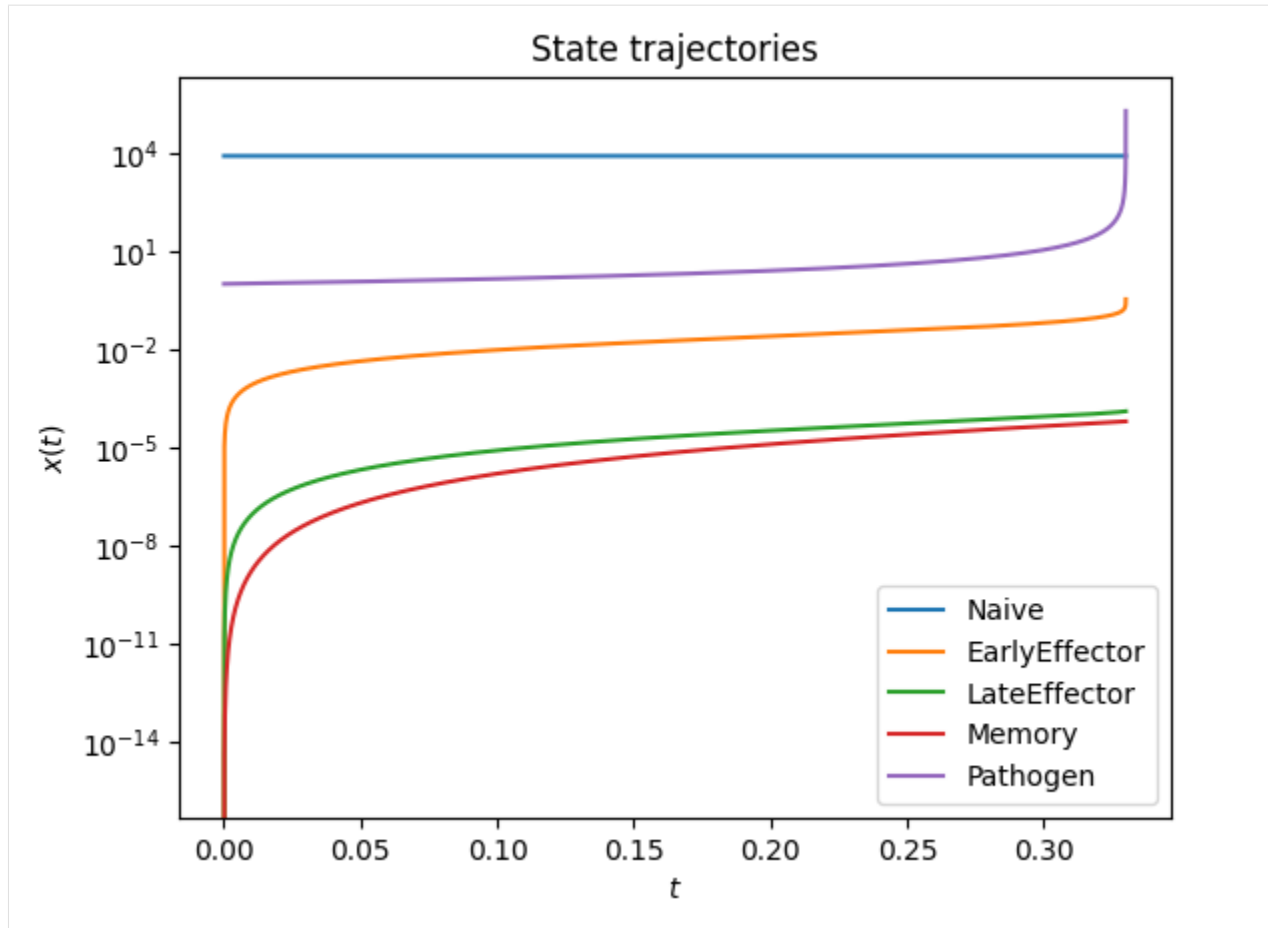We can see a steep increase for Pathogen just before the error occurs. Let's zoom in:

```
[6]: plt.plot(rdata.t, rdata.by_id("Pathogen"))  
plt.xlabel("time")  
plt.ylabel("Pathogen");
```

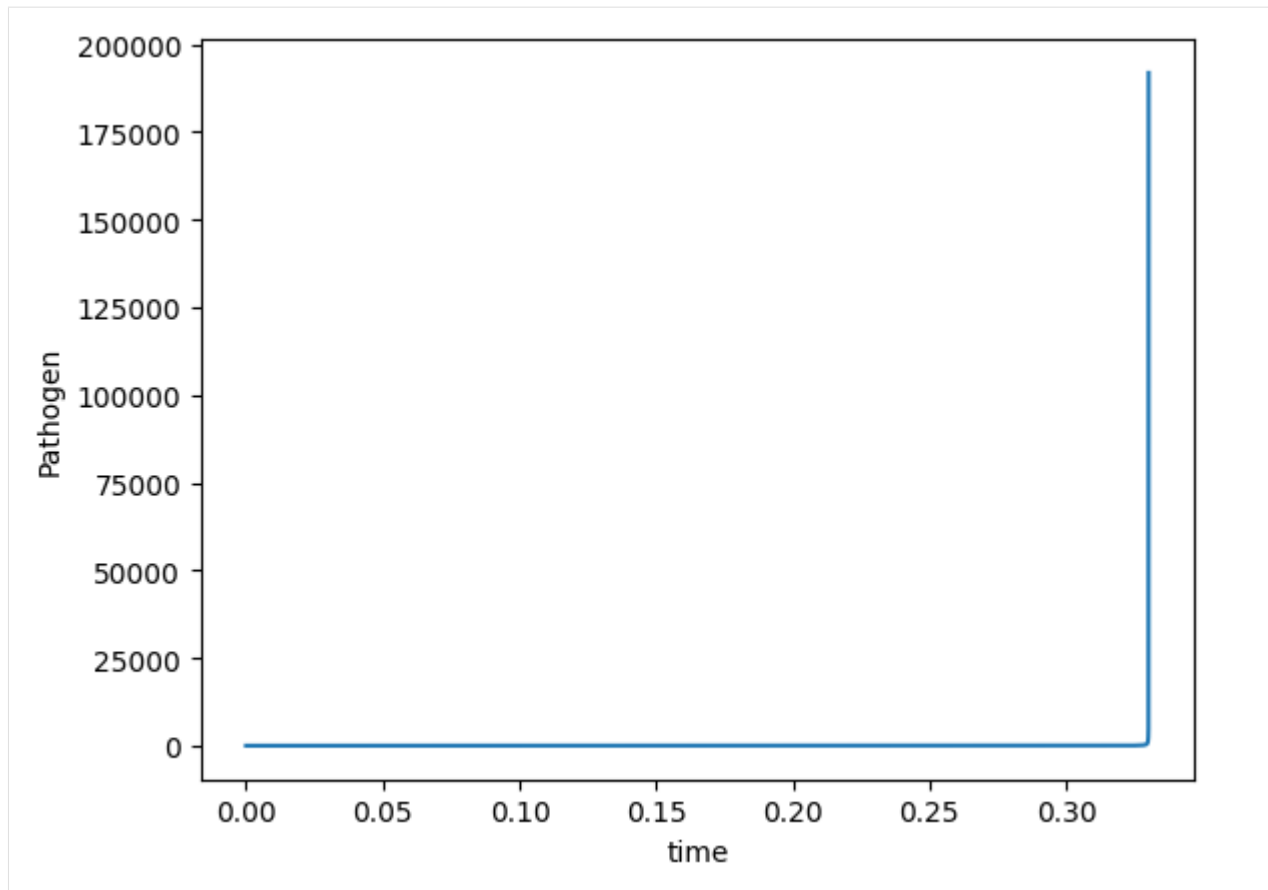

The solver is unable to handle such a steep increase. There is not much we can do. Increasing the tolerances will let the solver proceed a bit further, but this is usually not enough. Most likely there is a problem in the model or in the choice of parameter values.

the error test failed repeatedly or with $|h| = h_{\min}$

Let's run a simulation:

```
[7]: petab_problem = benchmark_models_petab.get_problem("Fujita_SciSignal2010")
    amici_model = import_petab_problem(petab_problem, verbose=False)

    np.random.seed(4920)
    problem_parameters = dict(
        zip(
            petab_problem.x_free_ids,
            petab_problem.sample_parameter_startpoints(n_starts=1)[0],
        )
    )
    res = simulate_petab(
        petab_problem=petab_problem,
        amici_model=amici_model,
        problem_parameters=problem_parameters,
        scaled_parameters=True
    )
```

(continues on next page)

(continued from previous page)

```
print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])

assert [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]] == [
    ↪ 'AMICI_SUCCESS', 'AMICI_ERR_FAILURE', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN
    ↪ ', 'AMICI_NOT_RUN']

2023-02-24 13:20:57.646 - amici.swig_wrappers - DEBUG - [condition_step_00_3][CVODES:
    ↪ CNode:ERR_FAILURE] AMICI ERROR: in module CVODES in function CNode : At t = 429.232,
    ↪ and h = 7.75194e-05, the error test failed repeatedly or with |h| = hmin.
2023-02-24 13:20:57.647 - amici.swig_wrappers - ERROR - [condition_step_00_3][FORWARD_
    ↪ FAILURE] AMICI forward simulation failed at t = 429.232: AMICI failed to integrate the
    ↪ forward problem

Status: ['AMICI_SUCCESS', 'AMICI_ERR_FAILURE', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_
    ↪ NOT_RUN', 'AMICI_NOT_RUN']
```

What happened?

AMICI failed to integrate the forward problem. The problem occurred for only one simulation condition, `condition_step_00_3`. The issue occurred at $t = 429.232$, where the error test failed. This means, the solver is unable to take a step of non-zero size without violating the chosen error tolerances.

How to address?


The step size is computed based on the Jacobian. Inspecting `ReturnData.J` shows us that we have rather large values in the Jacobian:

```
[8]: rdata = res[RDATAS][1]

# Show Jacobian as heatmap
plot_jacobian(rdata)

print(f"largest absolute Jacobian value: {np.max(np.abs(rdata.J)):.3g}")

largest absolute Jacobian value: 4.09e+05
```

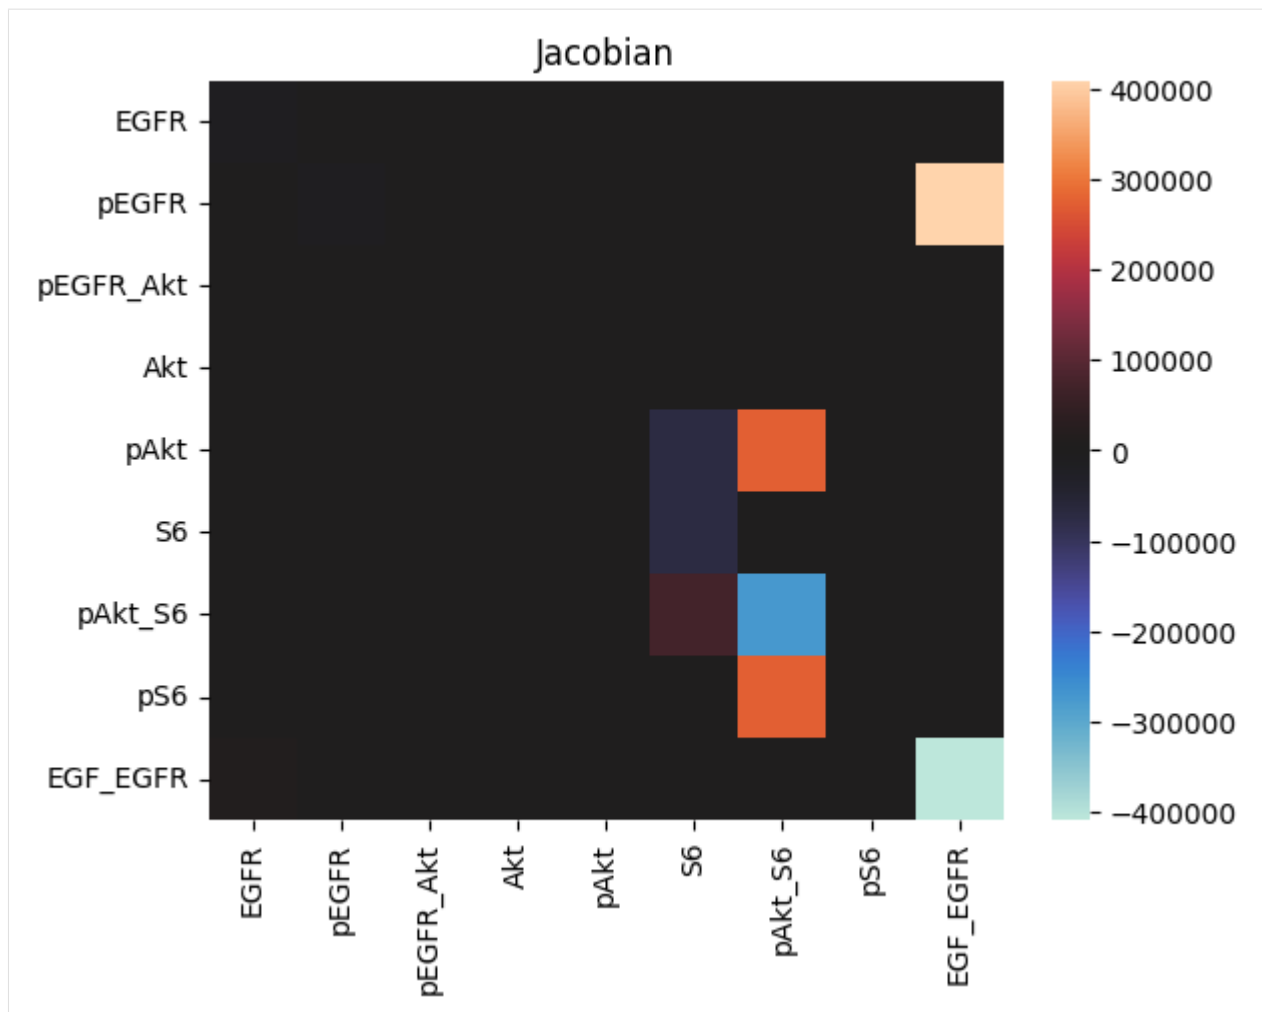

In this case, the default relative error tolerance may be too high and lead too large absolute errors.

Let's retry simulation using stricter tolerances:

```
[9]: # set stricter relative error tolerance
amici_solver = amici_model.getSolver()
amici_solver.setRelativeTolerance(amici_solver.getRelativeTolerance() / 10)

res = simulate_petab(
    petab_problem=petab_problem,
    amici_model=amici_model,
    problem_parameters=problem_parameters,
    scaled_parameters=True,
    solver=amici_solver
)
print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])
assert all(rdata.status == amici.AMICI_SUCCESS for rdata in res[RDATAS])
print("Simulations finished succesfully.")

Status: ['AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_
↪ SUCCESS', 'AMICI_SUCCESS']
Simulations finished succesfully.
```

Cvode routine CCode returned a root after reinitialization

Let's run a simulation:

```
[10]: petab_problem = benchmark_models_petab.get_problem("Weber_BMC2015")
      amici_model = import_petab_problem(petab_problem, verbose=False, force_compile=False)

      np.random.seed(4)
      problem_parameters = dict(
          zip(
              petab_problem.x_free_ids,
              petab_problem.sample_parameter_startpoints(n_starts=1)[0],
          )
      )
      res = simulate_petab(
          petab_problem=petab_problem,
          amici_model=amici_model,
          problem_parameters=problem_parameters,
          scaled_parameters=True
      )
      print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])
      assert [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]] == [
          'AMICI_ERROR', 'AMICI_NOT_RUN']

2023-02-24 13:20:58.504 - amici.swig_wrappers - ERROR - [model1_data2+model1_
↳data1][OTHER] AMICI simulation failed: Ccode routine CCode returned a root after
↳reinitialization. The initial step-size after the event or heaviside function is too
↳small. To fix this, increase absolute and relative tolerances! failed with error code 2
2023-02-24 13:20:58.504 - amici.swig_wrappers - DEBUG - [model1_data2+model1_
↳data1][BACKTRACE] The previous error occurred at:
2      0x7fc515a769b8 amici::CvodeException::CvodeException(int, char const*) + 24
3      0x7fc515a66027 /home/docs/checkouts/readthedocs.org/user_builds/amici/checkouts/
↳v0.16.1/documentation/amici_models/Weber_BMC2015/Weber_BMC2015/_Weber_BMC2015.cpython-
↳38-x86_64-linux-gnu.so(+0x48027) [0x7fc515a66027]
4      0x7fc515aa6ce6 amici::CvodeSolver::solve(double, int) const + 86
5      0x7fc533ad7386 amici::Solver::run(double) const + 198
6      0x7fc533a9d8b6 amici::ForwardProblem::workForwar

Status: ['AMICI_ERROR', 'AMICI_NOT_RUN']
```

What happened?

The simulation failed because the initial step-size after an event or heaviside function was too small. The error occurred during simulation of condition model1_data1 after successful preequilibration (model1_data2).

How to address?

The error message already suggests a fix for this situation, so let's try increasing the relative tolerance:

```
[11]: amici_solver = amici_model.getSolver()
      amici_solver.setRelativeTolerance(200 * amici_solver.getRelativeTolerance())

      np.random.seed(4)
      problem_parameters = dict(
          zip(
              petab_problem.x_free_ids,
```

(continues on next page)

(continued from previous page)

```

        petab_problem.sample_parameter_startpoints(n_starts=1)[0],
    )
)
res = simulate_petab(
    petab_problem=petab_problem,
    amici_model=amici_model,
    problem_parameters=problem_parameters,
    scaled_parameters=True,
    solver=amici_solver
)
print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])
assert all(rdata.status == amici.AMICI_SUCCESS for rdata in res[RDATAS])

```

Status: ['AMICI_SUCCESS', 'AMICI_SUCCESS']

AMICI encountered a NaN / Inf value for [...]

Let's run a simulation:

```

[12]: petab_problem = benchmark_models_petab.get_problem("Borghans_BiophysChem1997")
      amici_model = import_petab_problem(petab_problem, verbose=False)

      np.random.seed(18)
      problem_parameters = dict(
          zip(
              petab_problem.x_free_ids,
              petab_problem.sample_parameter_startpoints(n_starts=1)[0],
          )
      )
      res = simulate_petab(
          petab_problem=petab_problem,
          amici_model=amici_model,
          problem_parameters=problem_parameters,
          scaled_parameters=True
      )
      print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])
      assert [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]] == [
          ↪ 'AMICI_FIRST_RHSFUNC_ERR']

```

```

2023-02-24 13:20:58.949 - amici.swig_wrappers - WARNING - [model1_data1][AMICI:NaN]↵
↪ AMICI encountered a NaN value for xdot[2] (A_state)
2023-02-24 13:20:58.950 - amici.swig_wrappers - WARNING - [model1_data1][AMICI:NaN]↵
↪ AMICI encountered a NaN value for w[6] (flux_v7_v_6)
2023-02-24 13:20:58.952 - amici.swig_wrappers - DEBUG - [model1_data1][CVODES:CVode:
↪ FIRST_RHSFUNC_ERR] AMICI ERROR: in module CVODES in function CVode : The right-hand
↪ side routine failed at the first call.
2023-02-24 13:20:58.953 - amici.swig_wrappers - ERROR - [model1_data1][FORWARD_FAILURE]↵
↪ AMICI forward simulation failed at t = 0: AMICI failed to integrate the forward problem

```

Status: ['AMICI_FIRST_RHSFUNC_ERR']


What happened?

The forward simulation failed because AMICI encountered a NaN value when simulating condition model1_data1.

Then NaNs occurred in \dot{x} and w (model expressions, such as reaction fluxes or assignment rules). Furthermore, the failure occurred at the first call, so at $t = t_0$ (here: $t = 0$).

How to address?

The NaN in \dot{x} is most likely a consequence of the one in w . (A subset of) the dependency tree looks something like:

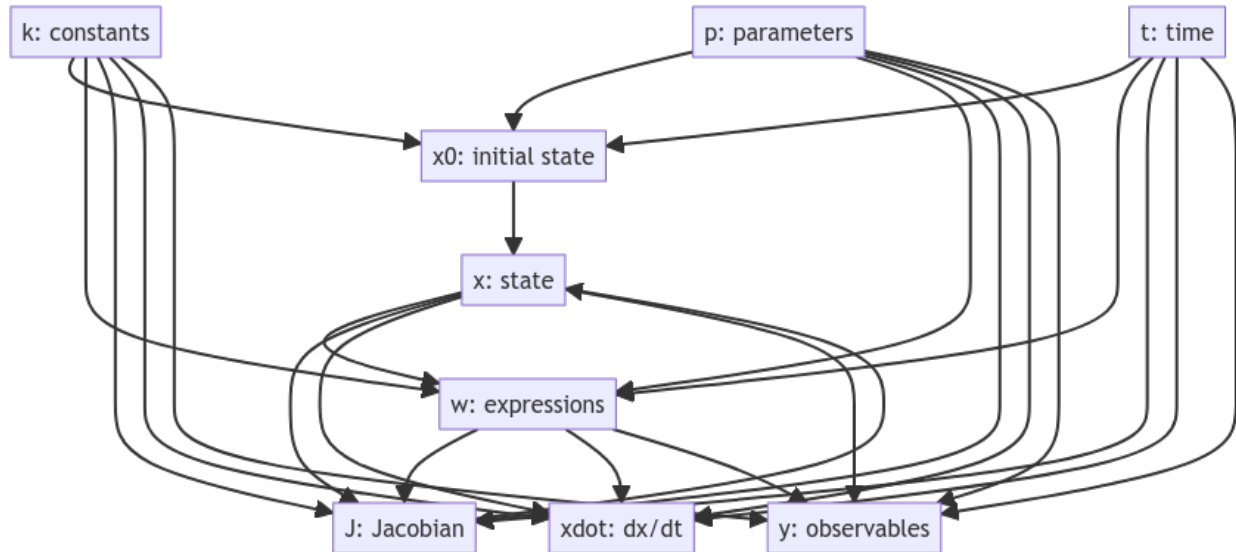

Always look for the most basic (furthest up) model quantities. In cases where non-finite values occur in expressions further down, rerunning the simulation after calling `Model.setAlwaysCheckFinite(True)` may give some further hints on where the issue originates.

The NaN in w occurred for `flux_v7_v_6` (see error log), i.e., when computing the reaction flux for reaction `v7_v_6`. As w only depends on (t, p, k, x) and no non-finite values have been reported for those, the issue has to be in the respective flux equation.

Let's look at that expression. This can either be done by inspecting the underlying SBML model (e.g., using COPASI), or by checking the generated model code:

```
[13]: # model source code location
model_src_dir = Path(amici_model.module.__file__).parents[1]

# find the problematic expression in the model source code
!grep flux_v7_v_6 {model_src_dir}/w.cpp

    flux_v7_v_6 = 1.0*std::pow(A_state, 2)*Vd*std::pow(Z_state, n_par)/((std::pow(A_
    ↪state, 2) + std::pow(Kp, 2))*(std::pow(Kd, n_par) + std::pow(Z_state, n_par))); //
    ↪w[6]
```

What could go wrong? We can obtain NaN from any of these symbols being NaN, or through division by zero.

Let's let's check the denominator first:

$$(A_{state}^2 + Kp^2) * (Kd^{n_{par}} + Z_{state}^{n_{par}})$$

`A_state` and `Z_state` are state variables, `Kd`, `K_p`, and `n_par` are parameters.

As the error occurred at $t = t_0$, let's ensure the initial state is non-zero and finite:

```
[14]: rdata = res[RDATAS][0]
      edata = res[EDATAS][0]
      # check initial states
      x0 = dict(zip(amici_model.getStateIds(), rdata.x0))
      print(f"{x0=}")

x0={'Z_state': 0.6869701913398437, 'Y_state': 0.2977237418558598, 'A_state': 0.
↳ 1116031306650328}
```

The initial states are fine - the first multiplicand is non-zero, as x_0 was non-zero.

So let's check the parameter values occurring in the second multiplicand:

```
[15]: # we have to account for the chosen parameter scale
      from itertools import starmap
      unscaled_parameter = dict(zip(
          amici_model.getParameterIds(),
          starmap(amici_model.getUnscaledParameter, zip(edata.parameters, edata.pscale)),
      ))
      print(dict((p, unscaled_parameter[p]) for p in ('Kd', 'Kp', 'n_par')))

{'Kd': 0.028491925689008366, 'Kp': 1002.513636749445, 'n_par': 7816.430091706722}
```

Considering that `n_par` occurs as exponent, it's magnitude looks pretty high. This term is very likely causing the problem - let's check:

```
[16]: print(f"{x0['Z_state']**unscaled_parameter['n_par'] + unscaled_parameter['Kd']**unscaled_
      ↳parameter['n_par']=}")

x0['Z_state']**unscaled_parameter['n_par'] + unscaled_parameter['Kd']**unscaled_
↳parameter['n_par']=0.0
```

Indeed, no way we can fix this for the given model. This was most likely an unrealistic parameter value, originating from a too high upper parameter bound for `n_par`. Therefore, if this error occurs during optimization, a first step could be adapting the respective parameter bounds. In other cases, this may be a result of unfortunate arrangement of model expressions, which can sometimes be solved by passing a suitable simplification function to the model import.

Steady state sensitivity computation failed due to unsuccessful factorization of RHS Jacobian

Let's run a simulation:

```
[17]: petab_problem = benchmark_models_petab.get_problem("Blasi_CellSystems2016")
      with suppress(KeyError):
          del os.environ["AMICI_EXPERIMENTAL_SBML_NONCONST_CLS"]
      amici_model = import_petab_problem(
          petab_problem,
          verbose=False,
          force_compile=True,
          model_name="Blasi_CellSystems2016_1"
      )

      amici_solver = amici_model.getSolver()
      amici_solver.setSensitivityMethod(amici.SensitivityMethod.forward)
```

(continues on next page)

(continued from previous page)

```

amici_solver.setSensitivityOrder(amici.SensitivityOrder.first)

np.random.seed(2020)
problem_parameters = dict(
    zip(
        petab_problem.x_free_ids,
        petab_problem.sample_parameter_startpoints(n_starts=1)[0],
    )
)
res = simulate_petab(
    petab_problem=petab_problem,
    amici_model=amici_model,
    problem_parameters=problem_parameters,
    scaled_parameters=True,
    solver=amici_solver,
)
print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])

# hard to reproduce on GHA
if os.getenv('GITHUB_ACTIONS') is None:
    assert [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]] == [
        'AMICI_ERROR']

```

```

2023-02-24 13:21:21.708 - amici.swig_wrappers - ERROR - [control][OTHER] AMICI_
simulation failed: Steady state sensitivity computation failed due to unsuccessful_
factorization of RHS Jacobian
2023-02-24 13:21:21.709 - amici.swig_wrappers - DEBUG - [control][BACKTRACE] The_
previous error occurred at:
2  0x7fc53399de85 /home/docs/checkouts/readthedocs.org/user_builds/amici/checkouts/
v0.16.1/python/sdist/amici/_amici.cpython-38-x86_64-linux-gnu.so(+0xc6e85)_
[0x7fc53399de85]
3  0x7fc533a9471e amici::runAmiciSimulation(amici::Solver&, amici::ExpData const*,_
amici::Model&, bool) + 2702
4  0x7fc533a94a47 /home/docs/checkouts/readthedocs.org/user_builds/amici/checkouts/
v0.16.1/python/sdist/amici/_amici.cpython-38-x86_64-linux-gnu.so(+0x1bda47)_
[0x7fc533a94a47]
5  0x7fc5338828e6

```

```

Status: ['AMICI_ERROR']

```

What happened?

AMICI failed to compute steady-state sensitivities, because it was not able to factorize the Jacobian.

How to address?

This is most likely a result of a singular Jacobian. Let's check the condition number:

```

[18]: rdata = res[RDATAS][0]
      np.linalg.cond(rdata.J)

```

```

[18]: 3.01187419527941e+19

```

Indeed, the condition number shows that the Jacobian is numerically singular. If this happens consistently, it is usually due to conserved quantities in the model.

There are two ways we can address that:

1. Use numerical integration to compute sensitivities, for which a singular Jacobian is not an issue. This is, usually, slower, though.
2. Remove any conserved quantities.

Let's try both approaches:

```
[19]: # use numerical integration
amici_model.setSteadyStateSensitivityMode(amici.SteadyStateSensitivityMode.
↳integrationOnly)

res = simulate_petab(
    petab_problem=petab_problem,
    amici_model=amici_model,
    problem_parameters=problem_parameters,
    scaled_parameters=True,
    solver=amici_solver,
)
print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])
assert all(rdata.status == amici.AMICI_SUCCESS for rdata in res[RDATAS])

Status: ['AMICI_SUCCESS']
```

```
[20]: # Remove conserved quantities - this requires re-importing the model

# this is enabled by the `AMICI_EXPERIMENTAL_SBML_NONCONST_CLS` environment variable
os.environ["AMICI_EXPERIMENTAL_SBML_NONCONST_CLS"] = "1"
amici_model = import_petab_problem(
    petab_problem,
    verbose=False,
    # we need a different model name if we import the model again
    # we cannot load a model with the same name as an already loaded model
    model_name="Blasi_CellSystems2016_2",
    force_compile=True,
)
del os.environ["AMICI_EXPERIMENTAL_SBML_NONCONST_CLS"]

amici_solver = amici_model.getSolver()
amici_solver.setSensitivityMethod(amici.SensitivityMethod.forward)
amici_solver.setSensitivityOrder(amici.SensitivityOrder.first)

res = simulate_petab(
    petab_problem=petab_problem,
    amici_model=amici_model,
    problem_parameters=problem_parameters,
    scaled_parameters=True,
    solver=amici_solver,
)
print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])
assert all(rdata.status == amici.AMICI_SUCCESS for rdata in res[RDATAS])

Status: ['AMICI_SUCCESS']
```

Steady state computation failed

Let's run a simulation:

```
[21]: petab_problem = benchmark_models_petab.get_problem("Brannmark_JBC2010")
      amici_model = import_petab_problem(
          petab_problem,
          verbose=False,
      )

      amici_solver = amici_model.getSolver()

      np.random.seed(1851)
      problem_parameters = dict(
          zip(
              petab_problem.x_free_ids,
              petab_problem.sample_parameter_startpoints(n_starts=1)[0],
          )
      )
      res = simulate_petab(
          petab_problem=petab_problem,
          amici_model=amici_model,
          problem_parameters=problem_parameters,
          scaled_parameters=True,
          solver=amici_solver,
      )

      print("Status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])

      # hard to reproduce on GHA
      if os.getenv('GITHUB_ACTIONS') is None:
          assert [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]] == [
              'AMICI_ERROR', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN',
              'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN']

2023-02-24 13:21:48.809 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][CVODES:CVode:ERR_
↳ FAILURE] AMICI ERROR: in module CVODES in function CVode : At t = 736.713 and h = 0.
↳ 000145837, the error test failed repeatedly or with |h| = hmin.
2023-02-24 13:21:48.810 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][OTHER] AMICI_
↳ equilibration failed at t=736.713.
2023-02-24 13:21:48.812 - amici.swig_wrappers - ERROR - [Dose_0+Dose_0][OTHER] AMICI_
↳ simulation failed: Steady state computation failed. First run of Newton solver failed.
↳ Simulation to steady state failed. Second run of Newton solver failed.
2023-02-24 13:21:48.813 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][BACKTRACE] The_
↳ previous error occurred at:
2      0x7fc53399d7af /home/docs/checkouts/readthedocs.org/user_builds/amici/checkouts/
↳ v0.16.1/python/sdist/amici/_amici.cpython-38-x86_64-linux-gnu.so(+0xc67af)
↳ [0x7fc53399d7af]
3      0x7fc533ae2582 amici::SteadystateProblem::findSteadyState(amici::Solver const&,
↳ amici::Model&, int) + 418
4      0x7fc533ae25cf amici::SteadystateProblem::workSteadyStateProblem(amici::Solver_
↳ const&, amici::Model&, int) + 63
5      0x7fc533a93dc2 amici::runAmiciSimulation(amici::Solver&, amici::ExpData const
```

```
Status: ['AMICI_ERROR', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN',  
↪', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN']
```

What happened?

All given experimental conditions require pre-equilibration, i.e., finding a steady state. AMICI first tries to find a steady state using the Newton solver, if that fails, it tries simulating until steady state, if that also fails, it tries the Newton solver from the end of the simulation. In this case, all three failed. Neither Newton's method nor simulation yielded a steady state satisfying the required tolerances.

This can also be seen in `ReturnDataView.preeq_status` (the three statuses corresponds to Newton #1, Simulation, Newton #2):

```
[22]: rdata = res[RDATAS][0]  
list(map(amici.SteadyStateStatus, rdata.preeq_status.flatten()))
```

```
[22]: [<SteadyStateStatus.not_run: 0>,  
      <SteadyStateStatus.failed: -1>,  
      <SteadyStateStatus.not_run: 0>]
```

How to address?

There are several ways to address that:

1. Stricter integration tolerances (preferred if affordable - higher accuracy, but generally slower)
2. Looser steady-state tolerances (lower accuracy, generally faster)
3. Increase the number of allowed steps for Newton's method

Let's try all of them:

```
[23]: # Reduce relative tolerance for integration  
amici_solver = amici_model.getSolver()  
amici_solver.setRelativeTolerance(1/100 * amici_solver.getRelativeTolerance())  
  
res = simulate_petab(  
    petab_problem=petab_problem,  
    amici_model=amici_model,  
    problem_parameters=problem_parameters,  
    scaled_parameters=True,  
    solver=amici_solver,  
)  
print("status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])  
  
rdata = res[RDATAS][0]  
print(f"preeq_status={list(map(amici.SteadyStateStatus, rdata.preeq_status.flatten()))}")  
print(f"{rdata.preeq_numsteps=}")  
  
# hard to reproduce on GHA  
if os.getenv('GITHUB_ACTIONS') is None:  
    assert all(rdata.status == amici.AMICI_SUCCESS for rdata in res[RDATAS])  
  
status: ['AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_  
↪SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS']  
preeq_status=[<SteadyStateStatus.not_run: 0>, <SteadyStateStatus.success: 1>,  
↪<SteadyStateStatus.not_run: 0>]  
rdata.preeq_numsteps=array([[ 0, 3150, 0]])
```

```
[24]: # Increase relative steady state tolerance
for log10_relaxation_factor in range(1, 10):
    print(f"Relaxing tolerances by factor {10 ** log10_relaxation_factor}")
    amici_solver = amici_model.getSolver()
    amici_solver.setRelativeToleranceSteadyState(amici_solver.
    ↪getRelativeToleranceSteadyState() * 10 ** log10_relaxation_factor)

    res = simulate_petab(
        petab_problem=petab_problem,
        amici_model=amici_model,
        problem_parameters=problem_parameters,
        scaled_parameters=True,
        solver=amici_solver,
    )
    if all(rdata.status == amici.AMICI_SUCCESS for rdata in res[RDATAS]):
        print(f"-> Succeeded with relative steady state tolerance {amici_solver.
    ↪getRelativeToleranceSteadyState()}\n")
        break
    else:
        print(f"-> Failed.\n")

print("status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])

rdata = res[RDATAS][0]
print(f"preeq_status={list(map(amici.SteadyStateStatus, rdata.preeq_status.flatten()))}")
print(f"{rdata.preeq_numsteps=}")
assert all(rdata.status == amici.AMICI_SUCCESS for rdata in res[RDATAS])
```

Relaxing tolerances by factor 10

```
2023-02-24 13:21:49.357 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][CVODES:CCode:ERR_
    ↪FAILURE] AMICI ERROR: in module CVODES in function CCode : At t = 736.713 and h = 0.
    ↪000145837, the error test failed repeatedly or with |h| = hmin.
2023-02-24 13:21:49.358 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][OTHER] AMICI_
    ↪equilibration failed at t=736.713.
2023-02-24 13:21:49.360 - amici.swig_wrappers - ERROR - [Dose_0+Dose_0][OTHER] AMICI_
    ↪simulation failed: Steady state computation failed. First run of Newton solver failed.
    ↪Simulation to steady state failed. Second run of Newton solver failed.
2023-02-24 13:21:49.362 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][BACKTRACE] The_
    ↪previous error occurred at:
2      0x7fc53399d7af /home/docs/checkouts/readthedocs.org/user_builds/amici/checkouts/
    ↪v0.16.1/python/sdist/amici/_amici.cpython-38-x86_64-linux-gnu.so(+0xc67af)
    ↪[0x7fc53399d7af]
3      0x7fc533ae2582 amici::SteadystateProblem::findSteadyState(amici::Solver const&,
    ↪amici::Model&, int) + 418
4      0x7fc533ae25cf amici::SteadystateProblem::workSteadyStateProblem(amici::Solver_
    ↪const&, amici::Model&, int) + 63
5      0x7fc533a93dc2 amici::runAmiciSimulation(amici::Solver&, amici::ExpData const
    ↪-> Failed.
```

Relaxing tolerances by factor 100

```
2023-02-24 13:21:49.591 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][CVODES:CCode:ERR_
    ↪FAILURE] AMICI ERROR: in module CVODES in function CCode : At t = 736.713 and h = 0.
    ↪000145837, the error test failed repeatedly or with |h| = hmin. (continues on next page)
```

(continued from previous page)

```

2023-02-24 13:21:49.592 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][OTHER] AMICI_
↳ equilibration failed at t=736.713.
2023-02-24 13:21:49.594 - amici.swig_wrappers - ERROR - [Dose_0+Dose_0][OTHER] AMICI_
↳ simulation failed: Steady state computation failed. First run of Newton solver failed.
↳ Simulation to steady state failed. Second run of Newton solver failed.
2023-02-24 13:21:49.595 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][BACKTRACE] The_
↳ previous error occurred at:
2      0x7fc53399d7af /home/docs/checkouts/readthedocs.org/user_builds/amici/checkouts/
↳ v0.16.1/python/sdist/amici/_amici.cpython-38-x86_64-linux-gnu.so(+0xc67af)
↳ [0x7fc53399d7af]
3      0x7fc533ae2582 amici::SteadystateProblem::findSteadyState(amici::Solver const&,
↳ amici::Model&, int) + 418
4      0x7fc533ae25cf amici::SteadystateProblem::workSteadyStateProblem(amici::Solver_
↳ const&, amici::Model&, int) + 63
5      0x7fc533a93dc2 amici::runAmiciSimulation(amici::Solver&, amici::ExpData const

-> Failed.

Relaxing tolerances by factor 1000

2023-02-24 13:21:49.823 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][CVODES:CNode:ERR_
↳ FAILURE] AMICI ERROR: in module CVODES in function CNode : At t = 736.713 and h = 0.
↳ 000145837, the error test failed repeatedly or with |h| = hmin.
2023-02-24 13:21:49.824 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][OTHER] AMICI_
↳ equilibration failed at t=736.713.
2023-02-24 13:21:49.826 - amici.swig_wrappers - ERROR - [Dose_0+Dose_0][OTHER] AMICI_
↳ simulation failed: Steady state computation failed. First run of Newton solver failed.
↳ Simulation to steady state failed. Second run of Newton solver failed.
2023-02-24 13:21:49.827 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][BACKTRACE] The_
↳ previous error occurred at:
2      0x7fc53399d7af /home/docs/checkouts/readthedocs.org/user_builds/amici/checkouts/
↳ v0.16.1/python/sdist/amici/_amici.cpython-38-x86_64-linux-gnu.so(+0xc67af)
↳ [0x7fc53399d7af]
3      0x7fc533ae2582 amici::SteadystateProblem::findSteadyState(amici::Solver const&,
↳ amici::Model&, int) + 418
4      0x7fc533ae25cf amici::SteadystateProblem::workSteadyStateProblem(amici::Solver_
↳ const&, amici::Model&, int) + 63
5      0x7fc533a93dc2 amici::runAmiciSimulation(amici::Solver&, amici::ExpData const

-> Failed.

Relaxing tolerances by factor 10000
-> Succeeded with relative steady state tolerance 0.01

status: ['AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_
↳ SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS', 'AMICI_SUCCESS']
preeq_status=[<SteadyStateStatus.not_run: 0>, <SteadyStateStatus.success: 1>,
↳ <SteadyStateStatus.not_run: 0>]
rdata.preeq_numsteps=array([[ 0, 577,  0]])

```

That fixed the error, and took only a quarter of the number steps as the previous run, but at the cost of much lower accuracy.

```
[25]: # Let's try increasing the number of Newton steps
# (this is 0 by default, so the Newton solver wasn't used before,
# as can be seen from the 0 in `rdata.preeq_numsteps[0]`)
amici_solver = amici_model.getSolver()
amici_solver.setNewtonMaxSteps(10**4)

res = simulate_petab(
    petab_problem=petab_problem,
    amici_model=amici_model,
    problem_parameters=problem_parameters,
    scaled_parameters=True,
    solver=amici_solver,
)
print("status:", [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]])

rdata = res[RDATAS][0]
print(f"preeq_status={list(map(amici.SteadyStateStatus, rdata.preeq_status.flatten()))}")
print(f"{rdata.preeq_numsteps=}")
# hard to reproduce on GHA
if os.getenv('GITHUB_ACTIONS') is None:
    assert [amici.simulation_status_to_str(rdata.status) for rdata in res[RDATAS]] == [
        'AMICI_ERROR', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN',
        'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN']

2023-02-24 13:21:50.305 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][CVODES:CNode:ERR_
    FAILURE] AMICI ERROR: in module CVODES in function CNode : At t = 736.713 and h = 0.
    000145837, the error test failed repeatedly or with |h| = hmin.
2023-02-24 13:21:50.306 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][OTHER] AMICI_
    equilibration failed at t=736.713.
2023-02-24 13:21:50.307 - amici.swig_wrappers - ERROR - [Dose_0+Dose_0][OTHER] AMICI_
    simulation failed: Steady state computation failed. First run of Newton solver failed:
    RHS could not be factorized. Simulation to steady state failed. Second run of Newton_
    solver failed: RHS could not be factorized.
2023-02-24 13:21:50.309 - amici.swig_wrappers - DEBUG - [Dose_0+Dose_0][BACKTRACE] The_
    previous error occurred at:
2      0x7fc53399d7af /home/docs/checkouts/readthedocs.org/user_builds/amici/checkouts/
    v0.16.1/python/sdist/amici/_amici.cpython-38-x86_64-linux-gnu.so(+0xc67af)
    [0x7fc53399d7af]
3      0x7fc533ae2582 amici::SteadystateProblem::findSteadyState(amici::Solver const&,
    amici::Model&, int) + 418
4      0x7fc533ae25cf amici::SteadystateProblem::workSteadyStateProblem(amici::Solver_
    const&, amici::Model&, int) + 63
5      0x7fc533a93dc2 amici::runAmiciSimulation(amici::Solver&, amici::ExpData const

status: ['AMICI_ERROR', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN',
    'AMICI_NOT_RUN', 'AMICI_NOT_RUN', 'AMICI_NOT_RUN']
preeq_status=[<SteadyStateStatus.failed_factorization: -3>, <SteadyStateStatus.failed: -
    1>, <SteadyStateStatus.failed_factorization: -3>]
rdata.preeq_numsteps=array([[ 0, 1105,  0]])
```

Increasing the maximum number of Newton steps doesn't seem to help here. The Jacobian was numerically singular and its factorization failed. This can be a result of conserved quantities in the model. Section *Steady state sensitivity computation failed due to unsuccessful factorization of RHS Jacobian* shows how to address that.


10.2.7 Speeding up model import and simulation - with a focus on large models

Objective: Give some hints to speed up import and simulation of larger models

This notebook gives some hints that may help to speed up import and simulation of (mostly) larger models. While some of these settings may also yield slight performance improvements for smaller models, other settings may make things slower. The impact may be highly model-dependent (number of states, number of parameters, rate expressions) or system-dependent and it's worthwhile doing some benchmarking.

To simulate models in AMICI, a model specified in a high-level format needs to be imported first, as shown in the following figure. This roughly involves the following steps:

1. Generating the ODEs
2. Computing derivatives
3. Generating C++ code
4. Compiling the generated code
5. Simulating the model

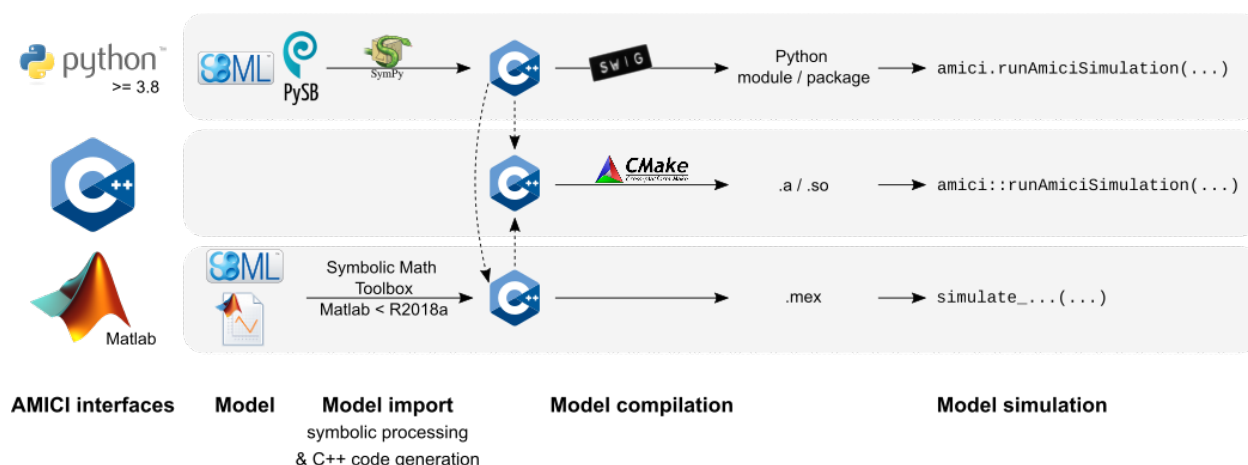

There are various options to speed up individual steps of this process. Generally, faster import comes with slower simulation and vice versa. During parameter estimation, a model is often imported only once, and then millions of simulations are run. Therefore, faster simulation will easily compensate for slower import (one-off cost). In other cases, many models may have to be imported, but only few simulations will be executed. In this case, faster import may be more relevant.

In the following, we will present various settings that (may) influence import and simulation time. We will follow the order of steps outlined above.

Since many of the following demonstrations take quite some time to compute, this notebook mostly shows pre-generated results.

```
[1]: from IPython.core.pylabtools import figsize, getfigs
import matplotlib.pyplot as plt
import pandas as pd

plt.rcParams.update({'font.size': 12})
```


Examples

The demos below make use of the following models contained in the [PEtab benchmark collection](#) and other publications:

Model	# parameters	# states
Chen_MSB2009	155	500
Froehlich_CellSystems2018	4231	1396
FröhlichGer2022 (RTKERK__base)	105	2272
hello_pysb	4	3

All data has been generated with AMICI v0.15.0 or v0.16.0 unless stated otherwise.

Model import

Symbolic processing

Parameters as constants

By default, AMICI will generate sensitivity equations with respect to all model parameters. If it is clear upfront, that sensitivities with respect to certain parameters will not be required, their IDs can be passed to `amici.sbml_import.SbmlImporter.sbml2amici` or `amici.pysb_import.pysb2amici` via the `constant_parameters` argument to not generate the respective equations. This will reduce CPU time and RAM requirements during import and simulation. The PEPetab import will automatically pass all parameters with `petab.ESTIMATE==False` as `constant_parameters` arguments.

See also the following section for the case that no sensitivities are required at all.

Not generating sensitivity code


If only forward simulations of a model are required, a modest import speedup can be obtained from not generating sensitivity code. This can be enabled via the `generate_sensitivity_code` argument of `amici.sbml_import.SbmlImporter.sbml2amici` or `amici.pysb_import.pysb2amici`.

Example:

```
petab_yaml="https://raw.githubusercontent.com/Benchmarking-Initiative/Benchmark-Models-
↳PEtab/master/Benchmark-Models/Froehlich_CellSystems2018/Froehlich_CellSystems2018.yaml"
/usr/bin/time -v amici_import_petab -y "$petab_yaml" --no-compile
# vs.
/usr/bin/time -v amici_import_petab -y "$petab_yaml" --no-compile --no-sensitivities
```

```
[2]: figsize(4, 4)
plt.bar(["True", "False"], [873.54, 697.85])
plt.xlabel("generate_sensitivity_code")
plt.ylabel("Import time (s)")
plt.title("Import speed-up when not generating sensitivity code\n(Froehlich_
↳CellSystems2018)");
plt.show()

print(f"speedup: {873.54/697.85:.2f}x")
```

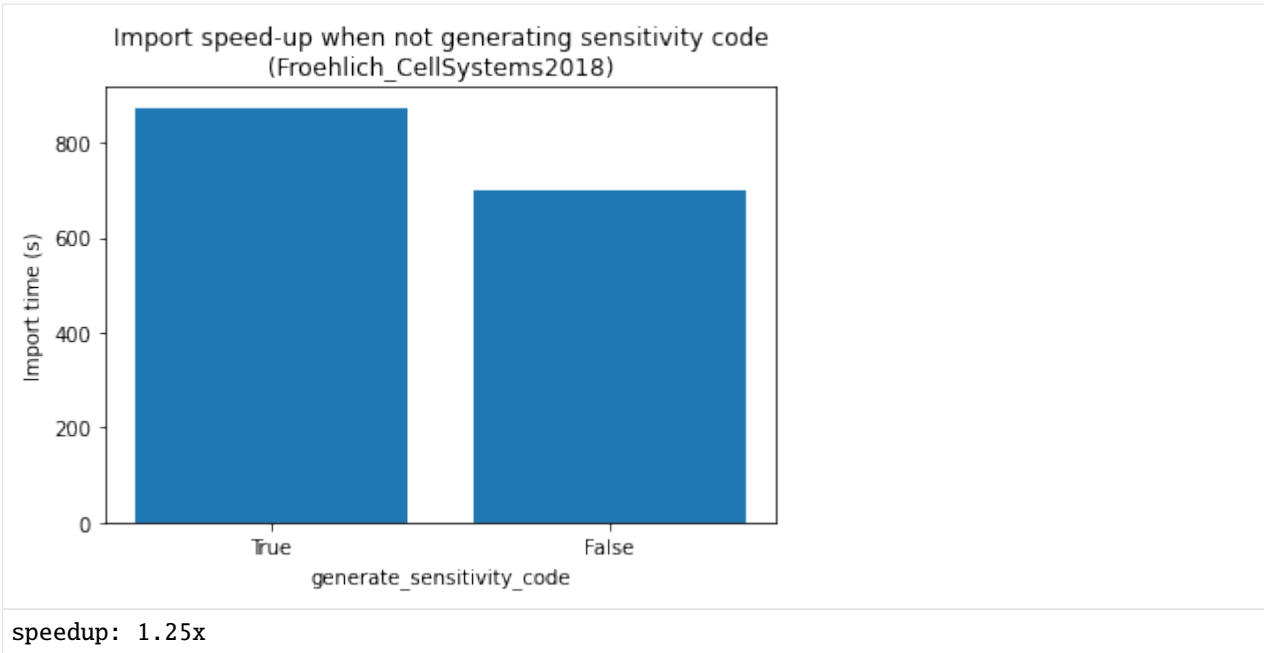

Extracting common subexpressions

For some models, the size of the generated model code can be significantly reduced by extracting common subexpressions. This can yield substantial reductions of compile times and RAM-requirements. Very large models might not compile without this option. Extracting common subexpressions can be enabled by setting an environment variable `AMICI_EXTRACT_CSE=1` before model import. The downside is, that the generated model code becomes rather unreadable. The increase in import time when enabling this feature is usually <15%, the effect on code size and compile time is highly model dependent. Mostly models with tightly coupled ODEs, as obtained from complex rate laws or spatial discretizations of ODEs, seem to benefit. For models with mass action or similar kinetics, this option seems to not be helpful and rather increases compile time (e.g., for FröhlichGer2022, the compile time doubles).

Benchmark result from [here](#) (SBML import, `AMICI_IMPORT_NPROCS=2`, sequential compilation with clang14, `CFLAGS=-O2`):

	default	AMICI_EXTRACT_CSE=1
import time	160 min (100%)	164 min (103%)
code size	89 MB (100%)	27 MB (30%)
compile time	169 min (100%)	90 min (53%)
compile RAM	7.49 GB (100%)	1.18 GB (16%)
simulation time (*)	100%	97%

(*) lowest out of 20 identical simulations using ASA


Parallelization

For large models or complex model expressions, symbolic computation of the derivatives can be quite time consuming. This can be parallelized by setting the environment variable `AMICI_IMPORT_NPROCS` to the number of parallel processes that should be used. The impact strongly depends on the model. Note that setting this value too high may have a negative performance impact (benchmark!).


Impact for a large and a tiny model:

```
[3]: df_import = pd.read_csv("results_import.tsv", sep="\t")
for model_name, df in df_import.groupby("model_name"):
    plt.plot(df.nprocs, df.time)
    plt.title(f"Import time {model_name}")
    plt.xlabel("AMICI_IMPORT_NPROCS")
    plt.ylabel("Import time (s)")
    plt.ylim(ymin=0)
    plt.show()

import_times = df.sort_values("nprocs")["time"].values
percent_change = (import_times[0] - min(import_times[1:])) / import_times[0] * 100
if percent_change > 0:
    print(f"Import time decreased by up to ~{percent_change:.0f}%.")
else:
    print(f"Import time increased by at least ~{-percent_change:.0f}%.")
```

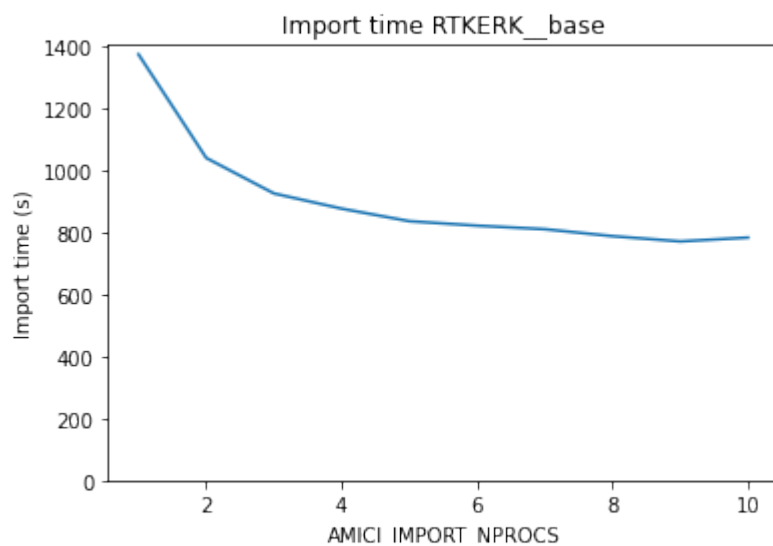

Import time decreased by up to ~44%.

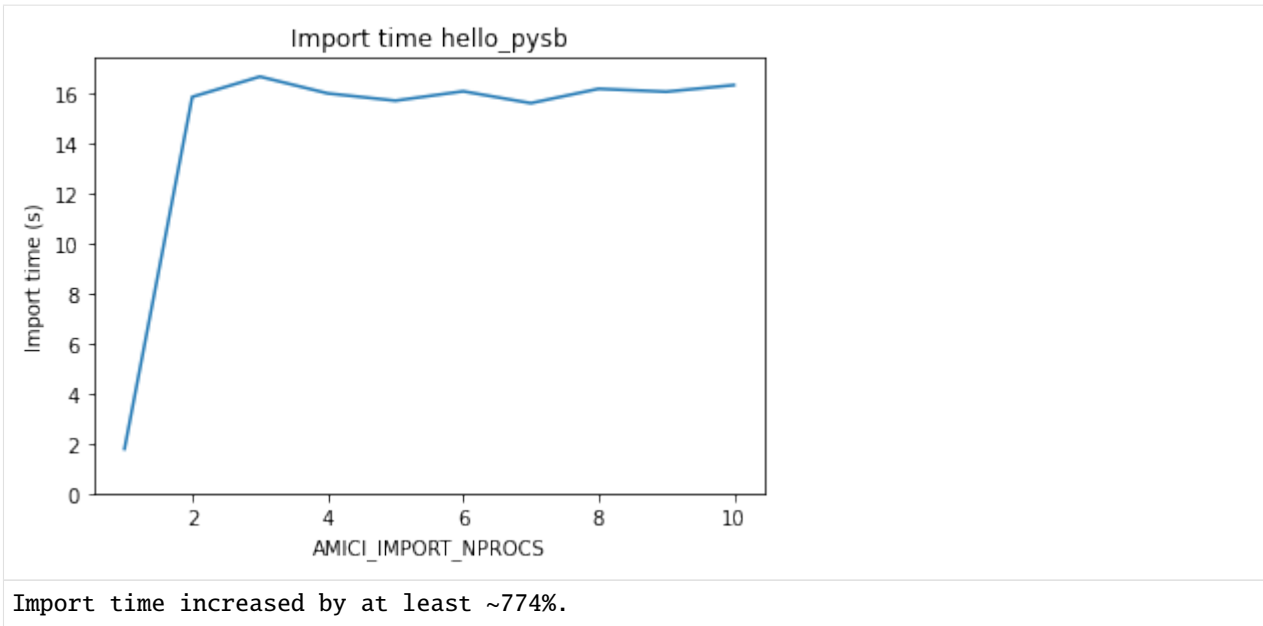


Compilation

Choice of compiler

From own experience, clang seems to handle larger models, or more specifically, their large source files, better than g++, both in terms of memory requirement and compile time. You can use a different compiler by setting the CC and CXX environment variables to, e.g., CC=clang, CXX=clang.

```
[4]: figsize(8, 4)
    compilation_time_s = [3022.453, 289.518]
    labels = ["g++ (Ubuntu 12.2.0-3ubuntu1) 12.2.0", "Ubuntu clang version 15.0.2-1"]
    plt.bar(labels, compilation_time_s)
    plt.ylim(ymin=0)
    plt.title("Choice of compiler - FröhlichGer2022")
    plt.xlabel("Compiler")
    plt.ylabel("Walltime for compilation (s)");
    plt.show()
    print(f"Clang was ~{compilation_time_s[0] / compilation_time_s[1]:.0f}x as fast as g++.")
```

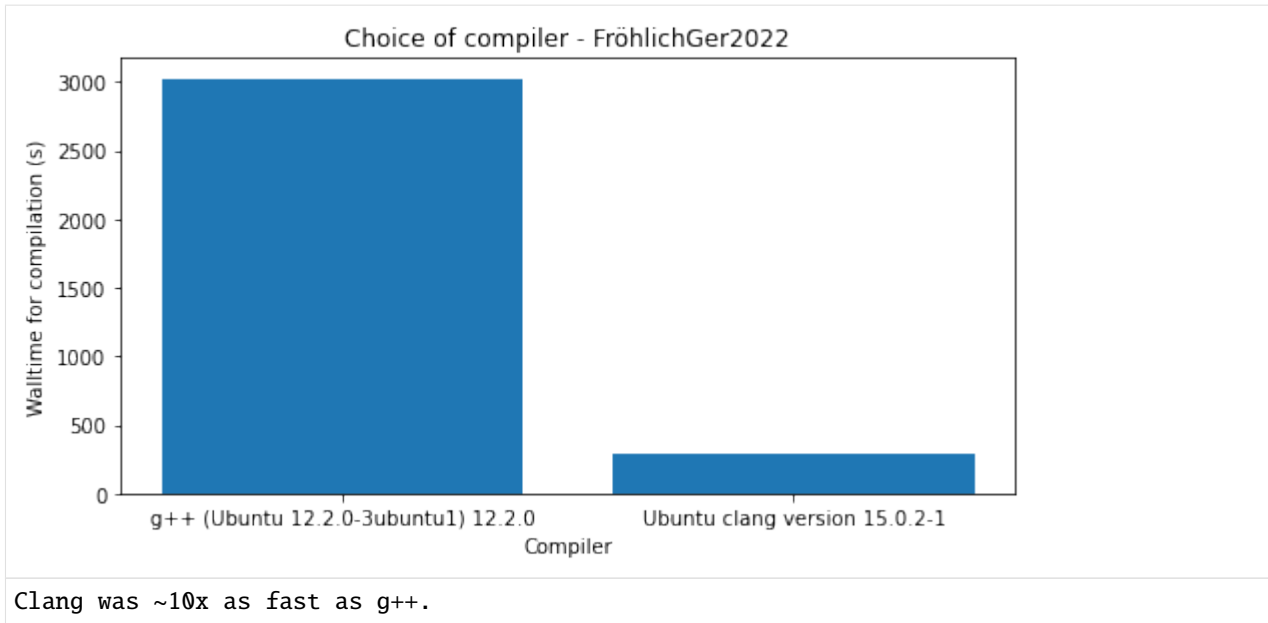

Parallel compilation


It's possible to compile multiple source files in parallel by specifying the number of parallel processes via the `AMICI_PARALLEL_COMPILE` environment variable. This is also beneficial for small models. Note, however, that for large models, this may require significant amounts of RAM.

Example for a large and tiny model:


```
[5]: df_compile = pd.read_csv("results_compile.tsv", sep="\t")
figsize(6, 4)

for model_name, df in df_compile.groupby("model_name"):
    plt.plot(df.nprocs, df.time)
    plt.title(f"Compile time {model_name}")
    plt.xlabel("AMICI_PARALLEL_COMPILE")
    plt.ylabel("Compile time (s)")
    plt.ylim(ymin=0)
    plt.show()

    compilation_time_s = df.sort_values("nprocs")["time"].values
    print("We were able to reduce compile time by up to "
          f"~{(compilation_time_s[0] - min(compilation_time_s[1:])) / compilation_time_
          ↪s[0] * 100:.0f}%.")
```

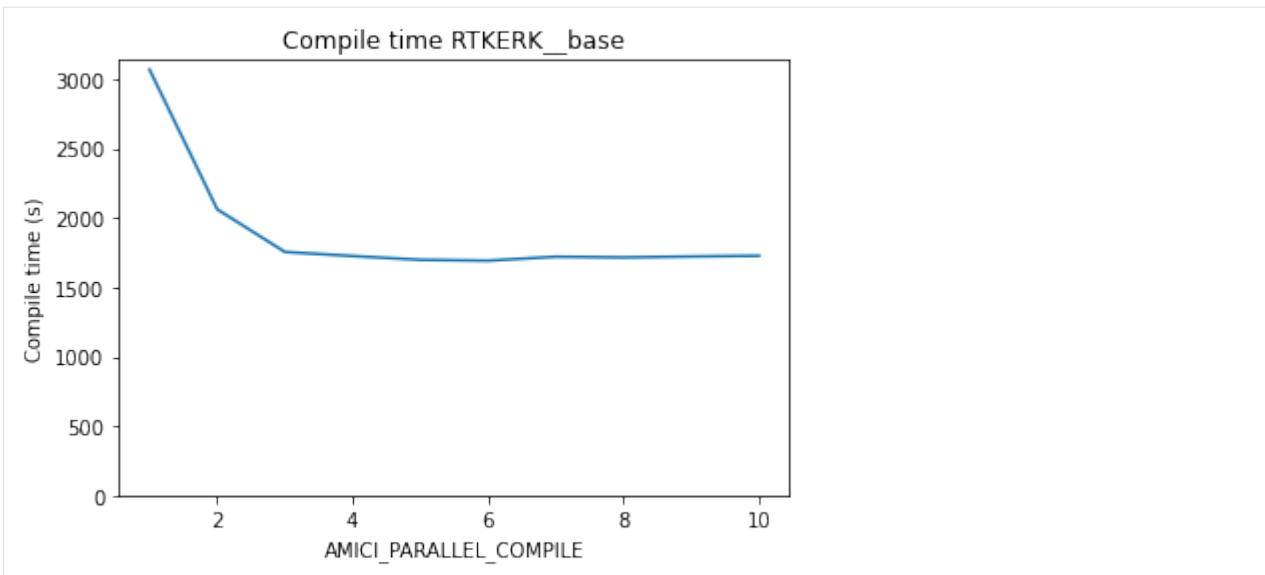

We were able to reduce compile time by up to ~45%.

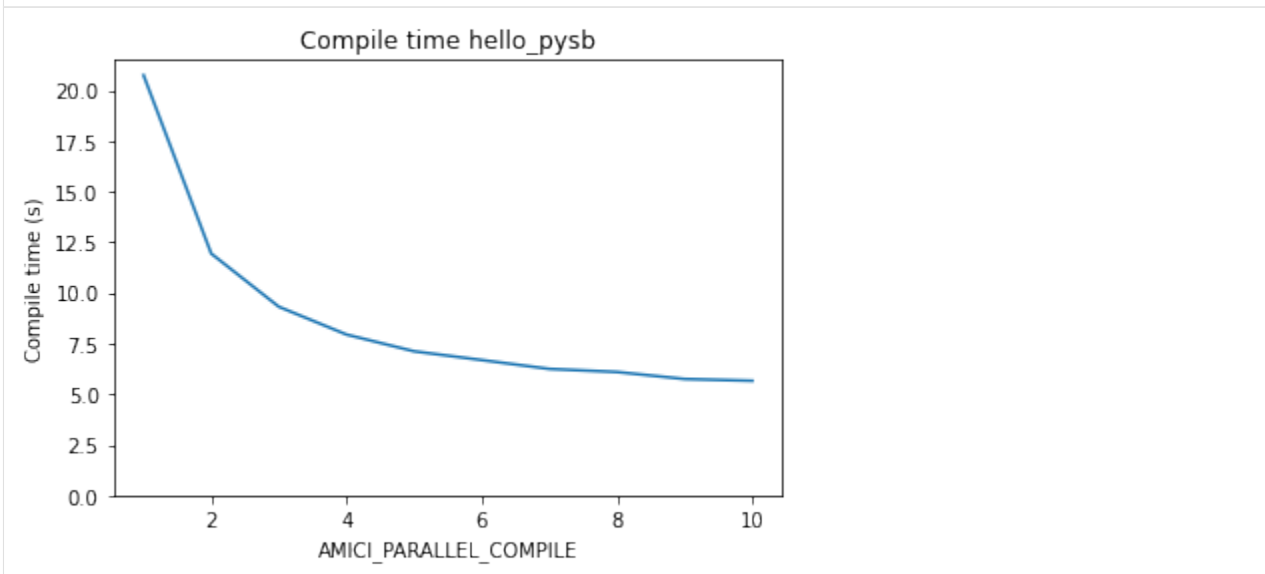

We were able to reduce compile time by up to ~73%.

Compiler flags

For most compilers, different machine code optimizations can be enabled/disabled by the `-O0`, `-O1`, `-O2`, `-O3` flags, where a higher number enables more optimizations. For fastest simulation, `-O3` should be used. However, these optimizations come at the cost of increased compile times. If models grow very large, some optimizations (especially with `g++`, see above) become prohibitively slow. In this case, a lower optimization level may be necessary to be able to compile models at all.

Another potential performance gain can be obtained from using CPU-specific instructions using `-march=native`. The disadvantage is, that the compiled model extension will only run on CPUs supporting the same instruction set. This may become problematic when attempting to use an AMICI model on a machine other than on which it was compiled (e.g. on heterogeneous compute clusters).

These compiler flags should be set for both, AMICI installation and model compilation.

For AMICI installation, e.g.,


```
CFLAGS="-O3 -march=native" pip install amici
```

For model compilation, flags can be passed via the `AMICI_CXXFLAGS` environment variable.


Example:

```
petab_yaml="https://raw.githubusercontent.com/Benchmarking-Initiative/Benchmark-Models-
↳ Petab/master/Benchmark-Models/Chen_MSB2009/Chen_MSB2009.yaml"
amici_import_petab -y "${petab_yaml}" --no-compile
cd Chen_MSB2009-amici0.16.0/
for cflags in "-O0" "-O1" "-O2" "-O3" "-O3 -march=native"
  # this line only builds the model extension, and is normally performed automatically.
↳ during import
  do AMICI_PARALLEL_COMPILE=1 AMICI_CXXFLAGS=${cflags} /usr/bin/time -v python setup.
↳ py build_ext --force --build-lib .
done
```

```
[6]: compilation_time_s = [20.01, 24.62, 25.59, 25.63, 28.21]
labels = ["-O0", "-O1", "-O2", "-O3", "-O3 -march=native"]
figsize(9, 4)
plt.bar(labels, compilation_time_s)
plt.title("Impact of optimization flags on compilation")
plt.xlabel("AMICI_CXXFLAGS")
plt.ylabel("Walltime for compilation (s)");
```

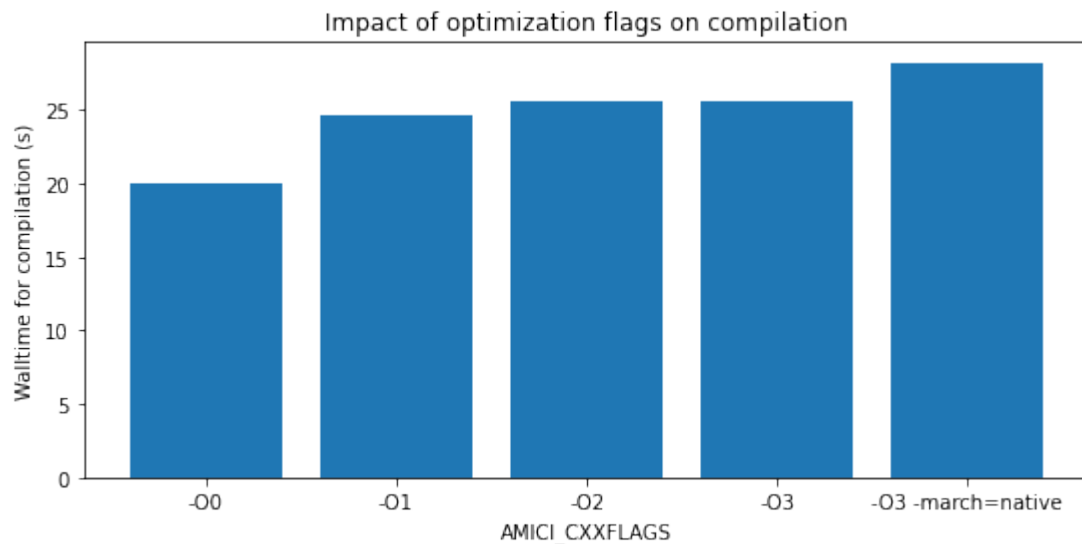

```
[7]: plt.bar(
    ["-O0", "-O1", "-O2", "-O3", "-O3 -march=native"],
    [4357.768, 3276.873, 3140.092, 3069.855, 3039.262],
)
plt.title("Impact of optimization flags on simulation")
plt.xlabel("AMICI_CXXFLAGS")
plt.ylabel("Simulation time (s)");
```

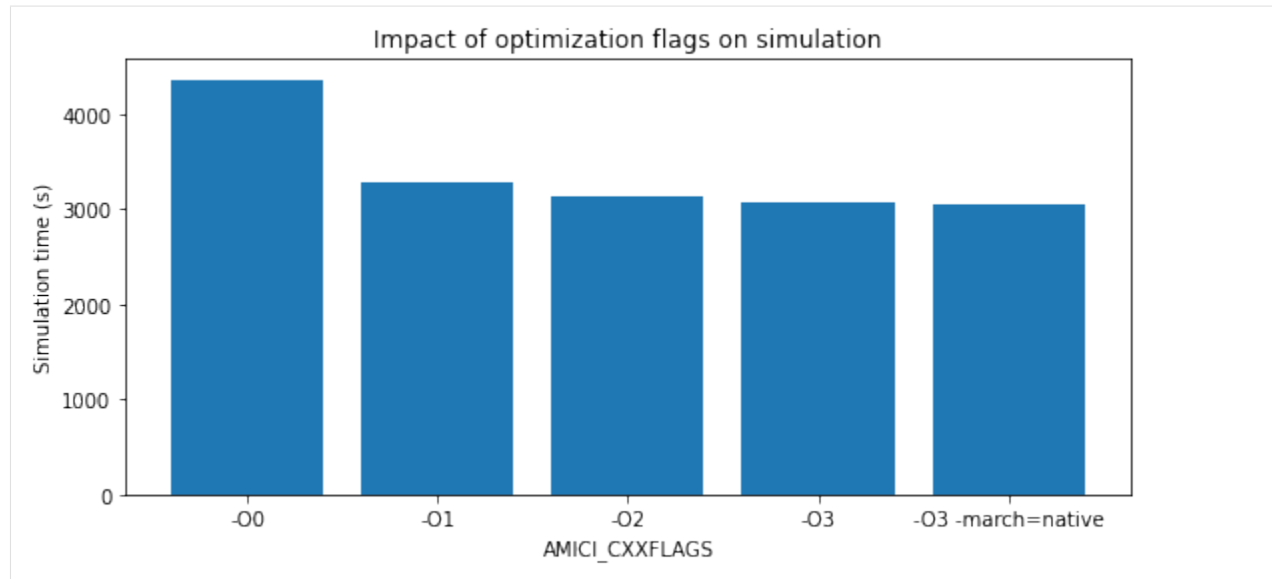

Using some optimized BLAS

You might have access to some custom [BLAS](#) optimized for your hardware which might speed up your simulations somewhat. We are not aware of any systematic evaluation and cannot make any recommendation. You pass the respective compiler and linker flags via the environment variables `BLAS_CFLAGS` and `BLAS_LIBS`, respectively.

Model simulation

A major determinant of simulation time for a given model is the required accuracy and the selected solvers. This has been evaluated, for example, in <https://doi.org/10.1038/s41598-021-82196-2> and is not covered further here.

Adjoint vs. forward sensitivities

If only the objective function gradient is required, adjoint sensitivity analysis are often preferable over forward sensitivity analysis. As a rule of thumb, adjoint sensitivity analysis seems to outperform forward sensitivity analysis for models with more than 20 parameters:

CC BY 4.0 Fröhlich et al., DOI:10.1371/journal.pcbi.1005331

Sensitivities w.r.t. a subset of parameters

If only sensitivities with respect to a subset of model parameters are of interest to you (see also *Parameters as constants* above), you can speed up the simulation by selecting the relevant parameter indices via `amici.Model.setParameterList`.

Parallel simulation of multiple conditions

Whenever there are multiple independent simulations to perform, you can use `amici.runAmiciSimulations(..., num_threads=...)` instead of `amici.runAmiciSimulations(...)` to run them in parallel. Note that all simulation results have to be kept in memory, which may become problematic for very large numbers of simulations. Parallelization is based on OpenMP and does not come with the issues associated with Python's multiprocessing or multithreading (spawning extra processes or limitations related to the global interpreter lock).

Reporting mode

During model simulation, many quantities are calculated, but not all might be of interest for you. For example, for parameter estimation you might only be interested in the likelihood and gradient. In this case, you can save time and memory using

```
amici.Solver.setReturnDataReportingMode(amici.RDataReporting.likelihood).
```

10.3 Using AMICI's Python interface

In the following we will give a detailed overview how to specify models in Python and how to call the generated simulation files.

10.3.1 Model definition

This document provides an overview of different interfaces to import models in AMICI. Further examples are available in the AMICI repository in the `python/examples` directory.

SBML import

AMICI can import *SBML* models via the `amici.sbml_import.SbmlImporter()` class.

Status of SBML support in Python-AMICI

Python-AMICI currently **passes 1030 out of the 1821 (~57%) test cases** from the semantic *SBML Test Suite* (current status).

The following SBML test suite tags are currently supported (i.e., at least one test case with the respective test passes; tag descriptions):

Component tags:

- AssignmentRule
- Compartment
- CSymbolAvogadro
- CSymbolTime
- EventNoDelay
- FunctionDefinition
- InitialAssignment

- Parameter
- RateRule
- Reaction
- Species

Test tags:

- 0D-Compartment
- Amount
- AssignedConstantStoichiometry
- AssignedVariableStoichiometry
- BoolNumericSwap
- BoundaryCondition
- Concentration
- ConstantSpecies
- ConversionFactors
- DefaultValue
- EventT0Firing
- HasOnlySubstanceUnits
- InitialValueReassigned
- L3v2MathML
- LocalParameters
- MultiCompartment
- NoMathML
- NonConstantCompartment
- NonConstantParameter
- NonUnityCompartment
- NonUnityStoichiometry
- ReversibleReaction
- SpeciesReferenceInMath
- UncommonMathML
- VolumeConcentrationRates

In addition, we currently plan to add support for the following features (see corresponding [issues](#) for details and progress):

- Algebraic rules ([#760](#))

However, the following features are unlikely to be supported:

- any SBML extensions
- *factorial()*, *ceil()*, *floor()*, due to incompatibility with symbolic sensitivity computations

- `delay()` due to missing *SUNDIALS* solver support
- events with delays, events with non-persistent triggers

Tutorials

A basic tutorial on how to import and simulate SBML models is available in the *Getting Started notebook*, while a more detailed example including customized import and sensitivity computation is available in the *Example Steadystate notebook*.

PySB import

AMICI can import *PySB* models via `amici.pysb_import.pysb2amici()`.

BNGL import

AMICI can import *BNGL* models via `amici.bngl_import.bngl2amici()`.

PETab import

AMICI can import *PETab*-based model definitions and run simulations for the specified simulations conditions. For usage, see *python/examples/example_petab/petab.ipynb*.

Importing plain ODEs

The AMICI Python interface does not currently support direct import of ODEs. However, it is straightforward to encode them as *RateRules* in an SBML model. The *yaml2sbml* package may come in handy, as it facilitates generating SBML models from a YAML-based specification of an ODE model. Besides the SBML model it can also create *PETab* files.

SED-ML import

We also plan to implement support for the *Simulation Experiment Description Markup Language* (SED-ML).

10.3.2 Environment variables affecting model import

In addition to the environment variables listed *here*, the following environment variables control various behaviours during model import and compilation:

Table 1: Environment variables affecting model import

Variable	Purpose	Example
AMICI_EXTRACT_CSE	Extract common subexpressions. May significantly reduce file size and compile time for large models, but makes the generated code less readable. Disabled by default.	AMICI_EXTRACT_CSE=1
AMICI_IMPORT_NPROCS	Number of processes to be used for model import. Defaults to 1. Speeds up import of large models. Will slow down import of small models, benchmarking recommended.	AMICI_IMPORT_NPROCS=4
AMICI_EXPERIMENTAL_SBML_NONCONSTANTS	Compensation laws for non-constant species. SBML-import only. See <code>amici.sbml_import.SbmlImporter.sbml2amici()</code> .	

10.3.3 Miscellaneous

OpenMP support for parallelized simulation for multiple experimental conditions

AMICI can be built with OpenMP support, which allows to parallelize model simulations for multiple experimental conditions.

On Linux and OSX this is enabled by default. This can be verified using:

```
import amici
amici.compileWithOpenMP()
```

If not already enabled by default, you can enable OpenMP support by setting the environment variables `AMICI_CXXFLAGS` and `AMICI_LDFLAGS` to the correct OpenMP flags of your compiler and linker, respectively. This has to be done for both AMICI package installation *and* model compilation. When using gcc on Linux, this would be:

```
# on your shell:
AMICI_CXXFLAGS=-fopenmp AMICI_LDFLAGS=-fopenmp pip3 install amici
```

```
# in python, before model compilation:
import os
os.environ['AMICI_CXXFLAGS'] = '-fopenmp'
os.environ['AMICI_LDFLAGS'] = '-fopenmp'
```

10.4 FAQ

Q: I am trying to install the AMICI Python package, but installation fails with something like

```
amici/src/cblas.cpp:16:13: fatal error: cblas.h: No such file or directory
#include <cblas.h>
          ^~~~~~
compilation terminated.
error: command 'x86_64-linux-gnu-gcc' failed with exit status 1
```

A: You will have to install a CBLAS-compatible BLAS library and/or set `BLAS_CFLAGS` as described in the [installation guide](#).

Q: Importing my model fails with something like `ImportError: _someModelName.cpython-37m-x86_64-linux-gnu.so: undefined symbol: omp_get_thread_num`.

A: You probably installed the AMICI package with OpenMP support, but did not have the relevant compiler/linker flags set when importing/building the model. See [here](#).

10.5 AMICI Python API

Modules

<code>amici</code>	AMICI
<code>amici.amici</code>	Core C++ bindings This module encompasses the complete public C++ API of AMICI, which was exposed via swig. All functions listed here are directly accessible in the main amici package, i.e., <code>amici.amici.ExpData</code> is available as <code>amici.ExpData</code> . Usage of functions and classes from the base amici package is generally recommended as they often include convenience wrappers that avoid common pitfalls when accessing C++ types from python and implement some nonstandard type conversions.
<code>amici.sbml_import</code>	SBML Import This module provides all necessary functionality to import a model specified in the Systems Biology Markup Language (SBML).
<code>amici.pysb_import</code>	PySB Import This module provides all necessary functionality to import a model specified in the <code>pysb.core.Model</code> format.
<code>amici.bngl_import</code>	BNGL Import This module provides all necessary functionality to import a model specified in the BNGL format.
<code>amici.petab_import</code>	PETab Import Import a model in the petab (https://github.com/PETab-dev/PETab) format into AMICI.
<code>amici.petab_import_pysb</code>	PySB-PETab Import Import a model in the PySB-adapted petab (https://github.com/PETab-dev/PETab) format into AMICI.
<code>amici.petab_objective</code>	PETab Objective Functionality related to running simulations or evaluating the objective function as defined by a PETab problem
<code>amici.petab_simulate</code>	PETab Simulate Functionality related to the use of AMICI for simulation with PETab's Simulator class.
<code>amici.import_utils</code>	Miscellaneous functions related to model import, independent of any specific model format
<code>amici.ode_export</code>	C++ Export This module provides all necessary functionality specify an ODE model and generate executable C++ simulation code. The user generally won't have to directly call any function from this module as this will be done by <code>amici.pysb_import.pysb2amici()</code> , <code>amici.sbml_import.SbmlImporter.sbml2amici()</code> and <code>amici.petab_import.import_model()</code> .
<code>amici.ode_model</code>	Objects for AMICI's internal ODE model representation
<code>amici.plotting</code>	Plotting Plotting related functions
<code>amici.pandas</code>	Pandas Wrappers This module contains convenience wrappers that allow for easy interconversion between C++ objects from <code>amici.amici</code> and pandas DataFrames
<code>amici.logging</code>	Logging This module provides custom logging functionality for other amici modules
<code>amici.gradient_check</code>	Finite Difference Check This module provides functions to automatically check correctness of amici computed sensitivities using finite difference approximations

10.5.1 amici

AMICI

The AMICI Python module provides functionality for importing SBML or PySB models and turning them into C++ Python extensions.

Module Attributes

<code>amici_path</code>	absolute root path of the amici repository or Python package
<code>amiciSwigPath</code>	absolute path of the amici swig directory
<code>amiciSrcPath</code>	absolute path of the amici source directory
<code>amiciModulePath</code>	absolute root path of the amici module
<code>hdf5_enabled</code>	boolean indicating if amici was compiled with hdf5 support

Functions

<code>import_model_module(module_name[, module_path])</code>	mod-	Import Python module of an AMICI model
--	------	--

Classes

<code>ModelModule(*args, **kwargs)</code>	Type of AMICI-generated model modules.
<code>add_path(path)</code>	Context manager for temporarily changing PYTHON-PATH

Exceptions

<code>AmiciVersionError</code>	Error thrown if an AMICI model is loaded that is incompatible with the installed AMICI base package
--------------------------------	---

exception amici.AmiciVersionError

Error thrown if an AMICI model is loaded that is incompatible with the installed AMICI base package

class amici.ModelModule(*args, **kwargs)

Type of AMICI-generated model modules.

To enable static type checking.

getModel()

Create a model instance.

Return type `amici.amici.Model`

`get_model()`

Create a model instance.

Return type `amici.amici.Model`

`class amici.add_path(path)`

Context manager for temporarily changing PYTHONPATH

`amici.amiciModulePath = '/home/docs/checkouts/readthedocs.org/user_builds/amici/checkouts/v0.16.1/python/sdist/amici'`

absolute root path of the amici module

`amici.amiciSrcPath = '/home/docs/checkouts/readthedocs.org/user_builds/amici/checkouts/v0.16.1/python/sdist/amici/src'`

absolute path of the amici source directory

`amici.amiciSwigPath = '/home/docs/checkouts/readthedocs.org/user_builds/amici/checkouts/v0.16.1/python/sdist/amici/swig'`

absolute path of the amici swig directory

`amici.amici_path = '/home/docs/checkouts/readthedocs.org/user_builds/amici/checkouts/v0.16.1/python/sdist/amici'`

absolute root path of the amici repository or Python package

`amici.hdf5_enabled: bool = False`

boolean indicating if amici was compiled with hdf5 support

`amici.import_model_module(module_name, module_path=None)`

Import Python module of an AMICI model

Parameters

- **module_name** (`str`) – Name of the python package of the model
- **module_path** (`typing.Union[pathlib.Path, str, None]`) – Absolute or relative path of the package directory

Return type `amici.ModelModule`

Returns The model module

10.5.2 amici.amici

Core C++ bindings

This module encompasses the complete public C++ API of AMICI, which was exposed via swig. All functions listed here are directly accessible in the main amici package, i.e., `amici.amici.ExpData` is available as `amici.ExpData`. Usage of functions and classes from the base amici package is generally recommended as they often include convenience wrappers that avoid common pitfalls when accessing C++ types from python and implement some nonstandard type conversions.

Module Attributes

<code>SensitivityOrder_none</code>	Don't compute sensitivities.
<code>SensitivityOrder_first</code>	First-order sensitivities.
<code>SensitivityOrder_second</code>	Second-order sensitivities.
<code>SensitivityMethod_none</code>	Don't compute sensitivities.
<code>SensitivityMethod_forward</code>	Forward sensitivity analysis.
<code>SensitivityMethod_adjoint</code>	Adjoint sensitivity analysis.
<code>NonlinearSolverIteration_fixedpoint</code>	deprecated

Functions

<code>compiledWithOpenMP()</code>	AMICI extension was compiled with OpenMP?
<code>enum(prefix)</code>	
<code>getScaledParameter(unscaledParameter, scaling)</code>	Apply parameter scaling according to <i>scaling</i>
<code>getUnscaledParameter(scaledParameter, scaling)</code>	Remove parameter scaling according to <i>scaling</i>
<code>parameterScalingFromIntVector(intVec)</code>	Swig-Generated class, which, in contrast to other Vector classes, does not allow for simple interoperability with common Python types, but must be created using <code>amici.amici.parameterScalingFromIntVector()</code>
<code>runAmiciSimulation(solver, edata, model[, ...])</code>	Core integration routine.
<code>runAmiciSimulations(solver, edatas, model, ...)</code>	Same as runAmiciSimulation, but for multiple ExpData instances.
<code>scaleParameters(bufferUnscaled, pscale, ...)</code>	Apply parameter scaling according to <i>scaling</i>
<code>simulation_status_to_str(status)</code>	Get the string representation of the given simulation status code (see ReturnData::status).
<code>unscaleParameters(bufferScaled, pscale, ...)</code>	Remove parameter scaling according to the parameter scaling in pscale

Classes

<code>BoolVector(*args)</code>	Swig-Generated class templating common python types including Iterable [<code>bool</code>] and <code>numpy.array</code> [<code>bool</code>] to facilitate interfacing with C++ bindings.
<code>DoubleVector(*args)</code>	Swig-Generated class templating common python types including Iterable [<code>float</code>] and <code>numpy.array</code> [<code>float</code>] to facilitate interfacing with C++ bindings.
<code>ExpData(*args)</code>	ExpData carries all information about experimental or condition-specific data
<code>ExpDataPtr(*args)</code>	Swig-Generated class that implements smart pointers to ExpData as objects.
<code>ExpDataPtrVector(*args)</code>	Swig-Generated class templating common python types including Iterable [<code>amici.amici.ExpData</code>] and <code>numpy.array</code> [<code>amici.amici.ExpData</code>] to facilitate interfacing with C++ bindings.
<code>FixedParameterContext(value)</code>	An enumeration.

continues on next page

Table 2 – continued from previous page

<i>IntVector</i> (*args)	Swig-Generated class templating common python types including <code>Iterable</code> [<code>int</code>] and <code>numpy.array</code> [<code>int</code>] to facilitate interfacing with C++ bindings.
<i>InternalSensitivityMethod</i> (value)	An enumeration.
<i>InterpolationType</i> (value)	An enumeration.
<i>LinearMultistepMethod</i> (value)	An enumeration.
<i>LinearSolver</i> (value)	An enumeration.
<i>LogItem</i> (*args)	A log item.
<i>LogItemVector</i> (*args)	
<i>Logger</i> ()	A logger, holding a list of error messages.
<i>Model</i> (*args, **kwargs)	The <code>Model</code> class represents an AMICI ODE/DAE model.
<i>ModelDimensions</i> (*args)	Container for model dimensions.
<i>ModelPtr</i> (*args)	Swig-Generated class that implements smart pointers to <code>Model</code> as objects.
<i>NewtonDampingFactorMode</i> (value)	An enumeration.
<i>NonlinearSolverIteration</i> (value)	An enumeration.
<i>ObservableScaling</i> (value)	An enumeration.
<i>ParameterScaling</i> (value)	An enumeration.
<i>ParameterScalingVector</i> (*args)	
<i>RDataReporting</i> (value)	An enumeration.
<i>ReturnData</i> (*args)	Stores all data to be returned by <code>amici.amici.runAmiciSimulation()</code> .
<i>ReturnDataPtr</i> (*args)	Swig-Generated class that implements smart pointers to <code>ReturnData</code> as objects.
<i>SecondOrderMode</i> (value)	An enumeration.
<i>SensitivityMethod</i> (value)	An enumeration.
<i>SensitivityOrder</i> (value)	An enumeration.
<i>SimulationParameters</i> (*args)	Container for various simulation parameters.
<i>SimulationState</i> ()	implements an exchange format to store and transfer the state of a simulation at a specific timepoint.
<i>Solver</i> (*args, **kwargs)	The <code>Solver</code> class provides a generic interface to CVODES and IDAS solvers, individual realizations are realized in the <code>CVodeSolver</code> and the <code>IDASolver</code> class.
<i>SolverPtr</i> (*args)	Swig-Generated class that implements smart pointers to <code>Solver</code> as objects.
<i>SteadyStateSensitivityMode</i> (value)	An enumeration.
<i>SteadyStateStatus</i> (value)	An enumeration.
<i>SteadyStateStatusVector</i> (*args)	
<i>StringDoubleMap</i> (*args)	Swig-Generated class templating <code>Dict</code> [<code>str</code> , <code>float</code>] to facilitate interfacing with C++ bindings.
<i>StringVector</i> (*args)	Swig-Generated class templating common python types including <code>Iterable</code> [<code>str</code>] and <code>numpy.array</code> [<code>str</code>] to facilitate interfacing with C++ bindings.

class `amici.amici.BoolVector`(*args)

Swig-Generated class templating common python types including `Iterable` [`bool`] and `numpy.array` [`bool`] to facilitate interfacing with C++ bindings.

class amici.amici.**DoubleVector**(*args)

Swig-Generated class templating common python types including Iterable [float] and numpy.array [float] to facilitate interfacing with C++ bindings.

class amici.amici.**ExpData**(*args)

ExpData carries all information about experimental or condition-specific data

getObservedData() → std::vector< amici::realtype, std::allocator< amici::realtype > > const &

Get all measurements.

Return type *DoubleVector*

Returns observed data (dimension: nt x nytrue, row-major)

getObservedDataPtr(it: int) → amici::realtype const *

Get measurements for a given timepoint index.

Parameters **it** (int) – timepoint index

Return type float

Returns pointer to observed data at index (dimension: nytrue)

getObservedDataStdDev() → std::vector< amici::realtype, std::allocator< amici::realtype > > const &

Get measurement standard deviations.

Return type *DoubleVector*

Returns standard deviation of observed data

getObservedDataStdDevPtr(it: int) → amici::realtype const *

Get pointer to measurement standard deviations.

Parameters **it** (int) – timepoint index

Return type float

Returns pointer to standard deviation of observed data at index

getObservedEvents() → std::vector< amici::realtype, std::allocator< amici::realtype > > const &

get function that copies data from ExpData::mz to output

Return type *DoubleVector*

Returns observed event data

getObservedEventsPtr(ie: int) → amici::realtype const *

get function that returns a pointer to observed data at ieth occurrence

Parameters **ie** (int) – event occurrence

Return type float

Returns pointer to observed event data at ieth occurrence

getObservedEventsStdDev() → std::vector< amici::realtype, std::allocator< amici::realtype > > const &

get function that copies data from ExpData::observedEventsStdDev to output

Return type *DoubleVector*

Returns standard deviation of observed event data

getObservedEventsStdDevPtr(*ie*: *int*) → amici::realtype const *

get function that returns a pointer to standard deviation of observed event data at ie-th occurrence

Parameters **ie** (*int*) – event occurrence

Return type *float*

Returns pointer to standard deviation of observed event data at ie-th occurrence

getTimepoint(*it*: *int*) → amici::realtype

Get timepoint for the given index

Parameters **it** (*int*) – timepoint index

Return type *float*

Returns timepoint timepoint at index

getTimepoints() → std::vector< amici::realtype, std::allocator< amici::realtype > > const &

Get output timepoints.

Return type *DoubleVector*

Returns ExpData::ts

property id

Arbitrary (not necessarily unique) identifier.

isSetObservedData(*it*: *int*, *iy*: *int*) → bool

Whether there is a measurement for the given time- and observable- index.

Parameters

- **it** (*int*) – time index
- **iy** (*int*) – observable index

Return type *boolean*

Returns boolean specifying if data was set

isSetObservedDataStdDev(*it*: *int*, *iy*: *int*) → bool

Whether standard deviation for a measurement at specified timepoint- and observable index has been set.

Parameters

- **it** (*int*) – time index
- **iy** (*int*) – observable index

Return type *boolean*

Returns boolean specifying if standard deviation of data was set

isSetObservedEvents(*ie*: *int*, *iz*: *int*) → bool

get function that checks whether event data at specified indices has been set

Parameters

- **ie** (*int*) – event index
- **iz** (*int*) – event observable index

Return type *boolean*

Returns boolean specifying if data was set

isSetObservedEventsStdDev(*ie*: *int*, *iz*: *int*) → *bool*

get function that checks whether standard deviation of even data at specified indices has been set

Parameters

- **ie** (*int*) – event index
- **iz** (*int*) – event observable index

Return type *boolean*

Returns *boolean* specifying if standard deviation of event data was set

nmaxevent() → *int*

maximal number of events to track

Return type *int*

Returns maximal number of events to track

nt() → *int*

number of timepoints

Return type *int*

Returns number of timepoints

nytrue() → *int*

number of observables of the non-augmented model

Return type *int*

Returns number of observables of the non-augmented model

nztrue() → *int*

number of event observables of the non-augmented model

Return type *int*

Returns number of event observables of the non-augmented model

setObservedData(**args*) → *void*

Overload 1:

Set all measurements.

Parameters **observedData** (*DoubleVector*) – observed data (dimension: nt x nytrue, row-major)

Overload 2:

Set measurements for a given observable index

Parameters

- **observedData** (*DoubleVector*) – observed data (dimension: nt)
- **iy** (*int*) – observed data index

Return type *None*

setObservedDataStdDev(*args) → void

Overload 1:

Set standard deviations for measurements.

Parameters **observedDataStdDev** (**DoubleVector**) – standard deviation of observed data (dimension: nt x nytrue, row-major)

Overload 2:

Set identical standard deviation for all measurements.

Parameters **stdDev** (*float*) – standard deviation (dimension: scalar)

Overload 3:

Set standard deviations of observed data for a specific observable index.

Parameters

- **observedDataStdDev** (**DoubleVector**) – standard deviation of observed data (dimension: nt)
- **iy** (*int*) – observed data index

Overload 4:

Set all standard deviation for a given observable index to the input value.

Parameters

- **stdDev** (*float*) – standard deviation (dimension: scalar)
- **iy** (*int*) – observed data index

Return type *None*

setObservedEvents(*args) → void

Overload 1:

set function that copies observed event data from input to ExpData::observedEvents

Parameters **observedEvents** (**DoubleVector**) – observed data (dimension: nmaxevent x nytrue, row-major)

Overload 2:

set function that copies observed event data for specific event observable

Parameters

- **observedEvents** ([DoubleVector](#)) – observed data (dimension: nmaxevent)
- **iz** ([int](#)) – observed event data index

Return type [None](#)

setObservedEventsStdDev(*args) → void

Overload 1:

set function that copies data from input to ExpData::observedEventsStdDev

Parameters **observedEventsStdDev** ([DoubleVector](#)) – standard deviation of observed event data

Overload 2:

set function that sets all ExpData::observedDataStdDev to the input value

Parameters **stdDev** ([float](#)) – standard deviation (dimension: scalar)

Overload 3:

set function that copies standard deviation of observed data for specific observable

Parameters

- **observedEventsStdDev** ([DoubleVector](#)) – standard deviation of observed data (dimension: nmaxevent)
- **iz** ([int](#)) – observed data index

Overload 4:

set function that sets all standard deviation of a specific observable to the input value

Parameters

- **stdDev** ([float](#)) – standard deviation (dimension: scalar)
- **iz** ([int](#)) – observed data index

Return type [None](#)

setTimepoints(*ts*: [DoubleVector](#)) → void

Set output timepoints.

Parameters *ts* ([amici.amici.DoubleVector](#)) – timepoints

Return type [None](#)

class [amici.amici.ExpDataPtr](#)(*args)

Swig-Generated class that implements smart pointers to ExpData as objects.

property [fixedParameters](#)

Model constants

Vector of size [Model::nk\(\)](#) or empty

property [fixedParametersPreequilibration](#)

Model constants for pre-equilibration

Vector of size [Model::nk\(\)](#) or empty.

property [fixedParametersPresimulation](#)

Model constants for pre-simulation

Vector of size [Model::nk\(\)](#) or empty.

property [id](#)

Arbitrary (not necessarily unique) identifier.

property [parameters](#)

Model parameters

Vector of size [Model::np\(\)](#) or empty with parameter scaled according to [SimulationParameter::pscale](#).

property [plist](#)

Parameter indices w.r.t. which to compute sensitivities

property [pscale](#)

Parameter scales

Vector of parameter scale of size [Model::np\(\)](#), indicating how/if each parameter is to be scaled.

property [reinitialization_state_idxes_presim](#)

Indices of states to be reinitialized based on provided presimulation constants / fixed parameters.

property [reinitialization_state_idxes_sim](#)

Indices of states to be reinitialized based on provided constants / fixed parameters.

property [reinitializeFixedParameterInitialStates](#)

Flag indicating whether reinitialization of states depending on fixed parameters is activated

property [sx0](#)

Initial state sensitivities

Dimensions: [Model::nx\(\)](#) * [Model::nplist\(\)](#), [Model::nx\(\)](#) * [ExpData::plist.size\(\)](#), if [ExpData::plist](#) is not empty, or empty

property [t_presim](#)

Duration of pre-simulation.

If this is > 0, presimulation will be performed from (model->t0 - t_presim) to model->t0 using the fixed-Parameters in [fixedParametersPresimulation](#)


```

property ts_
    Timepoints for which model state/outputs/... are requested
    Vector of timepoints.

property tstart_
    starting time

property x0
    Initial state
    Vector of size Model::nx() or empty

class amici.amici.ExpDataPtrVector(*args)
    Swig-Generated class templating common python types including Iterable [amici.amici.ExpData] and
    numpy.array [amici.amici.ExpData] to facilitate interfacing with C++ bindings.

class amici.amici.FixedParameterContext(value)
    An enumeration.

    preequilibration = 1

    presimulation = 2

    simulation = 0

class amici.amici.IntVector(*args)
    Swig-Generated class templating common python types including Iterable [int] and numpy.array [int] to
    facilitate interfacing with C++ bindings.

class amici.amici.InternalSensitivityMethod(value)
    An enumeration.

    simultaneous = 1

    staggered = 2

    staggered1 = 3

class amici.amici.InterpolationType(value)
    An enumeration.

    hermite = 1

    polynomial = 2

class amici.amici.LinearMultistepMethod(value)
    An enumeration.

    BDF = 2

    adams = 1

class amici.amici.LinearSolver(value)
    An enumeration.

    KLU = 9

    LAPACKBand = 4

```

LAPACKDense = 3

SPBCG = 7

SPGMR = 6

SPTFQMR = 8

SuperLUMT = 10

band = 2

dense = 1

diag = 5

class amici.amici.LogItem(*args)

A log item.

property identifier

Short identifier for the logged event

property message

A more detailed and readable message

property severity

Severity level

class amici.amici.LogItemVector(*args)

class amici.amici.Logger

A logger, holding a list of error messages.

property items

The log items

log(*args) → void

Overload 1:

Add a log entry

Parameters

- **severity** (*int*) – Severity level
- **identifier** (*str*) – Short identifier for the logged event
- **message** (*str*) – A more detailed message

Overload 2:

Add a log entry with printf-like message formatting

Parameters

- **severity** (*int*) – Severity level
- **identifier** (*str*) – Short identifier for the logged event

- **format** (*string*) – printf format string

Return type *None*

class amici.amici.**Model**(*args, **kwargs)

The Model class represents an AMICI ODE/DAE model.

The model can compute various model related quantities based on symbolically generated code.

clone() → amici::Model *

Clone this instance.

Return type *Model*

Returns The clone

fdsigmaydy(*dsigmaydy: Iterable[float], t: float const, p: Iterable[float], k: Iterable[float], y: Iterable[float]*) → void

Model-specific implementation of fsigmay

Parameters

- **dsigmaydy** (*typing.Iterable[float]*) – partial derivative of standard deviation of measurements w.r.t. model outputs
- **t** (*float*) – current time
- **p** (*typing.Iterable[float]*) – parameter vector
- **k** (*typing.Iterable[float]*) – constant vector
- **y** (*typing.Iterable[float]*) – model output at timepoint t

Return type *None*

fdtotal_cldp(*dtotal_cldp: Iterable[float], x_rdata: Iterable[float], p: Iterable[float], k: Iterable[float], ip: int const*) → void

Compute dtotal_cl / dp

Parameters

- **dtotal_cldp** (*typing.Iterable[float]*) – dtotal_cl / dp
- **x_rdata** (*typing.Iterable[float]*) – State variables with conservation laws applied
- **p** (*typing.Iterable[float]*) – parameter vector
- **k** (*typing.Iterable[float]*) – constant vector
- **ip** (*int*) – Sensitivity index

Return type *None*

fdtotal_cldx_rdata(*dtotal_cldx_rdata: Iterable[float], x_rdata: Iterable[float], p: Iterable[float], k: Iterable[float], tcl: Iterable[float]*) → void

Compute dtotal_cl / dx_rdata

Parameters

- **dtotal_cldx_rdata** (*typing.Iterable[float]*) – dtotal_cl / dx_rdata
- **x_rdata** (*typing.Iterable[float]*) – State variables with conservation laws applied
- **p** (*typing.Iterable[float]*) – parameter vector
- **k** (*typing.Iterable[float]*) – constant vector

- **tcl** (`typing.Iterable[float]`) – Total abundances for conservation laws

Return type `None`

fdx_rdatadp(*dx_rdatadp: Iterable[float], x: Iterable[float], tcl: Iterable[float], p: Iterable[float], k: Iterable[float], ip: int const*) → void

Compute dx_rdata / dp

Parameters

- **dx_rdatadp** (`typing.Iterable[float]`) – dx_rdata / dp
- **p** (`typing.Iterable[float]`) – parameter vector
- **k** (`typing.Iterable[float]`) – constant vector
- **x** (`typing.Iterable[float]`) – State variables with conservation laws applied
- **tcl** (`typing.Iterable[float]`) – Total abundances for conservation laws
- **ip** (`int`) – Sensitivity index

Return type `None`

fdx_rdatadtcl(*dx_rdatadtcl: Iterable[float], x: Iterable[float], tcl: Iterable[float], p: Iterable[float], k: Iterable[float]*) → void

Compute dx_rdata / dtcl

Parameters

- **dx_rdatadtcl** (`typing.Iterable[float]`) – dx_rdata / dtcl
- **p** (`typing.Iterable[float]`) – parameter vector
- **k** (`typing.Iterable[float]`) – constant vector
- **x** (`typing.Iterable[float]`) – State variables with conservation laws applied
- **tcl** (`typing.Iterable[float]`) – Total abundances for conservation laws

Return type `None`

fdx_rdatadx_solver(*dx_rdatadx_solver: Iterable[float], x: Iterable[float], tcl: Iterable[float], p: Iterable[float], k: Iterable[float]*) → void

Compute dx_rdata / dx_solver

Parameters

- **dx_rdatadx_solver** (`typing.Iterable[float]`) – dx_rdata / dx_solver
- **p** (`typing.Iterable[float]`) – parameter vector
- **k** (`typing.Iterable[float]`) – constant vector
- **x** (`typing.Iterable[float]`) – State variables with conservation laws applied
- **tcl** (`typing.Iterable[float]`) – Total abundances for conservation laws

Return type `None`

getAddSigmaResiduals() → bool

Checks whether residuals should be added to account for parameter dependent sigma.

Return type `boolean`

Returns `sigma_res`

getAlwaysCheckFinite() → bool

Get setting of whether the result of every call to *Model::f** should be checked for finiteness.

Return type boolean

Returns that

getExpressionIds() → std::vector< std::string, std::allocator< std::string > >

Get IDs of the expression.

Return type *StringVector*

Returns Expression IDs

getExpressionNames() → std::vector< std::string, std::allocator< std::string > >

Get names of the expressions.

Return type *StringVector*

Returns Expression names

getFixedParameterById(par_id: str) → amici::realtype

Get value of fixed parameter with the specified ID.

Parameters **par_id** (str) – Parameter ID

Return type float

Returns Parameter value

getFixedParameterByName(par_name: str) → amici::realtype

Get value of fixed parameter with the specified name.

If multiple parameters have the same name, the first parameter with matching name is returned.

Parameters **par_name** (str) – Parameter name

Return type float

Returns Parameter value

getFixedParameterIds() → std::vector< std::string, std::allocator< std::string > >

Get IDs of the fixed model parameters.

Return type *StringVector*

Returns Fixed parameter IDs

getFixedParameterNames() → std::vector< std::string, std::allocator< std::string > >

Get names of the fixed model parameters.

Return type *StringVector*

Returns Fixed parameter names

getFixedParameters() → std::vector< amici::realtype, std::allocator< amici::realtype > > const &

Get values of fixed parameters.

Return type *DoubleVector*

Returns Vector of fixed parameters with same ordering as in *Model::getFixedParameterIds*

getInitialStateSensitivities() → std::vector< amici::realtype, std::allocator< amici::realtype > >

Get the initial states sensitivities.

Return type *DoubleVector*

Returns vector of initial state sensitivities

getInitialStates() → std::vector< amici::realtype, std::allocator< amici::realtype > >

Get the initial states.

Return type *DoubleVector*

Returns Initial state vector

getMinimumSigmaResiduals() → amici::realtype

Gets the specified estimated lower boundary for sigma_y.

Return type float

Returns lower boundary

getName() → std::string

Get the model name.

Return type str

Returns Model name

getObservableIds() → std::vector< std::string, std::allocator< std::string > >

Get IDs of the observables.

Return type *StringVector*

Returns Observable IDs

getObservableNames() → std::vector< std::string, std::allocator< std::string > >

Get names of the observables.

Return type *StringVector*

Returns Observable names

getObservableScaling(iy: int) → amici::ObservableScaling

Get scaling type for observable

Parameters **iy** (int) – observable index

Return type int

Returns scaling type

getParameterById(par_id: str) → amici::realtype

Get value of first model parameter with the specified ID.

Parameters **par_id** (str) – Parameter ID

Return type float

Returns Parameter value

getParameterByName(par_name: str) → amici::realtype

Get value of first model parameter with the specified name.

Parameters **par_name** (str) – Parameter name

Return type float

Returns Parameter value

getParameterIds() → std::vector< std::string, std::allocator< std::string > >

Get IDs of the model parameters.

Return type *StringVector*

Returns Parameter IDs

getParameterList() → std::vector< int, std::allocator< int > > const &

Get the list of parameters for which sensitivities are computed.

Return type *IntVector*

Returns List of parameter indices

getParameterNames() → std::vector< std::string, std::allocator< std::string > >

Get names of the model parameters.

Return type *StringVector*

Returns The parameter names

getParameterScale() → std::vector< amici::ParameterScaling, std::allocator< amici::ParameterScaling > > const &

Get parameter scale for each parameter.

Return type *ParameterScalingVector*

Returns Vector of parameter scales

getParameters() → std::vector< amici::realtype, std::allocator< amici::realtype > > const &

Get parameter vector.

Return type *DoubleVector*

Returns The user-set parameters (see also *Model::getUnscaledParameters*)

getReinitializationStateIdxs() → std::vector< int, std::allocator< int > > const &

Return indices of states to be reinitialized based on provided constants / fixed parameters

Return type *IntVector*

Returns Those indices.

getReinitializeFixedParameterInitialStates() → bool

Get whether initial states depending on fixedParameters are to be reinitialized after preequilibration and presimulation.

Return type boolean

Returns flag *true* / *false*

getStateIds() → std::vector< std::string, std::allocator< std::string > >

Get IDs of the model states.

Return type *StringVector*

Returns State IDs

getStateIdsSolver() → std::vector< std::string, std::allocator< std::string > >

Get IDs of the solver states.

Return type *StringVector*

Returns State IDs

getStateIsNonNegative() → std::vector< bool, std::allocator< bool > > const &

Get flags indicating whether states should be treated as non-negative.

Return type *BoolVector*

Returns Vector of flags

getStateNames() → std::vector< std::string, std::allocator< std::string > >

Get names of the model states.

Return type *StringVector*

Returns State names

getStateNamesSolver() → std::vector< std::string, std::allocator< std::string > >

Get names of the solver states.

Return type *StringVector*

Returns State names

getSteadyStateSensitivityMode() → amici::SteadyStateSensitivityMode

Gets the mode how sensitivities are computed in the steadystate simulation.

Return type *SteadyStateSensitivityMode*

Returns Mode

getTimepoint(it: int) → amici::realtype

Get simulation timepoint for time index *it*.

Parameters *it* (int) – Time index

Return type float

Returns Timepoint

getTimepoints() → std::vector< amici::realtype, std::allocator< amici::realtype > > const &

Get the timepoint vector.

Return type *DoubleVector*

Returns Timepoint vector

getUnscaledParameters() → std::vector< amici::realtype, std::allocator< amici::realtype > > const &

Get parameters with transformation according to parameter scale applied.

Return type *DoubleVector*

Returns Unscaled parameters

hasCustomInitialStateSensitivities() → bool

Return whether custom initial state sensitivities have been set.

Return type boolean

Returns *true* if has custom initial state sensitivities, otherwise *false*.

hasCustomInitialStates() → bool

Return whether custom initial states have been set.

Return type boolean

Returns *true* if has custom initial states, otherwise *false*

hasExpressionIds() → bool

Report whether the model has expression IDs set.

Return type boolean

Returns Boolean indicating whether expression ids were set. Also returns *true* if the number of corresponding variables is just zero.

hasExpressionNames() → bool

Report whether the model has expression names set.

Return type boolean

Returns Boolean indicating whether expression names were set. Also returns *true* if the number of corresponding variables is just zero.

hasFixedParameterIds() → bool

Report whether the model has fixed parameter IDs set.

Return type boolean

Returns Boolean indicating whether fixed parameter IDs were set. Also returns *true* if the number of corresponding variables is just zero.

hasFixedParameterNames() → bool

Report whether the model has fixed parameter names set.

Return type boolean

Returns Boolean indicating whether fixed parameter names were set. Also returns *true* if the number of corresponding variables is just zero.

hasObservableIds() → bool

Report whether the model has observable IDs set.

Return type boolean

Returns Boolean indicating whether observable ids were set. Also returns *true* if the number of corresponding variables is just zero.

hasObservableNames() → bool

Report whether the model has observable names set.

Return type boolean

Returns Boolean indicating whether observable names were set. Also returns *true* if the number of corresponding variables is just zero.

hasParameterIds() → bool

Report whether the model has parameter IDs set.

Return type boolean

Returns Boolean indicating whether parameter IDs were set. Also returns *true* if the number of corresponding variables is just zero.

hasParameterNames() → bool

Report whether the model has parameter names set.

Return type boolean

Returns Boolean indicating whether parameter names were set. Also returns *true* if the number of corresponding variables is just zero.

hasQuadraticLLH() → *bool*

Checks whether the defined noise model is gaussian, i.e., the nllh is quadratic

Return type *boolean*

Returns *boolean* flag

hasStateIds() → *bool*

Report whether the model has state IDs set.

Return type *boolean*

Returns *Boolean* indicating whether state IDs were set. Also returns *true* if the number of corresponding variables is just zero.

hasStateNames() → *bool*

Report whether the model has state names set.

Return type *boolean*

Returns *Boolean* indicating whether state names were set. Also returns *true* if the number of corresponding variables is just zero.

property idlist

Flag array for DAE equations

k() → *double const **

Get fixed parameters.

Return type *float*

Returns *Pointer* to constants array

property logger

Logger

nMaxEvent() → *int*

Get maximum number of events that may occur for each type.

Return type *int*

Returns *Maximum* number of events that may occur for each type

ncl() → *int*

Get number of conservation laws.

Return type *int*

Returns *Number* of conservation laws (i.e., difference between *nx_rdata* and *nx_solver*).

nk() → *int*

Get number of constants

Return type *int*

Returns *Length* of constant vector

np() → *int*

Get total number of model parameters.

Return type *int*

Returns *Length* of parameter vector

nplist() → int

Get number of parameters wrt to which sensitivities are computed.

Return type int

Returns Length of sensitivity index vector

nt() → int

Get number of timepoints.

Return type int

Returns Number of timepoints

nx_reinit() → int

Get number of solver states subject to reinitialization.

Return type int

Returns Model member *nx_solver_reinit*

property o2mode

Flag indicating whether for *amici::Solver::sensi_ == amici::SensitivityOrder::second* directional or full second order derivative will be computed

plist(pos: int) → int

Get entry in parameter list by index.

Parameters pos (int) – Index in sensitivity parameter list

Return type int

Returns Index in parameter list

property pythonGenerated

Flag indicating Matlab- or Python-based model generation

requireSensitivitiesForAllParameters() → void

Require computation of sensitivities for all parameters p [0..np[in natural order.

NOTE: Resets initial state sensitivities.

Return type None

setAddSigmaResiduals(sigma_res: bool) → void

Specifies whether residuals should be added to account for parameter dependent sigma.

If set to true, additional residuals of the form $\sqrt{\log(\sigma) + C}$ will be added. This enables least-squares optimization for variables with Gaussian noise assumption and parameter dependent standard deviation sigma. The constant C can be set via [setMinimumSigmaResiduals\(\)](#).

Parameters sigma_res (bool) – if true, additional residuals are added

Return type None

setAllStatesNonNegative() → void

Set flags indicating that all states should be treated as non-negative.

Return type None

setAlwaysCheckFinite(alwaysCheck: bool) → void

Set whether the result of every call to *Model::f** should be checked for finiteness.

Parameters alwaysCheck (bool) –

Return type `None`

setFixedParameterById(*par_id*: `str`, *value*: `float`) → void

Set value of first fixed parameter with the specified ID.

Parameters

- **par_id** (`str`) – Fixed parameter id
- **value** (`float`) – Fixed parameter value

Return type `None`

setFixedParameterByName(*par_name*: `str`, *value*: `float`) → void

Set value of first fixed parameter with the specified name.

Parameters

- **par_name** (`str`) – Fixed parameter ID
- **value** (`float`) – Fixed parameter value

Return type `None`

setFixedParameters(*k*: `DoubleVector`) → void

Set values for constants.

Parameters **k** (`amici.amici.DoubleVector`) – Vector of fixed parameters

Return type `None`

setFixedParametersByIdRegex(*par_id_regex*: `str`, *value*: `float`) → int

Set values of all fixed parameters with the ID matching the specified regex.

Parameters

- **par_id_regex** (`str`) – Fixed parameter name regex
- **value** (`float`) – Fixed parameter value

Return type `int`

Returns Number of fixed parameter IDs that matched the regex

setFixedParametersByNameRegex(*par_name_regex*: `str`, *value*: `float`) → int

Set value of all fixed parameters with name matching the specified regex.

Parameters

- **par_name_regex** (`str`) – Fixed parameter name regex
- **value** (`float`) – Fixed parameter value

Return type `int`

Returns Number of fixed parameter names that matched the regex

setInitialStateSensitivities(*sx0*: `DoubleVector`) → void

Set the initial state sensitivities.

Parameters **sx0** (`amici.amici.DoubleVector`) – vector of initial state sensitivities with chainrule applied. This could be a slice of `ReturnData::sx` or `ReturnData::sx0`

Return type `None`

setInitialStates(*x0*: `DoubleVector`) → void

Set the initial states.

Parameters **x0** (`amici.amici.DoubleVector`) – Initial state vector

Return type `None`

setMinimumSigmaResiduals(*min_sigma*: `float`) → void

Sets the estimated lower boundary for `sigma_y`. When `setAddSigmaResiduals()` is activated, this lower boundary must ensure that $\log(\text{sigma}) + \text{min_sigma} > 0$.

Parameters **min_sigma** (`float`) – lower boundary

Return type `None`

setMaxEvent(*nmaxevent*: `int`) → void

Set maximum number of events that may occur for each type.

Parameters **nmaxevent** (`int`) – Maximum number of events that may occur for each type

Return type `None`

setParameterById(*args) → void

Overload 1:

Set model parameters according to the parameter IDs and mapped values.

Parameters

- **p** (`StringDoubleMap`) – Map of parameters IDs and values
- **ignoreErrors** (`boolean`) – Ignore errors such as parameter IDs in p which are not model parameters

Overload 2:

Set value of first model parameter with the specified ID.

Parameters

- **par_id** (`str`) – Parameter ID
- **value** (`float`) – Parameter value

Return type `None`

setParameterByName(*args) → void

Overload 1:

Set value of first model parameter with the specified name.

Parameters

- **par_name** (`str`) – Parameter name
- **value** (`float`) – Parameter value

Overload 2:

Set model parameters according to the parameter name and mapped values.

Parameters

- **p** (`StringDoubleMap`) – Map of parameters names and values
- **ignoreErrors** (`boolean`) – Ignore errors such as parameter names in p which are not model parameters

Overload 3:

Set model parameters according to the parameter name and mapped values.

Parameters

- **p** (`StringDoubleMap`) – Map of parameters names and values
- **ignoreErrors** – Ignore errors such as parameter names in p which are not model parameters

Return type `None`

setParameterList (*plist*: `IntVector`) → void

Set the list of parameters for which sensitivities are to be computed.

NOTE: Resets initial state sensitivities.

Parameters **plist** (`amici.amici.IntVector`) – List of parameter indices

Return type `None`

setParameterScale (**args*) → void

Return type `None`

setParameters (*p*: `DoubleVector`) → void

Set the parameter vector.

Parameters **p** (`amici.amici.DoubleVector`) – Vector of parameters

Return type `None`

setParametersByIdRegex (*par_id_regex*: `str`, *value*: `float`) → `int`

Set all values of model parameters with IDs matching the specified regular expression.

Parameters

- **par_id_regex** (`str`) – Parameter ID regex
- **value** (`float`) – Parameter value

Return type `int`

Returns Number of parameter IDs that matched the regex

setParametersByNameRegex (*par_name_regex*: `str`, *value*: `float`) → `int`

Set all values of all model parameters with names matching the specified regex.

Parameters

- **par_name_regex** (*str*) – Parameter name regex
- **value** (*float*) – Parameter value

Return type *int*

Returns Number of fixed parameter names that matched the regex

setReinitializationStateIdxs(*idxs*: *IntVector*) → void

Set indices of states to be reinitialized based on provided constants / fixed parameters

Parameters **idxs** (*amici.amici.IntVector*) – Array of state indices

Return type *None*

setReinitializeFixedParameterInitialStates(*flag*: *bool*) → void

Set whether initial states depending on fixed parameters are to be reinitialized after preequilibration and presimulation.

Parameters **flag** (*bool*) – Fixed parameters reinitialized?

Return type *None*

setStateIsNonNegative(*stateIsNonNegative*: *BoolVector*) → void

Set flags indicating whether states should be treated as non-negative.

Parameters **stateIsNonNegative** (*amici.amici.BoolVector*) – Vector of flags

Return type *None*

setSteadyStateSensitivityMode(*mode*: *SteadyStateSensitivityMode*) → void

Set the mode how sensitivities are computed in the steadystate simulation.

Parameters **mode** (*amici.amici.SteadyStateSensitivityMode*) – Steadystate sensitivity mode

Return type *None*

setT0(*t0*: *float*) → void

Set simulation start time.

Parameters **t0** (*float*) – Simulation start time

Return type *None*

setTimepoints(*ts*: *DoubleVector*) → void

Set the timepoint vector.

Parameters **ts** (*amici.amici.DoubleVector*) – New timepoint vector

Return type *None*

setUnscaledInitialStateSensitivities(*sx0*: *DoubleVector*) → void

Set the initial state sensitivities.

Parameters **sx0** (*amici.amici.DoubleVector*) – Vector of initial state sensitivities without chainrule applied. This could be the readin from a *model.sx0data* saved to HDF5.

Return type *None*

t0() → double

Get simulation start time.

Return type *float*

Returns Simulation start time

```
class amici.amici.ModelDimensions(*args)
    Container for model dimensions.

    Holds number of states, observables, etc.

property lbw
    Lower bandwidth of the Jacobian

property nJ
    Dimension of the augmented objective function for 2nd order ASA

property ndJydy
    Number of nonzero elements in the  $y$  derivative of  $dJy$  (dimension  $ny_{true}$ )

property ndtotal_cldx_rdata
    Number of nonzero elements in the  $x_rdata$  derivative of  $total_{cl}$ 

property ndwdp
    Number of nonzero elements in the  $p$  derivative of the repeating elements

property ndwdw
    Number of nonzero elements in the  $w$  derivative of the repeating elements

property ndwdx
    Number of nonzero elements in the  $x$  derivative of the repeating elements

property ndxdotdw
    Number of nonzero elements in the  $w$  derivative of  $xdot$ 

property ndxrdatadtcl
    Number of nonzero elements in the  $tcl$  derivative of  $x_rdata$ 

property ndxrdatadxsolver
    Number of nonzero elements in the  $x$  derivative of  $x_rdata$ 

property ne
    Number of events

property nk
    Number of constants

property nnz
    Number of nonzero entries in Jacobian

property np
    Number of parameters

property nw
    Number of common expressions

property nx_rdata
    Number of states

property nx_solver
    Number of states with conservation laws applied

property nx_solver_reinit
    Number of solver states subject to reinitialization
```


property nxtrue_rdata

Number of states in the unaugmented system

property nxtrue_solver

Number of states in the unaugmented system with conservation laws applied

property ny

Number of observables

property nytrue

Number of observables in the unaugmented system

property nz

Number of event outputs

property nztrue

Number of event outputs in the unaugmented system

property ubw

Upper bandwidth of the Jacobian

class amici.amici.ModelPtr(*args)

Swig-Generated class that implements smart pointers to Model as objects.

property idlist

Flag array for DAE equations

property lbw

Lower bandwidth of the Jacobian

property logger

Logger

property nJ

Dimension of the augmented objective function for 2nd order ASA

property ndJydy

Number of nonzero elements in the y derivative of dJy (dimension $nytrue$)

property ndtotal_cldx_rdata

Number of nonzero elements in the x_rdata derivative of $total_{cl}$

property ndwdp

Number of nonzero elements in the p derivative of the repeating elements

property ndwdw

Number of nonzero elements in the w derivative of the repeating elements

property ndwdx

Number of nonzero elements in the x derivative of the repeating elements

property ndxdotdw

Number of nonzero elements in the w derivative of $xdot$

property ndxrdatadtcl

Number of nonzero elements in the tcl derivative of x_rdata

property ndxrdatadxsolver

Number of nonzero elements in the x derivative of x_r data

property ne

Number of events

property nnz

Number of nonzero entries in Jacobian

property nw

Number of common expressions

property nx_rdata

Number of states

property nx_solver

Number of states with conservation laws applied

property nx_solver_reinit

Number of solver states subject to reinitialization

property nxtrue_rdata

Number of states in the unaugmented system

property nxtrue_solver

Number of states in the unaugmented system with conservation laws applied

property ny

Number of observables

property nytrue

Number of observables in the unaugmented system

property nz

Number of event outputs

property nztrue

Number of event outputs in the unaugmented system

property o2mode

Flag indicating whether for `amici::Solver::sensi_ == amici::SensitivityOrder::second` directional or full second order derivative will be computed

property pythonGenerated

Flag indicating Matlab- or Python-based model generation

property ubw

Upper bandwidth of the Jacobian

```
class amici.amici.NewtonDampingFactorMode(value)
```

An enumeration.

```
off = 0
```

```
on = 1
```

```
class amici.amici.NonlinearSolverIteration(value)
```

An enumeration.

```

    fixedpoint = 1
    functional = 1
    newton = 2
amici.amici.NonlinearSolverIteration_fixedpoint = 1
    deprecated
class amici.amici.ObservableScaling(value)
    An enumeration.
    lin = 0
    log = 1
    log10 = 2
class amici.amici.ParameterScaling(value)
    An enumeration.
    ln = 1
    log10 = 2
    none = 0
class amici.amici.ParameterScalingVector(*args)
class amici.amici.RDataReporting(value)
    An enumeration.
    full = 0
    likelihood = 2
    residuals = 1
class amici.amici.ReturnData(*args)
    Stores all data to be returned by amici.amici.runAmiciSimulation().
    NOTE: multi-dimensional arrays are stored in row-major order (C-style)
    property FIM
        fisher information matrix (shape nplist x nplist, row-major)
    property J
        Jacobian of differential equation right hand side (shape nx x nx, row-major)
    property chi2
         $\chi^2$  value
    property cpu_time
        computation time of forward solve [ms]

```

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

property `cpu_timeB`

computation time of backward solve [ms]

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

property `cpu_time_total`

total CPU time from entering `runAmiciSimulation` until exiting [ms]

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

property `id`

Arbitrary (not necessarily unique) identifier.

property `llh`

log-likelihood value

property `messages`

log messages

property `newton_maxsteps`

maximal number of newton iterations for steady state calculation

property `nmaxevent`

maximal number of occurring events (for every event type)

property `nplist`

number of parameter for which sensitivities were requested

property `nt`

number of considered timepoints

property `numerrtestfails`

number of error test failures forward problem (shape *nt*)

property `numerrtestfailsB`

number of error test failures backward problem (shape *nt*)

property `numnonlinsolvconvfails`

number of linear solver convergence failures forward problem (shape *nt*)

property `numnonlinsolvconvfailsB`

number of linear solver convergence failures backward problem (shape *nt*)

property `numrhsevals`

number of right hand side evaluations forward problem (shape *nt*)

property `numrhsevalsB`

number of right hand side evaluations backward problem (shape *nt*)

property `numsteps`

number of integration steps forward problem (shape *nt*)

property numstepsB

number of integration steps backward problem (shape *nt*)

property nx

number of states (alias *nx_rdata*, kept for backward compatibility)

property nxtrue

number of states in the unaugmented system (alias *nxtrue_rdata*, kept for backward compatibility)

property o2mode

flag indicating whether second-order sensitivities were requested

property order

employed order forward problem (shape *nt*)

property posteq_cpu_time

computation time of the steady state solver [ms] (postequilibration)

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

property posteq_cpu_timeB

computation time of the steady state solver of the backward problem [ms] (postequilibration)

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

property posteq_numsteps

number of Newton steps for steady state problem (preequilibration) [newton, simulation, newton] (shape 3) (postequilibration)

property posteq_numstepsB

number of simulation steps for adjoint steady state problem (postequilibration) [== 0 if analytical solution worked, > 0 otherwise]

property posteq_status

flags indicating success of steady state solver (postequilibration)

property posteq_t

time when steadystate was reached via simulation (postequilibration)

property posteq_wrms

weighted root-mean-square of the rhs when steadystate was reached (postequilibration)

property preeq_cpu_time

computation time of the steady state solver [ms] (preequilibration)

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

property preeq_cpu_timeB

computation time of the steady state solver of the backward problem [ms] (preequilibration)

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

property preeq_numsteps

number of Newton steps for steady state problem (preequilibration) [newton, simulation, newton] (length = 3)

property preeq_numstepsB

number of simulation steps for adjoint steady state problem (preequilibration) [== 0 if analytical solution worked, > 0 otherwise]

property preeq_status

flags indicating success of steady state solver (preequilibration)

property preeq_t

time when steadystate was reached via simulation (preequilibration)

property preeq_wrms

weighted root-mean-square of the rhs when steadystate was reached (preequilibration)

property pscale

scaling of parameterization

property rdata_reporting

reporting mode

property res

observable (shape $nt \times ny$, row-major)

property rz

event trigger output (shape $n_{maxevent} \times nz$, row-major)

property s2llh

second-order parameter derivative of log-likelihood (shape $nJ-1 \times nplist$, row-major)

property s2rz

second-order parameter derivative of event trigger output (shape $n_{maxevent} \times nz_{true} \times nplist \times nplist$, row-major)

property sensi

sensitivity order

property sensi_meth

sensitivity method

property sigma_res

boolean indicating whether residuals for standard deviations have been added

property sigmay

observable standard deviation (shape $nt \times ny$, row-major)

property sigmaz

event output sigma standard deviation (shape $n_{maxevent} \times nz$, row-major)

property slh

parameter derivative of log-likelihood (shape $nplist$)

property sres

parameter derivative of residual (shape $nt*ny \times nplist$, row-major)

property srz

parameter derivative of event trigger output (shape $nmaxevent \times nplist \times nz$, row-major)

property ssigma

parameter derivative of observable standard deviation (shape $nt \times nplist \times ny$, row-major)

property ssigmaz

parameter derivative of event output standard deviation (shape $nmaxevent \times nplist \times nz$, row-major)

property status

Simulation status code.

One of:

- AMICI_SUCCESS, indicating successful simulation
- AMICI_MAX_TIME_EXCEEDED, indicating that the simulation did not finish within the allowed time (see Solver.{set,get}MaxTime)
- AMICI_ERROR, indicating that some error occurred during simulation (a more detailed error message will have been printed).
- AMICI_NOT_RUN, if no simulation was started

property sx

parameter derivative of state (shape $nt \times nplist \times nx$, row-major)

property sx0

initial sensitivities (shape $nplist \times nx$, row-major)

property sx_ss

preequilibration sensitivities found by Newton solver (shape $nplist \times nx$, row-major)

property sy

parameter derivative of observable (shape $nt \times nplist \times ny$, row-major)

property sz

parameter derivative of event output (shape $nmaxevent \times nplist \times nz$, row-major)

property ts

timepoints (shape nt)

property w

w data from the model (recurring terms in $xdot$, for imported SBML models from python, this contains the flux vector) (shape $nt \times nw$, row major)

property x

state (shape $nt \times nx$, row-major)

property x0

initial state (shape nx)

property x_ss

preequilibration steady state found by Newton solver (shape nx)

property `xdot`time derivative (shape *nx*)**property `y`**observable (shape *nt* x *ny*, row-major)**property `z`**event output (shape *nmaxevent* x *nz*, row-major)**class** `amici.amici.ReturnDataPtr(*args)`

Swig-Generated class that implements smart pointers to ReturnData as objects.

property `FIM`fisher information matrix (shape *nplist* x *nplist*, row-major)**property `J`**Jacobian of differential equation right hand side (shape *nx* x *nx*, row-major)**property `chi2`** χ^2 value**property `cpu_time`**

computation time of forward solve [ms]

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.**property `cpu_timeB`**

computation time of backward solve [ms]

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.**property `cpu_time_total`**total CPU time from entering `runAmiciSimulation` until exiting [ms]**Warning:** This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.**property `id`**

Arbitrary (not necessarily unique) identifier.

property `lbw`

Lower bandwidth of the Jacobian

property `llh`

log-likelihood value

property `messages`

log messages

property nj

Dimension of the augmented objective function for 2nd order ASA

property ndJydy

Number of nonzero elements in the y derivative of dJy (dimension $nytrue$)

property ndtotal_cldx_rdata

Number of nonzero elements in the x_rdata derivative of $total_{cl}$

property ndwdp

Number of nonzero elements in the p derivative of the repeating elements

property ndwdw

Number of nonzero elements in the w derivative of the repeating elements

property ndwdx

Number of nonzero elements in the x derivative of the repeating elements

property ndxdotdw

Number of nonzero elements in the w derivative of $xdot$

property ndxrdatadtcl

Number of nonzero elements in the tcl derivative of x_rdata

property ndxrdatadxsolver

Number of nonzero elements in the x derivative of x_rdata

property ne

Number of events

property newton_maxsteps

maximal number of newton iterations for steady state calculation

property nk

Number of constants

property nmaxevent

maximal number of occurring events (for every event type)

property nnz

Number of nonzero entries in Jacobian

property np

Number of parameters

property nplist

number of parameter for which sensitivities were requested

property nt

number of considered timepoints

property numerrtestfails

number of error test failures forward problem (shape nt)

property numerrtestfailsB

number of error test failures backward problem (shape nt)

property numnonlinsolvconvfails

number of linear solver convergence failures forward problem (shape *nt*)

property numnonlinsolvconvfailsB

number of linear solver convergence failures backward problem (shape *nt*)

property numrhsevals

number of right hand side evaluations forward problem (shape *nt*)

property numrhsevalsB

number of right hand side evaluations backward problem (shape *nt*)

property numsteps

number of integration steps forward problem (shape *nt*)

property numstepsB

number of integration steps backward problem (shape *nt*)

property nw

Number of common expressions

property nx

number of states (alias *nx_rdata*, kept for backward compatibility)

property nx_rdata

Number of states

property nx_solver

Number of states with conservation laws applied

property nx_solver_reinit

Number of solver states subject to reinitialization

property nxtrue

number of states in the unaugmented system (alias *nxtrue_rdata*, kept for backward compatibility)

property nxtrue_rdata

Number of states in the unaugmented system

property nxtrue_solver

Number of states in the unaugmented system with conservation laws applied

property ny

Number of observables

property nytrue

Number of observables in the unaugmented system

property nz

Number of event outputs

property nztrue

Number of event outputs in the unaugmented system

property o2mode

flag indicating whether second-order sensitivities were requested

property order

employed order forward problem (shape *nt*)

property posteq_cpu_time

computation time of the steady state solver [ms] (postequilibration)

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

property posteq_cpu_timeB

computation time of the steady state solver of the backward problem [ms] (postequilibration)

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

property posteq_numsteps

number of Newton steps for steady state problem (preequilibration) [newton, simulation, newton] (shape 3) (postequilibration)

property posteq_numstepsB

number of simulation steps for adjoint steady state problem (postequilibration) [== 0 if analytical solution worked, > 0 otherwise]

property posteq_status

flags indicating success of steady state solver (postequilibration)

property posteq_t

time when steadystate was reached via simulation (postequilibration)

property posteq_wrms

weighted root-mean-square of the rhs when steadystate was reached (postequilibration)

property preeq_cpu_time

computation time of the steady state solver [ms] (preequilibration)

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

property preeq_cpu_timeB

computation time of the steady state solver of the backward problem [ms] (preequilibration)

Warning: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

property preeq_numsteps

number of Newton steps for steady state problem (preequilibration) [newton, simulation, newton] (length = 3)

property preeq_numstepsB

number of simulation steps for adjoint steady state problem (preequilibration) [== 0 if analytical solution worked, > 0 otherwise]

property preeq_status

flags indicating success of steady state solver (preequilibration)

property preeq_t

time when steadystate was reached via simulation (preequilibration)

property preeq_wrms

weighted root-mean-square of the rhs when steadystate was reached (preequilibration)

property pscale

scaling of parameterization

property rdata_reporting

reporting mode

property res

observable (shape $nt*ny$, row-major)

property rz

event trigger output (shape $nmaxevent \times nz$, row-major)

property s2llh

second-order parameter derivative of log-likelihood (shape $nJ-1 \times nplist$, row-major)

property s2rz

second-order parameter derivative of event trigger output (shape $nmaxevent \times nztrue \times nplist \times nplist$, row-major)

property sensi

sensitivity order

property sensi_meth

sensitivity method

property sigma_res

boolean indicating whether residuals for standard deviations have been added

property sigmay

observable standard deviation (shape $nt \times ny$, row-major)

property sigmaz

event output sigma standard deviation (shape $nmaxevent \times nz$, row-major)

property sllh

parameter derivative of log-likelihood (shape $nplist$)

property sres

parameter derivative of residual (shape $nt*ny \times nplist$, row-major)

property srz

parameter derivative of event trigger output (shape $nmaxevent \times nplist \times nz$, row-major)

property ssigmay

parameter derivative of observable standard deviation (shape $nt \times nplist \times ny$, row-major)

property ssigmaz

parameter derivative of event output standard deviation (shape $n_{\text{maxevent}} \times n_{\text{plist}} \times n_z$, row-major)

property status

Simulation status code.

One of:

- `AMICI_SUCCESS`, indicating successful simulation
- `AMICI_MAX_TIME_EXCEEDED`, indicating that the simulation did not finish within the allowed time (see `Solver.{set,get}MaxTime`)
- `AMICI_ERROR`, indicating that some error occurred during simulation (a more detailed error message will have been printed).
- `AMICI_NOT_RUN`, if no simulation was started

property sx

parameter derivative of state (shape $n_t \times n_{\text{plist}} \times n_x$, row-major)

property sx0

initial sensitivities (shape $n_{\text{plist}} \times n_x$, row-major)

property sx_ss

preequilibration sensitivities found by Newton solver (shape $n_{\text{plist}} \times n_x$, row-major)

property sy

parameter derivative of observable (shape $n_t \times n_{\text{plist}} \times n_y$, row-major)

property sz

parameter derivative of event output (shape $n_{\text{maxevent}} \times n_{\text{plist}} \times n_z$, row-major)

property ts

timepoints (shape n_t)

property ubw

Upper bandwidth of the Jacobian

property w

w data from the model (recurring terms in `xdot`, for imported SBML models from python, this contains the flux vector) (shape $n_t \times n_w$, row major)

property x

state (shape $n_t \times n_x$, row-major)

property x0

initial state (shape n_x)

property x_ss

preequilibration steady state found by Newton solver (shape n_x)

property xdot

time derivative (shape n_x)

property y

observable (shape $n_t \times n_y$, row-major)

property z

event output (shape $n_{\text{maxevent}} \times n_z$, row-major)

```
class amici.amici.SecondOrderMode(value)
    An enumeration.
    directional = 2
    full = 1
    none = 0

class amici.amici.SensitivityMethod(value)
    An enumeration.
    adjoint = 2
    forward = 1
    none = 0

amici.amici.SensitivityMethod_adjoint = 2
    Adjoint sensitivity analysis.
amici.amici.SensitivityMethod_forward = 1
    Forward sensitivity analysis.
amici.amici.SensitivityMethod_none = 0
    Don't compute sensitivities.

class amici.amici.SensitivityOrder(value)
    An enumeration.
    first = 1
    none = 0
    second = 2

amici.amici.SensitivityOrder_first = 1
    First-order sensitivities.
amici.amici.SensitivityOrder_none = 0
    Don't compute sensitivities.
amici.amici.SensitivityOrder_second = 2
    Second-order sensitivities.

class amici.amici.SimulationParameters(*args)
    Container for various simulation parameters.
    property fixedParameters
        Model constants
        Vector of size Model::nk() or empty
    property fixedParametersPreequilibration
        Model constants for pre-equilibration
        Vector of size Model::nk() or empty.
```

property fixedParametersPresimulation

Model constants for pre-simulation

Vector of size `Model::nk()` or empty.

property parameters

Model parameters

Vector of size `Model::np()` or empty with parameter scaled according to `SimulationParameter::pscale`.

property plist

Parameter indices w.r.t. which to compute sensitivities

property pscale

Parameter scales

Vector of parameter scale of size `Model::np()`, indicating how/if each parameter is to be scaled.

property reinitialization_state_idxes_presim

Indices of states to be reinitialized based on provided presimulation constants / fixed parameters.

property reinitialization_state_idxes_sim

Indices of states to be reinitialized based on provided constants / fixed parameters.

reinitializeAllFixedParameterDependentInitialStates(*nx_rdata*: *int*) → void

Set reinitialization of all states based on model constants for all simulation phases.

Convenience function to populate *reinitialization_state_idxes_presim* and *reinitialization_state_idxes_sim*

Parameters *nx_rdata* (*int*) – Number of states (`Model::nx_rdata`)

Return type *None*

reinitializeAllFixedParameterDependentInitialStatesForPresimulation(*nx_rdata*: *int*) → void

Set reinitialization of all states based on model constants for presimulation (only meaningful if preequilibration is performed).

Convenience function to populate *reinitialization_state_idxes_presim* and *reinitialization_state_idxes_sim*

Parameters *nx_rdata* (*int*) – Number of states (`Model::nx_rdata`)

Return type *None*

reinitializeAllFixedParameterDependentInitialStatesForSimulation(*nx_rdata*: *int*) → void

Set reinitialization of all states based on model constants for the ‘main’ simulation (only meaningful if presimulation or preequilibration is performed).

Convenience function to populate *reinitialization_state_idxes_presim* and *reinitialization_state_idxes_sim*

Parameters *nx_rdata* (*int*) – Number of states (`Model::nx_rdata`)

Return type *None*

property reinitializeFixedParameterInitialStates

Flag indicating whether reinitialization of states depending on fixed parameters is activated

property sx0

Initial state sensitivities

Dimensions: `Model::nx() * Model::nplist()`, `Model::nx() * ExpData::plist.size()`, if `ExpData::plist` is not empty, or empty

property t_presim

Duration of pre-simulation.

If this is > 0, presimulation will be performed from (model->t0 - t_presim) to model->t0 using the fixed-Parameters in fixedParametersPresimulation

property ts_

Timepoints for which model state/outputs/... are requested

Vector of timepoints.

property tstart_

starting time

property x0

Initial state

Vector of size Model::nx() or empty

class amici.amici.SimulationState

implements an exchange format to store and transfer the state of a simulation at a specific timepoint.

property dx

state variables

property state

state of the model that was used for simulation

property sx

state variable sensitivity

property t

timepoint

property x

state variables

class amici.amici.Solver(*args, **kwargs)

The Solver class provides a generic interface to CVODES and IDAS solvers, individual realizations are realized in the CNodeSolver and the IDASolver class. All transient private/protected members (CVODES/IDAS memory, interface variables and status flags) are specified as mutable and not included in serialization or equality checks. No solver setting parameter should be marked mutable.

NOTE: Any changes in data members here must be propagated to copy ctor, equality operator, serialization functions in serialization.h, and amici::hdf5::(read/write)SolverSettings(From/To)HDF5 in hdf5.cpp.

clone() → amici::Solver *

Clone this instance

Return type *Solver*

Returns The clone

computingASA() → bool

check if ASA is being computed

Return type boolean

Returns flag

computingFSA() → bool

check if FSA is being computed

Return type boolean

Returns flag

getAbsoluteTolerance() → double

Get the absolute tolerances for the forward problem

Same tolerance is used for the backward problem if not specified differently via setAbsoluteToleranceASA.

Return type float

Returns absolute tolerances

getAbsoluteToleranceB() → double

Returns the absolute tolerances for the backward problem for adjoint sensitivity analysis

Return type float

Returns absolute tolerances

getAbsoluteToleranceFSA() → double

Returns the absolute tolerances for the forward sensitivity problem

Return type float

Returns absolute tolerances

getAbsoluteToleranceQuadratures() → double

returns the absolute tolerance for the quadrature problem

Return type float

Returns absolute tolerance

getAbsoluteToleranceSteadyState() → double

returns the absolute tolerance for the steady state problem

Return type float

Returns absolute tolerance

getAbsoluteToleranceSteadyStateSensi() → double

returns the absolute tolerance for the sensitivities of the steady state problem

Return type float

Returns absolute tolerance

getCpuTime() → amici::realtype

Reads out the CPU time needed for forward solve

Return type float

Returns cpu_time

getCpuTimeB() → amici::realtype

Reads out the CPU time needed for backward solve

Return type float

Returns cpu_timeB

getInternalSensitivityMethod() → amici::InternalSensitivityMethod

returns the internal sensitivity method

Return type *InternalSensitivityMethod*

Returns internal sensitivity method

getInterpolationType() → amici::InterpolationType

Return type *InterpolationType*

Returns

getLastOrder() → std::vector< int,std::allocator< int > > const &

Accessor order

Return type *IntVector*

Returns order

getLinearMultistepMethod() → amici::LinearMultistepMethod

returns the linear system multistep method

Return type *LinearMultistepMethod*

Returns linear system multistep method

getLinearSolver() → amici::LinearSolver

Return type *LinearSolver*

Returns

getMaxSteps() → long

returns the maximum number of solver steps for the forward problem

Return type *int*

Returns maximum number of solver steps

getMaxStepsBackwardProblem() → long

returns the maximum number of solver steps for the backward problem

Return type *int*

Returns maximum number of solver steps

getMaxTime() → double

Returns the maximum time allowed for integration

Return type *float*

Returns Time in seconds

getNewtonDampingFactorLowerBound() → double

Get a lower bound of the damping factor used in the Newton solver

Return type *float*

Returns

getNewtonDampingFactorMode() → amici::NewtonDampingFactorMode

Get a state of the damping factor used in the Newton solver

Return type *NewtonDampingFactorMode*

Returns**getNewtonMaxSteps()** → int

Get maximum number of allowed Newton steps for steady state computation

Return type int**Returns****getNewtonStepSteadyStateCheck()** → bool

Returns how convergence checks for steadystate computation are performed. If activated, convergence checks are limited to every 25 steps in the simulation solver to limit performance impact.

Return type boolean**Returns** boolean flag indicating newton step (true) or the right hand side (false)**getNonlinearSolverIteration()** → amici::NonlinearSolverIteration

returns the nonlinear system solution method

Return type *NonlinearSolverIteration***Returns****getNumErrTestFails()** → std::vector< int,std::allocator< int > > const &

Accessor netf

Return type *IntVector***Returns** netf**getNumErrTestFailsB()** → std::vector< int,std::allocator< int > > const &

Accessor netfB

Return type *IntVector***Returns** netfB**getNumNonlinSolvConvFails()** → std::vector< int,std::allocator< int > > const &

Accessor nnlscf

Return type *IntVector***Returns** nnlscf**getNumNonlinSolvConvFailsB()** → std::vector< int,std::allocator< int > > const &

Accessor nnlscfB

Return type *IntVector***Returns** nnlscfB**getNumRhsEvals()** → std::vector< int,std::allocator< int > > const &

Accessor nrhs

Return type *IntVector***Returns** nrhs**getNumRhsEvalsB()** → std::vector< int,std::allocator< int > > const &

Accessor nrhsB

Return type *IntVector***Returns** nrhsB

getNumSteps() → std::vector< int,std::allocator< int > > const &

Accessor ns

Return type *IntVector*

Returns ns

getNumStepsB() → std::vector< int,std::allocator< int > > const &

Accessor nsB

Return type *IntVector*

Returns nsB

getRelativeTolerance() → double

Get the relative tolerances for the forward problem

Same tolerance is used for the backward problem if not specified differently via setRelativeToleranceASA.

Return type float

Returns relative tolerances

getRelativeToleranceB() → double

Returns the relative tolerances for the adjoint sensitivity problem

Return type float

Returns relative tolerances

getRelativeToleranceFSA() → double

Returns the relative tolerances for the forward sensitivity problem

Return type float

Returns relative tolerances

getRelativeToleranceQuadratures() → double

Returns the relative tolerance for the quadrature problem

Return type float

Returns relative tolerance

getRelativeToleranceSteadyState() → double

returns the relative tolerance for the steady state problem

Return type float

Returns relative tolerance

getRelativeToleranceSteadyStateSensi() → double

returns the relative tolerance for the sensitivities of the steady state problem

Return type float

Returns relative tolerance

getReturnDataReportingMode() → amici::RDataReporting

returns the ReturnData reporting mode

Return type *RDataReporting*

Returns ReturnData reporting mode

getSensiSteadyStateCheck() → bool

Returns how convergence checks for steadystate computation are performed.

Return type boolean

Returns boolean flag indicating state and sensitivity equations (true) or only state variables (false).

getSensitivityMethod() → amici::SensitivityMethod

Return current sensitivity method

Return type *SensitivityMethod*

Returns method enum

getSensitivityMethodPreequilibration() → amici::SensitivityMethod

Return current sensitivity method during preequilibration

Return type *SensitivityMethod*

Returns method enum

getSensitivityOrder() → amici::SensitivityOrder

Get sensitivity order

Return type *SensitivityOrder*

Returns sensitivity order

getStabilityLimitFlag() → bool

returns stability limit detection mode

Return type boolean

Returns stldet can be false (deactivated) or true (activated)

getStateOrdering() → int

Gets KLU / SuperLUMT state ordering mode

Return type int

Returns State-ordering as integer according to SUNLinSolKLU::StateOrdering or SUNLinSol-SuperLUMT::StateOrdering (which differ).

getSteadyStateSensiToleranceFactor() → double

returns the steady state sensitivity simulation tolerance factor.

Steady state sensitivity simulation tolerances are the product of the sensitivity simulation tolerances and this factor, unless manually set with *set(Absolute/Relative)ToleranceSteadyStateSensi()*.

Return type float

Returns steady state simulation tolerance factor

getSteadyStateToleranceFactor() → double

returns the steady state simulation tolerance factor.

Steady state simulation tolerances are the product of the simulation tolerances and this factor, unless manually set with *set(Absolute/Relative)ToleranceSteadyState()*.

Return type float

Returns steady state simulation tolerance factor

gett() → amici::realtype
current solver timepoint

Return type float

Returns t

property logger

nplist() → int
number of parameters with which the solver was initialized

Return type int

Returns sx.getLength()

nquad() → int
number of quadratures with which the solver was initialized

Return type int

Returns xQB.getLength()

nx() → int
number of states with which the solver was initialized

Return type int

Returns x.getLength()

setAbsoluteTolerance(*atol: float*) → void
Sets the absolute tolerances for the forward problem
Same tolerance is used for the backward problem if not specified differently via setAbsoluteToleranceASA.

Parameters **atol** (float) – absolute tolerance (non-negative number)

Return type None

setAbsoluteToleranceB(*atol: float*) → void
Sets the absolute tolerances for the backward problem for adjoint sensitivity analysis

Parameters **atol** (float) – absolute tolerance (non-negative number)

Return type None

setAbsoluteToleranceFSA(*atol: float*) → void
Sets the absolute tolerances for the forward sensitivity problem

Parameters **atol** (float) – absolute tolerance (non-negative number)

Return type None

setAbsoluteToleranceQuadratures(*atol: float*) → void
sets the absolute tolerance for the quadrature problem

Parameters **atol** (float) – absolute tolerance (non-negative number)

Return type None

setAbsoluteToleranceSteadyState(*atol: float*) → void
sets the absolute tolerance for the steady state problem

Parameters **atol** (float) – absolute tolerance (non-negative number)

Return type None

setAbsoluteToleranceSteadyStateSensi(*atol*: *float*) → void

sets the absolute tolerance for the sensitivities of the steady state problem

Parameters *atol* (*float*) – absolute tolerance (non-negative number)

Return type *None*

setInternalSensitivityMethod(*ism*: *InternalSensitivityMethod*) → void

sets the internal sensitivity method

Parameters *ism* (*amici.amici.InternalSensitivityMethod*) – internal sensitivity method

Return type *None*

setInterpolationType(*interpType*: *InterpolationType*) → void

sets the interpolation of the forward solution that is used for the backwards problem

Parameters *interpType* (*amici.amici.InterpolationType*) – interpolation type

Return type *None*

setLinearMultistepMethod(*lmm*: *LinearMultistepMethod*) → void

sets the linear system multistep method

Parameters *lmm* (*amici.amici.LinearMultistepMethod*) – linear system multistep method

Return type *None*

setLinearSolver(*linsol*: *LinearSolver*) → void

Parameters *linsol* (*amici.amici.LinearSolver*) –

Return type *None*

setMaxSteps(*maxsteps*: *int*) → void

sets the maximum number of solver steps for the forward problem

Parameters *maxsteps* (*int*) – maximum number of solver steps (positive number)

Return type *None*

setMaxStepsBackwardProblem(*maxsteps*: *int*) → void

sets the maximum number of solver steps for the backward problem

Parameters *maxsteps* (*int*) – maximum number of solver steps (non-negative number)

Notes: default behaviour (100 times the value for the forward problem) can be restored by passing *maxsteps*=0

Return type *None*

setMaxTime(*maxtime*: *float*) → void

Set the maximum CPU time allowed for integration

Parameters *maxtime* (*float*) – Time in seconds. Zero means infinite time.

Return type *None*

setNewtonDampingFactorLowerBound(*dampingFactorLowerBound*: *float*) → void

Set a lower bound of the damping factor in the Newton solver

Parameters *dampingFactorLowerBound* (*float*) –

Return type *None*

setNewtonDampingFactorMode(*dampingFactorMode*: [NewtonDampingFactorMode](#)) → void

Turn on/off a damping factor in the Newton method

Parameters **dampingFactorMode** ([amici.amici.NewtonDampingFactorMode](#)) –

Return type [None](#)

setNewtonMaxSteps(*newton_maxsteps*: [int](#)) → void

Set maximum number of allowed Newton steps for steady state computation

Parameters **newton_maxsteps** ([int](#)) –

Return type [None](#)

setNewtonStepSteadyStateCheck(*flag*: [bool](#)) → void

Sets how convergence checks for steadystate computation are performed.

Parameters **flag** ([bool](#)) – boolean flag to pick newton step (true) or the right hand side (false, default)

Return type [None](#)

setNonlinearSolverIteration(*iter*: [NonlinearSolverIteration](#)) → void

sets the nonlinear system solution method

Parameters **iter** ([amici.amici.NonlinearSolverIteration](#)) – nonlinear system solution method

Return type [None](#)

setRelativeTolerance(*rtol*: [float](#)) → void

Sets the relative tolerances for the forward problem

Same tolerance is used for the backward problem if not specified differently via setRelativeToleranceASA.

Parameters **rtol** ([float](#)) – relative tolerance (non-negative number)

Return type [None](#)

setRelativeToleranceB(*rtol*: [float](#)) → void

Sets the relative tolerances for the adjoint sensitivity problem

Parameters **rtol** ([float](#)) – relative tolerance (non-negative number)

Return type [None](#)

setRelativeToleranceFSA(*rtol*: [float](#)) → void

Sets the relative tolerances for the forward sensitivity problem

Parameters **rtol** ([float](#)) – relative tolerance (non-negative number)

Return type [None](#)

setRelativeToleranceQuadratures(*rtol*: [float](#)) → void

sets the relative tolerance for the quadrature problem

Parameters **rtol** ([float](#)) – relative tolerance (non-negative number)

Return type [None](#)

setRelativeToleranceSteadyState(*rtol*: [float](#)) → void

sets the relative tolerance for the steady state problem

Parameters **rtol** ([float](#)) – relative tolerance (non-negative number)

Return type `None`

setRelativeToleranceSteadyStateSensi(*rtol*: `float`) → void

sets the relative tolerance for the sensitivities of the steady state problem

Parameters **rtol** (`float`) – relative tolerance (non-negative number)

Return type `None`

setReturnDataReportingMode(*rdrm*: `RDataReporting`) → void

sets the ReturnData reporting mode

Parameters **rdrm** (`amici.amici.RDataReporting`) – ReturnData reporting mode

Return type `None`

setSensiSteadyStateCheck(*flag*: `bool`) → void

Sets for which variables convergence checks for steadystate computation are performed.

Parameters **flag** (`bool`) – boolean flag to pick state and sensitivity equations (true, default) or only state variables (false).

Return type `None`

setSensitivityMethod(*sensi_meth*: `SensitivityMethod`) → void

Set sensitivity method

Parameters **sensi_meth** (`amici.amici.SensitivityMethod`) –

Return type `None`

setSensitivityMethodPreequilibration(*sensi_meth_preeq*: `SensitivityMethod`) → void

Set sensitivity method for preequilibration

Parameters **sensi_meth_preeq** (`amici.amici.SensitivityMethod`) –

Return type `None`

setSensitivityOrder(*sensi*: `SensitivityOrder`) → void

Set the sensitivity order

Parameters **sensi** (`amici.amici.SensitivityOrder`) – sensitivity order

Return type `None`

setStabilityLimitFlag(*stldet*: `bool`) → void

set stability limit detection mode

Parameters **stldet** (`bool`) – can be false (deactivated) or true (activated)

Return type `None`

setStateOrdering(*ordering*: `int`) → void

Sets KLU / SuperLUMT state ordering mode

This only applies when `linsol` is set to `LinearSolver::KLU` or `LinearSolver::SuperLUMT`. Mind the difference between `SUNLinSolKLU::StateOrdering` and `SUNLinSolSuperLUMT::StateOrdering`.

Parameters **ordering** (`int`) – state ordering

Return type `None`

setSteadyStateSensiToleranceFactor(*factor: float*) → void

set the steady state sensitivity simulation tolerance factor.

Steady state sensitivity simulation tolerances are the product of the sensitivity simulation tolerances and this factor, unless manually set with *set(Absolute/Relative)ToleranceSteadyStateSensi()*.

Parameters **factor** (*float*) – tolerance factor (non-negative number)

Return type *None*

setSteadyStateToleranceFactor(*factor: float*) → void

set the steady state simulation tolerance factor.

Steady state simulation tolerances are the product of the simulation tolerances and this factor, unless manually set with *set(Absolute/Relative)ToleranceSteadyState()*.

Parameters **factor** (*float*) – tolerance factor (non-negative number)

Return type *None*

startTimer() → void

Start timer for tracking integration time

Return type *None*

switchForwardSensisOff() → void

Disable forward sensitivity integration (used in steady state sim)

Return type *None*

timeExceeded(*interval: int = 1*) → bool

Check whether maximum integration time was exceeded

Parameters **interval** (*int*) – Only check the time every *interval* ths call to avoid potentially relatively expensive syscalls

Return type boolean

Returns True if the maximum integration time was exceeded, false otherwise.

class amici.amici.SolverPtr(*args)

Swig-Generated class that implements smart pointers to Solver as objects.

property logger

class amici.amici.SteadyStateSensitivityMode(value)

An enumeration.

integrateIfNewtonFails = 2

integrationOnly = 1

newtonOnly = 0

class amici.amici.SteadyStateStatus(value)

An enumeration.

failed = -1

failed_convergence = -2

failed_damping = -4

```
failed_factorization = -3
```

```
failed_too_long_simulation = -5
```

```
not_run = 0
```

```
success = 1
```

```
class amici.amici.SteadyStateStatusVector(*args)
```

```
class amici.amici.StringDoubleMap(*args)
```

Swig-Generated class templating Dict [str, float] to facilitate interfacing with C++ bindings.

```
class amici.amici.StringVector(*args)
```

Swig-Generated class templating common python types including Iterable [str] and numpy.array [str] to facilitate interfacing with C++ bindings.

```
amici.amici.compiledWithOpenMP() → bool
```

AMICI extension was compiled with OpenMP?

Return type bool

```
amici.amici.enum(prefix)
```

```
amici.amici.getScaledParameter(unscaledParameter: float, scaling: ParameterScaling) → double
```

Apply parameter scaling according to *scaling*

Parameters

- **unscaledParameter** (float) –
- **scaling** (amici.amici.ParameterScaling) – parameter scaling

Return type float

Returns Scaled parameter

```
amici.amici.getUnscaledParameter(scaledParameter: float, scaling: ParameterScaling) → double
```

Remove parameter scaling according to *scaling*

Parameters

- **scaledParameter** (float) – scaled parameter
- **scaling** (amici.amici.ParameterScaling) – parameter scaling

Return type float

Returns Unscaled parameter

```
amici.amici.parameterScalingFromIntVector(intVec: IntVector) → std::vector<
    amici::ParameterScaling, std::allocator<
    amici::ParameterScaling > >
```

Swig-Generated class, which, in contrast to other Vector classes, does not allow for simple interoperability with common Python types, but must be created using `amici.amici.parameterScalingFromIntVector()`

Return type amici.amici.ParameterScalingVector

```
amici.amici.runAmiciSimulation(solver: Solver, edata: ExpData, model: Model, rethrow: bool = False) →
    std::unique_ptr< amici::ReturnData >
```

Core integration routine. Initializes the solver and runs the forward and backward problem.

Parameters

- **solver** (*amici.amici.Solver*) – Solver instance
- **edata** (*amici.amici.ExpData*) – pointer to experimental data object
- **model** (*amici.amici.Model*) – model specification object
- **rethrow** (*bool*) – rethrow integration exceptions?

Return type *ReturnData*

Returns rdata pointer to return data object

```
amici.amici.runAmiciSimulations(solver: Solver, edatas: ExpDataPtrVector, model: Model, failfast: bool,
                               num_threads: int) → std::vector< std::unique_ptr< amici::ReturnData
                               >, std::allocator< std::unique_ptr< amici::ReturnData > > >
```

Same as runAmiciSimulation, but for multiple ExpData instances. When compiled with OpenMP support, this function runs multi-threaded.

Parameters

- **solver** (*amici.amici.Solver*) – Solver instance
- **edatas** (*amici.amici.ExpDataPtrVector*) – experimental data objects
- **model** (*amici.amici.Model*) – model specification object
- **failfast** (*bool*) – flag to allow early termination
- **num_threads** (*int*) – number of threads for parallel execution

Return type *Iterable[ReturnData]*

Returns vector of pointers to return data objects

```
amici.amici.scaleParameters(bufferUnscaled: Iterable[float], pscale: Iterable[ParameterScaling],
                            bufferScaled: Iterable[float]) → void
```

Apply parameter scaling according to *scaling*

Parameters

- **bufferUnscaled** (*typing.Iterable[float]*) –
- **pscale** (*typing.Iterable[amici.amici.ParameterScaling]*) – parameter scaling
- **bufferScaled** (*typing.Iterable[float]*) – destination

Return type *None*

```
amici.amici.simulation_status_to_str(status: int) → std::string
```

Get the string representation of the given simulation status code (see ReturnData::status).

Parameters **status** (*int*) – Status code

Return type *str*

Returns Name of the variable representing this status code.

```
amici.amici.unscaleParameters(bufferScaled: Iterable[float], pscale: Iterable[ParameterScaling],
                              bufferUnscaled: Iterable[float]) → void
```

Remove parameter scaling according to the parameter scaling in pscale

All vectors must be of same length.

Parameters

- **bufferScaled** (*typing.Iterable[float]*) – scaled parameters

- **pscale** (`typing.Iterable[amici.amici.ParameterScaling]`) – parameter scaling
- **bufferUnscaled** (`typing.Iterable[float]`) – unscaled parameters are written to the array

Return type `None`

10.5.3 amici.sbml_import

SBML Import

This module provides all necessary functionality to import a model specified in the [Systems Biology Markup Language](#) (SBML).

Functions

<code>assignmentRules2observables</code> (sbml_model[, ...])	Turn assignment rules into observables.
<code>get_species_initial</code> (species)	Extract the initial concentration from a given species
<code>replace_logx</code> (math_str)	Replace $\log X(.)$ by $\log(., X)$ since sympy cannot parse the former

Classes

<code>SbmlImporter</code> (sbml_source[, ...])	Class to generate AMICI C++ files for a model provided in the Systems Biology Markup Language (SBML).
--	---

Exceptions

<code>SBMLException</code>	
----------------------------	--

exception `amici.sbml_import.SBMLException`

class `amici.sbml_import.SbmlImporter`(sbml_source, show_sbml_warnings=False, from_file=True)

Class to generate AMICI C++ files for a model provided in the Systems Biology Markup Language (SBML).

Variables

- **show_sbml_warnings** – indicates whether libSBML warnings should be displayed
- **symbols** – dict carrying symbolic definitions
- **sbml_reader** – The libSBML sbml reader

Warning: Not storing this may result in a segfault.

- **sbml_doc** – document carrying the sbml definition

Warning: Not storing this may result in a segfault.

- **sbml** – SBML model to import
- **compartments** – dict of compartment ids and compartment volumes
- **stoichiometric_matrix** – stoichiometric matrix of the model
- **flux_vector** – reaction kinetic laws
- **flux_ids** – identifiers for elements of flux_vector
- **_local_symbols** – model symbols for sympy to consider during sympification see *locals* argument in ``sympy.sympify``
- **species_assignment_rules** – Assignment rules for species. Key is symbolic identifier and value is assignment value
- **compartment_assignment_rules** – Assignment rules for compartments. Key is symbolic identifier and value is assignment value
- **parameter_assignment_rules** – assignment rules for parameters, these parameters are not permissible for sensitivity analysis
- **initial_assignments** – initial assignments for parameters, these parameters are not permissible for sensitivity analysis
- **sbml_parser_settings** – sets behaviour of SBML Formula parsing

add_d_dt(*d_dt*, *variable*, *variable0*, *name*)

Creates or modifies species, to implement rate rules for compartments and species, respectively.

Parameters

- **d_dt** (`sympy.core.expr.Expr`) – The rate rule (or, right-hand side of an ODE).
- **variable** (`sympy.core.symbol.Symbol`) – The subject of the rate rule.
- **variable0** (`typing.Union[float, sympy.core.expr.Expr]`) – The initial value of the variable.
- **name** (`str`) – Species name, only applicable if this function generates a new species

Return type `None`

add_local_symbol(*key*, *value*)

Add local symbols with some sanity checking for duplication which would indicate redefinition of internals, which SBML permits, but we don't.

Parameters

- **key** (`str`) – local symbol key
- **value** (`sympy.core.expr.Expr`) – local symbol value

check_event_support()

Check possible events in the model, as AMICI does currently not support

- delays in events
- priorities of events
- events fired at initial time

Furthermore, event triggers are optional (e.g., if an event is fired at initial time, no trigger function is necessary). In this case, warn that this event will have no effect.

Return type `None`

check_support()

Check whether all required SBML features are supported. Also ensures that the SBML contains at least one reaction, or rate rule, or assignment rule, to produce change in the system over time.

Return type `None`

is_assignment_rule_target(*element*)

Checks if an element has a valid assignment rule in the specified model.

Parameters **element** (`libsbml.SBase`) – SBML variable

Return type `bool`

Returns boolean indicating truth of function name

is_rate_rule_target(*element*)

Checks if an element has a valid assignment rule in the specified model.

Parameters **element** (`libsbml.SBase`) – SBML variable

Return type `bool`

Returns boolean indicating truth of function name

process_conservation_laws(*ode_model*)

Find conservation laws in reactions and species.

Parameters **ode_model** – ODEModel object with basic definitions

Return type `None`

sbml2amici(*model_name*, *output_dir*=None, *observables*=None, *event_observables*=None, *constant_parameters*=None, *sigmas*=None, *event_sigmas*=None, *noise_distributions*=None, *event_noise_distributions*=None, *verbose*=40, *assume_pow_positivity*=False, *compiler*=None, *allow_reinit_fixpar_initcond*=True, *compile*=True, *compute_conservation_laws*=True, *simplify*=<function _default_simplify>, *cache_simplify*=False, *log_as_log10*=True, *generate_sensitivity_code*=True)

Generate and compile AMICI C++ files for the model provided to the constructor.

The resulting model can be imported as a regular Python module (if *compile*=True), or used from Matlab or C++ as described in the documentation of the respective AMICI interface.

Note that this generates model ODEs for changes in concentrations, not amounts unless the *hasOnlySubstanceUnits* attribute has been defined for a particular species.

Sensitivity analysis for local parameters is enabled by creating global parameters `_{reactionId}_{localParameterName}`.

Parameters

- **model_name** (`str`) – name of the model/model directory
- **output_dir** (`typing.Union[str, pathlib.Path, None]`) – see `amici.ode_export.ODEExporter.set_paths()`
- **observables** (`typing.Optional[typing.Dict[str, typing.Dict[str, str]]]`) – dictionary(observableId: { 'name': observableName (optional), 'formula': formulaString }) to be added to the model

- **event_observables** (`typing.Optional[typing.Dict[str, typing.Dict[str, str]]]`) – dictionary(`eventObservableId`: {‘name’:eventObservableName (optional), ‘event’:eventId, ‘formula’:formulaString}) to be added to the model
- **constant_parameters** (`typing.Optional[typing.Iterable[str]]`) – list of SBML Ids identifying constant parameters
- **sigmas** (`typing.Optional[typing.Dict[str, typing.Union[str, float]]]`) – dictionary(`observableId`: sigma value or (existing) parameter name)
- **event_sigmas** (`typing.Optional[typing.Dict[str, typing.Union[str, float]]]`) – dictionary(`eventObservableId`: sigma value or (existing) parameter name)
- **noise_distributions** (`typing.Optional[typing.Dict[str, typing.Union[str, typing.Callable]]]`) – dictionary(`observableId`: noise type). If nothing is passed for some observable id, a normal model is assumed as default. Either pass a noise type identifier, or a callable generating a custom noise string.
- **event_noise_distributions** (`typing.Optional[typing.Dict[str, typing.Union[str, typing.Callable]]]`) – dictionary(`eventObservableId`: noise type). If nothing is passed for some observable id, a normal model is assumed as default. Either pass a noise type identifier, or a callable generating a custom noise string.
- **verbose** (`typing.Union[int, bool]`) – verbosity level for logging, True/False default to `logging.Error`/`logging.DEBUG`
- **assume_pow_positivity** (`bool`) – if set to True, a special pow function is used to avoid problems with state variables that may become negative due to numerical errors
- **compiler** (`typing.Optional[str]`) – distutils/setuptools compiler selection to build the python extension
- **allow_reinit_fixpar_initcond** (`bool`) – see `amici.ode_export.ODEExporter`
- **compile** (`bool`) – If True, compile the generated Python package, if False, just generate code.
- **compute_conservation_laws** (`bool`) – if set to True, conservation laws are automatically computed and applied such that the state-jacobian of the ODE right-hand-side has full rank. This option should be set to True when using the Newton algorithm to compute steadystate sensitivities. Conservation laws for constant species are enabled by default. Support for conservation laws for non-constant species is experimental and may be enabled by setting an environment variable `AMICI_EXPERIMENTAL_SBML_NONCONST_CLS` to either `demartino` to use the algorithm proposed by De Martino et al. (2014) <https://doi.org/10.1371/journal.pone.0100750>, or to any other value to use the deterministic algorithm implemented in `conserved_moieties2.py`. In some cases, the `demartino` may run for a very long time. This has been observed for example in the case of stoichiometric coefficients with many significant digits.
- **simplify** (`typing.Optional[typing.Callable]`) – see `amici.ODEModel._simplify`
- **cache_simplify** (`bool`) – see `amici.ODEModel.__init__()`
- **log_as_log10** (`bool`) – If True, log in the SBML model will be parsed as `log10` (default), if False, log will be parsed as natural logarithm `ln`
- **generate_sensitivity_code** (`bool`) – If False, the code required for sensitivity computation will not be generated

Return type `None`

`amici.sbml_import.assignmentRules2observables(sbml_model, filter_function=<function <lambda>>)`

Turn assignment rules into observables.

Parameters

- **sbml_model** (`libsbml.Model`) – Model to operate on
- **filter_function** (`typing.Callable`) – Callback function taking assignment variable as input and returning True/False to indicate if the respective rule should be turned into an observable.

Returns A dictionary(observableId:{ ‘name’: observableName, ‘formula’: formulaString })

`amici.sbml_import.get_species_initial(species)`

Extract the initial concentration from a given species

Parameters **species** (`libsbml.Species`) – species index

Return type `sympy.core.expr.Expr`

Returns initial species concentration

`amici.sbml_import.replace_logx(math_str)`

Replace logX(.) by log(., X) since sympy cannot parse the former

Parameters **math_str** (`typing.Union[str, float, None]`) – string for sympification

Return type `typing.Union[str, float, None]`

Returns sympifiable string

10.5.4 amici.pysb_import

PySB Import

This module provides all necessary functionality to import a model specified in the `pysb.core.Model` format.

Functions

<code>extract_monomers(complex_patterns)</code>	Constructs a list of monomer names contained in complex patterns.
<code>has_fixed_parameter_ic(specie, pysb_model, ...)</code>	Wrapper to interface <code>ode_export.ODEModel.state_has_fixed_parameter_initial_condition()</code> from a pysb specie/model arguments
<code>ode_model_from_pysb_importer(model[, ...])</code>	Creates an <code>amici.ODEModel</code> instance from a <code>pysb.Model</code> instance.
<code>pysb2amici(model[, output_dir, observables, ...])</code>	Generate AMICI C++ files for the provided model.
<code>pysb_model_from_path(pysb_model_file)</code>	Load a pysb model module and return the <code>pysb.Model</code> instance

`amici.pysb_import.extract_monomers(complex_patterns)`

Constructs a list of monomer names contained in complex patterns. Multiplicity of names corresponds to the stoichiometry in the complex.

Parameters **complex_patterns** (`typing.Union[pysb.core.ComplexPattern, typing.List[pysb.core.ComplexPattern]]`) – (list of) complex pattern(s)

Return type `typing.List[str]`

Returns list of monomer names

`amici.pysb_import.has_fixed_parameter_ic(specie, pysb_model, ode_model)`

Wrapper to interface `ode_export.ODEModel.state_has_fixed_parameter_initial_condition()` from a pysb specie/model arguments

Parameters

- **specie** (`pysb.core.ComplexPattern`) – pysb species
- **pysb_model** (`pysb.core.Model`) – pysb model
- **ode_model** (`amici.ode_export.ODEModel`) – ODE model

Return type `bool`

Returns False if the species does not have an initial condition at all. Otherwise the return value of `ode_export.ODEModel.state_has_fixed_parameter_initial_condition()`

`amici.pysb_import.ode_model_from_pysb_importer(model, constant_parameters=None, observables=None, sigmas=None, noise_distributions=None, compute_conservation_laws=True, simplify=<function powsimp>, cache_simplify=False, verbose=False)`

Creates an `amici.ODEModel` instance from a `pysb.Model` instance.

Parameters

- **model** (`pysb.core.Model`) – see `amici.pysb_import.pysb2amici()`
- **constant_parameters** (`typing.Optional[typing.List[str]]`) – see `amici.pysb_import.pysb2amici()`
- **observables** (`typing.Optional[typing.List[str]]`) – see `amici.pysb_import.pysb2amici()`
- **sigmas** (`typing.Optional[typing.Dict[str, str]]`) – dict with names of observable Expressions as keys and names of sigma Expressions as value sigma
- **noise_distributions** (`typing.Optional[typing.Dict[str, typing.Union[str, typing.Callable]]]`) – see `amici.pysb_import.pysb2amici()`
- **compute_conservation_laws** (`bool`) – see `amici.pysb_import.pysb2amici()`
- **simplify** (`typing.Callable`) – see `amici.ODEModel._simplify`
- **cache_simplify** (`bool`) – see `amici.ODEModel.__init__()` Note that there are possible issues with PySB models: <https://github.com/AMICI-dev/AMICI/pull/1672>
- **verbose** (`typing.Union[int, bool]`) – verbosity level for logging, True/False default to `logging.DEBUG/logging.ERROR`

Return type `amici.ode_export.ODEModel`

Returns New `ODEModel` instance according to `pysbModel`

`amici.pysb_import.pysb2amici(model, output_dir=None, observables=None, constant_parameters=None, sigmas=None, noise_distributions=None, verbose=False, assume_pow_positivity=False, compiler=None, compute_conservation_laws=True, compile=True, simplify=<function _default_simplify>, cache_simplify=False, generate_sensitivity_code=True, model_name=None)`

Generate AMICI C++ files for the provided model.

Warning: PySB models with Compartments

When importing a PySB model with `pysb.Compartments`, BioNetGen scales reaction fluxes with the compartment size. Instead of using the respective symbols, the compartment size Parameter or Expression is evaluated when generating equations. This may lead to unexpected results if the compartment size parameter is changed for AMICI simulations.

Parameters

- **model** (`pysb.core.Model`) – pysb model, `pysb.Model.name` will determine the name of the generated module
- **output_dir** (`typing.Union[pathlib.Path, str, None]`) – see `amici.ode_export.ODEExporter.set_paths()`
- **observables** (`typing.Optional[typing.List[str]]`) – list of `pysb.core.Expression` or `pysb.core.Observable` names in the provided model that should be mapped to observables
- **sigmas** (`typing.Optional[typing.Dict[str, str]]`) – dict of `pysb.core.Expression` names that should be mapped to sigmas
- **noise_distributions** (`typing.Optional[typing.Dict[str, typing.Union[str, typing.Callable]]]`) – dict with names of observable Expressions as keys and a noise type identifier, or a callable generating a custom noise formula string (see `amici.import_utils.noise_distribution_to_cost_function()`). If nothing is passed for some observable id, a normal model is assumed as default.
- **constant_parameters** (`typing.Optional[typing.List[str]]`) – list of `pysb.core.Parameter` names that should be mapped as fixed parameters
- **verbose** (`typing.Union[int, bool]`) – verbosity level for logging, True/False default to `logging.DEBUG/logging.ERROR`
- **assume_pow_positivity** (`bool`) – if set to True, a special pow function is used to avoid problems with state variables that may become negative due to numerical errors
- **compiler** (`typing.Optional[str]`) – distutils/setuptools compiler selection to build the python extension
- **compute_conservation_laws** (`bool`) – if set to True, conservation laws are automatically computed and applied such that the state-jacobian of the ODE right-hand-side has full rank. This option should be set to True when using the Newton algorithm to compute steadystates
- **compile** (`bool`) – If True, build the python module for the generated model. If false, just generate the source code.
- **simplify** (`typing.Callable`) – see `amici.ODEModel._simplify`
- **cache_simplify** (`bool`) – see `amici.ODEModel.__init__()` Note that there are possible issues with PySB models: <https://github.com/AMICI-dev/AMICI/pull/1672>
- **generate_sensitivity_code** (`bool`) – if set to False, code for sensitivity computation will not be generated
- **model_name** (`typing.Optional[str]`) – Name for the generated model module. If None, `pysb.Model.name` will be used.

`amici.pysb_import.pysb_model_from_path(pysb_model_file)`

Load a pysb model module and return the `pysb.Model` instance

Parameters `pysb_model_file` (`typing.Union[str, pathlib.Path]`) – Full or relative path to the PySB model module

Return type `pysb.core.Model`

Returns The pysb Model instance

10.5.5 amici.bngl_import

BNGL Import

This module provides all necessary functionality to import a model specified in the *BNGL* format.

Functions

<code>bngl2amici(bngl_model, *args, **kwargs)</code>	Generate AMICI C++ files for the provided model.
--	--

`amici.bngl_import.bngl2amici(bngl_model, *args, **kwargs)`

Generate AMICI C++ files for the provided model.

Parameters

- **bngl_model** (`str`) – bngl model file, model name will determine the name of the generated module
- **args** – see `amici.pysb_import.pysb2amici()` for additional arguments
- **kwargs** – see `amici.pysb_import.pysb2amici()` for additional arguments

Return type `None`

10.5.6 amici.petab_import

PEtab Import

Import a model in the *petab* (<https://github.com/PEtab-dev/PEtab>) format into AMICI.

Functions

<code>check_model(amici_model, petab_problem)</code>	Check that the model is consistent with the PETab problem.
<code>element_is_state(sbml_model, sbml_id)</code>	Does the element with ID <i>sbml_id</i> correspond to a state variable?
<code>get_fixed_parameters(petab_problem[, ...])</code>	Determine, set and return fixed model parameters.
<code>get_observation_model(observable_df)</code>	Get observables, sigmas, and noise distributions from PETab observation table in a format suitable for <code>amici.sbml_import.SbmlImporter.sbml2amici()</code> .
<code>import_model([sbml_model, condition_table, ...])</code>	Create AMICI model from PETab problem
<code>import_model_sbml([sbml_model, ...])</code>	Create AMICI model from PETab problem
<code>import_petab_problem(petab_problem[, ...])</code>	Import model from petab problem.
<code>petab_noise_distributions_to_amici(observable_df)</code>	Map from the petab to the amici format of noise distribution identifiers.
<code>petab_scale_to_amici_scale(scale_str)</code>	Convert PETab parameter scaling string to AMICI scaling integer
<code>show_model_info(sbml_model)</code>	Log some model quantities
<code>species_to_parameters(species_ids, sbml_model)</code>	Turn a SBML species into parameters and replace species references inside the model instance.

`amici.petab_import.check_model(amici_model, petab_problem)`

Check that the model is consistent with the PETab problem.

Return type `None`

`amici.petab_import.element_is_state(sbml_model, sbml_id)`

Does the element with ID *sbml_id* correspond to a state variable?

Return type `bool`

`amici.petab_import.get_fixed_parameters(petab_problem, non_estimated_parameters_as_constants=True)`

Determine, set and return fixed model parameters.

Non-estimated parameters and parameters specified in the condition table are turned into constants (unless they are overridden). Only global SBML parameters are considered. Local parameters are ignored.

Parameters

- **petab_problem** (`petab.problem.Problem`) – The PETab problem instance
- **non_estimated_parameters_as_constants** – Whether parameters marked as non-estimated in PETab should be considered constant in AMICI. Setting this to `True` will reduce model size and simulation times. If sensitivities with respect to those parameters are required, this should be set to `False`.

Return type `typing.List[str]`

Returns List of IDs of parameters which are to be considered constant.

`amici.petab_import.get_observation_model(observable_df)`

Get observables, sigmas, and noise distributions from PETab observation table in a format suitable for `amici.sbml_import.SbmlImporter.sbml2amici()`.

Parameters **observable_df** (`pandas.core.frame.DataFrame`) – PETab observables table

Return type `typing.Tuple[typing.Dict[str, typing.Dict[str, str]], typing.Dict[str, str], typing.Dict[str, typing.Union[str, float]]]`

Returns Tuple of dicts with observables, noise distributions, and sigmas.

```
amici.petab_import.import_model(sbml_model=None, condition_table=None, observable_table=None,
                                measurement_table=None, petab_problem=None, model_name=None,
                                model_output_dir=None, verbose=True,
                                allow_reinit_fixpar_initcond=True, validate=True,
                                non_estimated_parameters_as_constants=True,
                                output_parameter_defaults=None, **kwargs)
```

Create AMICI model from PETab problem

Parameters

- **sbml_model** (`typing.Union[str, pathlib.Path, libsbml.Model, None]`) – PETab SBML model or SBML file name. Deprecated, pass `petab_problem` instead.
- **condition_table** (`typing.Union[str, pathlib.Path, pandas.core.frame.DataFrame, None]`) – PETab condition table. If provided, parameters from there will be turned into AMICI constant parameters (i.e. parameters w.r.t. which no sensitivities will be computed). Deprecated, pass `petab_problem` instead.
- **observable_table** (`typing.Union[str, pathlib.Path, pandas.core.frame.DataFrame, None]`) – PETab observable table. Deprecated, pass `petab_problem` instead.
- **measurement_table** (`typing.Union[str, pathlib.Path, pandas.core.frame.DataFrame, None]`) – PETab measurement table. Deprecated, pass `petab_problem` instead.
- **petab_problem** (`typing.Optional[petab.problem.Problem]`) – PETab problem.
- **model_name** (`typing.Optional[str]`) – Name of the generated model. If model file name was provided, this defaults to the file name without extension, otherwise the SBML model ID will be used.
- **model_output_dir** (`typing.Union[pathlib.Path, str, None]`) – Directory to write the model code to. Will be created if doesn't exist. Defaults to current directory.
- **verbose** (`typing.Union[bool, int, None]`) – Print/log extra information.
- **allow_reinit_fixpar_initcond** (`bool`) – See [amici.ode_export.ODEExporter](#). Must be enabled if initial states are to be reset after preequilibration.
- **validate** (`bool`) – Whether to validate the PETab problem
- **non_estimated_parameters_as_constants** – Whether parameters marked as non-estimated in PETab should be considered constant in AMICI. Setting this to `True` will reduce model size and simulation times. If sensitivities with respect to those parameters are required, this should be set to `False`.
- **output_parameter_defaults** (`typing.Optional[typing.Dict[str, float]]`) – Optional default parameter values for output parameters introduced in the PETab observables table, in particular for placeholder parameters. Dictionary mapping parameter IDs to default values.
- **kwargs** – Additional keyword arguments to be passed to [amici.sbml_import.SbmlImporter.sbml2amici\(\)](#).

Return type [amici.sbml_import.SbmlImporter](#)

Returns The created [amici.sbml_import.SbmlImporter](#) instance.

```
amici.petab_import.import_model_sbml(sbml_model=None, condition_table=None, observable_table=None,
                                     measurement_table=None, petab_problem=None,
                                     model_name=None, model_output_dir=None, verbose=True,
                                     allow_reinit_fixpar_initcond=True, validate=True,
                                     non_estimated_parameters_as_constants=True,
                                     output_parameter_defaults=None, **kwargs)
```

Create AMICI model from PETab problem

Parameters

- **sbml_model** (`typing.Union[str, pathlib.Path, libsbml.Model, None]`) – PETab SBML model or SBML file name. Deprecated, pass `petab_problem` instead.
- **condition_table** (`typing.Union[str, pathlib.Path, pandas.core.frame.DataFrame, None]`) – PETab condition table. If provided, parameters from there will be turned into AMICI constant parameters (i.e. parameters w.r.t. which no sensitivities will be computed). Deprecated, pass `petab_problem` instead.
- **observable_table** (`typing.Union[str, pathlib.Path, pandas.core.frame.DataFrame, None]`) – PETab observable table. Deprecated, pass `petab_problem` instead.
- **measurement_table** (`typing.Union[str, pathlib.Path, pandas.core.frame.DataFrame, None]`) – PETab measurement table. Deprecated, pass `petab_problem` instead.
- **petab_problem** (`typing.Optional[petab.problem.Problem]`) – PETab problem.
- **model_name** (`typing.Optional[str]`) – Name of the generated model. If model file name was provided, this defaults to the file name without extension, otherwise the SBML model ID will be used.
- **model_output_dir** (`typing.Union[pathlib.Path, str, None]`) – Directory to write the model code to. Will be created if doesn't exist. Defaults to current directory.
- **verbose** (`typing.Union[bool, int, None]`) – Print/log extra information.
- **allow_reinit_fixpar_initcond** (`bool`) – See [amici.ode_export.ODEExporter](#). Must be enabled if initial states are to be reset after preequilibration.
- **validate** (`bool`) – Whether to validate the PETab problem
- **non_estimated_parameters_as_constants** – Whether parameters marked as non-estimated in PETab should be considered constant in AMICI. Setting this to `True` will reduce model size and simulation times. If sensitivities with respect to those parameters are required, this should be set to `False`.
- **output_parameter_defaults** (`typing.Optional[typing.Dict[str, float]]`) – Optional default parameter values for output parameters introduced in the PETab observables table, in particular for placeholder parameters. Dictionary mapping parameter IDs to default values.
- **kwargs** – Additional keyword arguments to be passed to [amici.sbml_import.SbmlImporter.sbml2amici\(\)](#).

Return type [amici.sbml_import.SbmlImporter](#)

Returns The created [amici.sbml_import.SbmlImporter](#) instance.

```
amici.petab_import.import_petab_problem(petab_problem, model_output_dir=None, model_name=None,
                                       force_compile=False,
                                       non_estimated_parameters_as_constants=True, **kwargs)
```

Import model from petab problem.

Parameters

- **petab_problem** (`petab.problem.Problem`) – A petab problem containing all relevant information on the model.
- **model_output_dir** (`typing.Union[pathlib.Path, str, None]`) – Directory to write the model code to. Will be created if doesn't exist. Defaults to current directory.
- **model_name** (`typing.Optional[str]`) – Name of the generated model. If model file name was provided, this defaults to the file name without extension, otherwise the model ID will be used.
- **force_compile** (`bool`) – Whether to compile the model even if the target folder is not empty, or the model exists already.
- **non_estimated_parameters_as_constants** – Whether parameters marked as non-estimated in PETab should be considered constant in AMICI. Setting this to `True` will reduce model size and simulation times. If sensitivities with respect to those parameters are required, this should be set to `False`.
- **kwargs** – Additional keyword arguments to be passed to `amici.sbml_import.SbmlImporter.sbml2amici()`.

Return type `amici.amici.Model`

Returns The imported model.

`amici.petab_import.petab_noise_distributions_to_amici(observable_df)`

Map from the petab to the amici format of noise distribution identifiers.

Parameters **observable_df** (`pandas.core.frame.DataFrame`) – PETab observable table

Return type `typing.Dict[str, str]`

Returns Dictionary of observable_id => AMICI noise-distributions

`amici.petab_import.petab_scale_to_amici_scale(scale_str)`

Convert PETab parameter scaling string to AMICI scaling integer

Return type `int`

`amici.petab_import.show_model_info(sbml_model)`

Log some model quantities

`amici.petab_import.species_to_parameters(species_ids, sbml_model)`

Turn a SBML species into parameters and replace species references inside the model instance.

Parameters

- **species_ids** (`typing.List[str]`) – List of SBML species ID to convert to parameters with the same ID as the replaced species.
- **sbml_model** (`libsbml.Model`) – SBML model to modify

Return type `typing.List[str]`

Returns List of IDs of species which have been converted to parameters

10.5.7 amici.petab_import_pysb

PySB-PEtab Import

Import a model in the PySB-adapted `petab` (<https://github.com/PEtab-dev/PEtab>) format into AMICI.

Functions

<code>create_dummy_sbml(pysb_model[, observable_ids])</code>	Create SBML dummy model for to use PySB models with PÉtab.
<code>import_model_pysb(petab_problem[, ...])</code>	Create AMICI model from PySB-PEtab problem

Classes

<code>PysbPetabProblem([pysb_model])</code>	Representation of a PySB-model-based PÉtab problem
---	--

class `amici.petab_import_pysb.PysbPetabProblem`(*pysb_model=None, *args, **kwargs*)

Representation of a PySB-model-based PÉtab problem

This class extends `petab.Problem` with a PySB model. The model is augmented with the observation model based on the PÉtab observable table. For now, a dummy SBML model is created which allows used the existing SBML-PEtab API.

Variables `pysb_model` – PySB model instance from of this PÉtab problem.

static from_files(*condition_file=None, measurement_file=None, parameter_file=None, visualization_files=None, observable_files=None, pysb_model_file=None, flatten=False*)

Factory method to load model and tables from files.

Parameters

- **condition_file** (`typing.Union[str, pathlib.Path, typing.Iterable[typing.Union[str, pathlib.Path]], None]`) – PÉtab condition table
- **measurement_file** (`typing.Union[str, pathlib.Path, typing.Iterable[typing.Union[str, pathlib.Path]], None]`) – PÉtab measurement table
- **parameter_file** (`typing.Union[str, pathlib.Path, typing.Iterable[typing.Union[str, pathlib.Path]], None]`) – PÉtab parameter table
- **visualization_files** (`typing.Union[str, pathlib.Path, typing.Iterable[typing.Union[str, pathlib.Path]], None]`) – PÉtab visualization tables
- **observable_files** (`typing.Union[str, pathlib.Path, typing.Iterable[typing.Union[str, pathlib.Path]], None]`) – PÉtab observables tables
- **pysb_model_file** (`typing.Union[str, pathlib.Path, None]`) – PySB model file
- **flatten** (`bool`) – Flatten the petab problem

Return type `amici.petab_import_pysb.PysbPetabProblem`

Returns Petab Problem

static from_yaml(*yaml_config*, *flatten=False*)

Factory method to load model and tables as specified by YAML file.

NOTE: The PySB model is currently expected in the YAML file under `sbml_files`.

Parameters

- **yaml_config** (`typing.Union[typing.Dict, pathlib.Path, str]`) – PETab configuration as dictionary or YAML file name
- **flatten** (`bool`) – Flatten the petab problem

Return type `amici.petab_import_pysb.PysbPetabProblem`

Returns Petab Problem

`amici.petab_import_pysb.create_dummy_sbml(pysb_model, observable_ids=None)`

Create SBML dummy model for to use PySB models with PETab.

Model must at least contain PETab problem parameter and noise parameters for observables.

Parameters

- **pysb_model** (`pysb.core.Model`) – PySB model
- **observable_ids** (`typing.Optional[typing.Iterable[str]]`) – Observable IDs

Return type `typing.Tuple[libsbml.Model, libsbml.SBMLDocument]`

Returns A dummy SBML model and document.

`amici.petab_import_pysb.import_model_pysb(petab_problem, model_output_dir=None, verbose=True, model_name=None, **kwargs)`

Create AMICI model from PySB-PETab problem

Parameters

- **petab_problem** (`amici.petab_import_pysb.PysbPetabProblem`) – PySB PETab problem
- **model_output_dir** (`typing.Union[pathlib.Path, str, None]`) – Directory to write the model code to. Will be created if doesn't exist. Defaults to current directory.
- **verbose** (`typing.Union[bool, int, None]`) – Print/log extra information.
- **model_name** (`typing.Optional[str]`) – Name of the generated model module
- **kwargs** – Additional keyword arguments to be passed to `amici.pysb_import.pysb2amici()`.

Return type `None`

10.5.8 amici.petab_objective

PETab Objective

Functionality related to running simulations or evaluating the objective function as defined by a PETab problem

Functions

<code>create_edata_for_condition(condition, ...)</code>	Get <code>amici.amici.ExpData</code> for the given PETab condition.
<code>create_edatas(amici_model, petab_problem[, ...])</code>	Create list of <code>amici.amici.ExpData</code> objects for PETab problem.
<code>create_parameter_mapping(petab_problem, ...)</code>	Generate AMICI specific parameter mapping.
<code>create_parameter_mapping_for_condition(...)</code>	Generate AMICI specific parameter mapping for condition.
<code>create_parameterized_edatas(amici_model, ...)</code>	Create list of <code>:class:amici.ExpData</code> objects with parameters filled in.
<code>rdatas_to_measurement_df(rdatas, model, ...)</code>	Create a measurement dataframe in the PETab format from the passed <code>rdatas</code> and own information.
<code>rdatas_to_simulation_df(rdatas, model, ...)</code>	Create a PETab simulation dataframe from <code>amici.amici.ReturnData</code> s.
<code>simulate_petab(petab_problem, amici_model[, ...])</code>	Simulate PETab model.

`amici.petab_objective.create_edata_for_condition(condition, measurement_df, amici_model, petab_problem, observable_ids)`

Get `amici.amici.ExpData` for the given PETab condition.

Sets timepoints, observed data and sigmas.

Parameters

- **condition** (`typing.Union[typing.Dict, pandas.core.series.Series]`) – `pandas.DataFrame` row with `preequilibrationConditionId` and `simulationConditionId`.
- **measurement_df** (`pandas.core.frame.DataFrame`) – `pandas.DataFrame` with measurements for the given condition.
- **amici_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI model
- **petab_problem** (`petab.problem.Problem`) – Underlying PETab problem
- **observable_ids** (`typing.List[str]`) – List of observable IDs

Return type `amici.swig_wrappers.ExpData`

Returns `ExpData` instance.

`amici.petab_objective.create_edatas(amici_model, petab_problem, simulation_conditions=None)`

Create list of `amici.amici.ExpData` objects for PETab problem.

Parameters

- **amici_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI model.
- **petab_problem** (`petab.problem.Problem`) – Underlying PETab problem.
- **simulation_conditions** (`typing.Union[pandas.core.frame.DataFrame, typing.Dict, None]`) – Result of `petab.get_simulation_conditions()`. Can be provided to save time if this has been obtained before.

Return type `typing.List[amici.swig_wrappers.ExpData]`

Returns List with one `amici.amici.ExpData` per simulation condition, with filled in timepoints and data.

```
amici.petab_objective.create_parameter_mapping(petab_problem, simulation_conditions,  
                                              scaled_parameters, amici_model,  
                                              **parameter_mapping_kwargs)
```

Generate AMICI specific parameter mapping.

Parameters

- **petab_problem** (`petab.problem.Problem`) – PETab problem
- **simulation_conditions** (`typing.Union[pandas.core.frame.DataFrame, typing.List[typing.Dict]]`) – Result of `petab.get_simulation_conditions()`. Can be provided to save time if this has been obtained before.
- **scaled_parameters** (`bool`) – If `True`, problem_parameters are assumed to be on the scale provided in the PETab parameter table and will be unscaled. If `False`, they are assumed to be in linear scale.
- **amici_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI model.
- **parameter_mapping_kwargs** – Optional keyword arguments passed to `petab.get_optimization_to_simulation_parameter_mapping()`. To allow changing fixed PETab problem parameters (`estimate=0`), use `fill_fixed_parameters=False`.

Return type `amici.parameter_mapping.ParameterMapping`

Returns List of the parameter mappings.

```
amici.petab_objective.create_parameter_mapping_for_condition(parameter_mapping_for_condition,  
                                                           condition, petab_problem,  
                                                           amici_model)
```

Generate AMICI specific parameter mapping for condition.

Parameters

- **parameter_mapping_for_condition** (`typing.Tuple[typing.Dict[str, typing.Union[str, numbers.Number]], typing.Dict[str, typing.Union[str, numbers.Number]], typing.Dict[str, str], typing.Dict[str, str]]`) – Preliminary parameter mapping for condition.
- **condition** (`typing.Union[pandas.core.series.Series, typing.Dict]`) – `pandas.DataFrame` row with `preequilibrationConditionId` and `simulationConditionId`.
- **petab_problem** (`petab.problem.Problem`) – Underlying PETab problem.
- **amici_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI model.

Return type `amici.parameter_mapping.ParameterMappingForCondition`

Returns The parameter and parameter scale mappings, for fixed preequilibration, fixed simulation, and variable simulation parameters, and then the respective scalings.

```
amici.petab_objective.create_parameterized_edatas(amici_model, petab_problem, problem_parameters,  
                                                  scaled_parameters=False,  
                                                  parameter_mapping=None,  
                                                  simulation_conditions=None)
```

Create list of :class:amici.ExpData objects with parameters filled in.

Parameters

- **amici_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI Model assumed to be compatible with `petab_problem`.

- **petab_problem** (`petab.problem.Problem`) – PETab problem to work on.
- **problem_parameters** (`typing.Dict[str, numbers.Number]`) – Run simulation with these parameters. If None, PETab nominalValues will be used. To be provided as dict, mapping PETab problem parameters to SBML IDs.
- **scaled_parameters** (`bool`) – If True, problem_parameters are assumed to be on the scale provided in the PETab parameter table and will be unscaled. If False, they are assumed to be in linear scale.
- **parameter_mapping** (`typing.Optional[amici.parameter_mapping.ParameterMapping]`) – Optional precomputed PETab parameter mapping for efficiency, as generated by `create_parameter_mapping()`.
- **simulation_conditions** (`typing.Union[pandas.core.frame.DataFrame, typing.Dict, None]`) – Result of `petab.get_simulation_conditions()`. Can be provided to save time if this has been obtained before.

Return type `typing.List[amici.swig_wrappers.ExpData]`

Returns List with one `amici.amici.ExpData` per simulation condition, with filled in timepoints, data and parameters.

`amici.petab_objective.rdatas_to_measurement_df(rdatas, model, measurement_df)`

Create a measurement dataframe in the PETab format from the passed rdatas and own information.

Parameters

- **rdatas** (`typing.Sequence[amici.amici.ReturnData]`) – A sequence of rdatas with the ordering of `petab.get_simulation_conditions()`.
- **model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI model used to generate rdatas.
- **measurement_df** (`pandas.core.frame.DataFrame`) – PETab measurement table used to generate rdatas.

Return type `pandas.core.frame.DataFrame`

Returns A dataframe built from the rdatas in the format of `measurement_df`.

`amici.petab_objective.rdatas_to_simulation_df(rdatas, model, measurement_df)`

Create a PETab simulation dataframe from `amici.amici.ReturnData` s.

See `rdatas_to_measurement_df()` for details, only that model outputs will appear in column `simulation` instead of `measurement`.

Return type `pandas.core.frame.DataFrame`

`amici.petab_objective.simulate_petab(petab_problem, amici_model, solver=None, problem_parameters=None, simulation_conditions=None, edatas=None, parameter_mapping=None, scaled_parameters=False, log_level=30, num_threads=1, failfast=True)`

Simulate PETab model.

Parameters

- **petab_problem** (`petab.problem.Problem`) – PETab problem to work on.
- **amici_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI Model assumed to be compatible with `petab_problem`.

- **solver** (`typing.Optional[amici.amici.Solver]`) – An AMICI solver. Will use default options if None.
- **problem_parameters** (`typing.Optional[typing.Dict[str, float]]`) – Run simulation with these parameters. If None, PETab nominalValues will be used. To be provided as dict, mapping PETab problem parameters to SBML IDs.
- **simulation_conditions** (`typing.Union[pandas.core.frame.DataFrame, typing.Dict, None]`) – Result of `petab.get_simulation_conditions()`. Can be provided to save time if this has been obtained before. Not required if `edatas` and `parameter_mapping` are provided.
- **edatas** (`typing.Optional[typing.List[typing.Union[amici.swig_wrappers.ExpData, amici.amici.ExpDataPtr]]]`) – Experimental data. Parameters are inserted in-place for simulation.
- **parameter_mapping** (`typing.Optional[amici.parameter_mapping.ParameterMapping]`) – Optional precomputed PETab parameter mapping for efficiency, as generated by `create_parameter_mapping()`.
- **scaled_parameters** (`typing.Optional[bool]`) – If True, `problem_parameters` are assumed to be on the scale provided in the PETab parameter table and will be unscaled. If False, they are assumed to be in linear scale.
- **log_level** (`int`) – Log level, see `amici.logging` module.
- **num_threads** (`int`) – Number of threads to use for simulating multiple conditions (only used if compiled with OpenMP).
- **failfast** (`bool`) – Returns as soon as an integration failure is encountered, skipping any remaining simulations.

Return type `typing.Dict[str, typing.Any]`

Returns

Dictionary of

- cost function value (LLH),
- list of `amici.amici.ReturnData` (RDATAS),
- list of `amici.amici.ExpData` (EDATAS),

corresponding to the different simulation conditions. For ordering of simulation conditions, see `petab.Problem.get_simulation_conditions_from_measurement_df()`.

10.5.9 amici.petab_simulate

PETab Simulate

Functionality related to the use of AMICI for simulation with PETab's Simulator class.

Use cases:

- generate data for use with PETab's plotting methods
- generate synthetic data

Classes

<code>PetabSimulator(*args[, amici_model])</code>	Implementation of the <i>PEtab Simulator</i> class that uses AMICI.
---	---

class amici.petab_simulate.**PetabSimulator**(*args, amici_model=None, **kwargs)

Implementation of the *PEtab Simulator* class that uses AMICI.

simulate_without_noise(**kwargs)

See petab.simulate.Simulator.simulate() docstring.

Additional keyword arguments can be supplied to specify arguments for the AMICI *PEtab* import, simulate, and export methods. See the docstrings for the respective methods for argument options: - `amici.petab_import.import_petab_problem()`, and - `amici.petab_objective.simulate_petab()`.

Note that some arguments are expected to have already been specified in the Simulator constructor (including the *PEtab* problem).

Return type `pandas.core.frame.DataFrame`

10.5.10 amici.import_utils

Miscellaneous functions related to model import, independent of any specific model format

Functions

<code>cast_to_sym(value, input_name)</code>	Typecasts the value to <code>sympy.Float</code> if possible, and ensures the value is a symbolic expression.
<code>generate_flux_symbol(reaction_index[, name])</code>	Generate identifier symbol for a reaction flux.
<code>generate_measurement_symbol(observable_id)</code>	Generates the appropriate measurement symbol for the provided observable
<code>generate_regularization_symbol(observable_id)</code>	Generates the appropriate regularization symbol for the provided observable
<code>grouper(iterable, n[, fillvalue])</code>	Collect data into fixed-length chunks or blocks
<code>noise_distribution_to_cost_function(...)</code>	Parse noise distribution string to a cost function definition amici can work with.
<code>noise_distribution_to_observable_transformation(...)</code>	Parse noise distribution string and extract observable transformation
<code>smart_subs(element, old, new)</code>	Optimized substitution that checks whether anything needs to be done first
<code>smart_subs_dict(sym, subs[, field, reverse])</code>	Substitutes expressions completely flattening them out.
<code>strip_pysb(symbol)</code>	Strips pysb info from a <code>pysb.Component</code> object
<code>symbol_with_assumptions(name)</code>	Central function to create symbols with consistent, canonical assumptions
<code>toposort_symbols(symbols[, field])</code>	Topologically sort symbol definitions according to their interdependency

Classes

<code>ObservableTransformation(value)</code>	Different modes of observable transformation.
--	---

Exceptions

<code>CircularDependencyError(data)</code>
--

exception amici.import_utils.CircularDependencyError(*data*)

class amici.import_utils.ObservableTransformation(*value*)

Different modes of observable transformation.

LIN = 'lin'

LOG = 'log'

LOG10 = 'log10'

amici.import_utils.cast_to_sym(*value*, *input_name*)

Typecasts the value to sympy.Float if possible, and ensures the value is a symbolic expression.

Parameters

- **value** (`typing.Union[typing.SupportsFloat, sympy.core.expr.Expr, sympy.logic.boolalg.BooleanAtom]`) – value to be cast
- **input_name** (`str`) – name of input variable

Return type `sympy.core.expr.Expr`

Returns typecast value

amici.import_utils.generate_flux_symbol(*reaction_index*, *name=None*)

Generate identifier symbol for a reaction flux. This function will always return the same unique python object for a given entity.

Parameters

- **reaction_index** (`int`) – index of the reaction to which the flux corresponds
- **name** (`typing.Optional[str]`) – an optional identifier of the reaction to which the flux corresponds

Return type `sympy.core.symbol.Symbol`

Returns identifier symbol

amici.import_utils.generate_measurement_symbol(*observable_id*)

Generates the appropriate measurement symbol for the provided observable

Parameters **observable_id** (`typing.Union[str, sympy.core.symbol.Symbol]`) – symbol (or string representation) of the observable

Returns symbol for the corresponding measurement

`amici.import_utils.generate_regularization_symbol(observable_id)`

Generates the appropriate regularization symbol for the provided observable

Parameters `observable_id` (`typing.Union[str, sympy.core.symbol.Symbol]`) – symbol (or string representation) of the observable

Returns symbol for the corresponding regularization

`amici.import_utils.grouper(iterable, n, fillvalue=None)`

Collect data into fixed-length chunks or blocks

`grouper('ABCDEFGF', 3, 'x') -> ABC DEF Gxx`

Parameters

- `iterable` (`typing.Iterable`) – any iterable
- `n` (`int`) – chunk length
- `fillvalue` (`typing.Optional[typing.Any]`) – padding for last chunk if length < n

Return type `typing.Iterable[typing.Tuple[typing.Any]]`

Returns `itertools.zip_longest` of requested chunks

`amici.import_utils.noise_distribution_to_cost_function(noise_distribution)`

Parse noise distribution string to a cost function definition amici can work with.

The noise distributions listed in the following are supported. m denotes the measurement, y the simulation, and σ a distribution scale parameter (currently, AMICI only supports a single distribution parameter).

- `'normal'`, `'lin-normal'`: A normal distribution:

$$\pi(m|y, \sigma) = \frac{1}{\sqrt{2\pi}\sigma} \exp\left(-\frac{(m-y)^2}{2\sigma^2}\right)$$

- `'log-normal'`: A log-normal distribution (i.e. $\log(m)$ is normally distributed):

$$\pi(m|y, \sigma) = \frac{1}{\sqrt{2\pi}\sigma m} \exp\left(-\frac{(\log m - \log y)^2}{2\sigma^2}\right)$$

- `'log10-normal'`: A log10-normal distribution (i.e. $\log_{10}(m)$ is normally distributed):

$$\pi(m|y, \sigma) = \frac{1}{\sqrt{2\pi}\sigma m \log(10)} \exp\left(-\frac{(\log_{10} m - \log_{10} y)^2}{2\sigma^2}\right)$$

- `'laplace'`, `'lin-laplace'`: A laplace distribution:

$$\pi(m|y, \sigma) = \frac{1}{2\sigma} \exp\left(-\frac{|m-y|}{\sigma}\right)$$

- `'log-laplace'`: A log-Laplace distribution (i.e. $\log(m)$ is Laplace distributed):

$$\pi(m|y, \sigma) = \frac{1}{2\sigma m} \exp\left(-\frac{|\log m - \log y|}{\sigma}\right)$$

- `'log10-laplace'`: A log10-Laplace distribution (i.e. $\log_{10}(m)$ is Laplace distributed):

$$\pi(m|y, \sigma) = \frac{1}{2\sigma m \log(10)} \exp\left(-\frac{|\log_{10} m - \log_{10} y|}{\sigma}\right)$$

- ‘*binomial*’, ‘*lin-binomial*’: A (continuation of a discrete) binomial distribution, parameterized via the success probability $p = \sigma$:

$$\pi(m|y, \sigma) = \text{Heaviside}(y - m) \cdot \frac{\Gamma(y + 1)}{\Gamma(m + 1)\Gamma(y - m + 1)} \sigma^m (1 - \sigma)^{(y-m)}$$

- ‘*negative-binomial*’, ‘*lin-negative-binomial*’: A (continuation of a discrete) negative binomial distribution, with $\text{mean} = y$, parameterized via success probability p :

$$\pi(m|y, \sigma) = \frac{\Gamma(m + r)}{\Gamma(m + 1)\Gamma(r)} (1 - \sigma)^m \sigma^r$$

where

$$r = \frac{1 - \sigma}{\sigma} y$$

The distributions above are for a single data point. For a collection $D = \{m_i\}_i$ of data points and corresponding simulations $Y = \{y_i\}_i$ and noise parameters $\Sigma = \{\sigma_i\}_i$, AMICI assumes independence, i.e. the full distributions is

$$\pi(D|Y, \Sigma) = \prod_i \pi(m_i|y_i, \sigma_i)$$

AMICI uses the logarithm $\log(\pi(m|y, \sigma))$.

In addition to the above mentioned distributions, it is also possible to pass a function taking a symbol string and returning a log-distribution string with variables ‘{str_symbol}’, ‘m{str_symbol}’, ‘sigma{str_symbol}’ for y , m , σ , respectively.

Parameters `noise_distribution` (`typing.Union[str, typing.Callable]`) – An identifier specifying a noise model. Possible values are

{‘*normal*’, ‘*lin-normal*’, ‘*log-normal*’, ‘*log10-normal*’, ‘*laplace*’, ‘*lin-laplace*’, ‘*log-laplace*’, ‘*log10-laplace*’, ‘*binomial*’, ‘*lin-binomial*’, ‘*negative-binomial*’, ‘*lin-negative-binomial*’, <Callable>}

For the meaning of the values see above.

Return type `typing.Callable[[str], str]`

Returns A function that takes a `strSymbol` and then creates a cost function string (negative log-likelihood) from it, which can be sympified.

`amici.import_utils.noise_distribution_to_observable_transformation(noise_distribution)`

Parse noise distribution string and extract observable transformation

Parameters `noise_distribution` (`typing.Union[str, typing.Callable]`) – see `noise_distribution_to_cost_function()`

Return type `amici.import_utils.ObservableTransformation`

Returns observable transformation

`amici.import_utils.smart_subs(element, old, new)`

Optimized substitution that checks whether anything needs to be done first

Parameters

- **element** (`sympy.core.expr.Expr`) – substitution target
- **old** (`sympy.core.symbol.Symbol`) – to be substituted

- **new** (`sympy.core.expr.Expr`) – substitution value

Return type `sympy.core.expr.Expr`

Returns substituted expression

`amici.import_utils.smart_subs_dict(sym, subs, field=None, reverse=True)`

Substitutes expressions completely flattening them out. Requires sorting of expressions with `toposort`.

Parameters

- **sym** (`sympy.core.expr.Expr`) – Symbolic expression in which expressions will be substituted
- **subs** (`typing.Dict[sympy.core.symbol.Symbol, typing.Union[typing.Dict[str, sympy.core.expr.Expr], sympy.core.expr.Expr]]`) – Substitutions
- **field** (`typing.Optional[str]`) – Field of substitution expressions in `subs.values()`, if applicable
- **reverse** (`bool`) – Whether ordering in `subs` should be reversed. Note that substitution requires the reverse order of what is required for evaluation.

Return type `sympy.core.expr.Expr`

Returns Substituted symbolic expression

`amici.import_utils.strip_pysb(symbol)`

Strips `pysb` info from a `pysb.Component` object

Parameters **symbol** (`sympy.core.basic.Basic`) – symbolic expression

Return type `sympy.core.basic.Basic`

Returns stripped expression

`amici.import_utils.symbol_with_assumptions(name)`

Central function to create symbols with consistent, canonical assumptions

Parameters **name** (`str`) – name of the symbol

Returns symbol with canonical assumptions

`amici.import_utils.toposort_symbols(symbols, field=None)`

Topologically sort symbol definitions according to their interdependency

Parameters

- **symbols** (`typing.Dict[sympy.core.symbol.Symbol, typing.Union[typing.Dict[str, sympy.core.expr.Expr], sympy.core.expr.Expr]]`) – symbol definitions
- **field** (`typing.Optional[str]`) – field of definition `values()` that is used to compute interdependency

Return type `typing.Dict[sympy.core.symbol.Symbol, typing.Union[typing.Dict[str, sympy.core.expr.Expr], sympy.core.expr.Expr]]`

Returns ordered symbol definitions

10.5.11 amici.ode_export

C++ Export

This module provides all necessary functionality specify an ODE model and generate executable C++ simulation code. The user generally won't have to directly call any function from this module as this will be done by `amici.pysb_import.pysb2amici()`, `amici.sbml_import.SbmlImporter.sbml2amici()` and `amici.petab_import.import_model()`.

Functions

<code>apply_template(source_file, target_file, ...)</code>	Load source file, apply template substitution as provided in <code>templateData</code> and save as <code>targetFile</code> .
<code>get_function_extern_declaration(fun, name)</code>	Constructs the extern function declaration for a given function
<code>get_model_override_implementation(fun, name)</code>	Constructs <code>amici::Model::*</code> override implementation for a given function
<code>get_sunindex_extern_declaration(fun, name, ...)</code>	Constructs the function declaration for an index function of a given function
<code>get_sunindex_override_implementation(fun, ...)</code>	Constructs the <code>amici::Model</code> function implementation for an index function of a given function
<code>is_valid_identifier(x)</code>	Check whether x is a valid identifier for conditions, parameters, observables.
<code>remove_argument_types(signature)</code>	Strips argument types from a function signature
<code>smart_is_zero_matrix(x)</code>	A faster implementation of sympy's <code>is_zero_matrix</code>
<code>smart_jacobian(eq, sym_var)</code>	Wrapper around symbolic jacobian with some additional checks that reduce computation time for large matrices
<code>smart_multiply(x, y)</code>	Wrapper around symbolic multiplication with some additional checks that reduce computation time for large matrices
<code>var_in_function_signature(name, varname)</code>	Checks if the values for a symbolic variable is passed in the signature of a function

Classes

<code>ODEExporter(ode_model[, outdir, verbose, ...])</code>	The <code>ODEExporter</code> class generates AMICI C++ files for ODE model as defined in symbolic expressions.
<code>ODEModel([verbose, simplify, cache_simplify])</code>	Defines an Ordinary Differential Equation as set of <code>ModelQuantities</code> .
<code>TemplateAmici(template)</code>	Template format used in AMICI (see <code>string.Template</code> for more details).

```
class amici.ode_export.ODEExporter(ode_model, outdir=None, verbose=False,
                                   assume_pow_positivity=False, compiler=None,
                                   allow_reinit_fixpar_initcond=True, generate_sensitivity_code=True,
                                   model_name='model')
```

The `ODEExporter` class generates AMICI C++ files for ODE model as defined in symbolic expressions.

Variables

- `model` – ODE definition

- **verbose** – more verbose output if True
- **assume_pow_positivity** – if set to true, a special pow function is used to avoid problems with state variables that may become negative due to numerical errors
- **compiler** – distutils/setuptools compiler selection to build the Python extension
- **functions** – carries C++ function signatures and other specifications
- **model_name** – name of the model that will be used for compilation
- **model_path** – path to the generated model specific files
- **model_swig_path** – path to the generated swig files
- **allow_reinit_fixpar_initcond** – indicates whether reinitialization of initial states depending on fixedParameters is allowed for this model
- **_build_hints** – If the given model uses special functions, this set contains hints for model building.
- **generate_sensitivity_code** – Specifies whether code for sensitivity computation is to be generated

Note: When importing large models (several hundreds of species or parameters), import time can potentially be reduced by using multiple CPU cores. This is controlled by setting the `AMICI_IMPORT_NPROCS` environment variable to the number of parallel processes that are to be used (default: 1). Note that for small models this may (slightly) increase import times.

`compile_model()`

Compiles the generated code it into a simulatable module

Return type `None`

`generate_model_code()`

Generates the native C++ code for the loaded model and a Matlab script that can be run to compile a mex file from the C++ code

Return type `None`

`set_name(model_name)`

Sets the model name

Parameters `model_name` (`str`) – name of the model (may only contain upper and lower case letters, digits and underscores, and must not start with a digit)

Return type `None`

`set_paths(output_dir=None)`

Set output paths for the model and create if necessary

Parameters `output_dir` (`typing.Union[pathlib.Path, str, None]`) – relative or absolute path where the generated model code is to be placed. If `None`, this will default to `amici-{self.model_name}` in the current working directory. will be created if it does not exist.

Return type `None`

```
class amici.ode_export.ODEModel(verbose=False, simplify=<function _default_simplify>,
                                cache_simplify=False)
```

Defines an Ordinary Differential Equation as set of ModelQuantities. This class provides general purpose interfaces to compute arbitrary symbolic derivatives that are necessary for model simulation or sensitivity computation.

Variables

- **_states** – list of state variables
- **_observables** – list of observables
- **_eventobservables** – list of event observables
- **_sigmays** – list of sigmas for observables
- **_sigmazs** – list of sigmas for event observables
- **_parameters** – list of parameters
- **_loglikelihoods** – list of loglikelihoods for observables
- **_loglikelihoodzs** – list of loglikelihoods for event observables
- **_loglikelihoodrzs** – list of loglikelihoods for event observable regularizations
- **_expressions** – list of expressions instances
- **_conservationlaws** – list of conservation laws
- **_symboldim_funs** – define functions that compute model dimensions, these are functions as the underlying symbolic expressions have not been populated at compile time
- **_eqs** – carries symbolic formulas of the symbolic variables of the model
- **_sparseeqs** – carries linear list of all symbolic formulas for sparsified variables
- **_vals** – carries numeric values of symbolic identifiers of the symbolic variables of the model
- **_names** – carries the names of symbolic identifiers of the symbolic variables of the model
- **_syms** – carries symbolic identifiers of the symbolic variables of the model
- **_sparsesyms** – carries linear list of all symbolic identifiers for sparsified variables
- **_colptrs** – carries column pointers for sparsified variables. See `SUNMatrixContent_Sparse` definition in `sunmatrix/sunmatrix_sparse.h`
- **_rowvals** – carries row values for sparsified variables. See `SUNMatrixContent_Sparse` definition in `sunmatrix/sunmatrix_sparse.h`
- **_equation_prototype** – defines the attribute from which an equation should be generated via list comprehension (see `ODEModel._generate_equation()`)
- **_variable_prototype** – defines the attribute from which a variable should be generated via list comprehension (see `ODEModel._generate_symbol()`)
- **_value_prototype** – defines the attribute from which a value should be generated via list comprehension (see `ODEModel._generate_value()`)
- **_total_derivative_prototypes** – defines how a total derivative equation is computed for an equation, key defines the name and values should be arguments for `ODEModel.totalDerivative()`
- **_lock_total_derivative** – add chainvariables to this set when computing total derivative from a partial derivative call to enforce a partial derivative in the next recursion. prevents infinite recursion

- **_simplify** – If not None, this function will be used to simplify symbolic derivative expressions. Receives sympy expressions as only argument. To apply multiple simplifications, wrap them in a lambda expression.
- **_x0_fixedParameters_idx** – Index list of subset of states for which x0_fixedParameters was computed
- **_w_recursion_depth** – recursion depth in w, quantified as nilpotency of dwdw
- **_has_quadratic_nllh** – whether all observables have a gaussian noise model, i.e. whether res and FIM make sense.
- **_code_printer** – Code printer to generate C++ code
- **_z2event** – list of event indices for each event observable

add_component(*component*, *insert_first=False*)

Adds a new ModelQuantity to the model.

Parameters

- **component** (*amici.ode_model.ModelQuantity*) – model quantity to be added
- **insert_first** (*typing.Optional[bool]*) – whether to add quantity first or last, relevant when components may refer to other components of the same type.

Return type *None*

add_conservation_law(*state*, *total_abundance*, *coefficients*)

Adds a new conservation law to the model. A conservation law is defined by the conserved quantity $T = \sum_i (a_i * x_i)$, where a_i are coefficients and x_i are different state variables.

Parameters

- **state** (*sympy.core.symbol.Symbol*) – symbolic identifier of the state that should be replaced by the conservation law (x_j)
- **total_abundance** (*sympy.core.symbol.Symbol*) – symbolic identifier of the total abundance (T/a_j)
- **coefficients** (*typing.Dict[sympy.core.symbol.Symbol, sympy.core.expr.Expr]*) – Dictionary of coefficients {x_i: a_i}

Return type *None*

colptrs(*name*)

Returns (and constructs if necessary) the column pointers for a sparsified symbolic variable.

Parameters **name** (*str*) – name of the symbolic variable

Return type *typing.Union[typing.List[sympy.core.numbers.Number], typing.List[typing.List[sympy.core.numbers.Number]]]*

Returns list containing the column pointers

conservation_law_has_multispecies(*tcl*)

Checks whether a conservation law has multiple species or it just defines one constant species

Parameters **tcl** (*amici.ode_model.ConservationLaw*) – conservation law

Return type *bool*

Returns boolean indicating if conservation_law is not None

eq(*name*)

Returns (and constructs if necessary) the formulas for a symbolic entity.

Parameters **name** (`str`) – name of the symbolic variable

Return type `sympy.matrices.dense.MutableDenseMatrix`

Returns matrix of symbolic formulas

free_symbols()

Returns list of free symbols that appear in ODE RHS and initial conditions.

Return type `typing.Set[sympy.core.basic.Basic]`

generate_basic_variables()

Generates the symbolic identifiers for all variables in `ODEModel._variable_prototype`

Return type `None`

get_appearance_counts(*idxs*)

Counts how often a state appears in the time derivative of another state and expressions for a subset of states

Parameters **idxs** (`typing.List[int]`) – list of state indices for which counts are to be computed

Return type `typing.List[int]`

Returns list of counts for the states ordered according to the provided indices

get_conservation_laws()

Returns a list of states with conservation law set

Return type `typing.List[typing.Tuple[sympy.core.symbol.Symbol, sympy.core.expr.Expr]]`

Returns list of state identifiers

get_observable_transformations()

List of observable transformations

Return type `typing.List[amici.import_utils.ObservableTransformation]`

Returns list of transformations

get_solver_indices()

Returns a mapping that maps rdata species indices to solver indices

Return type `typing.Dict[int, int]`

Returns dictionary mapping rdata species indices to solver indices

import_from_sbml_importer(*si*, *compute_cls=True*)

Imports a model specification from a `amici.sbml_import.SbmlImporter` instance.

Parameters

- **si** (`amici.sbml_import.SbmlImporter`) – imported SBML model
- **compute_cls** (`typing.Optional[bool]`) – whether to compute conservation laws

Return type `None`

name(*name*)

Returns (and constructs if necessary) the names of a symbolic variable

Parameters **name** (*str*) – name of the symbolic variable

Return type `typing.List[str]`

Returns list of names

num_cons_law()

Number of conservation laws.

Return type `int`

Returns number of conservation laws

num_const()

Number of Constants.

Return type `int`

Returns number of constant symbols

num_eventobs()

Number of Event Observables.

Return type `int`

Returns number of event observable symbols

num_events()

Number of Events.

Return type `int`

Returns number of event symbols (length of the root vector in AMICI)

num_expr()

Number of Expressions.

Return type `int`

Returns number of expression symbols

num_obs()

Number of Observables.

Return type `int`

Returns number of observable symbols

num_par()

Number of Parameters.

Return type `int`

Returns number of parameter symbols

num_state_reinits()

Number of solver states which would be reinitialized after preequilibration

Return type `int`

Returns number of state variable symbols with reinitialization

num_states_rdata()

Number of states.

Return type `int`**Returns** number of state variable symbols**num_states_solver()**

Number of states after applying conservation laws.

Return type `int`**Returns** number of state variable symbols**parse_events()**

This function checks the right-hand side for roots of Heaviside functions or events, collects the roots, removes redundant roots, and replaces the formulae of the found roots by identifiers of AMICI's Heaviside function implementation in the right-hand side

Return type `None`**rowvals**(*name*)

Returns (and constructs if necessary) the row values for a sparsified symbolic variable.

Parameters **name** (`str`) – name of the symbolic variable**Return type** `typing.Union[typing.List[sympy.core.numbers.Number], typing.List[typing.List[sympy.core.numbers.Number]]]`**Returns** list containing the row values**sparseeq**(*name*)

Returns (and constructs if necessary) the sparsified formulas for a sparsified symbolic variable.

Parameters **name** – name of the symbolic variable**Return type** `sympy.matrices.dense.MutableDenseMatrix`**Returns** linearized matrix containing the symbolic formulas**sparsesym**(*name*, *force_generate=True*)

Returns (and constructs if necessary) the sparsified identifiers for a sparsified symbolic variable.

Parameters

- **name** (`str`) – name of the symbolic variable
- **force_generate** (`bool`) – whether the symbols should be generated if not available

Return type `typing.List[str]`**Returns** linearized Matrix containing the symbolic identifiers**state_has_conservation_law**(*ix*)

Checks whether the state at specified index has a conservation law set

Parameters **ix** (`int`) – state index**Return type** `bool`**Returns** boolean indicating if `conservation_law` is not `None`

state_has_fixed_parameter_initial_condition(*ix*)

Checks whether the state at specified index has a fixed parameter initial condition

Parameters *ix* (`int`) – state index

Return type `bool`

Returns boolean indicating if any of the initial condition free variables is contained in the model constants

state_is_constant(*ix*)

Checks whether the temporal derivative of the state is zero

Parameters *ix* (`int`) – state index

Return type `bool`

Returns boolean indicating if constant over time

sym(*name*)

Returns (and constructs if necessary) the identifiers for a symbolic entity.

Parameters *name* (`str`) – name of the symbolic variable

Return type `sympy.matrices.dense.MutableDenseMatrix`

Returns matrix of symbolic identifiers

sym_names()

Returns a list of names of generated symbolic variables

Return type `typing.List[str]`

Returns list of names

sym_or_eq(*name*, *varname*)

Returns symbols or equations depending on whether a given variable appears in the function signature or not.

Parameters

- *name* (`str`) – name of function for which the signature should be checked
- *varname* (`str`) – name of the variable which should be contained in the function signature

Return type `sympy.matrices.dense.MutableDenseMatrix`

Returns the variable symbols if the variable is part of the signature and the variable equations otherwise.

val(*name*)

Returns (and constructs if necessary) the numeric values of a symbolic entity

Parameters *name* (`str`) – name of the symbolic variable

Return type `typing.List[float]`

Returns list containing the numeric values

class amici.ode_export.TemplateAmici(*template*)

Template format used in AMICI (see `string.Template` for more details).

Variables *delimiter* – delimiter that identifies template variables

delimiter = 'TPL_'

```
pattern = re.compile('\n TPL_(?:\n (?P<escaped>TPL_) | # Escape sequence of two  
delimiters\n (?P<named>(?:a:[_a-z][_a-z0-9]*)) | # delimiter and a Python  
identifier\n {(?:P<braced>(?:a:[_a-z][_a-z0, re.IGNORECASE|re.VERBOSE)
```

`amici.ode_export.apply_template(source_file, target_file, template_data)`

Load source file, apply template substitution as provided in templateData and save as targetFile.

Parameters

- **source_file** (`typing.Union[str, pathlib.Path]`) – relative or absolute path to template file
- **target_file** (`typing.Union[str, pathlib.Path]`) – relative or absolute path to output file
- **template_data** (`typing.Dict[str, str]`) – template keywords to substitute (key is template variable without `TemplateAmici.delimiter`)

Return type `None`

`amici.ode_export.get_function_extern_declaration(fun, name)`

Constructs the extern function declaration for a given function

Parameters

- **fun** (`str`) – function name
- **name** (`str`) – model name

Return type `str`

Returns C++ function definition string

`amici.ode_export.get_model_override_implementation(fun, name, nobody=False)`

Constructs `amici::Model::*` override implementation for a given function

Parameters

- **fun** (`str`) – function name
- **name** (`str`) – model name
- **nobody** (`bool`) – whether the function has a nontrivial implementation

Return type `str`

Returns C++ function implementation string

`amici.ode_export.get_sunindex_extern_declaration(fun, name, indextype)`

Constructs the function declaration for an index function of a given function

Parameters

- **fun** (`str`) – function name
- **name** (`str`) – model name
- **indextype** (`str`) – index function { ‘colptrs’, ‘rowvals’ }

Return type `str`

Returns C++ function declaration string

`amici.ode_export.get_sunindex_override_implementation(fun, name, indextype, nobody=False)`

Constructs the `amici::Model` function implementation for an index function of a given function

Parameters

- **fun** (`str`) – function name
- **name** (`str`) – model name
- **indextype** (`str`) – index function {‘colptrs’, ‘rowvals’}
- **nobody** (`bool`) – whether the corresponding function has a nontrivial implementation

Return type `str`

Returns C++ function implementation string

`amici.ode_export.is_valid_identifier(x)`

Check whether `x` is a valid identifier for conditions, parameters, observables... . Identifiers may only contain upper and lower case letters, digits and underscores, and must not start with a digit.

Parameters **x** (`str`) – string to check

Return type `bool`

Returns True if valid, False otherwise

`amici.ode_export.remove_argument_types(signature)`

Strips argument types from a function signature

Parameters **signature** (`str`) – function signature

Return type `str`

Returns string that can be used to construct function calls with the same variable names and ordering as in the function signature

`amici.ode_export.smart_is_zero_matrix(x)`

A faster implementation of `sympy`’s `is_zero_matrix`

Avoids repeated indexer type checks and double iteration to distinguish False/None. Found to be about 100x faster for large matrices.

Parameters **x** (`typing.Union[sympy.matrices.dense.MutableDenseMatrix, sympy.matrices.sparse.MutableSparseMatrix]`) – Matrix to check

Return type `bool`

`amici.ode_export.smart_jacobian(eq, sym_var)`

Wrapper around symbolic jacobian with some additional checks that reduce computation time for large matrices

Parameters

- **eq** (`sympy.matrices.dense.MutableDenseMatrix`) – equation
- **sym_var** (`sympy.matrices.dense.MutableDenseMatrix`) – differentiation variable

Return type `sympy.matrices.sparse.MutableSparseMatrix`

Returns jacobian of eq wrt sym_var

`amici.ode_export.smart_multiply(x, y)`

Wrapper around symbolic multiplication with some additional checks that reduce computation time for large matrices

Parameters

- **x** (`typing.Union[sympy.matrices.dense.MutableDenseMatrix, sympy.matrices.sparse.MutableSparseMatrix]`) – educt 1
- **y** (`sympy.matrices.dense.MutableDenseMatrix`) – educt 2

Return type `typing.Union[sympy.matrices.dense.MutableDenseMatrix, sympy.matrices.sparse.MutableSparseMatrix]`

Returns product

`amici.ode_export.var_in_function_signature(name, varname)`

Checks if the values for a symbolic variable is passed in the signature of a function

Parameters

- **name** (`str`) – name of the function
- **varname** (`str`) – name of the symbolic variable

Return type `bool`

Returns boolean indicating whether the variable occurs in the function signature

10.5.12 amici.ode_model

Objects for AMICI's internal ODE model representation

Classes

<i>ConservationLaw</i> (identifier, name, value, ...)	A conservation law defines the absolute the total amount of a (weighted) sum of states
<i>Constant</i> (identifier, name, value)	A Constant is a fixed variable in the model with respect to which sensitivities cannot be computed, abbreviated by k.
<i>Event</i> (identifier, name, value, state_update)	An Event defines either a SBML event or a root of the argument of a Heaviside function.
<i>EventObservable</i> (identifier, name, value, event)	An Event Observable links model simulations to event related experimental measurements, abbreviated by z.
<i>Expression</i> (identifier, name, value)	An Expression is a recurring elements in symbolic formulas.
<i>LogLikelihood</i> (identifier, name, value)	A LogLikelihood defines the distance between measurements and experiments for a particular observable.
<i>LogLikelihoodRZ</i> (identifier, name, value)	Loglikelihood for event observables regularization
<i>LogLikelihoodY</i> (identifier, name, value)	Loglikelihood for observables
<i>LogLikelihoodZ</i> (identifier, name, value)	Loglikelihood for event observables
<i>ModelQuantity</i> (identifier, name, value)	Base class for model components
<i>Observable</i> (identifier, name, value[, ...])	An Observable links model simulations to experimental measurements, abbreviated by y.
<i>Parameter</i> (identifier, name, value)	A Parameter is a free variable in the model with respect to which sensitivities may be computed, abbreviated by p.
<i>Sigma</i> (identifier, name, value)	A Standard Deviation Sigma rescales the distance between simulations and measurements when computing residuals or objective functions, abbreviated by $\sigma\{y, z\}$.
<i>SigmaY</i> (identifier, name, value)	Standard deviation for observables
<i>SigmaZ</i> (identifier, name, value)	Standard deviation for event observables
<i>State</i> (identifier, name, init, dt)	A State variable defines an entity that evolves with time according to the provided time derivative, abbreviated by x.

class amici.ode_model.**ConservationLaw**(*identifier, name, value, coefficients, state_id*)

A conservation law defines the absolute the total amount of a (weighted) sum of states

get_ncoeff(*state_id*)

Computes the normalized coefficient a_i/a_j where i is the index of the provided *state_id* and j is the index of the state that is replaced by this conservation law. This can be used to compute both $dtotal_cl/dx_rdata$ ($=ncoeff$) and dx_rdata/dx_solver ($=-ncoeff$).

Parameters *state_id* – identifier of the state

Return type `typing.Union[sympy.core.expr.Expr, int, float]`

Returns normalized coefficient of the state

get_x_rdata()

Returns the expression that allows computation of *x_rdata* for the state that this conservation law replaces.

Returns *x_rdata* expression

class amici.ode_model.Constant(*identifier, name, value*)

A Constant is a fixed variable in the model with respect to which sensitivities cannot be computed, abbreviated by k.

class amici.ode_model.Event(*identifier, name, value, state_update, initial_value=True*)

An Event defines either a SBML event or a root of the argument of a Heaviside function. The Heaviside functions will be tracked via the vector *h* during simulation and are needed to inform the ODE solver about a discontinuity in either the right-hand side or the states themselves, causing a reinitialization of the solver.

get_initial_value()

Return the initial value for the root function.

Return type bool

Returns initial value formula

class amici.ode_model.EventObservable(*identifier, name, value, event, measurement_symbol=None, transformation='lin'*)

An Event Observable links model simulations to event related experimental measurements, abbreviated by z.

Variables *_event* – symbolic event identifier

get_event()

Get the symbolic identifier of the corresponding event.

Return type sympy.core.symbol.Symbol

Returns symbolic identifier

class amici.ode_model.Expression(*identifier, name, value*)

An Expression is a recurring elements in symbolic formulas. Specifying this may yield more compact expression which may lead to substantially shorter model compilation times, but may also reduce model simulation time. Abbreviated by w.

class amici.ode_model.LogLikelihoodRZ(*identifier, name, value*)

Loglikelihood for event observables regularization

class amici.ode_model.LogLikelihoodY(*identifier, name, value*)

Loglikelihood for observables

class amici.ode_model.LogLikelihoodZ(*identifier, name, value*)

Loglikelihood for event observables

class amici.ode_model.ModelQuantity(*identifier, name, value*)

Base class for model components

get_id()

ModelQuantity identifier

Return type sympy.core.symbol.Symbol

Returns identifier of the ModelQuantity

get_name()

ModelQuantity name

Return type str

Returns name of the ModelQuantity

get_val()

ModelQuantity value

Return type `sympy.core.expr.Expr`

Returns value of the ModelQuantity

set_val(val)

Set ModelQuantity value

Returns value of the ModelQuantity

class `amici.ode_model.Observable(identifier, name, value, measurement_symbol=None, transformation=ObservableTransformation.LIN)`

An Observable links model simulations to experimental measurements, abbreviated by y.

Variables

- **_measurement_symbol** – sympy symbol used in the objective function to represent measurements to this observable
- **trafo** – observable transformation, only applies when evaluating objective function or residuals

get_measurement_symbol()

Return type `sympy.core.symbol.Symbol`

get_regularization_symbol()

Return type `sympy.core.symbol.Symbol`

class `amici.ode_model.Parameter(identifier, name, value)`

A Parameter is a free variable in the model with respect to which sensitivities may be computed, abbreviated by p.

class `amici.ode_model.SigmaY(identifier, name, value)`

Standard deviation for observables

class `amici.ode_model.SigmaZ(identifier, name, value)`

Standard deviation for event observables

class `amici.ode_model.State(identifier, name, init, dt)`

A State variable defines an entity that evolves with time according to the provided time derivative, abbreviated by x.

Variables

- **_conservation_law** – algebraic formula that allows computation of this state according to a conservation law
- **_dt** – algebraic formula that defines the temporal derivative of this state

get_dt()

Gets the time derivative

Return type `sympy.core.expr.Expr`

Returns time derivative

get_dx_rdata_dx_solver(*state_id*)

Returns the expression that allows computation of `dx_rdata_dx_solver` for this state, accounting for conservation laws.

Returns `dx_rdata_dx_solver` expression

get_free_symbols()

Gets the set of free symbols in time derivative and initial conditions

Return type `typing.Set[sympy.core.basic.Basic]`

Returns free symbols

get_x_rdata()

Returns the expression that allows computation of `x_rdata` for this state, accounting for conservation laws.

Returns `x_rdata` expression

has_conservation_law()

Checks whether this state has a conservation law assigned.

Returns True if assigned, False otherwise

set_conservation_law(*law*)

Sets the conservation law of a state.

If a conservation law is set, the respective state will be replaced by an algebraic formula according to the respective conservation law.

Parameters *law* (`amici.ode_model.ConservationLaw`) – linear sum of states that if added to this state remain constant over time

Return type `None`

set_dt(*dt*)

Sets the time derivative

Parameters *dt* (`sympy.core.expr.Expr`) – time derivative

Return type `None`

10.5.13 amici.plotting

Plotting

Plotting related functions

Functions

<code>plotObservableTrajectories</code> (<i>rdata</i> [, ...])	Plot observable trajectories
<code>plotStateTrajectories</code> (<i>rdata</i> [, ...])	Plot state trajectories
<code>plot_jacobian</code> (<i>rdata</i>)	Plot Jacobian as heatmap.
<code>plot_observable_trajectories</code> (<i>rdata</i> [, ...])	Plot observable trajectories
<code>plot_state_trajectories</code> (<i>rdata</i> [, ...])	Plot state trajectories

```
amici.plotting.plotObservableTrajectories(rdata, observable_indices=None, ax=None, model=None,
                                         prefer_names=True)
```

Plot observable trajectories

Parameters

- **rdata** (*amici.numpy.ReturnDataView*) – AMICI simulation results as returned by *amici.amici.runAmiciSimulation()*
- **observable_indices** (*typing.Optional[typing.Iterable[int]]*) – Indices of observables for which trajectories are to be plotted
- **ax** (*typing.Optional[matplotlib.axes._axes.Axes]*) – matplotlib Axes instance to plot into
- **model** (*typing.Optional[amici.amici.Model]*) – amici model instance
- **prefer_names** (*bool*) – Whether observables names should be preferred over IDs, if available.

Return type *None*

```
amici.plotting.plotStateTrajectories(rdata, state_indices=None, ax=None, model=None,
                                     prefer_names=True)
```

Plot state trajectories

Parameters

- **rdata** (*amici.numpy.ReturnDataView*) – AMICI simulation results as returned by *amici.amici.runAmiciSimulation()*
- **state_indices** (*typing.Optional[typing.Iterable[int]]*) – Indices of states for which trajectories are to be plotted
- **ax** (*typing.Optional[matplotlib.axes._axes.Axes]*) – matplotlib Axes instance to plot into
- **model** (*typing.Optional[amici.amici.Model]*) – amici model instance
- **prefer_names** (*bool*) – Whether state names should be preferred over IDs, if available.

Return type *None*

```
amici.plotting.plot_jacobian(rdata)
```

Plot Jacobian as heatmap.

```
amici.plotting.plot_observable_trajectories(rdata, observable_indices=None, ax=None, model=None,
                                             prefer_names=True)
```

Plot observable trajectories

Parameters

- **rdata** (*amici.numpy.ReturnDataView*) – AMICI simulation results as returned by *amici.amici.runAmiciSimulation()*
- **observable_indices** (*typing.Optional[typing.Iterable[int]]*) – Indices of observables for which trajectories are to be plotted
- **ax** (*typing.Optional[matplotlib.axes._axes.Axes]*) – matplotlib Axes instance to plot into
- **model** (*typing.Optional[amici.amici.Model]*) – amici model instance

- **prefer_names** (*bool*) – Whether observables names should be preferred over IDs, if available.

Return type *None*

`amici.plotting.plot_state_trajectories(rdata, state_indices=None, ax=None, model=None, prefer_names=True)`

Plot state trajectories

Parameters

- **rdata** (*amici.numpy.ReturnDataView*) – AMICI simulation results as returned by `amici.amici.runAmiciSimulation()`
- **state_indices** (*typing.Optional[typing.Iterable[int]]*) – Indices of states for which trajectories are to be plotted
- **ax** (*typing.Optional[matplotlib.axes._axes.Axes]*) – matplotlib Axes instance to plot into
- **model** (*typing.Optional[amici.amici.Model]*) – amici model instance
- **prefer_names** (*bool*) – Whether state names should be preferred over IDs, if available.

Return type *None*

10.5.14 amici.pandas

Pandas Wrappers

This module contains convenience wrappers that allow for easy interconversion between C++ objects from *amici*, *amici* and pandas DataFrames

Functions

<code>constructEdataFromDataFrame(df, model, condition)</code>	Constructs an ExpData instance according to the provided Model and DataFrame.
<code>getDataObservablesAsDataFrame(model, edata_list)</code>	Write Observables from experimental data as DataFrame.
<code>getEdataFromDataFrame(model, df[, by_id])</code>	Constructs a ExpData instances according to the provided Model and DataFrame.
<code>getResidualsAsDataFrame(model, edata_list, ...)</code>	Convert a list of ReturnData and ExpData to pandas DataFrame with residuals.
<code>getSimulationObservablesAsDataFrame(model, ...)</code>	Write Observables from simulation results as DataFrame.
<code>getSimulationStatesAsDataFrame(model, ...[, ...])</code>	Get model state according to lists of ReturnData and ExpData.
<code>get_expressions_as_dataframe(model, ...[, by_id])</code>	Get values of model expressions from lists of ReturnData as DataFrame.

`amici.pandas.getDataObservablesAsDataFrame(model, edata_list, by_id=False)`

Write Observables from experimental data as DataFrame.

Parameters

- **model** (`typing.Union[amici.amici.ModelPtr, amici.amici.Model]`) – Model instance.
- **edata_list** (`typing.Union[typing.List[amici.amici.ExpData], typing.List[amici.amici.ExpDataPtr], amici.amici.ExpData, amici.amici.ExpDataPtr]`) – list of ExpData instances with experimental data. May also be a single ExpData instance.
- **by_id** (`typing.Optional[bool]`) – If True, uses observable ids as column names in the generated DataFrame, otherwise the possibly more descriptive observable names are used.

Return type `pandas.core.frame.DataFrame`

Returns pandas DataFrame with conditions/timepoints as rows and observables as columns.

`amici.pandas.getEdataFromDataFrame(model, df, by_id=False)`

Constructs a ExpData instances according to the provided Model and DataFrame.

Parameters

- **df** (`pandas.core.frame.DataFrame`) – dataframe with Observable Names/Ids, FixedParameter Names/Ids and time as columns. Standard deviations may be specified by appending ‘_std’ as suffix. Preequilibration fixedParameters may be specified by appending ‘_preeq’ as suffix. Presimulation fixedParameters may be specified by appending ‘_presim’ as suffix. Presimulation time may be specified as ‘t_presim’ column.
- **model** (`typing.Union[amici.amici.ModelPtr, amici.amici.Model]`) – Model instance.
- **by_id** (`typing.Optional[bool]`) – Whether the column names in *df* are based on ids or names, corresponding to how the dataframe was created in the first place.

Return type `typing.List[amici.amici.ExpData]`

Returns list of ExpData instances.

`amici.pandas.getResidualsAsDataFrame(model, edata_list, rdata_list, by_id=False)`

Convert a list of ReturnData and ExpData to pandas DataFrame with residuals.

Parameters

- **model** (`amici.amici.Model`) – Model instance.
- **edata_list** (`typing.Union[typing.List[amici.amici.ExpData], typing.List[amici.amici.ExpDataPtr], amici.amici.ExpData, amici.amici.ExpDataPtr]`) – list of ExpData instances with experimental data. May also be a single ExpData instance.
- **rdata_list** (`typing.Union[typing.List[amici.numpy.ReturnDataView], amici.numpy.ReturnDataView]`) – list of ReturnData instances corresponding to ExpData. May also be a single ReturnData instance.
- **by_id** (`typing.Optional[bool]`) – bool, optional (default = False) If True, ids are used as identifiers, otherwise the possibly more descriptive names.

Return type `pandas.core.frame.DataFrame`

Returns pandas DataFrame with conditions and residuals.

`amici.pandas.getSimulationObservablesAsDataFrame(model, edata_list, rdata_list, by_id=False)`

Write Observables from simulation results as DataFrame.

Parameters

- **model** (*amici.amici.Model*) – Model instance.
- **edata_list** (*typing.Union[typing.List[amici.amici.ExpData], typing.List[amici.amici.ExpDataPtr], amici.amici.ExpData, amici.amici.ExpDataPtr]*) – list of ExpData instances with experimental data. May also be a single ExpData instance.
- **rdata_list** (*typing.Union[typing.List[amici.numpy.ReturnDataView], amici.numpy.ReturnDataView]*) – list of ReturnData instances corresponding to ExpData. May also be a single ReturnData instance.
- **by_id** (*typing.Optional[bool]*) – If True, ids are used as identifiers, otherwise the possibly more descriptive names.

Return type *pandas.core.frame.DataFrame*

Returns pandas DataFrame with conditions/timepoints as rows and observables as columns.

`amici.pandas.getSimulationStatesAsDataFrame(model, edata_list, rdata_list, by_id=False)`

Get model state according to lists of ReturnData and ExpData.

Parameters

- **model** (*amici.amici.Model*) – Model instance.
- **edata_list** (*typing.Union[typing.List[amici.amici.ExpData], typing.List[amici.amici.ExpDataPtr], amici.amici.ExpData, amici.amici.ExpDataPtr]*) – list of ExpData instances with experimental data. May also be a single ExpData instance.
- **rdata_list** (*typing.Union[typing.List[amici.numpy.ReturnDataView], amici.numpy.ReturnDataView]*) – list of ReturnData instances corresponding to ExpData. May also be a single ReturnData instance.
- **by_id** (*typing.Optional[bool]*) – If True, ids are used as identifiers, otherwise the possibly more descriptive names.

Return type *pandas.core.frame.DataFrame*

Returns pandas DataFrame with conditions/timepoints as rows and state variables as columns.

`amici.pandas.get_expressions_as_dataframe(model, edata_list, rdata_list, by_id=False)`

Get values of model expressions from lists of ReturnData as DataFrame.

Parameters

- **model** (*amici.amici.Model*) – Model instance.
- **edata_list** (*typing.Union[typing.List[amici.amici.ExpData], typing.List[amici.amici.ExpDataPtr], amici.amici.ExpData, amici.amici.ExpDataPtr]*) – list of ExpData instances with experimental data. May also be a single ExpData instance.
- **rdata_list** (*typing.Union[typing.List[amici.numpy.ReturnDataView], amici.numpy.ReturnDataView]*) – list of ReturnData instances corresponding to ExpData. May also be a single ReturnData instance.
- **by_id** (*typing.Optional[bool]*) – If True, ids are used as identifiers, otherwise the possibly more descriptive names.

Return type *pandas.core.frame.DataFrame*

Returns pandas DataFrame with conditions/timepoints as rows and model expressions as columns.

10.5.15 amici.logging

Logging

This module provides custom logging functionality for other amici modules

Functions

<code>get_logger([logger_name, log_level])</code>	Returns (if extistant) or creates an AMICI logger
<code>log_execution_time(description, logger)</code>	Parameterized function decorator that enables automatic execution time tracking
<code>set_log_level(logger, log_level)</code>	rtype None

`amici.logging.get_logger(logger_name='amici', log_level=None, **kwargs)`

Returns (if extistant) or creates an AMICI logger

If the AMICI base logger has already been set up, this method will return it or any of its descendant loggers without overriding the settings - i.e. any values supplied as kwargs will be ignored.

Parameters

- **logger_name** (`typing.Optional[str]`) – Get a logger for a specific namespace, typically `__name__` for code outside of classes or `self.__module__` inside a class
- **log_level** (`typing.Optional[int]`) – Override the default or preset log level for the requested logger. None or False uses the default or preset value. True evaluates to logging.DEBUG. Any integer is used directly.
- **console_output** – Set up a default console log handler if True (default). Only used when the AMICI logger hasn't been set up yet.
- **file_output** – Supply a filename to copy all log output to that file, or set to False to disable (default). Only used when the AMICI logger hasn't been set up yet.
- **capture_warnings** – Capture warnings from Python's warnings module if True (default). Only used when the AMICI logger hasn't been set up yet..

Return type `logging.Logger`

Returns A logging.Logger object with the requested name

`amici.logging.log_execution_time(description, logger)`

Parameterized function decorator that enables automatic execution time tracking

Parameters

- **description** (`str`) – Description of what the decorated function does
- **logger** (`logging.Logger`) – Logger to which execution timing will be printed

Return type `typing.Callable`

`amici.logging.set_log_level(logger, log_level)`

Return type None

10.5.16 amici.gradient_check

Finite Difference Check

This module provides functions to automatically check correctness of amici computed sensitivities using finite difference approximations

Functions

<code>check_derivatives(model, solver[, edata, ...])</code>	Finite differences check for likelihood gradient.
<code>check_finite_difference(x0, model, solver, ...)</code>	Checks the computed sensitivity based derivatives against a finite difference approximation.

`amici.gradient_check.check_derivatives(model, solver, edata=None, atol=0.0001, rtol=0.0001, epsilon=0.001, check_least_squares=True, skip_zero_pars=False)`

Finite differences check for likelihood gradient.

Parameters

- **model** (`amici.amici.Model`) – amici model
- **solver** (`amici.amici.Solver`) – amici solver
- **edata** (`typing.Optional[amici.swig_wrappers.ExpData]`) – exp data
- **atol** (`typing.Optional[float]`) – absolute tolerance for comparison
- **rtol** (`typing.Optional[float]`) – relative tolerance for comparison
- **epsilon** (`typing.Optional[float]`) – finite difference step-size
- **check_least_squares** (`bool`) – whether to check least squares related values.
- **skip_zero_pars** (`bool`) – whether to perform FD checks for parameters that are zero

Return type `None`

`amici.gradient_check.check_finite_difference(x0, model, solver, edata, ip, fields, atol=0.0001, rtol=0.0001, epsilon=0.001)`

Checks the computed sensitivity based derivatives against a finite difference approximation.

Parameters

- **x0** (`typing.Sequence[float]`) – parameter value at which to check finite difference approximation
- **model** (`amici.amici.Model`) – amici model
- **solver** (`amici.amici.Solver`) – amici solver
- **edata** (`amici.swig_wrappers.ExpData`) – exp data
- **ip** (`int`) – parameter index
- **fields** (`typing.List[str]`) – rdata fields for which to check the gradient
- **atol** (`typing.Optional[float]`) – absolute tolerance for comparison
- **rtol** (`typing.Optional[float]`) – relative tolerance for comparison
- **epsilon** (`typing.Optional[float]`) – finite difference step-size

Return type `None`

10.5.17 amici.parameter_mapping

Parameter mapping

When performing parameter inference, often parameters need to be mapped from simulation to estimation parameters, and parameters can differ between conditions. This can be handled using the *ParameterMapping*.

Note: While the parameter mapping can be used directly with AMICI, it was developed for usage together with PEtab, for which the whole workflow of generating the mapping is automatized.

Functions

<code>amici_to_petab_scale(amici_scale)</code>	Convert amici scale id to petab scale id.
<code>fill_in_parameters(edatas, ...)</code>	Fill fixed and dynamic parameters into the edatas (in-place).
<code>fill_in_parameters_for_condition(edata, ...)</code>	Fill fixed and dynamic parameters into the edata for condition (in-place).
<code>petab_to_amici_scale(petab_scale)</code>	Convert petab scale id to amici scale id.
<code>scale_parameter(value, petab_scale)</code>	Bring parameter from linear scale to target scale.
<code>scale_parameters_dict(value_dict, ...)</code>	Bring parameters from linear scale to target scale.
<code>unscale_parameter(value, petab_scale)</code>	Bring parameter from scale to linear scale.
<code>unscale_parameters_dict(value_dict, ...)</code>	Bring parameters from target scale to linear scale.

Classes

<code>ParameterMapping([parameter_mappings])</code>	Parameter mapping for multiple conditions.
<code>ParameterMappingForCondition([map_sim_var, ...])</code>	Parameter mapping for condition.

class `amici.parameter_mapping.ParameterMapping(parameter_mappings=None)`

Parameter mapping for multiple conditions.

This can be used like a list of *ParameterMappingForConditions*.

Parameters `parameter_mappings` (`typing.Optional[typing.List[amici.parameter_mapping.ParameterMappingForCondition]]`) – List of parameter mappings for specific conditions.

append(`parameter_mapping_for_condition`)

Append a condition specific parameter mapping.

property `free_symbols: Set[str]`

Get IDs of all (symbolic) parameters present in this mapping

Return type `typing.Set[str]`

```
class amici.parameter_mapping.ParameterMappingForCondition(map_sim_var=None,  
                                                         scale_map_sim_var=None,  
                                                         map_preeq_fix=None,  
                                                         scale_map_preeq_fix=None,  
                                                         map_sim_fix=None,  
                                                         scale_map_sim_fix=None)
```

Parameter mapping for condition.

Contains mappings for free parameters, fixed parameters, and fixed preequilibrium parameters, both for parameters and scales.

In the scale mappings, for each simulation parameter the scale on which the value is passed (and potentially gradients are to be returned) is given. In the parameter mappings, for each simulation parameter a corresponding optimization parameter (or a numeric value) is given.

If a mapping is not passed, the parameter mappings are assumed to be empty, and if a scale mapping is not passed, all scales are set to linear.

Parameters

- **map_sim_var** (`typing.Optional[typing.Dict[str, typing.Union[str, numbers.Number]]]`) – Mapping for free simulation parameters.
- **scale_map_sim_var** (`typing.Optional[typing.Dict[str, str]]`) – Scales for free simulation parameters.
- **map_preeq_fix** (`typing.Optional[typing.Dict[str, typing.Union[str, numbers.Number]]]`) – Mapping for fixed preequilibrium parameters.
- **scale_map_preeq_fix** (`typing.Optional[typing.Dict[str, str]]`) – Scales for fixed preequilibrium parameters.
- **map_sim_fix** (`typing.Optional[typing.Dict[str, typing.Union[str, numbers.Number]]]`) – Mapping for fixed simulation parameters.
- **scale_map_sim_fix** (`typing.Optional[typing.Dict[str, str]]`) – Scales for fixed simulation parameters.

property free_symbols: `Set[str]`

Get IDs of all (symbolic) parameters present in this mapping

Return type `typing.Set[str]`

`amici.parameter_mapping.amici_to_petab_scale(amici_scale)`

Convert amici scale id to petab scale id.

Return type `str`

`amici.parameter_mapping.fill_in_parameters(edatas, problem_parameters, scaled_parameters,
 parameter_mapping, amici_model)`

Fill fixed and dynamic parameters into the edatas (in-place).

Parameters

- **edatas** (`typing.List[amici.swig_wrappers.ExpData]`) – List of experimental datas `amici.Amici.ExpData` with everything except parameters filled.
- **problem_parameters** (`typing.Dict[str, numbers.Number]`) – Problem parameters as `parameterId=>value` dict. Only parameters included here will be set. Remaining parameters will be used as currently set in `amici_model`.

- **scaled_parameters** (`bool`) – If True, problem_parameters are assumed to be on the scale provided in the parameter mapping. If False, they are assumed to be in linear scale.
- **parameter_mapping** (`amici.parameter_mapping.ParameterMapping`) – Parameter mapping for all conditions.
- **amici_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI model.

Return type `None`

`amici.parameter_mapping.fill_in_parameters_for_condition(edata, problem_parameters, scaled_parameters, parameter_mapping, amici_model)`

Fill fixed and dynamic parameters into the edata for condition (in-place).

Parameters

- **edata** (`amici.swig_wrappers.ExpData`) – Experimental data object to fill parameters into.
- **problem_parameters** (`typing.Dict[str, numbers.Number]`) – Problem parameters as parameterId=>value dict. Only parameters included here will be set. Remaining parameters will be used as already set in *amici_model* and *edata*.
- **scaled_parameters** (`bool`) – If True, problem_parameters are assumed to be on the scale provided in the parameter mapping. If False, they are assumed to be in linear scale.
- **parameter_mapping** (`amici.parameter_mapping.ParameterMappingForCondition`) – Parameter mapping for current condition.
- **amici_model** (`typing.Union[amici.amici.Model, amici.amici.ModelPtr]`) – AMICI model

Return type `None`

`amici.parameter_mapping.petab_to_amici_scale(petab_scale)`

Convert petab scale id to amici scale id.

Return type `int`

`amici.parameter_mapping.scale_parameter(value, petab_scale)`

Bring parameter from linear scale to target scale.

Parameters

- **value** (`numbers.Number`) – Value to scale
- **petab_scale** (`str`) – Target scale of value

Return type `numbers.Number`

Returns value on target scale

`amici.parameter_mapping.scale_parameters_dict(value_dict, petab_scale_dict)`

Bring parameters from linear scale to target scale.

Bring values in *value_dict* from linear scale to the scale provided in *petab_scale_dict* (in-place). Both arguments are expected to have the same length and matching keys.

Parameters

- **value_dict** (`typing.Dict[typing.Any, numbers.Number]`) – Values to scale
- **petab_scale_dict** (`typing.Dict[typing.Any, str]`) – Target scales of values

Return type `None`

`amici.parameter_mapping.unscale_parameter(value, petab_scale)`

Bring parameter from scale to linear scale.

Parameters

- **value** (`numbers.Number`) – Value to scale
- **petab_scale** (`str`) – Target scale of value

Return type `numbers.Number`

Returns value on linear scale

`amici.parameter_mapping.unscale_parameters_dict(value_dict, petab_scale_dict)`

Bring parameters from target scale to linear scale.

Bring values in `value_dict` from linear scale to the scale provided in `petab_scale_dict` (in-place). Both arguments are expected to have the same length and matching keys.

Parameters

- **value_dict** (`typing.Dict[typing.Any, numbers.Number]`) – Values to scale
- **petab_scale_dict** (`typing.Dict[typing.Any, str]`) – Target scales of values

Return type `None`

10.5.18 amici.conserverved_quantities_demartino

Functions

<code>compute_moiety_conservation_laws(...[, ...])</code>	Compute moiety conservation laws.
---	-----------------------------------

`amici.conserverved_quantities_demartino.compute_moiety_conservation_laws(stoichiometric_list, num_species, num_reactions, max_num_monte_carlo=20, rng_seed=False, species_names=None)`

Compute moiety conservation laws.

According to the algorithm proposed by De Martino et al. (2014) <https://doi.org/10.1371/journal.pone.0100750>

Parameters

- **stoichiometric_list** (`typing.Sequence[float]`) – the stoichiometric matrix as a list (species x reactions, column-major ordering)
- **num_species** (`int`) – total number of species in the reaction network
- **num_reactions** (`int`) – total number of reactions in the reaction network
- **max_num_monte_carlo** (`int`) – maximum number of MonteCarlo steps before changing to relaxation
- **rng_seed** (`typing.Union[None, bool, int]`) – Seed for the random number generator. If `False`, the RNG will not be re-initialized. Other values will be passed to `random.seed()`.

- **species_names** (`typing.Optional[typing.Sequence[str]]`) – Species names. Optional and only used for logging.

Return type `typing.Tuple[typing.List[typing.List[int]], typing.List[typing.List[float]]]`

Returns Integer MCLs as list of lists of indices of involved species and list of lists of corresponding coefficients.

10.5.19 amici.conserverved_quantities_rref

Find conserved quantities deterministically

Functions

<code>nullspace_by_rref(mat)</code>	Compute basis of the nullspace of <code>mat</code> based on the reduced row echelon form
<code>pivots(mat)</code>	Get indices of pivot columns in <code>mat</code> , assumed to be in reduced row echelon form
<code>rref(mat[, round_ndigits])</code>	Bring matrix <code>mat</code> to reduced row echelon form

`amici.conserverved_quantities_rref.nullspace_by_rref(mat)`

Compute basis of the nullspace of `mat` based on the reduced row echelon form

Return type `numpy.array`

`amici.conserverved_quantities_rref.pivots(mat)`

Get indices of pivot columns in `mat`, assumed to be in reduced row echelon form

Return type `typing.List[int]`

`amici.conserverved_quantities_rref.rref(mat, round_ndigits=None)`

Bring matrix `mat` to reduced row echelon form

see https://en.wikipedia.org/wiki/Row_echelon_form

Parameters

- **mat** (`numpy.array`) – Numpy float matrix to operate on (will be copied)
- **round_ndigits** (`typing.Union[typing.Literal[False], int, None]`) – Number of digits to round intermediary results to, or `False` to disable rounding completely. Helps to avoid numerical artifacts.

Return type `numpy.array`

Returns `mat` in rref form.

10.5.20 amici.numpy

C++ object views

This module provides views on C++ objects for efficient access.

Classes

<i>ExpDataView</i> (edata)	Interface class for C++ Exp Data objects that avoids possibly costly copies of member data.
<i>ReturnDataView</i> (rdata)	Interface class for C++ amici.ReturnData objects that avoids possibly costly copies of member data.
<i>SwigPtrView</i> (swigptr)	Interface class to expose <code>std::vector<double></code> and scalar members of swig wrapped C++ objects as numpy array attributes and fields.

class amici.numpy.**ExpDataView**(edata)

Interface class for C++ Exp Data objects that avoids possibly costly copies of member data.

class amici.numpy.**ReturnDataView**(rdata)

Interface class for C++ amici.ReturnData objects that avoids possibly costly copies of member data.

by_id(entity_id, field=None, model=None)

Get the value of a given field for a named entity.

Parameters

- **entity_id** (`str`) – The ID of the model entity that is to be extracted from `field` (e.g. a state ID).
- **field** (`typing.Optional[str]`) – The requested field, e.g. 'x' for model states. This is optional if field would be one of {'x', 'y', 'w'}
- **model** (`typing.Optional[amici.amici.Model]`) – The model from which this ReturnDataView was generated. This is optional if this ReturnData was generated with `solver.getReturnDataReportingMode() == amici.RDataReporting.full`.

Return type `numpy.array`

class amici.numpy.**SwigPtrView**(swigptr)

Interface class to expose `std::vector<double>` and scalar members of swig wrapped C++ objects as numpy array attributes and fields. This class is memory efficient as copies of the underlying C++ objects is only created when respective fields are accessed for the first time. Cached copies are used for all subsequent calls.

Variables

- **_swigptr** – pointer to the C++ object
- **_field_names** – names of members that will be exposed as numpy arrays
- **_field_dimensions** – dimensions of numpy arrays
- **_cache** – dictionary with cached values

C++ INTERFACE

11.1 Building the C++ library

The following section describes building the AMICI C++ library:

Note: The AMICI C++ interface only supports simulation of models imported using the *Python interface* and *Matlab interface*. It cannot be used for model import itself.

Prerequisites:

- CBLAS compatible BLAS library
- HDF5 libraries (currently mandatory, see <https://github.com/AMICI-dev/AMICI/issues/1252>)
- a C++14 compatible compiler
- a C compiler
- Optional: boost for serialization

To use AMICI from C++, run the

```
./scripts/buildSuiteSparse.sh  
./scripts/buildSundials.sh  
./scripts/buildAmici.sh
```

script to build the AMICI library.

Note: On some systems, the CMake executable may be named something other than `cmake`. In this case, set the `CMAKE` environment variable to the correct name (e.g. `export CMAKE=cmake3`, in case you have CMake available as `cmake3`).

The static library can then be linked from

```
./build/libamici.a
```

In CMake-based packages, `amici` can be linked via

```
find_package(Amici)
```

For further usage, consult the AMICI *C++ interface documentation*.

11.1.1 Supported CBLAS libraries

The C++ interfaces require a system installation of a CBLAS-compatible *Basic Linear Algebra Subprograms* (BLAS) library. AMICI has been tested with various implementations such as Accelerate, Intel MKL, cblas, openblas and atlas.

11.1.2 Optional SuperLU_MT support

To build AMICI with SuperLU_MT support, run

```
./scripts/buildSuperLUMT.sh
./scripts/buildSundials.sh
cd build/
cmake -DSUNDIALS_SUPERLUMT_ENABLE=ON ..
make
```

11.2 Using AMICI's C++ interface

The various import functions in of the *Python interface* and *Matlab interface* translate models defined in different formats into C++ code. These generated model libraries, together with the AMICI base library can be used in any C++ application for model simulation and sensitivity analysis. This section will give a short overview over the generated files and provide a brief introduction of how this code can be included in other applications. Further details are available in the *C++ API reference*.

11.2.1 AMICI-generated C++ model files

After importing a model using either the *Python interface* or the *Matlab interface*, the specified output directory contains (among others) C++ code for the various model functions.

The content of a model source directory looks something like this (given *MODEL_NAME=model_steadystate*):

```
CMakeLists.txt
main.cpp
deltaqB.cpp
deltaqB.h
[... many more files *.cpp|h|md5|o ]
wrapfunctions.cpp
wrapfunctions.h
model_steadystate.h
model_steadystate.cpp
```

These files provide the implementation of a model-specific subclass of `amici::Model`. The `CMakeLists.txt` file can be used to build the model library using `CMake`. `main.cpp` contains a simple scaffold for running a model simulation from C++. See next section for more details on these files.

11.2.2 Running a model simulation

AMICI's public API is mostly available through `amici/amici.h`. This is the only header file that needs to be included for basic usage. All functions there are declared within the *amici namespace*. Additionally, `amici/hdf5.h` and `amici/serialization.h` may be handy for specific use cases. The former provides some functions for reading and writing *HDF5* files, latter for serialization (requires *Boost*). All model-specific functions are defined in the namespace `model_${modelname}`.

The main function for running an AMICI simulation is `amici::runAmiciSimulation()`. This function requires

- an instance of a `amici::Model` subclass as generated during model import. For the example `model_steadystate` the respective class is provided as `Model_model_steadystate` in `model_steadystate.h` in output directory for the given model.
- a `amici::Solver` instance. This solver instance needs to match the requirements of the model and can be obtained from `amici::AbstractModel::getSolver()`.
- optionally an `amici::ExpData` instance, which contains any experimental data (e.g. measurements, noise model parameters or model inputs) to evaluate residuals or an objective function.

This function returns a `amici::ReturnData` object, which contains all simulation results.

For running simulations for multiple experimental conditions (multiple `amici::ExpData` instances), `amici::runAmiciSimulations()` provides an alternative entry point. If AMICI (and your application) have been compiled with OpenMP support (see installation guide), this allows for running those simulations in parallel.

A scaffold for a standalone simulation program is automatically generated during model import in `main.cpp` in the model output directory. This program shows how to use the above-mentioned classes, how to obtain the simulation results, and may provide a starting point for your own simulation code.

Working with multiple or anonymous models

AMICI model import generates a `amici::Model` subclass for the specific model, based on the name used during import. On the one hand, this allows you to use multiple models with different names within a single application. On the other hand, this requires you to know the name of the model, which can be inconvenient in some cases.

When working with a single model, the `wrapfunctions.h` file generated during model import can be used to avoid specifying model names explicitly. It defines a function `amici::generic_model::getModel()`, that returns an instance of the model class by a generic name.

Note: Including multiple `wrapfunctions.h` files from different models in a single application is not possible. When using multiple models, explicit names have to be used or the different model libraries need to be loaded dynamically at runtime.

11.2.3 Compiling and linking

To run AMICI simulations from within your C++ application, you need to compile and link the following libraries:

- model library
- AMICI base library
- SUNDIALS libraries
- SuiteSparse libraries
- CBLAS-compatible BLAS

- optionally HDF5 (C, HL, and CXX components) set CMake option `ENABLE_HDF5` to OFF to build without HDF5-support
- optionally OpenMP (for parallel simulation of multiple conditions, see `amici::runAmiciSimulations()`)
- optionally boost (only when using serialization of AMICI object)

The simplest and recommended way is using the provide CMake files which take care of all these dependencies.

Considering the simple case, that you want to simulate one specific model in your CMake-based C++ application, you can copy or move the generated model directory containing the `CMakeLists.txt` file to your application directory, add `add_subdirectory(yourModelDirectory)` to your project's `CMakeLists.txt` file and build your project using CMake as usual.

11.2.4 Parameter estimation for AMICI models in high-performance computing environments

To perform parameter estimation for large or otherwise computationally demanding AMICI models from C++ in a high-performance computing environment, you may find the [parPE library](#) helpful. parPE allows for the private or shared memory parallel evaluation of a cost function requiring multiple simulations of the same model with different inputs. It provides interfaces to different optimizers, such as Ipopt.

11.3 AMICI C++ API

AMICI C++ library functions

11.3.1 Class Hierarchy

11.3.2 File Hierarchy

11.3.3 Full API

Namespaces

Namespace amici

Contents

- *Namespaces*
- *Classes*
- *Enums*
- *Functions*
- *Typedefs*
- *Variables*

Namespaces

- Namespace *amici::hdf5*

Classes

- Struct *LogItem*
- Struct *ModelDimensions*
- Struct *ModelState*
- Struct *ModelStateDerived*
- Struct *SimulationState*
- Class *AbstractModel*
- Class *AmiException*
- Class *AmiVector*
- Class *AmiVectorArray*
- Class *BackwardProblem*
- Class *ConditionContext*
- Class *ContextManager*
- Class *CvodeException*
- Class *CVodeSolver*
- Class *ExpData*
- Class *FinalStateStorer*
- Class *ForwardProblem*
- Class *IDAException*
- Class *IDASolver*
- Class *IntegrationFailure*
- Class *IntegrationFailureB*
- Class *Logger*
- Class *Model*
- Class *Model_DAE*
- Class *Model_ODE*
- Class *ModelContext*
- Class *NewtonFailure*
- Class *NewtonSolver*
- Class *NewtonSolverDense*
- Class *NewtonSolverSparse*
- Class *ReturnData*

- *Class SetupFailure*
- *Class SimulationParameters*
- *Class Solver*
- *Class SteadystateProblem*
- *Class SUNLinSolBand*
- *Class SUNLinSolDense*
- *Class SUNLinSolKLU*
- *Class SUNLinSolPCG*
- *Class SUNLinSolSPBCGS*
- *Class SUNLinSolSPFGMR*
- *Class SUNLinSolSPGMR*
- *Class SUNLinSolSPTFQMR*
- *Class SUNLinSolWrapper*
- *Class SUNMatrixWrapper*
- *Class SUNNonLinSolFixedPoint*
- *Class SUNNonLinSolNewton*
- *Class SUNNonLinSolWrapper*

Enums

- *Enum BLASLayout*
- *Enum BLASTranspose*
- *Enum FixedParameterContext*
- *Enum InternalSensitivityMethod*
- *Enum InterpolationType*
- *Enum LinearMultistepMethod*
- *Enum LinearSolver*
- *Enum LogSeverity*
- *Enum ModelQuantity*
- *Enum NewtonDampingFactorMode*
- *Enum NonlinearSolverIteration*
- *Enum ObservableScaling*
- *Enum ParameterScaling*
- *Enum RDataReporting*
- *Enum SecondOrderMode*
- *Enum SensitivityMethod*
- *Enum SensitivityOrder*

- *Enum SteadyStateContext*
- *Enum SteadyStateSensitivityMode*
- *Enum SteadyStateStatus*

Functions

- *Template Function amici::addSlice(const gsl::span<T const>, gsl::span<T>)*
- *Template Function amici::addSlice(std::vector<T> const&, gsl::span<T>)*
- *Function amici::amici_daxpy*
- *Function amici::amici_dgemm*
- *Function amici::amici_dgemv*
- *Function amici::backtraceString*
- *Template Function amici::checkBufferSize*
- *Function amici::checkSigmaPositivity(std::vector<realtype> const&, char const *)*
- *Function amici::checkSigmaPositivity(realtype, char const *)*
- *Template Function amici::deserializeFromChar*
- *Template Function amici::deserializeFromString*
- *Function amici::dotProd*
- *Function amici::getScaledParameter*
- *Function amici::getUnscaledParameter*
- *Template Function amici::is_equal*
- *Function amici::linearSum*
- *Function amici::N_VGetArrayPointerConst*
- *Function amici::operator==(const Solver&, const Solver&)*
- *Function amici::operator==(const SimulationParameters&, const SimulationParameters&)*
- *Function amici::operator==(ExpData const&, ExpData const&)*
- *Function amici::operator==(const Model&, const Model&)*
- *Function amici::operator==(const ModelDimensions&, const ModelDimensions&)*
- *Function amici::operator==(const ModelState&, const ModelState&)*
- *Function amici::printfToString*
- *Function amici::regexErrorToString*
- *Function amici::runAmiciSimulation*
- *Function amici::runAmiciSimulations*
- *Function amici::scaleParameters*
- *Template Function amici::serializeToChar*
- *Template Function amici::serializeToStdVec*
- *Template Function amici::serializeToString*

- *Function amici::simulation_status_to_str*
- *Template Function amici::slice(std::vector<T>&, int, unsigned)*
- *Template Function amici::slice(std::vector<T> const&, int, unsigned)*
- *Function amici::unravel_index(sunindextype, SUNMatrix)*
- *Function amici::unravel_index(size_t, size_t)*
- *Function amici::unscaleParameters*
- *Function amici::wrapErrHandlerFn*
- *Template Function amici::writeSlice(const gsl::span<T const>, gsl::span<T>)*
- *Template Function amici::writeSlice(std::vector<T> const&, std::vector<T>&)*
- *Template Function amici::writeSlice(std::vector<T> const&, gsl::span<T>)*
- *Function amici::writeSlice(AmiVector const&, gsl::span<realtype>)*

Typedefs

- *Typedef amici::const_N_Vector*
- *Typedef amici::realtype*

Variables

- *Variable amici::AMICI_CONV_FAILURE*
- *Variable amici::AMICI_DAMPING_FACTOR_ERROR*
- *Variable amici::AMICI_DATA_RETURN*
- *Variable amici::AMICI_ERR_FAILURE*
- *Variable amici::AMICI_ERROR*
- *Variable amici::AMICI_FIRST_RHSFUNC_ERR*
- *Variable amici::AMICI_ILL_INPUT*
- *Variable amici::AMICI_MAX_TIME_EXCEEDED*
- *Variable amici::AMICI_NO_STEADY_STATE*
- *Variable amici::AMICI_NORMAL*
- *Variable amici::AMICI_NOT_IMPLEMENTED*
- *Variable amici::AMICI_NOT_RUN*
- *Variable amici::AMICI_ONE_STEP*
- *Variable amici::AMICI_ONEOUTPUT*
- *Variable amici::AMICI_PREEQUILIBRATE*
- *Variable amici::AMICI_RECOVERABLE_ERROR*
- *Variable amici::AMICI_RHSFUNC_FAIL*
- *Variable amici::AMICI_ROOT_RETURN*

- Variable `amici::AMICI_SINGULAR_JACOBIAN`
- Variable `amici::AMICI_SUCCESS`
- Variable `amici::AMICI_TOO_MUCH_ACC`
- Variable `amici::AMICI_TOO_MUCH_WORK`
- Variable `amici::AMICI_UNRECOVERABLE_ERROR`
- Variable `amici::model_quantity_to_str`
- Variable `amici::pi`

Namespace `amici::hdf5`

Contents

- *Functions*

Functions

- Function `amici::hdf5::attributeExists(H5::H5File const&, const std::string&, const std::string&)`
- Function `amici::hdf5::attributeExists(H5::H5Object const&, const std::string&)`
- Function `amici::hdf5::createAndWriteDouble1DDataset`
- Function `amici::hdf5::createAndWriteDouble2DDataset`
- Function `amici::hdf5::createAndWriteDouble3DDataset`
- Function `amici::hdf5::createAndWriteInt1DDataset`
- Function `amici::hdf5::createAndWriteInt2DDataset`
- Function `amici::hdf5::createGroup`
- Function `amici::hdf5::createOrOpenForWriting`
- Function `amici::hdf5::getDoubleDataset1D`
- Function `amici::hdf5::getDoubleDataset2D`
- Function `amici::hdf5::getDoubleDataset3D`
- Function `amici::hdf5::getDoubleScalarAttribute`
- Function `amici::hdf5::getIntDataset1D`
- Function `amici::hdf5::getIntScalarAttribute`
- Function `amici::hdf5::getStringAttribute`
- Function `amici::hdf5::locationExists(std::string const&, std::string const&)`
- Function `amici::hdf5::locationExists(H5::H5File const&, std::string const&)`
- Function `amici::hdf5::readModelDataFromHDF5(std::string const&, Model&, std::string const&)`
- Function `amici::hdf5::readModelDataFromHDF5(H5::H5File const&, Model&, std::string const&)`
- Function `amici::hdf5::readSimulationExpData`

- *Function amici::hdf5::readSolverSettingsFromHDF5(const H5::H5File&, Solver&, std::string const&)*
- *Function amici::hdf5::readSolverSettingsFromHDF5(std::string const&, Solver&, std::string const&)*
- *Function amici::hdf5::writeReturnData(const ReturnData&, H5::H5File const&, const std::string&)*
- *Function amici::hdf5::writeReturnData(const ReturnData&, std::string const&, const std::string&)*
- *Function amici::hdf5::writeReturnDataDiagnosis*
- *Function amici::hdf5::writeSimulationExpData*
- *Function amici::hdf5::writeSolverSettingsToHDF5(Solver const&, std::string const&, std::string const&)*
- *Function amici::hdf5::writeSolverSettingsToHDF5(Solver const&, H5::H5File const&, std::string const&)*

Namespace boost

Contents

- *Namespaces*

Namespaces

- *Namespace boost::serialization*

Namespace boost::serialization

Contents

- *Functions*

Functions

- *Template Function boost::serialization::archiveVector*
- *Template Function boost::serialization::serialize(Archive&, amici::ReturnData&, unsigned int)*
- *Template Function boost::serialization::serialize(Archive&, amici::Solver&, unsigned int)*
- *Template Function boost::serialization::serialize(Archive&, amici::CNodeSolver&, unsigned int)*
- *Template Function boost::serialization::serialize(Archive&, amici::IDASolver&, unsigned int)*
- *Template Function boost::serialization::serialize(Archive&, amici::Model&, unsigned int)*

Namespace gsl

Contents

- *Functions*

Functions

- *Function* `gsl::make_span(N_Vector)`
- *Function* `gsl::make_span(SUNMatrix)`

Namespace std

STL namespace.

Classes and Structs

Struct LogItem

- Defined in `file_include_amici_logging.h`

Struct Documentation

struct **LogItem**

A log item.

Public Functions

LogItem() = default

Default ctor.

inline **LogItem**(*LogSeverity* severity, std::string const &identifier, std::string const &message)

Construct a *LogItem*.

Parameters

- **severity** –
- **identifier** –
- **message** –

Public Members

LogSeverity **severity**

Severity level

std::string **identifier**

Short identifier for the logged event

std::string **message**

A more detailed and readable message

Struct ModelDimensions

- Defined in file_include_amici_model_dimensions.h

Inheritance Relationships

Derived Types

- public amici::Model (*Class Model*)
- public amici::ReturnData (*Class ReturnData*)

Struct Documentation

struct **ModelDimensions**

Container for model dimensions.

Holds number of states, observables, etc.

Subclassed by *amici::Model*, *amici::ReturnData*

Public Functions

ModelDimensions() = default

Default ctor

```
inline ModelDimensions(const int nx_rdata, const int nxtrue_rdata, const int nx_solver, const int
                        nxtrue_solver, const int nx_solver_reinit, const int np, const int nk, const int ny,
                        const int nytrue, const int nz, const int nztrue, const int ne, const int nJ, const int nw,
                        const int ndwdx, const int ndwdp, const int ndwdw, const int ndxdotdw,
                        std::vector<int> ndJydy, const int ndxrdatadxsolver, const int ndxrdatadtcl, const int
                        ndtotal_cldx_rdata, const int nnz, const int ubw, const int lbw)
```

Constructor with model dimensions.

Parameters

- **nx_rdata** – Number of state variables
- **nxtrue_rdata** – Number of state variables of the non-augmented model

- **nx_solver** – Number of state variables with conservation laws applied
- **nxtrue_solver** – Number of state variables of the non-augmented model with conservation laws applied
- **nx_solver_reinit** – Number of state variables with conservation laws subject to reinitialization
- **np** – Number of parameters
- **nk** – Number of constants
- **ny** – Number of observables
- **nytrue** – Number of observables of the non-augmented model
- **nz** – Number of event observables
- **nztrue** – Number of event observables of the non-augmented model
- **ne** – Number of events
- **nJ** – Number of objective functions
- **nw** – Number of repeating elements
- **ndwdx** – Number of nonzero elements in the x derivative of the repeating elements
- **ndwdp** – Number of nonzero elements in the p derivative of the repeating elements
- **ndwdw** – Number of nonzero elements in the w derivative of the repeating elements
- **ndxdotdw** – Number of nonzero elements in the w derivative of x_{dot}
- **ndJydy** – Number of nonzero elements in the y derivative of dJy (shape **nytrue**)
- **ndxrdatadxsolver** – Number of nonzero elements in the x derivative of x_rdata
- **ndxrdatadtcl** – Number of nonzero elements in the tcl derivative of x_rdata
- **ndtotal_cldx_rdata** – Number of nonzero elements in the x_rdata derivative of $total_{cl}$
- **nnz** – Number of nonzero elements in Jacobian
- **ubw** – Upper matrix bandwidth in the Jacobian
- **lbw** – Lower matrix bandwidth in the Jacobian

Public Members

int **nx_rdata** = {0}

Number of states

int **nxtrue_rdata** = {0}

Number of states in the unaugmented system

int **nx_solver** = {0}

Number of states with conservation laws applied

int **nxtrue_solver** = {0}

Number of states in the unaugmented system with conservation laws applied

int **nx_solver_reinit** = {0}

Number of solver states subject to reinitialization

int **np** = {0}

Number of parameters

int **nk** = {0}

Number of constants

int **ny** = {0}

Number of observables

int **nytrue** = {0}

Number of observables in the unaugmented system

int **nz** = {0}

Number of event outputs

int **nztrue** = {0}

Number of event outputs in the unaugmented system

int **ne** = {0}

Number of events

int **nw** = {0}

Number of common expressions

int **ndwdx** = {0}

Number of nonzero elements in the \mathbf{x} derivative of the repeating elements

int **ndwdp** = {0}

Number of nonzero elements in the \mathbf{p} derivative of the repeating elements

int **ndwdw** = {0}

Number of nonzero elements in the \mathbf{w} derivative of the repeating elements

int **ndxdotdw** = {0}

Number of nonzero elements in the w derivative of \dot{x}

std::vector<int> **ndJydy**

Number of nonzero elements in the y derivative of dJy (dimension **nytrue**)

int **ndxrdatadxsolver** = {0}

Number of nonzero elements in the x derivative of x_rdata

int **ndxrdatadtcl** = {0}

Number of nonzero elements in the *tcl* derivative of *x_rdata*

int **ndtotal_cldx_rdata** = {0}

Number of nonzero elements in the *x_rdata* derivative of *total_{cl}*

int **nnz** = {0}

Number of nonzero entries in Jacobian

int **nJ** = {0}

Dimension of the augmented objective function for 2nd order ASA

int **ubw** = {0}

Upper bandwidth of the Jacobian

int **lbw** = {0}

Lower bandwidth of the Jacobian

Struct ModelState

- Defined in file_include_amici_model_state.h

Struct Documentation

struct **ModelState**

Exchange format to store and transfer the state of the model at a specific timepoint.

This is designed to only encompass the minimal number of attributes that need to be transferred.

Public Members

std::vector<*realtype*> **h**

Flag indicating whether a certain Heaviside function should be active or not (dimension: *ne*)

std::vector<*realtype*> **total_cl**

Total abundances for conservation laws (dimension: *nx_rdata* - *nx_solver*)

std::vector<*realtype*> **stotal_cl**

Sensitivities of total abundances for conservation laws (dimension: (*nx_rdata*-*nx_solver*) x *np*, row-major)

std::vector<*realtype*> **unscaledParameters**

Unscaled parameters (dimension: *np*)

`std::vector<realtype> fixedParameters`

Constants (dimension: `nk`)

`std::vector<int> plist`

Indexes of parameters wrt to which sensitivities are computed (dimension: `nplist`)

Struct `ModelStateDerived`

- Defined in `file_include_amici_model_state.h`

Struct Documentation

struct **ModelStateDerived**

Storage for `amici::Model` quantities computed based on `amici::ModelState` for a specific timepoint.

Serves as workspace for a model simulation to avoid repeated reallocation.

Public Functions

ModelStateDerived() = default

explicit **ModelStateDerived**(*ModelDimensions* const &dim)

Constructor from model dimensions.

Parameters `dim` – *Model* dimensions

Public Members

SUNMatrixWrapper **J_**

Sparse Jacobian (dimension: `amici::Model::nnz`)

SUNMatrixWrapper **JB_**

Sparse Backwards Jacobian (dimension: `amici::Model::nnz`)

SUNMatrixWrapper **dxdotdw_**

Sparse dxdotdw temporary storage (dimension: `ndxdotdw`)

SUNMatrixWrapper **dwdx_**

Sparse dwdx temporary storage (dimension: `ndwdx`)

SUNMatrixWrapper **dwdp_**

Sparse dwdp temporary storage (dimension: `ndwdp`)

SUNMatrixWrapper **M_**

Dense Mass matrix (dimension: `nx_solver` x `nx_solver`)

SUNMatrixWrapper **dxdotdp_full**

Temporary storage of `dxdotdp_full` data across functions (Python only) (dimension: `nplist` x `nx_solver`, nnz: dynamic, type `CSC_MAT`)

SUNMatrixWrapper **dxdotdp_explicit**

Temporary storage of `dxdotdp_explicit` data across functions (Python only) (dimension: `nplist` x `nx_solver`, nnz: `ndxdotdp_explicit`, type `CSC_MAT`)

SUNMatrixWrapper **dxdotdp_implicit**

Temporary storage of `dxdotdp_implicit` data across functions, Python-only (dimension: `nplist` x `nx_solver`, nnz: dynamic, type `CSC_MAT`)

SUNMatrixWrapper **dxdotdx_explicit**

Temporary storage of `dxdotdx_explicit` data across functions (Python only) (dimension: `nplist` x `nx_solver`, nnz: `nxdotdotdx_explicit`, type `CSC_MAT`)

SUNMatrixWrapper **dxdotdx_implicit**

Temporary storage of `dxdotdx_implicit` data across functions, Python-only (dimension: `nplist` x `nx_solver`, nnz: dynamic, type `CSC_MAT`)

SUNMatrixWrapper **dx_rdatadx_solver**

Temporary storage for `dx_rdatadx_solver` (dimension: `nx_rdata` x `nx_solver`, nnz: `ndxrdatadx_solver`, type: `CSC_MAT`)

SUNMatrixWrapper **dx_rdatadtcl**

Temporary storage for `dx_rdatadtcl` (dimension: `nx_rdata` x `ncl`, nnz: `ndxrdatadtclr`, type: `CSC_MAT`)

SUNMatrixWrapper **dtotal_cldx_rdata**

Temporary storage for `dtotal_cldx_rdata` (dimension: `ncl` x `nx_rdata`, nnz: `ndtotal_cldx_rdata`, type: `CSC_MAT`)

AmiVectorArray **dxdotdp** = {0, 0}

Temporary storage of `dxdotdp` data across functions, Matlab only (dimension: `nplist` x `nx_solver`, row-major)

`std::vector<SUNMatrixWrapper>` **dJydy_**

Sparse observable derivative of data likelihood, only used if `pythonGenerated == true` (dimension `nytrue`, `nJ` x `ny`, row-major)

`std::vector<realtype>` **dJydy_matlab_**

Observable derivative of data likelihood, only used if `pythonGenerated == false` (dimension `nJ` x `ny` x `nytrue`, row-major)

`std::vector<realtype>` **dJydsigma_**

Observable sigma derivative of data likelihood (dimension `nJ` x `ny` x `nytrue`, row-major)

`std::vector<realtype> dJydx_`

State derivative of data likelihood (dimension `nJ` x `nx_solver`, row-major)

`std::vector<realtype> dJydp_`

Parameter derivative of data likelihood for current timepoint (dimension: `nJ` x `nplist`, row-major)

`std::vector<realtype> dJzdz_`

event output derivative of event likelihood (dimension `nJ` x `nz` x `nztrue`, row-major)

`std::vector<realtype> dJzdsigma_`

event sigma derivative of event likelihood (dimension `nJ` x `nz` x `nztrue`, row-major)

`std::vector<realtype> dJrzdz_`

event output derivative of event likelihood at final timepoint (dimension `nJ` x `nz` x `nztrue`, row-major)

`std::vector<realtype> dJrzdsigma_`

event sigma derivative of event likelihood at final timepoint (dimension `nJ` x `nz` x `nztrue`, row-major)

`std::vector<realtype> dJzdx_`

state derivative of event likelihood (dimension `nJ` x `nx_solver`, row-major)

`std::vector<realtype> dJzdp_`

parameter derivative of event likelihood for current timepoint (dimension: `nJ` x `nplist` x, row-major)

`std::vector<realtype> dzdx_`

state derivative of event output (dimension: `nz` x `nx_solver`, row-major)

`std::vector<realtype> dzdp_`

parameter derivative of event output (dimension: `nz` x `nplist`, row-major)

`std::vector<realtype> drzdx_`

state derivative of event regularization variable (dimension: `nz` x `nx_solver`, row-major)

`std::vector<realtype> drzdp_`

parameter derivative of event regularization variable (dimension: `nz` x `nplist`, row-major)

`std::vector<realtype> dydp_`

parameter derivative of observable (dimension: `ny` x `nplist`, row-major)

`std::vector<realtype> dydx_`

state derivative of time-resolved observable (dimension: `nx_solver` x `ny`, row-major)

`std::vector<realtype> w_`

temporary storage of `w` data across functions (dimension: `nw`)

`std::vector<realtype> sx_`
 temporary storage for flattened sx, (dimension: `nx_solver` x `nplist`, row-major)

`std::vector<realtype> x_rdata_`
 temporary storage for `x_rdata` (dimension: `nx_rdata`)

`std::vector<realtype> sx_rdata_`
 temporary storage for `sx_rdata` slice (dimension: `nx_rdata`)

`std::vector<realtype> y_`
 temporary storage for time-resolved observable (dimension: `ny`)

`std::vector<realtype> sigmay_`
 data standard deviation for current timepoint (dimension: `ny`)

`std::vector<realtype> dsigmaydp_`
 temporary storage for parameter derivative of data standard deviation, (dimension: `ny` x `nplist`, row-major)

`std::vector<realtype> dsigmaydy_`
 temporary storage for observable derivative of data standard deviation, (dimension: `ny` x `ny`, row-major)

`std::vector<realtype> z_`
 temporary storage for event-resolved observable (dimension: `nz`)

`std::vector<realtype> rz_`
 temporary storage for event regularization (dimension: `nz`)

`std::vector<realtype> sigmaz_`
 temporary storage for event standard deviation (dimension: `nz`)

`std::vector<realtype> dsigmazdp_`
 temporary storage for parameter derivative of event standard deviation, (dimension: `nz` x `nplist`, row-major)

`std::vector<realtype> deltax_`
 temporary storage for change in x after event (dimension: `nx_solver`)

`std::vector<realtype> deltasx_`
 temporary storage for change in sx after event (dimension: `nx_solver` x `nplist`, row-major)

`std::vector<realtype> deltaxB_`
 temporary storage for change in xB after event (dimension: `nx_solver`)

`std::vector<realtype> deltaqB_`
 temporary storage for change in qB after event (dimension: `nJ` x `nplist`, row-major)

AmiVector **x_pos_tmp_** = {0}

temporary storage of positified state variables according to stateIsNonNegative (dimension: **nx_solver**)

Struct **SimulationState**

- Defined in file_include_amici_model_state.h

Struct Documentation

struct **SimulationState**

implements an exchange format to store and transfer the state of a simulation at a specific timepoint.

Public Members

realtype **t**

timepoint

AmiVector **x**

state variables

AmiVector **dx**

state variables

AmiVectorArray **sx**

state variable sensitivity

ModelState **state**

state of the model that was used for simulation

Class **AbstractModel**

- Defined in file_include_amici_abstract_model.h

Inheritance Relationships

Derived Type

- public amici::Model (*Class Model*)

Class Documentation

class **AbstractModel**

Abstract base class of *amici::Model* defining functions that need to be implemented in an AMICI model.

Some functions have empty default implementations or throw. This class shall not have any data members.

Subclassed by *amici::Model*

Public Functions

virtual **~AbstractModel**() = default

virtual std::unique_ptr<*Solver*> **getSolver**() = 0

Retrieves the solver object.

Returns The *Solver* instance

virtual void **froot**(const *realtype* t, const *AmiVector* &x, const *AmiVector* &dx, gsl::span<*realtype*> root) = 0

Root function.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **root** – array to which values of the root function will be written

virtual void **fxdot**(const *realtype* t, const *AmiVector* &x, const *AmiVector* &dx, *AmiVector* &xdot) = 0

Residual function.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – array to which values of the residual function will be written

virtual void **fsxdot**(const *realtype* t, const *AmiVector* &x, const *AmiVector* &dx, int ip, const *AmiVector* &sx, const *AmiVector* &sdx, *AmiVector* &sxdot) = 0

Sensitivity Residual function.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **ip** – parameter index
- **sx** – sensitivity state
- **sdx** – time derivative of sensitivity state (DAE only)
- **sxdot** – array to which values of the sensitivity residual function will be written

```
virtual void fxBdot_ss(const realtype t, const AmiVector &xB, const AmiVector &dxB, AmiVector &xBdot)
    = 0
```

Residual function backward when running in steady state mode.

Parameters

- **t** – time
- **xB** – adjoint state
- **dxB** – time derivative of state (DAE only)
- **xBdot** – array to which values of the residual function will be written

```
virtual void fJSparseB_ss(SUNMatrix JB) = 0
```

Sparse Jacobian function backward, steady state case.

Parameters **JB** – sparse matrix to which values of the Jacobian will be written

```
virtual void writeSteadystateJB(const realtype t, realtype cj, const AmiVector &x, const AmiVector &dx,
    const AmiVector &xB, const AmiVector &dxB, const AmiVector &xBdot)
    = 0
```

Computes the sparse backward Jacobian for steadystate integration and writes it to the model member.

Parameters

- **t** – timepoint
- **cj** – scalar in Jacobian
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint state right hand side

```
virtual void fJ(const realtype t, realtype cj, const AmiVector &x, const AmiVector &dx, const AmiVector
    &xdot, SUNMatrix J) = 0
```

Dense Jacobian function.

Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **J** – dense matrix to which values of the jacobian will be written

```
virtual void fJB(const realtype t, realtype cj, const AmiVector &x, const AmiVector &dx, const AmiVector
    &xB, const AmiVector &dxB, const AmiVector &xBdot, SUNMatrix JB) = 0
```

Dense Jacobian function.

Parameters

- **t** – time

- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side (unused)
- **JB** – dense matrix to which values of the jacobian will be written

virtual void **fJSparse**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, SUNMatrix J) = 0

Sparse Jacobian function.

Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **J** – sparse matrix to which values of the Jacobian will be written

virtual void **fJSparseB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot, SUNMatrix JB) = 0

Sparse Jacobian function.

Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side (unused)
- **JB** – dense matrix to which values of the jacobian will be written

virtual void **fJDiag**(const *realtype* t, *AmiVector* &Jdiag, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx) = 0

Diagonal Jacobian function.

Parameters

- **t** – time
- **Jdiag** – array to which the diagonal of the Jacobian will be written
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state

- **dx** – time derivative of state (DAE only)

virtual void **fdxdotdp**(const *realtype* t, const *AmiVector* &x, const *AmiVector* &dx) = 0

Model-specific sparse implementation of explicit parameter derivative of right hand side.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)

virtual void **fJv**(const *realtype* t, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, const *AmiVector* &v, *AmiVector* &nJv, *realtype* cj) = 0

Jacobian multiply function.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **v** – multiplication vector (unused)
- **nJv** – array to which result of multiplication will be written
- **cj** – scaling factor (inverse of timestep, DAE only)

virtual std::string **getAmiciVersion**() const

Returns the AMICI version that was used to generate the model.

Returns AMICI version string

virtual std::string **getAmiciCommit**() const

Returns the AMICI commit that was used to generate the model.

Returns AMICI commit string

virtual void **fx0**(*realtype* *x0, const *realtype* t, const *realtype* *p, const *realtype* *k)

Model-specific implementation of fx0.

Parameters

- **x0** – initial state
- **t** – initial time
- **p** – parameter vector
- **k** – constant vector

virtual bool **isFixedParameterStateReinitializationAllowed**() const

Function indicating whether reinitialization of states depending on fixed parameters is permissible.

Returns flag indicating whether reinitialization of states depending on fixed parameters is permissible

virtual void **fx0_fixedParameters**(*realtype* *x0, const *realtype* t, const *realtype* *p, const *realtype* *k, gsl::span<const int> reinitialization_state_idx)

Model-specific implementation of fx0_fixedParameters.

Parameters

- **x0** – initial state
- **t** – initial time
- **p** – parameter vector
- **k** – constant vector
- **reinitialization_state_idxs** – Indices of states to be reinitialized based on provided constants / fixed parameters.

```
virtual void fsx0_fixedParameters(realtype *sx0, const realtype t, const realtype *x0, const realtype *p,
                                const realtype *k, int ip, gsl::span<const int>
                                reinitialization_state_idxs)
```

Model-specific implementation of fsx0_fixedParameters.

Parameters

- **sx0** – initial state sensitivities
- **t** – initial time
- **x0** – initial state
- **p** – parameter vector
- **k** – constant vector
- **ip** – sensitivity index
- **reinitialization_state_idxs** – Indices of states to be reinitialized based on provided constants / fixed parameters.

```
virtual void fsx0(realtype *sx0, const realtype t, const realtype *x0, const realtype *p, const realtype *k, int
                 ip)
```

Model-specific implementation of fsx0.

Parameters

- **sx0** – initial state sensitivities
- **t** – initial time
- **x0** – initial state
- **p** – parameter vector
- **k** – constant vector
- **ip** – sensitivity index

```
virtual void fdx0(AmiVector &x0, AmiVector &dx0)
```

Initial value for time derivative of states (only necessary for DAEs)

Parameters

- **x0** – Vector with the initial states
- **dx0** – Vector to which the initial derivative states will be written (only DAE)

```
virtual void fstau(realtype *stau, const realtype t, const realtype *x, const realtype *p, const realtype *k,
                  const realtype *h, const realtype *tcl, const realtype *sx, int ip, int ie)
```

Model-specific implementation of fstau.

Parameters

- **stau** – total derivative of event timepoint
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **tcl** – total abundances for conservation laws
- **sx** – current state sensitivity
- **ip** – sensitivity index
- **ie** – event index

virtual void **fy**(*realtype* *y, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w)

Model-specific implementation of fy.

Parameters

- **y** – model output at current timepoint
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **w** – repeating elements vector

virtual void **fdydp**(*realtype* *dydp, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, int ip, const *realtype* *w, const *realtype* *dwdp)

Model-specific implementation of fdydp (MATLAB-only)

Parameters

- **dydp** – partial derivative of observables y w.r.t. model parameters p
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested
- **w** – repeating elements vector
- **dwdp** – Recurring terms in xdot, parameter derivative

virtual void **fdydp**(*realtype* *dydp, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, int ip, const *realtype* *w, const *realtype* *tcl, const *realtype* *dtcldp)

Model-specific implementation of fdydp (Python)

Parameters

- **dydp** – partial derivative of observables y w.r.t. model parameters p
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested
- **w** – repeating elements vector
- **tcl** – total abundances for conservation laws
- **dtcldp** – Sensitivities of total abundances for conservation laws

virtual void **fdydx**(*realtype* *dydx, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, const *realtype* *dwdx)

Model-specific implementation of fdydx.

Parameters

- **dydx** – partial derivative of observables y w.r.t. model states x
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **w** – repeating elements vector
- **dwdx** – Recurring terms in \dot{x} , state derivative

virtual void **fz**(*realtype* *z, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h)

Model-specific implementation of fz.

Parameters

- **z** – value of event output
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fsz**(*realtype* *sz, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *sx, int ip)

Model-specific implementation of fsz.

Parameters

- **sz** – Sensitivity of rz, total derivative
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **sx** – current state sensitivity
- **ip** – sensitivity index

```
virtual void frz(realtype *rz, int ie, const realtype t, const realtype *x, const realtype *p, const realtype *k,  
               const realtype *h)
```

Model-specific implementation of frz.

Parameters

- **rz** – value of root function at current timepoint (non-output events not included)
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

```
virtual void fsrz(realtype *srz, int ie, const realtype t, const realtype *x, const realtype *p, const realtype *k,  
                const realtype *h, const realtype *sx, int ip)
```

Model-specific implementation of fsrz.

Parameters

- **srz** – Sensitivity of rz, total derivative
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **sx** – current state sensitivity
- **h** – Heaviside vector
- **ip** – sensitivity index

```
virtual void fdzdp(realtype *dzdp, int ie, const realtype t, const realtype *x, const realtype *p, const realtype  
                 *k, const realtype *h, int ip)
```

Model-specific implementation of fdzdp.

Parameters

- **dzdp** – partial derivative of event-resolved output z w.r.t. model parameters p
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested

virtual void **fdzdx**(*realtype* *dzdx, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h)

Model-specific implementation of fdzdx.

Parameters

- **dzdx** – partial derivative of event-resolved output z w.r.t. model states x
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fdrzdp**(*realtype* *drzdp, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, int ip)

Model-specific implementation of fdrzdp.

Parameters

- **drzdp** – partial derivative of root output rz w.r.t. model parameters p
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested

virtual void **fdrzdx**(*realtype* *drzdx, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h)

Model-specific implementation of fdrzdx.

Parameters

- **drzdx** – partial derivative of root output rz w.r.t. model states x

- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fdeltax**(*realtype* *deltax, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, int ie, const *realtype* *xdot, const *realtype* *xdot_old)

Model-specific implementation of fdeltax.

Parameters

- **deltax** – state update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ie** – event index
- **xdot** – new model right hand side
- **xdot_old** – previous model right hand side

virtual void **fdeltasx**(*realtype* *deltasx, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, int ip, int ie, const *realtype* *xdot, const *realtype* *xdot_old, const *realtype* *sx, const *realtype* *stau, const *realtype* *tcl)

Model-specific implementation of fdeltasx.

Parameters

- **deltasx** – sensitivity update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **w** – repeating elements vector
- **ip** – sensitivity index
- **ie** – event index
- **xdot** – new model right hand side
- **xdot_old** – previous model right hand side
- **sx** – state sensitivity
- **stau** – event-time sensitivity

- **tcl** – total abundances for conservation laws

```
virtual void fdeltaxB(realtype *deltaxB, const realtype t, const realtype *x, const realtype *p, const realtype
                    *k, const realtype *h, int ie, const realtype *xdot, const realtype *xdot_old, const
                    realtype *xB)
```

Model-specific implementation of fdeltaxB.

Parameters

- **deltaxB** – adjoint state update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ie** – event index
- **xdot** – new model right hand side
- **xdot_old** – previous model right hand side
- **xB** – current adjoint state

```
virtual void fdeltaqB(realtype *deltaqB, const realtype t, const realtype *x, const realtype *p, const realtype
                    *k, const realtype *h, int ip, int ie, const realtype *xdot, const realtype *xdot_old,
                    const realtype *xB)
```

Model-specific implementation of fdeltaqB.

Parameters

- **deltaqB** – sensitivity update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – sensitivity index
- **ie** – event index
- **xdot** – new model right hand side
- **xdot_old** – previous model right hand side
- **xB** – adjoint state

```
virtual void fsigmay(realtype *sigmay, const realtype t, const realtype *p, const realtype *k, const realtype
                    *y)
```

Model-specific implementation of fsigmay.

Parameters

- **sigmay** – standard deviation of measurements
- **t** – current time

- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint t

virtual void **fdsigmaydp**(*realtype* *dsigmaydp, const *realtype* t, const *realtype* *p, const *realtype* *k, const *realtype* *y, int ip)

Model-specific implementation of fdsigmaydp.

Parameters

- **dsigmaydp** – partial derivative of standard deviation of measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint t
- **ip** – sensitivity index

virtual void **fdsigmaydy**(*realtype* *dsigmaydy, const *realtype* t, const *realtype* *p, const *realtype* *k, const *realtype* *y)

Model-specific implementation of fsigmay.

Parameters

- **dsigmaydy** – partial derivative of standard deviation of measurements w.r.t. model outputs
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint t

virtual void **fsgmaz**(*realtype* *sigmaz, const *realtype* t, const *realtype* *p, const *realtype* *k)

Model-specific implementation of fsgmaz.

Parameters

- **sigmaz** – standard deviation of event measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector

virtual void **fdsigmazdp**(*realtype* *dsigmazdp, const *realtype* t, const *realtype* *p, const *realtype* *k, int ip)

Model-specific implementation of fsgmaz.

Parameters

- **dsigmazdp** – partial derivative of standard deviation of event measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **ip** – sensitivity index

virtual void **fJy**(*realtype* *nllh, int iy, const *realtype* *p, const *realtype* *k, const *realtype* *y, const *realtype* *sigmay, const *realtype* *my)

Model-specific implementation of fJy.

Parameters

- **nllh** – negative log-likelihood for measurements y
- **iy** – output index
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint
- **sigmay** – measurement standard deviation at timepoint
- **my** – measurements at timepoint

virtual void **fJz**(*realtype* *nllh, int iz, const *realtype* *p, const *realtype* *k, const *realtype* *z, const *realtype* *sigmaz, const *realtype* *mz)

Model-specific implementation of fJz.

Parameters

- **nllh** – negative log-likelihood for event measurements z
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint
- **mz** – event measurements at timepoint

virtual void **fJrz**(*realtype* *nllh, int iz, const *realtype* *p, const *realtype* *k, const *realtype* *z, const *realtype* *sigmaz)

Model-specific implementation of fJrz.

Parameters

- **nllh** – regularization for event measurements z
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint

virtual void **fdJydy**(*realtype* *dJydy, int iy, const *realtype* *p, const *realtype* *k, const *realtype* *y, const *realtype* *sigmay, const *realtype* *my)

Model-specific implementation of fdJydy.

Parameters

- **dJydy** – partial derivative of time-resolved measurement negative log-likelihood Jy
- **iy** – output index

- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint
- **sigmay** – measurement standard deviation at timepoint
- **my** – measurement at timepoint

virtual void **fdJydy_colptrs**(*SUNMatrixWrapper* &dJydy, int index)

Model-specific implementation of fdJydy colptrs.

Parameters

- **dJydy** – sparse matrix to which colptrs will be written
- **index** – ytrue index

virtual void **fdJydy_rowvals**(*SUNMatrixWrapper* &dJydy, int index)

Model-specific implementation of fdJydy rowvals.

Parameters

- **dJydy** – sparse matrix to which rowvals will be written
- **index** – ytrue index

virtual void **fdJydsigma**(*realtype* *dJydsigma, int iy, const *realtype* *p, const *realtype* *k, const *realtype* *y, const *realtype* *sigmay, const *realtype* *my)

Model-specific implementation of fdJydsigma.

Parameters

- **dJydsigma** – Sensitivity of time-resolved measurement negative log-likelihood Jy w.r.t. standard deviation sigmay
- **iy** – output index
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint
- **sigmay** – measurement standard deviation at timepoint
- **my** – measurement at timepoint

virtual void **fdJzdz**(*realtype* *dJzdz, int iz, const *realtype* *p, const *realtype* *k, const *realtype* *z, const *realtype* *sigmaz, const *realtype* *mz)

Model-specific implementation of fdJzdz.

Parameters

- **dJzdz** – partial derivative of event measurement negative log-likelihood Jz
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint
- **mz** – event measurement at timepoint

virtual void **fdJzdsigma**(*realtype* *dJzdsigma, int iz, const *realtype* *p, const *realtype* *k, const *realtype* *z, const *realtype* *sigmaz, const *realtype* *mz)

Model-specific implementation of fdJzdsigma.

Parameters

- **dJzdsigma** – Sensitivity of event measurement negative log-likelihood Jz w.r.t. standard deviation sigmaz
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint
- **mz** – event measurement at timepoint

virtual void **fdJrzdz**(*realtype* *dJrzdz, int iz, const *realtype* *p, const *realtype* *k, const *realtype* *rz, const *realtype* *sigmaz)

Model-specific implementation of fdJrzdz.

Parameters

- **dJrzdz** – partial derivative of event penalization Jrz
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **rz** – model root output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint

virtual void **fdJrzdsigma**(*realtype* *dJrzdsigma, int iz, const *realtype* *p, const *realtype* *k, const *realtype* *rz, const *realtype* *sigmaz)

Model-specific implementation of fdJrzdsigma.

Parameters

- **dJrzdsigma** – Sensitivity of event penalization Jrz w.r.t. standard deviation sigmaz
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **rz** – model root output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint

virtual void **fw**(*realtype* *w, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *tcl)

Model-specific implementation of fw.

Parameters

- **w** – Recurring terms in xdot
- **t** – timepoint

- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **tcl** – total abundances for conservation laws

virtual void **fdwdp**(*realtype* *dwdp, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, const *realtype* *tcl, const *realtype* *stcl)

Model-specific sparse implementation of dwdp.

Parameters

- **dwdp** – Recurring terms in xdot, parameter derivative
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – total abundances for conservation laws
- **stcl** – sensitivities of total abundances for conservation laws

virtual void **fdwdp_colptrs**(*SUNMatrixWrapper* &dwdp)

Model-specific implementation for dwdp, column pointers.

Parameters **dwdp** – sparse matrix to which colptrs will be written

virtual void **fdwdp_rowvals**(*SUNMatrixWrapper* &dwdp)

Model-specific implementation for dwdp, row values.

Parameters **dwdp** – sparse matrix to which rowvals will be written

virtual void **fdwdp**(*realtype* *dwdp, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, const *realtype* *tcl, const *realtype* *stcl, int ip)

Model-specific sensitivity implementation of dwdp.

Parameters

- **dwdp** – Recurring terms in xdot, parameter derivative
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – total abundances for conservation laws
- **stcl** – sensitivities of total abundances for conservation laws

- **ip** – sensitivity parameter index

virtual void **fdwdx**(*realtype* *dwdx, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, const *realtype* *tcl)

Model-specific implementation of dwdx, data part.

Parameters

- **dwdx** – Recurring terms in xdot, state derivative
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – total abundances for conservation laws

virtual void **fdwdx_colptrs**(*SUNMatrixWrapper* &dwdx)

Model-specific implementation for dwdx, column pointers.

Parameters **dwdx** – sparse matrix to which colptrs will be written

virtual void **fdwdx_rowvals**(*SUNMatrixWrapper* &dwdx)

Model-specific implementation for dwdx, row values.

Parameters **dwdx** – sparse matrix to which rowvals will be written

virtual void **fdwdw**(*realtype* *dwdw, *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, const *realtype* *tcl)

Model-specific implementation of fdwdw, no w chainrule (Py)

Parameters

- **dwdw** – partial derivative w wrt w
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – Total abundances for conservation laws

virtual void **fdwdw_colptrs**(*SUNMatrixWrapper* &dwdw)

Model-specific implementation of fdwdw, colptrs part.

Parameters **dwdw** – sparse matrix to which colptrs will be written

virtual void **fdwdw_rowvals**(*SUNMatrixWrapper* &dwdw)

Model-specific implementation of fdwdw, rowvals part.

Parameters **dwdw** – sparse matrix to which rowvals will be written

virtual void **fdx_rdatadx_solver**(*realtype* *dx_rdatadx_solver, const *realtype* *x, const *realtype* *tcl, const *realtype* *p, const *realtype* *k)

Compute dx_rdata / dx_solver.

Parameters

- **dx_rdatadx_solver** – dx_rdata / dx_solver
- **p** – parameter vector
- **k** – constant vector
- **x** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws

virtual void **fdx_rdatadx_solver_colptrs**(*SUNMatrixWrapper* &dxrdatadxsolver)

Model-specific implementation of fdx_rdatadx_solver, colptrs part.

Parameters dxrdatadxsolver – sparse matrix to which colptrs will be written

virtual void **fdx_rdatadx_solver_rowvals**(*SUNMatrixWrapper* &dxrdatadxsolver)

Model-specific implementation of fdx_rdatadx_solver, rowvals part.

Parameters dxrdatadxsolver – sparse matrix to which rowvals will be written

virtual void **fdx_rdatadp**(*realtype* *dx_rdatadp, const *realtype* *x, const *realtype* *tcl, const *realtype* *p, const *realtype* *k, const int ip)

Compute dx_rdata / dp.

Parameters

- **dx_rdatadp** – dx_rdata / dp
- **p** – parameter vector
- **k** – constant vector
- **x** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws
- **ip** – Sensitivity index

virtual void **fdx_rdatadtcl**(*realtype* *dx_rdatadtcl, const *realtype* *x, const *realtype* *tcl, const *realtype* *p, const *realtype* *k)

Compute dx_rdata / dtcl.

Parameters

- **dx_rdatadtcl** – dx_rdata / dtcl
- **p** – parameter vector
- **k** – constant vector
- **x** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws

virtual void **fdx_rdatadtcl_colptrs**(*SUNMatrixWrapper* &dx_rdatadtcl)

Model-specific implementation of fdx_rdatadtcl, colptrs part.

Parameters dx_rdatadtcl – sparse matrix to which colptrs will be written

virtual void **fdx_rdatadtcl_rowvals**(*SUNMatrixWrapper* &dx_rdatadtcl)

Model-specific implementation of fdx_rdatadtcl, rowvals part.

Parameters **dx_rdatadtcl** – sparse matrix to which rowvals will be written

virtual void **fdtotal_cldp**(*realtype* *dtotal_cldp, const *realtype* *x_rdata, const *realtype* *p, const *realtype* *k, const int ip)

Compute dtotal_cl / dp.

Parameters

- **dtotal_cldp** – dtotal_cl / dp
- **x_rdata** – State variables with conservation laws applied
- **p** – parameter vector
- **k** – constant vector
- **ip** – Sensitivity index

virtual void **fdtotal_cldx_rdata**(*realtype* *dtotal_cldx_rdata, const *realtype* *x_rdata, const *realtype* *p, const *realtype* *k, const *realtype* *tcl)

Compute dtotal_cl / dx_rdata.

Parameters

- **dtotal_cldx_rdata** – dtotal_cl / dx_rdata
- **x_rdata** – State variables with conservation laws applied
- **p** – parameter vector
- **k** – constant vector
- **tcl** – Total abundances for conservation laws

virtual void **fdtotal_cldx_rdata_colptrs**(*SUNMatrixWrapper* &dtotal_cldx_rdata)

Model-specific implementation of fdtotal_cldx_rdata, colptrs part.

Parameters **dtotal_cldx_rdata** – sparse matrix to which colptrs will be written

virtual void **fdtotal_cldx_rdata_rowvals**(*SUNMatrixWrapper* &dtotal_cldx_rdata)

Model-specific implementation of fdtotal_cldx_rdata, rowvals part.

Parameters **dtotal_cldx_rdata** – sparse matrix to which rowvals will be written

Class AmiException

- Defined in file_include_amici_exception.h

Inheritance Relationships

Base Type

- `public std::exception`

Derived Types

- `public amici::CvodeException (Class CvodeException)`
- `public amici::IDAException (Class IDAException)`
- `public amici::IntegrationFailure (Class IntegrationFailure)`
- `public amici::IntegrationFailureB (Class IntegrationFailureB)`
- `public amici::NewtonFailure (Class NewtonFailure)`
- `public amici::SetupFailure (Class SetupFailure)`

Class Documentation

class **AmiException** : public std::exception

AMICI exception class.

Has a printf style interface to allow easy generation of error messages

Subclassed by *amici::CvodeException*, *amici::IDAException*, *amici::IntegrationFailure*, *amici::IntegrationFailureB*, *amici::NewtonFailure*, *amici::SetupFailure*

Public Functions

AmiException(int const first_frame = 3)

Default ctor.

Parameters **first_frame** – Index of first frame to include

explicit **AmiException**(char const *fmt, ...)

Constructor with printf style interface.

Parameters

- **fmt** – error message with printf format
- **...** – printf formatting variables

char const ***what**() const noexcept override

Override of default error message function.

Returns msg error message

char const ***getBacktrace**() const

Returns the stored backtrace.

Returns trace backtrace

void **storeBacktrace**(int nMaxFrames, int const first_frame)

Stores the current backtrace.

Parameters

- **nMaxFrames** – number of frames to go back in stacktrace
- **first_frame** – Index of first frame to include

Protected Functions

void **storeMessage**(char const *fmt, va_list argptr)

Store the provided message.

Parameters

- **fmt** – error message with printf format
- **argptr** – pointer to variadic argument list

Class AmiVector

- Defined in file_include_amici_vector.h

Class Documentation

class **AmiVector**

AmiVector class provides a generic interface to the NVector_Serial struct

Public Functions

AmiVector() = default

Default constructor.

inline explicit **AmiVector**(const long int length)

empty constructor

Creates an std::vector<realtype> and attaches the data pointer to a newly created N_Vector_Serial. Using N_VMake_Serial ensures that the N_Vector module does not try to deallocate the data vector when calling N_VDestroy_Serial

Parameters **length** – number of elements in vector

inline explicit **AmiVector**(std::vector<*realtype*> rvec)

constructor from std::vector,

Moves data from std::vector and constructs an nvec that points to the data

Parameters **rvec** – vector from which the data will be moved

inline explicit **AmiVector**(gsl::span<*realtype*> rvec)

constructor from gsl::span,

Copy data from gsl::span and constructs a vector

Parameters **rvec** – vector from which the data will be copied

inline **AmiVector**(const *AmiVector* &vold)

copy constructor

Parameters **vold** – vector from which the data will be copied

inline **AmiVector**(*AmiVector* &&other) noexcept

move constructor

Parameters **other** – vector from which the data will be moved

~AmiVector()

destructor

AmiVector &**operator**=(*AmiVector* const &other)

copy assignment operator

Parameters **other** – right hand side

Returns left hand side

inline *AmiVector* &**operator***(*AmiVector* const &multiplier)

operator *= (element-wise multiplication)

Parameters **multiplier** – multiplier

Returns result

inline *AmiVector* &**operator**/(*AmiVector* const &divisor)

operator /= (element-wise division)

Parameters **divisor** – divisor

Returns result

inline auto **begin**()

Returns an iterator that points to the first element of the vector.

Returns iterator that points to the first element

inline auto **end**()

Returns an iterator that points to one element after the last element of the vector.

Returns iterator that points to one element after the last element

realtype ***data**()

data accessor

Returns pointer to data array

const *realtype* ***data**() const

const data accessor

Returns const pointer to data array

N_Vector **getNVector**()

N_Vector accessor.

Returns N_Vector

const N_Vector **getNVector**() const

N_Vector accessor.

Returns N_Vector

`std::vector<realtype> const &getVector()` const
 Vector accessor.

Returns Vector

`int getLength()` const
 returns the length of the vector

Returns length

`void zero()`
 fills vector with zero values

`void minus()`
 changes the sign of data elements

`void set(realtype val)`
 sets all data elements to a specific value

Parameters **val** – value for data elements

`realtype &operator[]` (int pos)
 accessor to data elements of the vector

Parameters **pos** – index of element

Returns element

`realtype &at` (int pos)
 accessor to data elements of the vector

Parameters **pos** – index of element

Returns element

`const realtype &at` (int pos) const
 accessor to data elements of the vector

Parameters **pos** – index of element

Returns element

`void copy` (const *AmiVector* &other)
 copies data from another *AmiVector*

Parameters **other** – data source

`inline void abs()`
 Take absolute value (in-place)

Class *AmiVectorArray*

- Defined in `file_include_amici_vector.h`

Class Documentation

class **AmiVectorArray**

AmiVectorArray class.

Provides a generic interface to arrays of NVector_Serial structs

Public Functions

AmiVectorArray() = default

Default constructor.

AmiVectorArray(long int length_inner, long int length_outer)

empty constructor

Creates an `std::vector<realtype>` and attaches the data pointer to a newly created N_VectorArray using `CloneVectorArrayEmpty` ensures that the N_Vector module does not try to deallocate the data vector when calling `N_VDestroyVectorArray_Serial`

Parameters

- **length_inner** – length of vectors
- **length_outer** – number of vectors

AmiVectorArray(const *AmiVectorArray* &vaold)

copy constructor

Parameters **vaold** – object to copy from

~AmiVectorArray() = default

AmiVectorArray &**operator=**(*AmiVectorArray* const &other)

copy assignment operator

Parameters **other** – right hand side

Returns left hand side

realtype ***data**(int pos)

accessor to data of *AmiVector* elements

Parameters **pos** – index of *AmiVector*

Returns pointer to data array

const *realtype* ***data**(int pos) const

const accessor to data of *AmiVector* elements

Parameters **pos** – index of *AmiVector*

Returns const pointer to data array

realtype &**at**(int ipos, int jpos)

accessor to elements of *AmiVector* elements

Parameters

- **ipos** – inner index in *AmiVector*
- **jpos** – outer index in *AmiVectorArray*

Returns element

const *realtype* &**at**(int ipos, int jpos) const
 const accessor to elements of *AmiVector* elements

Parameters

- **ipos** – inner index in *AmiVector*
- **jpos** – outer index in *AmiVectorArray*

Returns element

N_Vector ***getNVectorArray**()
 accessor to NVectorArray

Returns N_VectorArray

N_Vector **getNVector**(int pos)
 accessor to NVector element

Parameters **pos** – index of corresponding *AmiVector*

Returns N_Vector

const N_Vector **getNVector**(int pos) const
 const accessor to NVector element

Parameters **pos** – index of corresponding *AmiVector*

Returns N_Vector

AmiVector &**operator[]**(int pos)
 accessor to *AmiVector* elements

Parameters **pos** – index of *AmiVector*

Returns *AmiVector*

const *AmiVector* &**operator[]**(int pos) const
 const accessor to *AmiVector* elements

Parameters **pos** – index of *AmiVector*

Returns const *AmiVector*

int **getLength**() const
 length of *AmiVectorArray*

Returns length

void **zero**()
 set every *AmiVector* in *AmiVectorArray* to zero

void **flatten_to_vector**(std::vector<*realtype*> &vec) const
 flattens the *AmiVectorArray* to a vector in row-major format

Parameters **vec** – vector into which the *AmiVectorArray* will be flattened. Must have length equal to number of elements.

void **copy**(const *AmiVectorArray* &other)
 copies data from another *AmiVectorArray*

Parameters **other** – data source

Class BackwardProblem

- Defined in file `_include_amici_backwardproblem.h`

Class Documentation

class **BackwardProblem**

class to solve backwards problems.

solves the backwards problem for adjoint sensitivity analysis and handles events and data-points

Public Functions

explicit **BackwardProblem**(const *ForwardProblem* &fwd, const *SteadystateProblem* *posteq)

Construct backward problem from forward problem.

Parameters

- **fwd** – pointer to corresponding forward problem
- **posteq** – pointer to postequilibration problem, can be nullptr

void **workBackwardProblem**()

Solve the backward problem.

If adjoint sensitivities are enabled this will also compute sensitivities. `workForwardProblem` must be called before this function is called.

inline *realtype* **gett**() const

Accessor for current time t.

Returns t

inline int **getwhich**() const

Accessor for which.

Returns which

inline int ***getwhichptr**()

Accessor for pointer to which.

Returns which

inline std::vector<*realtype*> const &**getdJydx**() const

Accessor for dJydx.

Returns dJydx

inline *AmiVector* const &**getAdjointState**() const

Accessor for xB.

Returns xB

inline *AmiVector* const &**getAdjointQuadrature**() const

Accessor for xQB.

Returns xQB

Class ConditionContext

- Defined in file_include_amici_edata.h

Inheritance Relationships

Base Type

- public amici::ContextManager (*Class ContextManager*)

Class Documentation

class **ConditionContext** : public amici::ContextManager

The *ConditionContext* class applies condition-specific *amici::Model* settings and restores them when going out of scope.

Public Functions

explicit **ConditionContext**(*Model* *model, *ExpData* const *edata = nullptr, *FixedParameterContext* fpc = *FixedParameterContext::simulation*)

Apply condition-specific settings from edata to model while keeping a backup of the original values.

Parameters

- **model** –
- **edata** –
- **fpc** – flag indicating which fixedParameter from edata to apply

ConditionContext &**operator**=(*ConditionContext* const &other) = delete

~ConditionContext()

void **applyCondition**(*ExpData* const *edata, *FixedParameterContext* fpc)

Apply condition-specific settings from edata to the constructor-supplied model, not changing the settings which were backed-up in the constructor call.

Parameters

- **edata** –
- **fpc** – flag indicating which fixedParameter from edata to apply

void **restore**()

Restore original settings on constructor-supplied *amici::Model*. Will be called during destruction. Explicit call is generally not necessary.

Class ContextManager

- Defined in file_include_amici_misc.h

Inheritance Relationships

Derived Types

- public amici::ConditionContext (*Class ConditionContext*)
- public amici::FinalStateStorer (*Class FinalStateStorer*)
- public amici::ModelContext (*Class ModelContext*)

Class Documentation

class ContextManager

Generic implementation for a context manager, explicitly deletes copy and move operators for derived classes.

Subclassed by *amici::ConditionContext*, *amici::FinalStateStorer*, *amici::ModelContext*

Public Functions

ContextManager() = default

ContextManager(*ContextManager* &other) = delete

ContextManager(*ContextManager* &&other) = delete

Class CcodeException

- Defined in file_include_amici_exception.h

Inheritance Relationships

Base Type

- public amici::AmiException (*Class AmiException*)

Class Documentation

class **CvodeException** : public amici::*AmiException*
 cvode exception handler class

Public Functions

CvodeException(int error_code, char const *function)
 Constructor.

Parameters

- **error_code** – error code returned by cvode function
- **function** – cvode function name

Class CVodeSolver

- Defined in file_include_amici_solver_cvodes.h

Inheritance Relationships

Base Type

- public amici::Solver (*Class Solver*)

Class Documentation

class **CVodeSolver** : public amici::*Solver*
 The *CVodeSolver* class is a wrapper around the SUNDIALS CVODES solver.

Public Functions

~CVodeSolver() override = default

virtual *Solver* ***clone**() const override
 Clone this instance.

Returns The clone

virtual void **reInit**(*realtype* t0, const *AmiVector* &yy0, const *AmiVector* &yp0) const override
 Reinitializes the states in the solver after an event occurrence.

Parameters

- **t0** – reinitialization timepoint
- **yy0** – initial state variables
- **yp0** – initial derivative state variables (DAE only)

virtual void **sensReInit**(const *AmiVectorArray* &yyS0, const *AmiVectorArray* &ypS0) const override
Reinitializes the state sensitivities in the solver after an event occurrence.

Parameters

- **yyS0** – new state sensitivity
- **ypS0** – new derivative state sensitivities (DAE only)

virtual void **sensToggleOff**() const override

Switches off computation of state sensitivities without deallocating the memory for sensitivities.

virtual void **reInitB**(int which, *realtype* tB0, const *AmiVector* &yyB0, const *AmiVector* &ypB0) const override

Reinitializes the adjoint states after an event occurrence.

Parameters

- **which** – identifier of the backwards problem
- **tB0** – reinitialization timepoint
- **yyB0** – new adjoint state
- **ypB0** – new adjoint derivative state

virtual void **quadReInitB**(int which, const *AmiVector* &yQB0) const override

Reinitialize the adjoint states after an event occurrence.

Parameters

- **which** – identifier of the backwards problem
- **yQB0** – new adjoint quadrature state

virtual int **solve**(*realtype* tout, int itask) const override

Solves the forward problem until a predefined timepoint.

Parameters

- **tout** – timepoint until which simulation should be performed
- **itask** – task identifier, can be CV_NORMAL or CV_ONE_STEP

Returns status flag indicating success of execution

virtual int **solveF**(*realtype* tout, int itask, int *ncheckPtr) const override

Solves the forward problem until a predefined timepoint (adjoint only)

Parameters

- **tout** – timepoint until which simulation should be performed
- **itask** – task identifier, can be CV_NORMAL or CV_ONE_STEP
- **ncheckPtr** – pointer to a number that counts the internal checkpoints

Returns status flag indicating success of execution

virtual void **solveB**(*realtype* tBout, int itaskB) const override

Solves the backward problem until a predefined timepoint (adjoint only)

Parameters

- **tBout** – timepoint until which simulation should be performed
- **itaskB** – task identifier, can be CV_NORMAL or CV_ONE_STEP

virtual void **getDky**(*realtype* t, int k) const override
interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order

virtual void **getSensDky**(*realtype* t, int k) const override
interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order

virtual void **getQuadDkyB**(*realtype* t, int k, int which) const override
interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order
- **which** – index of backward problem

virtual void **getDkyB**(*realtype* t, int k, int which) const override
interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order
- **which** – index of backward problem

virtual void **getRootInfo**(int *rootsfound) const override
getRootInfo extracts information which event occurred

Parameters **rootsfound** – array with flags indicating whether the respective event occurred

virtual void **setStopTime**(*realtype* tstop) const override
Sets a timepoint at which the simulation will be stopped.

Parameters **tstop** – timepoint until which simulation should be performed

virtual void **turnOffRootFinding**() const override
Disable rootfinding.

virtual const *Model* ***getModel**() const override
Accessor function to the model stored in the user data

Returns user data model

virtual void **setLinearSolver**() const override
Sets the linear solver for the forward problem.

virtual void **setLinearSolverB**(int which) const override
Sets the linear solver for the backward problem.

Parameters **which** – index of the backward problem

virtual void **setNonLinearSolver**() const override

Set the non-linear solver for the forward problem.

virtual void **setNonLinearSolverSens**() const override

Set the non-linear solver for sensitivities.

virtual void **setNonLinearSolverB**(int which) const override

Set the non-linear solver for the backward problem.

Parameters **which** – index of the backward problem

Solver() = default

Default constructor.

Solver(const *Solver* &other)

Solver copy constructor.

Parameters **other** –

Protected Functions

virtual void **calcIC**(*realtype* tout1) const override

Calculates consistent initial conditions, assumes initial states to be correct (DAE only)

Parameters **tout1** – next timepoint to be computed (sets timescale)

virtual void **calcICB**(int which, *realtype* tout1) const override

Calculates consistent initial conditions for the backwards problem, assumes initial states to be correct (DAE only)

Parameters

- **which** – identifier of the backwards problem
- **tout1** – next timepoint to be computed (sets timescale)

virtual void **getB**(int which) const override

extracts the adjoint state at the current timepoint from solver memory and writes it to the xB member variable

Parameters **which** – index of the backwards problem

virtual void **getSens**() const override

extracts the state sensitivity at the current timepoint from solver memory and writes it to the sx member variable

virtual void **getQuadB**(int which) const override

extracts the adjoint quadrature state at the current timepoint from solver memory and writes it to the xQB member variable

Parameters **which** – index of the backwards problem

virtual void **getQuad**(*realtype* &t) const override

extracts the quadrature at the current timepoint from solver memory and writes it to the xQ member variable

Parameters **t** – timepoint for quadrature extraction

virtual void **getQuadDky**(*realtype* t, int k) const override

interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order

virtual void **reInitPostProcessF**(*realtype* tnext) const override

reInitPostProcessF postprocessing of the solver memory after a discontinuity in the forward problem

Parameters **tnext** – next timepoint (defines integration direction)

virtual void **reInitPostProcessB**(*realtype* tnext) const override

reInitPostProcessB postprocessing of the solver memory after a discontinuity in the backward problem

Parameters **tnext** – next timepoint (defines integration direction)

void **reInitPostProcess**(void *cv_mem, *realtype* *t, *AmiVector* *yout, *realtype* tout) const

Postprocessing of the solver memory after a discontinuity.

Parameters

- **cv_mem** – pointer to CVODES solver memory object
- **t** – pointer to integration time
- **yout** – new state vector
- **tout** – anticipated next integration timepoint.

virtual void **allocateSolver**() const override

Create specifies solver method and initializes solver memory for the forward problem.

virtual void **setSStolerances**(double rtol, double atol) const override

sets scalar relative and absolute tolerances for the forward problem

Parameters

- **rtol** – relative tolerances
- **atol** – absolute tolerances

virtual void **setSensSStolerances**(double rtol, const double *atol) const override

activates sets scalar relative and absolute tolerances for the sensitivity variables

Parameters

- **rtol** – relative tolerances
- **atol** – array of absolute tolerances for every sensitivity variable

virtual void **setSensErrCon**(bool error_corr) const override

SetSensErrCon specifies whether error control is also enforced for sensitivities for the forward problem

Parameters **error_corr** – activation flag

virtual void **setQuadErrConB**(int which, bool flag) const override

Specifies whether error control is also enforced for the backward quadrature problem.

Parameters

- **which** – identifier of the backwards problem
- **flag** – activation flag

virtual void **setQuadErrCon**(bool flag) const override

Specifies whether error control is also enforced for the forward quadrature problem.

Parameters **flag** – activation flag

virtual void **setErrorHandlerFn**() const override

Attaches the error handler function (errMsgIdAndTxt) to the solver.

virtual void **setUserData**() const override

Attaches the user data to the forward problem.

virtual void **setUserDataB**(int which) const override

attaches the user data to the backward problem

Parameters **which** – identifier of the backwards problem

virtual void **setMaxNumSteps**(long int mxsteps) const override

specifies the maximum number of steps for the forward problem

Note: in contrast to the SUNDIALS method, this sets the overall maximum, not the maximum between output times.

Parameters **mxsteps** – number of steps

virtual void **setStabLimDet**(int stldet) const override

activates stability limit detection for the forward problem

Parameters **stldet** – flag for stability limit detection (TRUE or FALSE)

virtual void **setStabLimDetB**(int which, int stldet) const override

activates stability limit detection for the backward problem

Parameters

- **which** – identifier of the backwards problem
- **stldet** – flag for stability limit detection (TRUE or FALSE)

virtual void **setId**(const *Model* *model) const override

specify algebraic/differential components (DAE only)

Parameters **model** – model specification

virtual void **setSuppressAlg**(bool flag) const override

deactivates error control for algebraic components (DAE only)

Parameters **flag** – deactivation flag

void **resetState**(void *cv_mem, const *N_Vector* y0) const

resetState reset the CVODES solver to restart integration after a rhs discontinuity.

Parameters

- **cv_mem** – pointer to CVODES solver memory object
- **y0** – new state vector

virtual void **setSensParams**(const *realtype* *p, const *realtype* *pbar, const int *plist) const override
specifies the scaling and indexes for sensitivity computation

Parameters

- **p** – parameters
- **pbar** – parameter scaling constants
- **plist** – parameter index list

virtual void **adjInit**() const override
initializes the adjoint problem

virtual void **quadInit**(const *AmiVector* &xQ0) const override
initializes the quadratures

Parameters **xQ0** – vector with initial values for xQ

virtual void **allocateSolverB**(int *which) const override
Specifies solver method and initializes solver memory for the backward problem.

Parameters **which** – identifier of the backwards problem

virtual void **setSStolerancesB**(int which, *realtype* relTolB, *realtype* absTolB) const override
sets relative and absolute tolerances for the backward problem

Parameters

- **which** – identifier of the backwards problem
- **relTolB** – relative tolerances
- **absTolB** – absolute tolerances

virtual void **quadSStolerancesB**(int which, *realtype* reltolQB, *realtype* abstolQB) const override
sets relative and absolute tolerances for the quadrature backward problem

Parameters

- **which** – identifier of the backwards problem
- **reltolQB** – relative tolerances
- **abstolQB** – absolute tolerances

virtual void **quadSStolerances**(*realtype* reltolQ, *realtype* abstolQ) const override
sets relative and absolute tolerances for the quadrature problem

Parameters

- **reltolQB** – relative tolerances
- **abstolQB** – absolute tolerances

virtual void **setMaxNumStepsB**(int which, long int mxstepsB) const override
specifies the maximum number of steps for the forward problem

Note: in contrast to the SUNDIALS method, this sets the overall maximum, not the maximum between output times.

Parameters

- **which** – identifier of the backwards problem
- **mxstepsB** – number of steps

virtual void **diag**() const override

attaches a diagonal linear solver to the forward problem

virtual void **diagB**(int which) const override

attaches a diagonal linear solver to the backward problem

Parameters **which** – identifier of the backwards problem

virtual void **getNumSteps**(const void *ami_mem, long int *numsteps) const override

reports the number of solver steps

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numsteps** – output array

virtual void **getNumRhsEvals**(const void *ami_mem, long int *numrhsevals) const override

reports the number of right hand evaluations

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numrhsevals** – output array

virtual void **getNumErrTestFails**(const void *ami_mem, long int *numerrtestfails) const override

reports the number of local error test failures

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numerrtestfails** – output array

virtual void **getNumNonlinSolvConvFails**(const void *ami_mem, long int *numnonlinsolvconvfails) const override

reports the number of nonlinear convergence failures

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numnonlinsolvconvfails** – output array

virtual void **getLastOrder**(const void *ami_ami_mem, int *order) const override

Reports the order of the integration method during the last internal step.

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **order** – output array

virtual void ***getAdjBmem**(void *ami_mem, int which) const override

Retrieves the solver memory instance for the backward problem.

Parameters

- **which** – identifier of the backwards problem
- **ami_mem** – pointer to the forward solver memory instance

Returns A (void *) pointer to the CVODES memory allocated for the backward problem.

virtual void **init**(*realtype* t0, const *AmiVector* &x0, const *AmiVector* &dx0) const override

Initializes the states at the specified initial timepoint.

Parameters

- **t0** – initial timepoint
- **x0** – initial states
- **dx0** – initial derivative states

virtual void **initSteadystate**(const *realtype* t0, const *AmiVector* &x0, const *AmiVector* &dx0) const override

Initializes the states at the specified initial timepoint.

Parameters

- **t0** – initial timepoint
- **x0** – initial states
- **dx0** – initial derivative states

virtual void **sensInit1**(const *AmiVectorArray* &sx0, const *AmiVectorArray* &sdx0) const override

Initializes the forward sensitivities.

Parameters

- **sx0** – initial states sensitivities
- **sdx0** – initial derivative states sensitivities

virtual void **binit**(int which, *realtype* tf, const *AmiVector* &xB0, const *AmiVector* &dxB0) const override

Initialize the adjoint states at the specified final timepoint.

Parameters

- **which** – identifier of the backwards problem
- **tf** – final timepoint
- **xB0** – initial adjoint state
- **dxB0** – initial adjoint derivative state

virtual void **qbinit**(int which, const *AmiVector* &xQB0) const override

Initialize the quadrature states at the specified final timepoint.

Parameters

- **which** – identifier of the backwards problem
- **xQB0** – initial adjoint quadrature state

virtual void **rootInit**(int ne) const override

Initializes the rootfinding for events.

Parameters **ne** – number of different events

virtual void **setDenseJacFn**() const override

Set the dense Jacobian function.

virtual void **setSparseJacFn**() const override

sets the sparse Jacobian function

virtual void **setBandJacFn**() const override

sets the banded Jacobian function

virtual void **setJacTimesVecFn**() const override

sets the Jacobian vector multiplication function

virtual void **setDenseJacFnB**(int which) const override

sets the dense Jacobian function

Parameters **which** – identifier of the backwards problem

virtual void **setSparseJacFnB**(int which) const override

sets the sparse Jacobian function

Parameters **which** – identifier of the backwards problem

virtual void **setBandJacFnB**(int which) const override

sets the banded Jacobian function

Parameters **which** – identifier of the backwards problem

virtual void **setJacTimesVecFnB**(int which) const override

sets the Jacobian vector multiplication function

Parameters **which** – identifier of the backwards problem

virtual void **setSparseJacFn_ss**() const override

sets the sparse Jacobian function for backward steady state case

Friends

template<class **Archive**>

friend void **serialize**(*Archive* &ar, *CVodeSolver* &s, unsigned int)

Serialize *amici::CVodeSolver* to boost archive.

Parameters

- **ar** – Archive
- **s** – *Solver* instance to serialize

friend bool **operator==**(const *CVodeSolver* &a, const *CVodeSolver* &b)

Equality operator.

Parameters

- **a** –
- **b** –

Returns Whether a and b are equal

Class ExpData

- Defined in file_include_amici_edata.h

Inheritance Relationships

Base Type

- public amici::SimulationParameters (*Class SimulationParameters*)

Class Documentation

class **ExpData** : public amici::SimulationParameters

ExpData carries all information about experimental or condition-specific data.

Public Functions

ExpData() = default
default constructor

ExpData(*ExpData* const&) = default
Copy constructor, needs to be declared to be generated in swig.

ExpData(int nytrue, int nztrue, int nmaxevent)
constructor that only initializes dimensions

Parameters

- **nytrue** – Number of observables
- **nztrue** – Number of event outputs
- **nmaxevent** – Maximal number of events to track

ExpData(int nytrue, int nztrue, int nmaxevent, std::vector<*realtype*> ts)
constructor that initializes timepoints from vectors

Parameters

- **nytrue** – Number of observables
- **nztrue** – Number of event outputs
- **nmaxevent** – Maximal number of events to track
- **ts** – Timepoints (dimension: nt)

ExpData(int nytrue, int nztrue, int nmaxevent, std::vector<*realtype*> ts, std::vector<*realtype*> fixedParameters)
constructor that initializes timepoints and fixed parameters from vectors

Parameters

- **nytrue** – Number of observables
- **nztrue** – Number of event outputs
- **nmaxevent** – Maximal number of events to track

- **ts** – Timepoints (dimension: nt)
- **fixedParameters** – *Model* constants (dimension: nk)

ExpData(int nytrue, int nztrue, int nmaxevent, std::vector<*realtype*> ts, std::vector<*realtype*> const &observedData, std::vector<*realtype*> const &observedDataStdDev, std::vector<*realtype*> const &observedEvents, std::vector<*realtype*> const &observedEventsStdDev)

constructor that initializes timepoints and data from vectors

Parameters

- **nytrue** – Number of observables
- **nztrue** – Number of event outputs
- **nmaxevent** – Maximal number of events to track
- **ts** – Timepoints (dimension: nt)
- **observedData** – observed data (dimension: nt x nytrue, row-major)
- **observedDataStdDev** – standard deviation of observed data (dimension: nt x nytrue, row-major)
- **observedEvents** – observed events (dimension: nmaxevents x nztrue, row-major)
- **observedEventsStdDev** – standard deviation of observed events/roots (dimension: nmaxevents x nztrue, row-major)

explicit **ExpData**(*Model* const &model)

constructor that initializes with *Model*

Parameters **model** – pointer to model specification object

ExpData(*ReturnData* const &rdata, *realtype* sigma_y, *realtype* sigma_z)

constructor that initializes with returnData, adds noise according to specified sigmas

Parameters

- **rdata** – return data pointer with stored simulation results
- **sigma_y** – scalar standard deviations for all observables
- **sigma_z** – scalar standard deviations for all event observables

ExpData(*ReturnData* const &rdata, std::vector<*realtype*> sigma_y, std::vector<*realtype*> sigma_z)

constructor that initializes with returnData, adds noise according to specified sigmas

Parameters

- **rdata** – return data pointer with stored simulation results
- **sigma_y** – vector of standard deviations for observables (dimension: nytrue or nt x nytrue, row-major)
- **sigma_z** – vector of standard deviations for event observables (dimension: nztrue or nmax-event x nztrue, row-major)

~ExpData() = default

int **nytrue**() const

number of observables of the non-augmented model

Returns number of observables of the non-augmented model

int **nztrue**() const
 number of event observables of the non-augmented model
Returns number of event observables of the non-augmented model

int **nmaxevent**() const
 maximal number of events to track
Returns maximal number of events to track

int **nt**() const
 number of timepoints
Returns number of timepoints

void **setTimepoints**(std::vector<realtype> const &ts)
 Set output timepoints.
Parameters **ts** – timepoints

std::vector<realtype> const &**getTimepoints**() const
 Get output timepoints.
Returns ExpData::ts

realtype **getTimepoint**(int it) const
 Get timepoint for the given index.
Parameters **it** – timepoint index
Returns timepoint timepoint at index

void **setObservedData**(std::vector<realtype> const &observedData)
 Set all measurements.
Parameters **observedData** – observed data (dimension: nt x nytrue, row-major)

void **setObservedData**(std::vector<realtype> const &observedData, int iy)
 Set measurements for a given observable index.
Parameters

- **observedData** – observed data (dimension: nt)
- **iy** – observed data index

bool **isSetObservedData**(int it, int iy) const
 Whether there is a measurement for the given time- and observable- index.
Parameters

- **it** – time index
- **iy** – observable index

Returns boolean specifying if data was set

std::vector<realtype> const &**getObservedData**() const
 Get all measurements.
Returns observed data (dimension: nt x nytrue, row-major)

realtype const *getObservedDataPtr(int it) const

Get measurements for a given timepoint index.

Parameters *it* – timepoint index

Returns pointer to observed data at index (dimension: nytrue)

void setObservedDataStdDev(std::vector<*realtype*> const &observedDataStdDev)

Set standard deviations for measurements.

Parameters **observedDataStdDev** – standard deviation of observed data (dimension: nt x nytrue, row-major)

void setObservedDataStdDev(*realtype* stdDev)

Set identical standard deviation for all measurements.

Parameters **stdDev** – standard deviation (dimension: scalar)

void setObservedDataStdDev(std::vector<*realtype*> const &observedDataStdDev, int iy)

Set standard deviations of observed data for a specific observable index.

Parameters

- **observedDataStdDev** – standard deviation of observed data (dimension: nt)
- **iy** – observed data index

void setObservedDataStdDev(*realtype* stdDev, int iy)

Set all standard deviation for a given observable index to the input value.

Parameters

- **stdDev** – standard deviation (dimension: scalar)
- **iy** – observed data index

bool isSetObservedDataStdDev(int it, int iy) const

Whether standard deviation for a measurement at specified timepoint- and observable index has been set.

Parameters

- **it** – time index
- **iy** – observable index

Returns boolean specifying if standard deviation of data was set

std::vector<*realtype*> const &getObservedDataStdDev() const

Get measurement standard deviations.

Returns standard deviation of observed data

realtype const *getObservedDataStdDevPtr(int it) const

Get pointer to measurement standard deviations.

Parameters *it* – timepoint index

Returns pointer to standard deviation of observed data at index

void setObservedEvents(std::vector<*realtype*> const &observedEvents)

set function that copies observed event data from input to ExpData::observedEvents

Parameters **observedEvents** – observed data (dimension: nmaxevent x nztrue, row-major)

void **setObservedEvents**(std::vector<*realtype*> const &observedEvents, int iz)

set function that copies observed event data for specific event observable

Parameters

- **observedEvents** – observed data (dimension: nmaxevent)
- **iz** – observed event data index

bool **isSetObservedEvents**(int ie, int iz) const

get function that checks whether event data at specified indices has been set

Parameters

- **ie** – event index
- **iz** – event observable index

Returns boolean specifying if data was set

std::vector<*realtype*> const &**getObservedEvents**() const

get function that copies data from ExpData::mz to output

Returns observed event data

realtype const ***getObservedEventsPtr**(int ie) const

get function that returns a pointer to observed data at ieth occurrence

Parameters **ie** – event occurrence

Returns pointer to observed event data at ieth occurrence

void **setObservedEventsStdDev**(std::vector<*realtype*> const &observedEventsStdDev)

set function that copies data from input to ExpData::observedEventsStdDev

Parameters **observedEventsStdDev** – standard deviation of observed event data

void **setObservedEventsStdDev**(*realtype* stdDev)

set function that sets all ExpData::observedDataStdDev to the input value

Parameters **stdDev** – standard deviation (dimension: scalar)

void **setObservedEventsStdDev**(std::vector<*realtype*> const &observedEventsStdDev, int iz)

set function that copies standard deviation of observed data for specific observable

Parameters

- **observedEventsStdDev** – standard deviation of observed data (dimension: nmaxevent)
- **iz** – observed data index

void **setObservedEventsStdDev**(*realtype* stdDev, int iz)

set function that sets all standard deviation of a specific observable to the input value

Parameters

- **stdDev** – standard deviation (dimension: scalar)
- **iz** – observed data index

bool **isSetObservedEventsStdDev**(int ie, int iz) const

get function that checks whether standard deviation of even data at specified indices has been set

Parameters

- **ie** – event index

- **iz** – event observable index

Returns boolean specifying if standard deviation of event data was set

`std::vector<realtype> const &getObservedEventsStdDev() const`

get function that copies data from `ExpData::observedEventsStdDev` to output

Returns standard deviation of observed event data

`realtype const *getObservedEventsStdDevPtr(int ie) const`

get function that returns a pointer to standard deviation of observed event data at ie-th occurrence

Parameters **ie** – event occurrence

Returns pointer to standard deviation of observed event data at ie-th occurrence

Public Members

`std::string id`

Arbitrary (not necessarily unique) identifier.

Protected Functions

`void applyDimensions()`

resizes `observedData`, `observedDataStdDev`, `observedEvents` and `observedEventsStdDev`

`void applyDataDimension()`

resizes `observedData` and `observedDataStdDev`

`void applyEventDimension()`

resizes `observedEvents` and `observedEventsStdDev`

`void checkDataDimension(std::vector<realtype> const &input, char const *fieldname) const`

checker for dimensions of input `observedData` or `observedDataStdDev`

Parameters

- **input** – vector input to be checked
- **fieldname** – name of the input

`void checkEventsDimension(std::vector<realtype> const &input, char const *fieldname) const`

checker for dimensions of input `observedEvents` or `observedEventsStdDev`

Parameters

- **input** – vector input to be checked
- **fieldname** – name of the input

Protected Attributes

int **nytrue_** = {0}

number of observables

int **nztrue_** = {0}

number of event observables

int **nmaxevent_** = {0}

maximal number of event occurrences

std::vector<*realtype*> **observed_data_**

observed data (dimension: nt x nytrue, row-major)

std::vector<*realtype*> **observed_data_std_dev_**

standard deviation of observed data (dimension: nt x nytrue, row-major)

std::vector<*realtype*> **observed_events_**

observed events (dimension: nmaxevents x nztrue, row-major)

std::vector<*realtype*> **observed_events_std_dev_**

standard deviation of observed events/roots (dimension: nmaxevents x nztrue, row-major)

Friends

inline friend bool **operator==(***ExpData* const &lhs, *ExpData* const &rhs)

Equality operator.

Parameters

- **lhs** – some object
- **rhs** – another object

Returns true, if both arguments are equal; false otherwise.

Class FinalStateStorer

- Defined in file_include_amici_forwardproblem.h

Inheritance Relationships

Base Type

- `public amici::ContextManager` (*Class ContextManager*)

Class Documentation

class **FinalStateStorer** : public amici::ContextManager

stores the stimulation state when it goes out of scope

Public Functions

inline explicit **FinalStateStorer**(ForwardProblem *fwd)

constructor, attaches problem pointer

Parameters **fwd** – problem from which the simulation state is to be stored

FinalStateStorer &**operator**=(*FinalStateStorer* const &other) = delete

inline **~FinalStateStorer**()

destructor, stores simulation state

Class ForwardProblem

- Defined in file_include_amici_forwardproblem.h

Class Documentation

class **ForwardProblem**

The *ForwardProblem* class groups all functions for solving the forward problem.

Public Functions

ForwardProblem(ExpData const *edata, Model *model, Solver *solver, SteadystateProblem const *preeq)

Constructor.

Parameters

- **edata** – pointer to *ExpData* instance
- **model** – pointer to *Model* instance
- **solver** – pointer to *Solver* instance
- **preeq** – preequilibration with which to initialize the forward problem, pass nullptr for no initialization

~ForwardProblem() = default

void **workForwardProblem**()

Solve the forward problem.

If forward sensitivities are enabled this will also compute sensitivities.

void **getAdjointUpdates**(*Model* &model, *ExpData* const &edata)

computes adjoint updates dJydx according to provided model and expdata

Parameters

- **model** – *Model* instance
- **edata** – experimental data

inline *realtype* **getTime**() const

Accessor for t.

Returns t

inline *AmiVector* const &**getState**() const

Accessor for x.

Returns x

inline *AmiVector* const &**getStateDerivative**() const

Accessor for dx.

Returns dx

inline *AmiVectorArray* const &**getStateSensitivity**() const

Accessor for sx.

Returns sx

inline std::vector<*AmiVector*> const &**getStatesAtDiscontinuities**() const

Accessor for x_disc.

Returns x_disc

inline std::vector<*AmiVector*> const &**getRHSAtDiscontinuities**() const

Accessor for xdot_disc.

Returns xdot_disc

inline std::vector<*AmiVector*> const &**getRHSBeforeDiscontinuities**() const

Accessor for xdot_old_disc.

Returns xdot_old_disc

inline std::vector<int> const &**getNumberOfRoots**() const

Accessor for nroots.

Returns nroots

inline std::vector<*realtype*> const &**getDiscontinuities**() const

Accessor for discs.

Returns discs

inline std::vector<std::vector<int>> const &**getRootIndexes**() const

Accessor for rootidx.

Returns rootidx

inline std::vector<*realtype*> const &getDJydx() const

Accessor for dJydx.

Returns dJydx

inline std::vector<*realtype*> const &getDJzdx() const

Accessor for dJzdx.

Returns dJzdx

inline *AmiVector* *getStatePointer()

Accessor for pointer to x.

Returns &x

inline *AmiVector* *getStateDerivativePointer()

Accessor for pointer to dx.

Returns &dx

inline *AmiVectorArray* *getStateSensitivityPointer()

accessor for pointer to sx

Returns &sx

inline *AmiVectorArray* *getStateDerivativeSensitivityPointer()

Accessor for pointer to sdx.

Returns &sdx

inline int getCurrentTimeIteration() const

Accessor for it.

Returns it

inline *realtype* getFinalTime() const

Returns final time point for which simulations are available.

Returns time point

inline int getEventCounter() const

Returns maximal event index for which simulations are available.

Returns index

inline int getRootCounter() const

Returns maximal event index for which the timepoint is available.

Returns index

inline *SimulationState* const &getSimulationStateTimepoint(int it) const

Retrieves the carbon copy of the simulation state variables at the specified timepoint index.

Parameters *it* – timepoint index

Returns state

inline *SimulationState* const &getSimulationStateEvent(int iroot) const

Retrieves the carbon copy of the simulation state variables at the specified event index.

Parameters *iroot* – event index

Returns *SimulationState*

inline *SimulationState* const &**getInitialSimulationState**() const

Retrieves the carbon copy of the simulation state variables at the initial timepoint.

Returns *SimulationState*

inline *SimulationState* const &**getFinalSimulationState**() const

Retrieves the carbon copy of the simulation state variables at the final timepoint (or when simulation failed)

Returns *SimulationState*

Public Members

Model ***model**

pointer to model instance

Solver ***solver**

pointer to solver instance

ExpData const ***edata**

pointer to experimental data instance

Class IDAException

- Defined in file_include_amici_exception.h

Inheritance Relationships

Base Type

- public amici::AmiException (*Class AmiException*)

Class Documentation

class **IDAException** : public amici::AmiException

ida exception handler class

Public Functions

IDAException(int error_code, char const *function)

Constructor.

Parameters

- **error_code** – error code returned by ida function
- **function** – ida function name

Class IDASolver

- Defined in file_include_amici_solver_idas.h

Inheritance Relationships

Base Type

- public amici::Solver (*Class Solver*)

Class Documentation

class **IDASolver** : public amici::*Solver*

The *IDASolver* class is a wrapper around the SUNDIALS IDAS solver.

Public Functions

~IDASolver() override = default

virtual *Solver* ***clone**() const override

Clone this instance.

Returns The clone

virtual void **reInitPostProcessF**(*realtype* tnext) const override

reInitPostProcessF postprocessing of the solver memory after a discontinuity in the forward problem

Parameters **tnext** – next timepoint (defines integration direction)

virtual void **reInitPostProcessB**(*realtype* tnext) const override

reInitPostProcessB postprocessing of the solver memory after a discontinuity in the backward problem

Parameters **tnext** – next timepoint (defines integration direction)

virtual void **reInit**(*realtype* t0, const *AmiVector* &yy0, const *AmiVector* &yp0) const override

Reinitializes the states in the solver after an event occurrence.

Parameters

- **t0** – reinitialization timepoint
- **yy0** – initial state variables
- **yp0** – initial derivative state variables (DAE only)

virtual void **sensReInit**(const *AmiVectorArray* &yyS0, const *AmiVectorArray* &ypS0) const override

Reinitializes the state sensitivities in the solver after an event occurrence.

Parameters

- **yyS0** – new state sensitivity
- **ypS0** – new derivative state sensitivities (DAE only)

virtual void **sensToggleOff**() const override

Switches off computation of state sensitivities without deallocating the memory for sensitivities.

virtual void **reInitB**(int which, *realtype* tB0, const *AmiVector* &yyB0, const *AmiVector* &ypB0) const override

Reinitializes the adjoint states after an event occurrence.

Parameters

- **which** – identifier of the backwards problem
- **tB0** – reinitialization timepoint
- **yyB0** – new adjoint state
- **ypB0** – new adjoint derivative state

virtual void **quadReInitB**(int which, const *AmiVector* &yQB0) const override

Reinitialize the adjoint states after an event occurrence.

Parameters

- **which** – identifier of the backwards problem
- **yQB0** – new adjoint quadrature state

virtual void **quadSStolerancesB**(int which, *realtype* reltolQB, *realtype* abstolQB) const override
sets relative and absolute tolerances for the quadrature backward problem

Parameters

- **which** – identifier of the backwards problem
- **reltolQB** – relative tolerances
- **abstolQB** – absolute tolerances

virtual void **quadSStolerances**(*realtype* reltolQ, *realtype* abstolQ) const override
sets relative and absolute tolerances for the quadrature problem

Parameters

- **reltolQB** – relative tolerances
- **abstolQB** – absolute tolerances

virtual int **solve**(*realtype* tout, int itask) const override

Solves the forward problem until a predefined timepoint.

Parameters

- **tout** – timepoint until which simulation should be performed
- **itask** – task identifier, can be CV_NORMAL or CV_ONE_STEP

Returns status flag indicating success of execution

virtual int **solveF**(*realtype* tout, int itask, int *ncheckPtr) const override

Solves the forward problem until a predefined timepoint (adjoint only)

Parameters

- **tout** – timepoint until which simulation should be performed
- **itask** – task identifier, can be CV_NORMAL or CV_ONE_STEP
- **ncheckPtr** – pointer to a number that counts the internal checkpoints

Returns status flag indicating success of execution

virtual void **solveB**(*realtype* tBout, int itaskB) const override

Solves the backward problem until a predefined timepoint (adjoint only)

Parameters

- **tBout** – timepoint until which simulation should be performed
- **itaskB** – task identifier, can be CV_NORMAL or CV_ONE_STEP

virtual void **getRootInfo**(int *rootsfound) const override

getRootInfo extracts information which event occurred

Parameters **rootsfound** – array with flags indicating whether the respective event occurred

virtual void **getDky**(*realtype* t, int k) const override

interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order

virtual void **getSens**() const override

extracts the state sensitivity at the current timepoint from solver memory and writes it to the sx member variable

virtual void **getSensDky**(*realtype* t, int k) const override

interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order

virtual void **getB**(int which) const override

extracts the adjoint state at the current timepoint from solver memory and writes it to the xB member variable

Parameters **which** – index of the backwards problem

virtual void **getDkyB**(*realtype* t, int k, int which) const override

interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order
- **which** – index of backward problem

virtual void **getQuadB**(int which) const override

extracts the adjoint quadrature state at the current timepoint from solver memory and writes it to the xQB member variable

Parameters **which** – index of the backwards problem

virtual void **getQuadDkyB**(*realtype* t, int k, int which) const override
interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order
- **which** – index of backward problem

virtual void **getQuad**(*realtype* &t) const override
extracts the quadrature at the current timepoint from solver memory and writes it to the xQ member variable

Parameters **t** – timepoint for quadrature extraction

virtual void **getQuadDky**(*realtype* t, int k) const override
interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order

virtual void **calcIC**(*realtype* tout1) const override
Calculates consistent initial conditions, assumes initial states to be correct (DAE only)

Parameters **tout1** – next timepoint to be computed (sets timescale)

virtual void **calcICB**(int which, *realtype* tout1) const override
Calculates consistent initial conditions for the backwards problem, assumes initial states to be correct (DAE only)

Parameters

- **which** – identifier of the backwards problem
- **tout1** – next timepoint to be computed (sets timescale)

virtual void **setStopTime**(*realtype* tstop) const override
Sets a timepoint at which the simulation will be stopped.

Parameters **tstop** – timepoint until which simulation should be performed

virtual void **turnOffRootFinding**() const override
Disable rootfinding.

virtual const *Model* ***getModel**() const override
Accessor function to the model stored in the user data

Returns user data model

virtual void **setLinearSolver**() const override
Sets the linear solver for the forward problem.

virtual void **setLinearSolverB**(int which) const override
Sets the linear solver for the backward problem.

Parameters **which** – index of the backward problem

virtual void **setNonLinearSolver**() const override
Set the non-linear solver for the forward problem.

virtual void **setNonLinearSolverSens**() const override

Set the non-linear solver for sensitivities.

virtual void **setNonLinearSolverB**(int which) const override

Set the non-linear solver for the backward problem.

Parameters *which* – index of the backward problem

Solver() = default

Default constructor.

Solver(const *Solver* &other)

Solver copy constructor.

Parameters *other* –

Protected Functions

void **reInitPostProcess**(void *ida_mem, *realtype* *t, *AmiVector* *yout, *AmiVector* *ypout, *realtype* tout)
const

Postprocessing of the solver memory after a discontinuity.

Parameters

- **ida_mem** – pointer to IDAS solver memory object
- **t** – pointer to integration time
- **yout** – new state vector
- **ypout** – new state derivative vector
- **tout** – anticipated next integration timepoint.

virtual void **allocateSolver**() const override

Create specifies solver method and initializes solver memory for the forward problem.

virtual void **setSStolerances**(*realtype* rtol, *realtype* atol) const override

sets scalar relative and absolute tolerances for the forward problem

Parameters

- **rtol** – relative tolerances
- **atol** – absolute tolerances

virtual void **setSensSStolerances**(*realtype* rtol, const *realtype* *atol) const override

activates sets scalar relative and absolute tolerances for the sensitivity variables

Parameters

- **rtol** – relative tolerances
- **atol** – array of absolute tolerances for every sensitivity variable

virtual void **setSensErrCon**(bool error_corr) const override

SetSensErrCon specifies whether error control is also enforced for sensitivities for the forward problem

Parameters **error_corr** – activation flag

virtual void **setQuadErrConB**(int which, bool flag) const override

Specifies whether error control is also enforced for the backward quadrature problem.

Parameters

- **which** – identifier of the backwards problem
- **flag** – activation flag

virtual void **setQuadErrCon**(bool flag) const override

Specifies whether error control is also enforced for the forward quadrature problem.

Parameters **flag** – activation flag

virtual void **setErrorHandlerFn**() const override

Attaches the error handler function (errMsgIdAndTxt) to the solver.

virtual void **setUserData**() const override

Attaches the user data to the forward problem.

virtual void **setUserDataB**(int which) const override

attaches the user data to the backward problem

Parameters **which** – identifier of the backwards problem

virtual void **setMaxNumSteps**(long int mxsteps) const override

specifies the maximum number of steps for the forward problem

Note: in contrast to the SUNDIALS method, this sets the overall maximum, not the maximum between output times.

Parameters **mxsteps** – number of steps

virtual void **setStabLimDet**(int stldet) const override

activates stability limit detection for the forward problem

Parameters **stldet** – flag for stability limit detection (TRUE or FALSE)

virtual void **setStabLimDetB**(int which, int stldet) const override

activates stability limit detection for the backward problem

Parameters

- **which** – identifier of the backwards problem
- **stldet** – flag for stability limit detection (TRUE or FALSE)

virtual void **setId**(const *Model* *model) const override

specify algebraic/differential components (DAE only)

Parameters **model** – model specification

virtual void **setSuppressAlg**(bool flag) const override

deactivates error control for algebraic components (DAE only)

Parameters **flag** – deactivation flag

void **resetState**(void *ida_mem, *const_N_Vector* yy0, *const_N_Vector* yp0) const
resetState reset the IDAS solver to restart integration after a rhs discontinuity.

Parameters

- **ida_mem** – pointer to IDAS solver memory object
- **yy0** – new state vector
- **yp0** – new state derivative vector

virtual void **setSensParams**(const *realtype* *p, const *realtype* *pbar, const int *plist) const override
specifies the scaling and indexes for sensitivity computation

Parameters

- **p** – parameters
- **pbar** – parameter scaling constants
- **plist** – parameter index list

virtual void **adjInit**() const override
initializes the adjoint problem

virtual void **quadInit**(const *AmiVector* &xQ0) const override
initializes the quadratures

Parameters **xQ0** – vector with initial values for xQ

virtual void **allocateSolverB**(int *which) const override
Specifies solver method and initializes solver memory for the backward problem.

Parameters **which** – identifier of the backwards problem

virtual void **setMaxNumStepsB**(int which, long int mxstepsB) const override
specifies the maximum number of steps for the forward problem

Note: in contrast to the SUNDIALS method, this sets the overall maximum, not the maximum between output times.

Parameters

- **which** – identifier of the backwards problem
- **mxstepsB** – number of steps

virtual void **setSStolerancesB**(int which, *realtype* relTolB, *realtype* absTolB) const override
sets relative and absolute tolerances for the backward problem

Parameters

- **which** – identifier of the backwards problem
- **relTolB** – relative tolerances
- **absTolB** – absolute tolerances

virtual void **diag**() const override
attaches a diagonal linear solver to the forward problem

virtual void **diagB**(int which) const override

attaches a diagonal linear solver to the backward problem

Parameters **which** – identifier of the backwards problem

virtual void **getNumSteps**(const void *ami_mem, long int *numsteps) const override

reports the number of solver steps

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numsteps** – output array

virtual void **getNumRhsEvals**(const void *ami_mem, long int *numrhsevals) const override

reports the number of right hand evaluations

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numrhsevals** – output array

virtual void **getNumErrTestFails**(const void *ami_mem, long int *numerrtestfails) const override

reports the number of local error test failures

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numerrtestfails** – output array

virtual void **getNumNonlinSolvConvFails**(const void *ami_mem, long int *numnonlinsolvconvfails) const override

reports the number of nonlinear convergence failures

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numnonlinsolvconvfails** – output array

virtual void **getLastOrder**(const void *ami_mem, int *order) const override

Reports the order of the integration method during the last internal step.

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **order** – output array

virtual void ***getAdjBmem**(void *ami_mem, int which) const override

Retrieves the solver memory instance for the backward problem.

Parameters

- **which** – identifier of the backwards problem
- **ami_mem** – pointer to the forward solver memory instance

Returns A (void *) pointer to the CVODES memory allocated for the backward problem.

virtual void **init**(*realtype* t0, const *AmiVector* &x0, const *AmiVector* &dx0) const override

Initializes the states at the specified initial timepoint.

Parameters

- **t0** – initial timepoint
- **x0** – initial states
- **dx0** – initial derivative states

virtual void **initSteadystate**(const *realtype* t0, const *AmiVector* &x0, const *AmiVector* &dx0) const override

Initializes the states at the specified initial timepoint.

Parameters

- **t0** – initial timepoint
- **x0** – initial states
- **dx0** – initial derivative states

virtual void **sensInit1**(const *AmiVectorArray* &sx0, const *AmiVectorArray* &sdx0) const override

Initializes the forward sensitivities.

Parameters

- **sx0** – initial states sensitivities
- **sdx0** – initial derivative states sensitivities

virtual void **binit**(int which, *realtype* tf, const *AmiVector* &xB0, const *AmiVector* &dxB0) const override

Initialize the adjoint states at the specified final timepoint.

Parameters

- **which** – identifier of the backwards problem
- **tf** – final timepoint
- **xB0** – initial adjoint state
- **dxB0** – initial adjoint derivative state

virtual void **qbinit**(int which, const *AmiVector* &xQB0) const override

Initialize the quadrature states at the specified final timepoint.

Parameters

- **which** – identifier of the backwards problem
- **xQB0** – initial adjoint quadrature state

virtual void **rootInit**(int ne) const override

Initializes the rootfinding for events.

Parameters **ne** – number of different events

virtual void **setDenseJacFn**() const override

Set the dense Jacobian function.

virtual void **setSparseJacFn()** const override

sets the sparse Jacobian function

virtual void **setBandJacFn()** const override

sets the banded Jacobian function

virtual void **setJacTimesVecFn()** const override

sets the Jacobian vector multiplication function

virtual void **setDenseJacFnB**(int which) const override

sets the dense Jacobian function

Parameters **which** – identifier of the backwards problem

virtual void **setSparseJacFnB**(int which) const override

sets the sparse Jacobian function

Parameters **which** – identifier of the backwards problem

virtual void **setBandJacFnB**(int which) const override

sets the banded Jacobian function

Parameters **which** – identifier of the backwards problem

virtual void **setJacTimesVecFnB**(int which) const override

sets the Jacobian vector multiplication function

Parameters **which** – identifier of the backwards problem

virtual void **setSparseJacFn_ss()** const override

sets the sparse Jacobian function for backward steady state case

Class IntegrationFailure

- Defined in file_include_amici_exception.h

Inheritance Relationships

Base Type

- public amici::AmiException (*Class AmiException*)

Class Documentation

class **IntegrationFailure** : public amici::AmiException

Integration failure exception for the forward problem.

This exception should be thrown when an integration failure occurred for this exception we can assume that we can recover from the exception and return a solution struct to the user

Public Functions

IntegrationFailure(int code, *realtype* t)

Constructor.

Parameters

- **code** – error code returned by ccode/ida
- **t** – time of integration failure

Public Members

int **error_code**

error code returned by ccodes/idas

realtype **time**

time of integration failure

Class IntegrationFailureB

- Defined in file_include_amici_exception.h

Inheritance Relationships

Base Type

- public amici::AmiException (*Class AmiException*)

Class Documentation

class **IntegrationFailureB** : public amici::AmiException

Integration failure exception for the backward problem.

This exception should be thrown when an integration failure occurred for this exception we can assume that we can recover from the exception and return a solution struct to the user

Public Functions

IntegrationFailureB(int code, *realtype* t)

Constructor.

Parameters

- **code** – error code returned by ccode/ida
- **t** – time of integration failure

Public Members

int **error_code**

error code returned by ccode/ida

realtype **time**

time of integration failure

Class Logger

- Defined in file_include_amici_logging.h

Class Documentation

class **Logger**

A logger, holding a list of error messages.

Public Functions

Logger() = default

void **log**(*LogSeverity* severity, std::string const &identifier, std::string const &message)

Add a log entry.

Parameters

- **severity** – Severity level
- **identifier** – Short identifier for the logged event
- **message** – A more detailed message

void **log**(*LogSeverity* severity, std::string const &identifier, char const *format, ...)

Add a log entry with printf-like message formatting.

Parameters

- **severity** – Severity level
- **identifier** – Short identifier for the logged event
- **format** – printf format string

Public Members

`std::vector<LogItem> items`

The log items

Class Model

- Defined in `file_include_amici_model.h`

Inheritance Relationships

Base Types

- `public amici::AbstractModel` (*Class AbstractModel*)
- `public amici::ModelDimensions` (*Struct ModelDimensions*)

Derived Types

- `public amici::Model_DAE` (*Class Model_DAE*)
- `public amici::Model_ODE` (*Class Model_ODE*)

Class Documentation

class **Model** : public amici::AbstractModel, public amici::ModelDimensions

The *Model* class represents an AMICI ODE/DAE model.

The model can compute various model related quantities based on symbolically generated code.

Subclassed by *amici::Model_DAE*, *amici::Model_ODE*

Public Functions

Model() = default

Default constructor

Model(*ModelDimensions* const &model_dimensions, *SimulationParameters* simulation_parameters, amici::SecondOrderMode o2mode, std::vector<amici::realtype> idlist, std::vector<int> z2event, bool pythonGenerated = false, int ndxdotdp_explicit = 0, int ndxdotdx_explicit = 0, int w_recursion_depth = 0)

Constructor with model dimensions.

Parameters

- **model_dimensions** – *Model* dimensions
- **simulation_parameters** – Simulation parameters
- **o2mode** – Second order sensitivity mode

- **idlist** – Indexes indicating algebraic components (DAE only)
- **z2event** – Mapping of event outputs to events
- **pythonGenerated** – Flag indicating matlab or python wrapping
- **ndxdotdp_explicit** – Number of nonzero elements in `dxdotdp_explicit`
- **ndxdotdx_explicit** – Number of nonzero elements in `dxdotdx_explicit`
- **w_recursion_depth** – Recursion depth of fw

~Model() override = default

Destructor.

Model &operator=(Model const &other) = delete

Copy assignment is disabled until const members are removed.

Parameters other – Object to copy from

Returns

virtual **Model *clone()** const = 0

Clone this instance.

Returns The clone

void **initialize**(*AmiVector* &x, *AmiVector* &dx, *AmiVectorArray* &sx, *AmiVectorArray* &sdx, bool computeSensitivities, std::vector<int> &roots_found)

Initialize model properties.

Parameters

- **x** – Reference to state variables
- **dx** – Reference to time derivative of states (DAE only)
- **sx** – Reference to state variable sensitivities
- **sdx** – Reference to time derivative of state sensitivities (DAE only)
- **computeSensitivities** – Flag indicating whether sensitivities are to be computed
- **roots_found** – boolean indicators indicating whether roots were found at t0 by this fun

void **initializeB**(*AmiVector* &xB, *AmiVector* &dxB, *AmiVector* &xQB, bool posteq) const

Initialize model properties.

Parameters

- **xB** – Adjoint state variables
- **dxB** – Time derivative of adjoint states (DAE only)
- **xQB** – Adjoint quadratures
- **posteq** – Flag indicating whether postequilibration was performed

void **initializeStates**(*AmiVector* &x)

Initialize initial states.

Parameters x – State vector to be initialized

void **initializeStateSensitivities**(*AmiVectorArray* &sx, const *AmiVector* &x)

Initialize initial state sensitivities.

Parameters

- **sx** – Reference to state variable sensitivities
- **x** – Reference to state variables

void **initEvents**(const *AmiVector* &x, const *AmiVector* &dx, std::vector<int> &roots_found)

Initialize the Heaviside variables **h** at the initial time **t0**.

Heaviside variables activate/deactivate on event occurrences.

Parameters

- **x** – Reference to state variables
- **dx** – Reference to time derivative of states (DAE only)
- **roots_found** – boolean indicators indicating whether roots were found at t0 by this fun

int **nplist**() const

Get number of parameters wrt to which sensitivities are computed.

Returns Length of sensitivity index vector

int **np**() const

Get total number of model parameters.

Returns Length of parameter vector

int **nk**() const

Get number of constants.

Returns Length of constant vector

int **ncl**() const

Get number of conservation laws.

Returns Number of conservation laws (i.e., difference between **nx_rdata** and **nx_solver**).

int **nx_reinit**() const

Get number of solver states subject to reinitialization.

Returns *Model* member **nx_solver_reinit**

const double ***k**() const

Get fixed parameters.

Returns Pointer to constants array

int **nMaxEvent**() const

Get maximum number of events that may occur for each type.

Returns Maximum number of events that may occur for each type

void **setNMaxEvent**(int nmaxevent)

Set maximum number of events that may occur for each type.

Parameters **nmaxevent** – Maximum number of events that may occur for each type

int **nt**() const

Get number of timepoints.

Returns Number of timepoints

std::vector<*ParameterScaling*> const &**getParameterScale**() const

Get parameter scale for each parameter.

Returns Vector of parameter scales

void **setParameterScale**(*ParameterScaling* pscale)

Set parameter scale for each parameter.

NOTE: Resets initial state sensitivities.

Parameters **pscale** – Scalar parameter scale to be set for all parameters

void **setParameterScale**(const std::vector<*ParameterScaling*> &pscaleVec)

Set parameter scale for each parameter.

NOTE: Resets initial state sensitivities.

Parameters **pscaleVec** – Vector of parameter scales

std::vector<*realtype*> const &**getUnscaledParameters**() const

Get parameters with transformation according to parameter scale applied.

Returns Unscaled parameters

std::vector<*realtype*> const &**getParameters**() const

Get parameter vector.

Returns The user-set parameters (see also *Model::getUnscaledParameters*)

realtype **getParameterById**(std::string const &par_id) const

Get value of first model parameter with the specified ID.

Parameters **par_id** – Parameter ID

Returns Parameter value

realtype **getParameterByName**(std::string const &par_name) const

Get value of first model parameter with the specified name.

Parameters **par_name** – Parameter name

Returns Parameter value

void **setParameters**(std::vector<*realtype*> const &p)

Set the parameter vector.

Parameters **p** – Vector of parameters

void **setParameterById**(std::map<std::string, *realtype*> const &p, bool ignoreErrors = false)

Set model parameters according to the parameter IDs and mapped values.

Parameters

- **p** – Map of parameters IDs and values
- **ignoreErrors** – Ignore errors such as parameter IDs in p which are not model parameters

void **setParameterById**(std::string const &par_id, *realtype* value)

Set value of first model parameter with the specified ID.

Parameters

- **par_id** – Parameter ID
- **value** – Parameter value

int **setParametersByIdRegex**(std::string const &par_id_regex, *realtype* value)

Set all values of model parameters with IDs matching the specified regular expression.

Parameters

- **par_id_regex** – Parameter ID regex
- **value** – Parameter value

Returns Number of parameter IDs that matched the regex

void **setParameterByName**(std::string const &par_name, *realtype* value)

Set value of first model parameter with the specified name.

Parameters

- **par_name** – Parameter name
- **value** – Parameter value

void **setParameterByName**(std::map<std::string, *realtype*> const &p, bool ignoreErrors = false)

Set model parameters according to the parameter name and mapped values.

Parameters

- **p** – Map of parameters names and values
- **ignoreErrors** – Ignore errors such as parameter names in p which are not model parameters

int **setParametersByNameRegex**(std::string const &par_name_regex, *realtype* value)

Set all values of all model parameters with names matching the specified regex.

Parameters

- **par_name_regex** – Parameter name regex
- **value** – Parameter value

Returns Number of fixed parameter names that matched the regex

std::vector<*realtype*> const &**getFixedParameters**() const

Get values of fixed parameters.

Returns Vector of fixed parameters with same ordering as in *Model::getFixedParameterIds*

realtype **getFixedParameterById**(std::string const &par_id) const

Get value of fixed parameter with the specified ID.

Parameters **par_id** – Parameter ID

Returns Parameter value

realtype **getFixedParameterByName**(std::string const &par_name) const

Get value of fixed parameter with the specified name.

If multiple parameters have the same name, the first parameter with matching name is returned.

Parameters `par_name` – Parameter name

Returns Parameter value

void **setFixedParameters**(std::vector<*realtype*> const &k)

Set values for constants.

Parameters `k` – Vector of fixed parameters

void **setFixedParameterById**(std::string const &par_id, *realtype* value)

Set value of first fixed parameter with the specified ID.

Parameters

- `par_id` – Fixed parameter id
- `value` – Fixed parameter value

int **setFixedParametersByIdRegex**(std::string const &par_id_regex, *realtype* value)

Set values of all fixed parameters with the ID matching the specified regex.

Parameters

- `par_id_regex` – Fixed parameter name regex
- `value` – Fixed parameter value

Returns Number of fixed parameter IDs that matched the regex

void **setFixedParameterByName**(std::string const &par_name, *realtype* value)

Set value of first fixed parameter with the specified name.

Parameters

- `par_name` – Fixed parameter ID
- `value` – Fixed parameter value

int **setFixedParametersByNameRegex**(std::string const &par_name_regex, *realtype* value)

Set value of all fixed parameters with name matching the specified regex.

Parameters

- `par_name_regex` – Fixed parameter name regex
- `value` – Fixed parameter value

Returns Number of fixed parameter names that matched the regex

virtual std::string **getName**() const

Get the model name.

Returns *Model* name

virtual bool **hasParameterNames**() const

Report whether the model has parameter names set.

Returns Boolean indicating whether parameter names were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getParameterNames**() const

Get names of the model parameters.

Returns The parameter names

virtual bool **hasStateNames**() const

Report whether the model has state names set.

Returns Boolean indicating whether state names were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getStateNames**() const

Get names of the model states.

Returns State names

virtual std::vector<std::string> **getStateNamesSolver**() const

Get names of the solver states.

Returns State names

virtual bool **hasFixedParameterNames**() const

Report whether the model has fixed parameter names set.

Returns Boolean indicating whether fixed parameter names were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getFixedParameterNames**() const

Get names of the fixed model parameters.

Returns Fixed parameter names

virtual bool **hasObservableNames**() const

Report whether the model has observable names set.

Returns Boolean indicating whether observable names were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getObservableNames**() const

Get names of the observables.

Returns Observable names

virtual bool **hasExpressionNames**() const

Report whether the model has expression names set.

Returns Boolean indicating whether expression names were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getExpressionNames**() const

Get names of the expressions.

Returns Expression names

virtual bool **hasParameterIds**() const

Report whether the model has parameter IDs set.

Returns Boolean indicating whether parameter IDs were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getParameterIds**() const

Get IDs of the model parameters.

Returns Parameter IDs

virtual bool **hasStateIds()** const

Report whether the model has state IDs set.

Returns Boolean indicating whether state IDs were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getStateIds()** const

Get IDs of the model states.

Returns State IDs

virtual std::vector<std::string> **getStateIdsSolver()** const

Get IDs of the solver states.

Returns State IDs

virtual bool **hasFixedParameterIds()** const

Report whether the model has fixed parameter IDs set.

Returns Boolean indicating whether fixed parameter IDs were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getFixedParameterIds()** const

Get IDs of the fixed model parameters.

Returns Fixed parameter IDs

virtual bool **hasObservableIds()** const

Report whether the model has observable IDs set.

Returns Boolean indicating whether observable ids were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getObservableIds()** const

Get IDs of the observables.

Returns Observable IDs

virtual bool **hasExpressionIds()** const

Report whether the model has expression IDs set.

Returns Boolean indicating whether expression ids were set. Also returns `true` if the number of corresponding variables is just zero.

virtual std::vector<std::string> **getExpressionIds()** const

Get IDs of the expression.

Returns Expression IDs

virtual bool **hasQuadraticLLH()** const

Checks whether the defined noise model is gaussian, i.e., the nllh is quadratic.

Returns boolean flag

std::vector<realtype> const &**getTimepoints()** const

Get the timepoint vector.

Returns Timepoint vector

realtype **getTimepoint**(int it) const

Get simulation timepoint for time index *it*.

Parameters *it* – Time index

Returns Timepoint

void **setTimepoints**(std::vector<*realtype*> const &ts)

Set the timepoint vector.

Parameters *ts* – New timepoint vector

double **t0**() const

Get simulation start time.

Returns Simulation start time

void **setT0**(double t0)

Set simulation start time.

Parameters *t0* – Simulation start time

std::vector<bool> const &**getStateIsNonNegative**() const

Get flags indicating whether states should be treated as non-negative.

Returns Vector of flags

void **setStateIsNonNegative**(std::vector<bool> const &stateIsNonNegative)

Set flags indicating whether states should be treated as non-negative.

Parameters *stateIsNonNegative* – Vector of flags

void **setAllStatesNonNegative**()

Set flags indicating that all states should be treated as non-negative.

inline *ModelState* const &**getModelState**() const

Get the current model state.

Returns Current model state

inline void **setModelState**(*ModelState* const &state)

Set the current model state.

Parameters *state* – *Model* state

inline void **setMinimumSigmaResiduals**(double min_sigma)

Sets the estimated lower boundary for *sigma_y*. When `:meth:setAddSigmaResiduals` is activated, this lower boundary must ensure that $\log(\text{sigma}) + \text{min_sigma} > 0$.

Parameters *min_sigma* – lower boundary

inline *realtype* **getMinimumSigmaResiduals**() const

Gets the specified estimated lower boundary for *sigma_y*.

Returns lower boundary

inline void **setAddSigmaResiduals**(bool sigma_res)

Specifies whether residuals should be added to account for parameter dependent sigma.

If set to true, additional residuals of the form $\sqrt{\log(\sigma) + C}$ will be added. This enables least-squares optimization for variables with Gaussian noise assumption and parameter dependent standard deviation sigma. The constant *C* can be set via `:meth:setMinimumSigmaResiduals`.

Parameters `sigma_res` – if true, additional residuals are added

inline bool `getAddSigmaResiduals()` const

Checks whether residuals should be added to account for parameter dependent sigma.

Returns `sigma_res`

std::vector<int> const &`getParameterList()` const

Get the list of parameters for which sensitivities are computed.

Returns List of parameter indices

int `plist`(int pos) const

Get entry in parameter list by index.

Parameters `pos` – Index in sensitivity parameter list

Returns Index in parameter list

void `setParameterList`(std::vector<int> const &plist)

Set the list of parameters for which sensitivities are to be computed.

NOTE: Resets initial state sensitivities.

Parameters `plist` – List of parameter indices

std::vector<realtype> `getInitialStates()`

Get the initial states.

Returns Initial state vector

void `setInitialStates`(std::vector<realtype> const &x0)

Set the initial states.

Parameters `x0` – Initial state vector

bool `hasCustomInitialStates()` const

Return whether custom initial states have been set.

Returns true if has custom initial states, otherwise false

std::vector<realtype> `getInitialStateSensitivities()`

Get the initial states sensitivities.

Returns vector of initial state sensitivities

void `setInitialStateSensitivities`(std::vector<realtype> const &sx0)

Set the initial state sensitivities.

Parameters `sx0` – vector of initial state sensitivities with chainrule applied. This could be a slice of `ReturnData::sx` or `ReturnData::sx0`

bool `hasCustomInitialStateSensitivities()` const

Return whether custom initial state sensitivities have been set.

Returns true if has custom initial state sensitivities, otherwise false.

void `setUnscaledInitialStateSensitivities`(std::vector<realtype> const &sx0)

Set the initial state sensitivities.

Parameters `sx0` – Vector of initial state sensitivities without chainrule applied. This could be the readin from a `model.sx0data` saved to HDF5.

void **setSteadyStateSensitivityMode**(*SteadyStateSensitivityMode* mode)

Set the mode how sensitivities are computed in the steadystate simulation.

Parameters **mode** – Steadystate sensitivity mode

SteadyStateSensitivityMode **getSteadyStateSensitivityMode**() const

Gets the mode how sensitivities are computed in the steadystate simulation.

Returns Mode

void **setReinitializeFixedParameterInitialStates**(bool flag)

Set whether initial states depending on fixed parameters are to be reinitialized after preequilibration and presimulation.

Parameters **flag** – Fixed parameters reinitialized?

bool **getReinitializeFixedParameterInitialStates**() const

Get whether initial states depending on fixedParameters are to be reinitialized after preequilibration and presimulation.

Returns flag true / false

void **requireSensitivitiesForAllParameters**()

Require computation of sensitivities for all parameters p [0..np[in natural order.

NOTE: Resets initial state sensitivities.

void **getExpression**(gsl::span<*realtype*> w, const *realtype* t, const *AmiVector* &x)

Get time-resolved w.

Parameters

- **w** – Buffer (shape nw)
- **t** – Current timepoint
- **x** – Current state

void **getObservable**(gsl::span<*realtype*> y, const *realtype* t, const *AmiVector* &x)

Get time-resolved observables.

Parameters

- **y** – Buffer (shape ny)
- **t** – Current timepoint
- **x** – Current state

virtual *ObservableScaling* **getObservableScaling**(int iy) const

Get scaling type for observable.

Parameters **iy** – observable index

Returns scaling type

void **getObservableSensitivity**(gsl::span<*realtype*> sy, const *realtype* t, const *AmiVector* &x, const *AmiVectorArray* &sx)

Get sensitivity of time-resolved observables.

Total derivative $sy = dydx * sx + dydp$ (only for forward sensitivities).

Parameters

- **sy** – buffer (shape ny x nplist, row-major)

- **t** – Timpoint
- **x** – State variables
- **sx** – State sensitivities

void **getObservableSigma**(gsl::span<*realtype*> sigmay, const int it, const *ExpData* *edata)

Get time-resolved observable standard deviations.

Parameters

- **sigmay** – Buffer (shape ny)
- **it** – Timepoint index
- **edata** – Pointer to experimental data instance (optional, pass nullptr to ignore)

void **getObservableSigmaSensitivity**(gsl::span<*realtype*> ssigmay, gsl::span<const *realtype*> sy, const int it, const *ExpData* *edata)

Sensitivity of time-resolved observable standard deviation.

Total derivative (can be used with both adjoint and forward sensitivity).

Parameters

- **ssigmay** – Buffer (shape ny x nplist, row-major)
- **sy** – Sensitivity of time-resolved observables for current timepoint
- **it** – Timepoint index
- **edata** – Pointer to experimental data instance (optional, pass nullptr to ignore)

void **addObservableObjective**(*realtype* &Jy, const int it, const *AmiVector* &x, const *ExpData* &edata)

Add time-resolved measurement negative log-likelihood *Jy*.

Parameters

- **Jy** – Buffer (shape 1)
- **it** – Timepoint index
- **x** – State variables
- **edata** – Experimental data

void **addObservableObjectiveSensitivity**(std::vector<*realtype*> &s1lh, std::vector<*realtype*> &s2lh, const int it, const *AmiVector* &x, const *AmiVectorArray* &sx, const *ExpData* &edata)

Add sensitivity of time-resolved measurement negative log-likelihood *Jy*.

Parameters

- **s1lh** – First-order buffer (shape nplist)
- **s2lh** – Second-order buffer (shape nJ - 1 x nplist, row-major)
- **it** – Timepoint index
- **x** – State variables
- **sx** – State sensitivities
- **edata** – Experimental data

```
void addPartialObservableObjectiveSensitivity(std::vector<realtype> &sllh, std::vector<realtype>
                                             &s2llh, const int it, const AmiVector &x, const
                                             ExpData &edata)
```

Add sensitivity of time-resolved measurement negative log-likelihood J_y .

Partial derivative (to be used with adjoint sensitivities).

Parameters

- **sllh** – First order output buffer (shape `nplist`)
- **s2llh** – Second order output buffer (shape `nJ - 1 x nplist`, row-major)
- **it** – Timepoint index
- **x** – State variables
- **edata** – Experimental data

```
void getAdjointStateObservableUpdate(gsl::span<realtype> dJydx, const int it, const AmiVector &x,
                                     const ExpData &edata)
```

Get state sensitivity of the negative loglikelihood J_y , partial derivative (to be used with adjoint sensitivities).

Parameters

- **dJydx** – Output buffer (shape `nJ x nx_solver`, row-major)
- **it** – Timepoint index
- **x** – State variables
- **edata** – Experimental data instance

```
void getEvent(gsl::span<realtype> z, const int ie, const realtype t, const AmiVector &x)
```

Get event-resolved observables.

Parameters

- **z** – Output buffer (shape `nz`)
- **ie** – Event index
- **t** – Timepoint
- **x** – State variables

```
void getEventSensitivity(gsl::span<realtype> sz, const int ie, const realtype t, const AmiVector &x, const
                        AmiVectorArray &sx)
```

Get sensitivities of event-resolved observables.

Total derivative (only forward sensitivities).

Parameters

- **sz** – Output buffer (shape `nz x nplist`, row-major)
- **ie** – Event index
- **t** – Timepoint
- **x** – State variables
- **sx** – State sensitivities

void **getUnobservedEventSensitivity**(gsl::span<*realtype*> sz, const int ie)

Get sensitivity of z at final timepoint.

Ignores sensitivity of timepoint. Total derivative.

Parameters

- **sz** – Output buffer (shape nz x nplist, row-major)
- **ie** – Event index

void **getEventRegularization**(gsl::span<*realtype*> rz, const int ie, const *realtype* t, const *AmiVector* &x)

Get regularization for event-resolved observables.

Parameters

- **rz** – Output buffer (shape nz)
- **ie** – Event index
- **t** – Timepoint
- **x** – State variables

void **getEventRegularizationSensitivity**(gsl::span<*realtype*> srz, const int ie, const *realtype* t, const *AmiVector* &x, const *AmiVectorArray* &sx)

Get sensitivities of regularization for event-resolved observables.

Total derivative. Only forward sensitivities.

Parameters

- **srz** – Output buffer (shape nz x nplist, row-major)
- **ie** – Event index
- **t** – Timepoint
- **x** – State variables
- **sx** – State sensitivities

void **getEventSigma**(gsl::span<*realtype*> sigmaz, const int ie, const int nroots, const *realtype* t, const *ExpData* *edata)

Get event-resolved observable standard deviations.

Parameters

- **sigmaz** – Output buffer (shape nz)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **edata** – Pointer to experimental data (optional, pass nullptr to ignore)

void **getEventSigmaSensitivity**(gsl::span<*realtype*> ssigmaz, const int ie, const int nroots, const *realtype* t, const *ExpData* *edata)

Get sensitivities of event-resolved observable standard deviations.

Total derivative (only forward sensitivities).

Parameters

- **ssigmaz** – Output buffer (shape nz x nplist, row-major)

- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **edata** – Pointer to experimental data (optional, pass `nullptr` to ignore)

void **addEventObjective**(*realtype* &Jz, const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)

Add event-resolved observable negative log-likelihood.

Parameters

- **Jz** – Output buffer (shape 1)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **x** – State variables
- **edata** – Experimental data

void **addEventObjectiveRegularization**(*realtype* &Jrz, const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)

Add event-resolved observable negative log-likelihood.

Parameters

- **Jrz** – Output buffer (shape 1)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **x** – State variables
- **edata** – Experimental data

void **addEventObjectiveSensitivity**(std::vector<*realtype*> &s1lh, std::vector<*realtype*> &s2lh, const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *AmiVectorArray* &sx, const *ExpData* &edata)

Add sensitivity of time-resolved measurement negative log-likelihood J_y .

Total derivative (to be used with forward sensitivities).

Parameters

- **s1lh** – First order buffer (shape `nplist`)
- **s2lh** – Second order buffer (shape `nJ-1 x nplist`, row-major)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **x** – State variables
- **sx** – State sensitivities
- **edata** – Experimental data

```
void addPartialEventObjectiveSensitivity(std::vector<realtype> &s1lh, std::vector<realtype> &s2lh,
                                         const int ie, const int nroots, const realtype t, const
                                         AmiVector &x, const ExpData &edata)
```

Add sensitivity of time-resolved measurement negative log-likelihood J_y .

Partial derivative (to be used with adjoint sensitivities).

Parameters

- **s1lh** – First order buffer (shape `nplist`)
- **s2lh** – Second order buffer (shape `(nJ-1) x nplist`, row-major)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **x** – State variables
- **edata** – Experimental data

```
void getAdjointStateEventUpdate(gsl::span<realtype> dJzdx, const int ie, const int nroots, const realtype
                                t, const AmiVector &x, const ExpData &edata)
```

State sensitivity of the negative loglikelihood J_z .

Partial derivative (to be used with adjoint sensitivities).

Parameters

- **dJzdx** – Output buffer (shape `nJ x nx_solver`, row-major)
- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Timepoint
- **x** – State variables
- **edata** – Experimental data

```
void getEventTimeSensitivity(std::vector<realtype> &stau, const realtype t, const int ie, const AmiVector
                              &x, const AmiVectorArray &sx)
```

Sensitivity of event timepoint, total derivative.

Only forward sensitivities.

Parameters

- **stau** – Timepoint sensitivity (shape `nplist`)
- **t** – Timepoint
- **ie** – Event index
- **x** – State variables
- **sx** – State sensitivities

```
void addStateEventUpdate(AmiVector &x, const int ie, const realtype t, const AmiVector &xdot, const
                          AmiVector &xdot_old)
```

Update state variables after event.

Parameters

- **x** – Current state (will be overwritten)
- **ie** – Event index
- **t** – Current timepoint
- **xdot** – Current residual function values
- **xdot_old** – Value of residual function before event

void **addStateSensitivityEventUpdate**(*AmiVectorArray* &sx, const int ie, const *realtype* t, const *AmiVector* &x_old, const *AmiVector* &xdot, const *AmiVector* &xdot_old, const std::vector<*realtype*> &stau)

Update state sensitivity after event.

Parameters

- **sx** – Current state sensitivity (will be overwritten)
- **ie** – Event index
- **t** – Current timepoint
- **x_old** – Current state
- **xdot** – Current residual function values
- **xdot_old** – Value of residual function before event
- **stau** – Timepoint sensitivity, to be computed with *Model::getEventTimeSensitivity*

void **addAdjointStateEventUpdate**(*AmiVector* &xB, const int ie, const *realtype* t, const *AmiVector* &x, const *AmiVector* &xdot, const *AmiVector* &xdot_old)

Update adjoint state after event.

Parameters

- **xB** – Current adjoint state (will be overwritten)
- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state
- **xdot** – Current residual function values
- **xdot_old** – Value of residual function before event

void **addAdjointQuadratureEventUpdate**(*AmiVector* xQB, const int ie, const *realtype* t, const *AmiVector* &x, const *AmiVector* &xB, const *AmiVector* &xdot, const *AmiVector* &xdot_old)

Update adjoint quadratures after event.

Parameters

- **xQB** – Current quadrature state (will be overwritten)
- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state
- **xB** – Current adjoint state
- **xdot** – Current residual function values

- **xdot_old** – Value of residual function before event

void **updateHeaviside**(const std::vector<int> &rootsfound)

Update the Heaviside variables **h** on event occurrences.

Parameters rootsfound – Provides the direction of the zero-crossing, so adding it will give the right update to the Heaviside variables (zero if no root was found)

void **updateHeavisideB**(const int *rootsfound)

Updates the Heaviside variables **h** on event occurrences in the backward problem.

Parameters rootsfound – Provides the direction of the zero-crossing, so adding it will give the right update to the Heaviside variables (zero if no root was found)

int **checkFinite**(gsl::span<const *realtype*> array, *ModelQuantity* model_quantity) const

Check if the given array has only finite elements.

For (1D) spans.

Parameters

- **array** –
- **model_quantity** – The model quantity array corresponds to

Returns

int **checkFinite**(gsl::span<const *realtype*> array, *ModelQuantity* model_quantity, size_t num_cols) const

Check if the given array has only finite elements.

For flattened 2D arrays.

Parameters

- **array** – Flattened matrix
- **model_quantity** – The model quantity array corresponds to
- **num_cols** – Number of columns of the non-flattened matrix

Returns

int **checkFinite**(SUNMatrix m, *ModelQuantity* model_quantity, *realtype* t) const

Check if the given array has only finite elements.

For SUNMatrix.

Parameters

- **m** – Matrix to check
- **model_quantity** – The model quantity **m** corresponds to
- **t** – current timepoint

Returns

void **setAlwaysCheckFinite**(bool alwaysCheck)

Set whether the result of every call to `Model::f*` should be checked for finiteness.

Parameters alwaysCheck –

bool **getAlwaysCheckFinite**() const

Get setting of whether the result of every call to `Model::f*` should be checked for finiteness.

Returns that

void **fx0**(*AmiVector* &x)

Compute/get initial states.

Parameters **x** – Output buffer.

void **fx0_fixedParameters**(*AmiVector* &x)

Set only those initial states that are specified via fixed parameters.

Parameters **x** – Output buffer.

void **fsx0**(*AmiVectorArray* &sx, const *AmiVector* &x)

Compute/get initial value for initial state sensitivities.

Parameters

- **sx** – Output buffer for state sensitivities
- **x** – State variables

void **fsx0_fixedParameters**(*AmiVectorArray* &sx, const *AmiVector* &x)

Get only those initial states sensitivities that are affected from *amici::Model::fx0_fixedParameters*.

Parameters

- **sx** – Output buffer for state sensitivities
- **x** – State variables

virtual void **fsdx0**()

Compute sensitivity of derivative initial states sensitivities **sdx0**.

Only necessary for DAEs.

void **fx_rdata**(*AmiVector* &x_rdata, const *AmiVector* &x_solver)

Expand conservation law for states.

Parameters

- **x_rdata** – Output buffer for state variables with conservation laws expanded (stored in *amici::ReturnData*).
- **x_solver** – State variables with conservation laws applied (solver returns this)

void **fsx_rdata**(*AmiVectorArray* &sx_rdata, const *AmiVectorArray* &sx_solver, const *AmiVector* &x_solver)

Expand conservation law for state sensitivities.

Parameters

- **sx_rdata** – Output buffer for state variables sensitivities with conservation laws expanded (stored in *amici::ReturnData*).
- **sx_solver** – State variables sensitivities with conservation laws applied (solver returns this)
- **x_solver** – State variables with conservation laws applied (solver returns this)

void **setReinitializationStateIdxs**(const std::vector<int> &idxs)

Set indices of states to be reinitialized based on provided constants / fixed parameters.

Parameters **idxs** – Array of state indices

std::vector<int> const &**getReinitializationStateIdxs**() const

Return indices of states to be reinitialized based on provided constants / fixed parameters.

Returns Those indices.

const *AmiVectorArray* &get_dxdotdp() const
getter for dxdotdp (matlab generated)

Returns dxdotdp

const *SUNMatrixWrapper* &get_dxdotdp_full() const
getter for dxdotdp (python generated)

Returns dxdotdp

virtual void fdeltaqB(*realtype* *deltaqB, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, int ip, int ie, const *realtype* *xdot, const *realtype* *xdot_old, const *realtype* *xB)

Model-specific implementation of fdeltaqB.

Parameters

- **deltaqB** – sensitivity update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – sensitivity index
- **ie** – event index
- **xdot** – new model right hand side
- **xdot_old** – previous model right hand side
- **xB** – adjoint state

virtual void fdeltasx(*realtype* *deltasx, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, int ip, int ie, const *realtype* *xdot, const *realtype* *xdot_old, const *realtype* *sx, const *realtype* *stau, const *realtype* *tcl)

Model-specific implementation of fdeltasx.

Parameters

- **deltasx** – sensitivity update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **w** – repeating elements vector
- **ip** – sensitivity index
- **ie** – event index
- **xdot** – new model right hand side
- **xdot_old** – previous model right hand side

- **sx** – state sensitivity
- **stau** – event-time sensitivity
- **tcl** – total abundances for conservation laws

virtual void **fdeltax**(*realtype* *deltax, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, int ie, const *realtype* *xdot, const *realtype* *xdot_old)

Model-specific implementation of fdeltax.

Parameters

- **deltax** – state update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ie** – event index
- **xdot** – new model right hand side
- **xdot_old** – previous model right hand side

virtual void **fdeltaxB**(*realtype* *deltaxB, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, int ie, const *realtype* *xdot, const *realtype* *xdot_old, const *realtype* *xB)

Model-specific implementation of fdeltaxB.

Parameters

- **deltaxB** – adjoint state update
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ie** – event index
- **xdot** – new model right hand side
- **xdot_old** – previous model right hand side
- **xB** – current adjoint state

virtual void **fdJrzdsigma**(*realtype* *dJrzdsigma, int iz, const *realtype* *p, const *realtype* *k, const *realtype* *rz, const *realtype* *sigmaz)

Model-specific implementation of fdJrzdsigma.

Parameters

- **dJrzdsigma** – Sensitivity of event penalization Jrz w.r.t. standard deviation sigmaz
- **iz** – event output index
- **p** – parameter vector

- **k** – constant vector
- **rz** – model root output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint

virtual void **fdJrzdz**(*realtype* *dJrzdz, int iz, const *realtype* *p, const *realtype* *k, const *realtype* *rz, const *realtype* *sigmaz)

Model-specific implementation of fdJrzdz.

Parameters

- **dJrzdz** – partial derivative of event penalization Jrz
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **rz** – model root output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint

virtual void **fdJydsigma**(*realtype* *dJydsigma, int iy, const *realtype* *p, const *realtype* *k, const *realtype* *y, const *realtype* *sigmay, const *realtype* *my)

Model-specific implementation of fdJydsigma.

Parameters

- **dJydsigma** – Sensitivity of time-resolved measurement negative log-likelihood Jy w.r.t. standard deviation sigmay
- **iy** – output index
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint
- **sigmay** – measurement standard deviation at timepoint
- **my** – measurement at timepoint

virtual void **fdJydy**(*realtype* *dJydy, int iy, const *realtype* *p, const *realtype* *k, const *realtype* *y, const *realtype* *sigmay, const *realtype* *my)

Model-specific implementation of fdJydy.

Parameters

- **dJydy** – partial derivative of time-resolved measurement negative log-likelihood Jy
- **iy** – output index
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint
- **sigmay** – measurement standard deviation at timepoint
- **my** – measurement at timepoint

virtual void **fdJydy_colptrs**(*SUNMatrixWrapper* &dJydy, int index)

Model-specific implementation of fdJydy colptrs.

Parameters

- **dJydy** – sparse matrix to which colptrs will be written
- **index** – ytrue index

virtual void **fdJydy_rowvals**(*SUNMatrixWrapper* &dJydy, int index)

Model-specific implementation of fdJydy rowvals.

Parameters

- **dJydy** – sparse matrix to which rowvals will be written
- **index** – ytrue index

virtual void **fdJzdsigma**(*realtype* *dJzdsigma, int iz, const *realtype* *p, const *realtype* *k, const *realtype* *z, const *realtype* *sigmaz, const *realtype* *mz)

Model-specific implementation of fdJzdsigma.

Parameters

- **dJzdsigma** – Sensitivity of event measurement negative log-likelihood Jz w.r.t. standard deviation sigmaz
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint
- **mz** – event measurement at timepoint

virtual void **fdJzdz**(*realtype* *dJzdz, int iz, const *realtype* *p, const *realtype* *k, const *realtype* *z, const *realtype* *sigmaz, const *realtype* *mz)

Model-specific implementation of fdJzdz.

Parameters

- **dJzdz** – partial derivative of event measurement negative log-likelihood Jz
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint
- **mz** – event measurement at timepoint

virtual void **fdrzdp**(*realtype* *drzdp, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, int ip)

Model-specific implementation of fdrzdp.

Parameters

- **drzdp** – partial derivative of root output rz w.r.t. model parameters p

- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested

virtual void **fdrzdx**(*realtype* *drzdx, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h)

Model-specific implementation of fdrzdx.

Parameters

- **drzdx** – partial derivative of root output rz w.r.t. model states x
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fdsigmaydp**(*realtype* *dsigmaydp, const *realtype* t, const *realtype* *p, const *realtype* *k, const *realtype* *y, int ip)

Model-specific implementation of fdsigmaydp.

Parameters

- **dsigmaydp** – partial derivative of standard deviation of measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint t
- **ip** – sensitivity index

virtual void **fdsigmaydy**(*realtype* *dsigmaydy, const *realtype* t, const *realtype* *p, const *realtype* *k, const *realtype* *y)

Model-specific implementation of fsigmay.

Parameters

- **dsigmaydy** – partial derivative of standard deviation of measurements w.r.t. model outputs
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint t

virtual void **fdsigmazdp**(*realtype* *dsigmazdp, const *realtype* t, const *realtype* *p, const *realtype* *k, int ip)

Model-specific implementation of fsigmaz.

Parameters

- **dsigmazdp** – partial derivative of standard deviation of event measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **ip** – sensitivity index

virtual void **fdwdp**(*realtype* *dwdp, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, const *realtype* *tcl, const *realtype* *stcl)

Model-specific sparse implementation of dwdp.

Parameters

- **dwdp** – Recurring terms in xdot, parameter derivative
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – total abundances for conservation laws
- **stcl** – sensitivities of total abundances for conservation laws

virtual void **fdwdp**(*realtype* *dwdp, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, const *realtype* *tcl, const *realtype* *stcl, int ip)

Model-specific sensitivity implementation of dwdp.

Parameters

- **dwdp** – Recurring terms in xdot, parameter derivative
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – total abundances for conservation laws
- **stcl** – sensitivities of total abundances for conservation laws
- **ip** – sensitivity parameter index

virtual void **fdwdp_colptrs**(*SUNMatrixWrapper* &dwdp)

Model-specific implementation for dwdp, column pointers.

Parameters **dwdp** – sparse matrix to which colptrs will be written

virtual void **fdwdp_rowvals**(*SUNMatrixWrapper* &dwdp)

Model-specific implementation for dwdp, row values.

Parameters **dwdp** – sparse matrix to which rowvals will be written

virtual void **fdwdx**(*realtype* *dwdx, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, const *realtype* *tcl)

Model-specific implementation of dwdx, data part.

Parameters

- **dwdx** – Recurring terms in xdot, state derivative
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – total abundances for conservation laws

virtual void **fdwdx_colptrs**(*SUNMatrixWrapper* &dwdx)

Model-specific implementation for dwdx, column pointers.

Parameters **dwdx** – sparse matrix to which colptrs will be written

virtual void **fdwdx_rowvals**(*SUNMatrixWrapper* &dwdx)

Model-specific implementation for dwdx, row values.

Parameters **dwdx** – sparse matrix to which rowvals will be written

virtual void **fdwdw**(*realtype* *dwdw, *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, const *realtype* *tcl)

Model-specific implementation of fdwdw, no w chainrule (Py)

Parameters

- **dwdw** – partial derivative w wrt w
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **tcl** – Total abundances for conservation laws

virtual void **fdwdw_colptrs**(*SUNMatrixWrapper* &dwdw)

Model-specific implementation of fdwdw, colptrs part.

Parameters **dwdw** – sparse matrix to which colptrs will be written

virtual void **fdwdw_rowvals**(*SUNMatrixWrapper* &dwdw)

Model-specific implementation of fdwdw, rowvals part.

Parameters **dwdw** – sparse matrix to which rowvals will be written

virtual void **fdydp**(*realtype* *dydp, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k,
const *realtype* *h, int ip, const *realtype* *w, const *realtype* *dwdp)

Model-specific implementation of fdydp (MATLAB-only)

Parameters

- **dydp** – partial derivative of observables y w.r.t. model parameters p
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested
- **w** – repeating elements vector
- **dwdp** – Recurring terms in xdot, parameter derivative

virtual void **fdydp**(*realtype* *dydp, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k,
const *realtype* *h, int ip, const *realtype* *w, const *realtype* *tcl, const *realtype* *dtcldp)

Model-specific implementation of fdydp (Python)

Parameters

- **dydp** – partial derivative of observables y w.r.t. model parameters p
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested
- **w** – repeating elements vector
- **tcl** – total abundances for conservation laws
- **dtcldp** – Sensitivities of total abundances for conservation laws

virtual void **fdydx**(*realtype* *dydx, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k,
const *realtype* *h, const *realtype* *w, const *realtype* *dwdx)

Model-specific implementation of fdydx.

Parameters

- **dydx** – partial derivative of observables y w.r.t. model states x

- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **w** – repeating elements vector
- **dwdx** – Recurring terms in xdot, state derivative

virtual void **fdzdp**(*realtype* *dzdp, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, int ip)

Model-specific implementation of fdzdp.

Parameters

- **dzdp** – partial derivative of event-resolved output z w.r.t. model parameters p
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **ip** – parameter index w.r.t. which the derivative is requested

virtual void **fdzdx**(*realtype* *dzdx, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h)

Model-specific implementation of fdzdx.

Parameters

- **dzdx** – partial derivative of event-resolved output z w.r.t. model states x
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fJrz**(*realtype* *nllh, int iz, const *realtype* *p, const *realtype* *k, const *realtype* *z, const *realtype* *sigmaz)

Model-specific implementation of fJrz.

Parameters

- **nllh** – regularization for event measurements z
- **iz** – event output index
- **p** – parameter vector

- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint

virtual void **fJy**(*realtype* *nllh, int iy, const *realtype* *p, const *realtype* *k, const *realtype* *y, const *realtype* *sigmay, const *realtype* *my)

Model-specific implementation of fJy.

Parameters

- **nllh** – negative log-likelihood for measurements y
- **iy** – output index
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint
- **sigmay** – measurement standard deviation at timepoint
- **my** – measurements at timepoint

virtual void **fJz**(*realtype* *nllh, int iz, const *realtype* *p, const *realtype* *k, const *realtype* *z, const *realtype* *sigmaz, const *realtype* *mz)

Model-specific implementation of fJz.

Parameters

- **nllh** – negative log-likelihood for event measurements z
- **iz** – event output index
- **p** – parameter vector
- **k** – constant vector
- **z** – model event output at timepoint
- **sigmaz** – event measurement standard deviation at timepoint
- **mz** – event measurements at timepoint

virtual void **frz**(*realtype* *rz, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h)

Model-specific implementation of frz.

Parameters

- **rz** – value of root function at current timepoint (non-output events not included)
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fsgimay**(*realtype* *sigmay, const *realtype* t, const *realtype* *p, const *realtype* *k, const *realtype* *y)

Model-specific implementation of fsgimay.

Parameters

- **sigmay** – standard deviation of measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector
- **y** – model output at timepoint t

virtual void **fsgimaz**(*realtype* *sigmaz, const *realtype* t, const *realtype* *p, const *realtype* *k)

Model-specific implementation of fsgimaz.

Parameters

- **sigmaz** – standard deviation of event measurements
- **t** – current time
- **p** – parameter vector
- **k** – constant vector

virtual void **fsrz**(*realtype* *srz, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *sx, int ip)

Model-specific implementation of fsrz.

Parameters

- **srz** – Sensitivity of rz, total derivative
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **sx** – current state sensitivity
- **h** – Heaviside vector
- **ip** – sensitivity index

virtual void **fstau**(*realtype* *stau, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *tcl, const *realtype* *sx, int ip, int ie)

Model-specific implementation of fstau.

Parameters

- **stau** – total derivative of event timepoint
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector

- **h** – Heaviside vector
- **tc1** – total abundances for conservation laws
- **sx** – current state sensitivity
- **ip** – sensitivity index
- **ie** – event index

virtual void **fsx0**(*realtype* *sx0, const *realtype* t, const *realtype* *x0, const *realtype* *p, const *realtype* *k, int ip)

Model-specific implementation of fsx0.

Parameters

- **sx0** – initial state sensitivities
- **t** – initial time
- **x0** – initial state
- **p** – parameter vector
- **k** – constant vector
- **ip** – sensitivity index

virtual void **fsx0_fixedParameters**(*realtype* *sx0, const *realtype* t, const *realtype* *x0, const *realtype* *p, const *realtype* *k, int ip, gsl::span<const int> reinitialization_state_idx)

Model-specific implementation of fsx0_fixedParameters.

Parameters

- **sx0** – initial state sensitivities
- **t** – initial time
- **x0** – initial state
- **p** – parameter vector
- **k** – constant vector
- **ip** – sensitivity index
- **reinitialization_state_idx** – Indices of states to be reinitialized based on provided constants / fixed parameters.

virtual void **fsz**(*realtype* *sz, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *sx, int ip)

Model-specific implementation of fsz.

Parameters

- **sz** – Sensitivity of rz, total derivative
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector

- **h** – Heaviside vector
- **sx** – current state sensitivity
- **ip** – sensitivity index

virtual void **fw**(*realtype* *w, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *tcl)

Model-specific implementation of fw.

Parameters

- **w** – Recurring terms in xdot
- **t** – timepoint
- **x** – vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **tcl** – total abundances for conservation laws

virtual void **fx0**(*realtype* *x0, const *realtype* t, const *realtype* *p, const *realtype* *k)

Model-specific implementation of fx0.

Parameters

- **x0** – initial state
- **t** – initial time
- **p** – parameter vector
- **k** – constant vector

virtual void **fx0_fixedParameters**(*realtype* *x0, const *realtype* t, const *realtype* *p, const *realtype* *k, gsl::span<const int> reinitialization_state_idx)

Model-specific implementation of fx0_fixedParameters.

Parameters

- **x0** – initial state
- **t** – initial time
- **p** – parameter vector
- **k** – constant vector
- **reinitialization_state_idx** – Indices of states to be reinitialized based on provided constants / fixed parameters.

virtual void **fy**(*realtype* *y, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w)

Model-specific implementation of fy.

Parameters

- **y** – model output at current timepoint
- **t** – current time
- **x** – current state

- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector
- **w** – repeating elements vector

virtual void **fz**(*realtype* *z, int ie, const *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h)

Model-specific implementation of fz.

Parameters

- **z** – value of event output
- **ie** – event index
- **t** – current time
- **x** – current state
- **p** – parameter vector
- **k** – constant vector
- **h** – Heaviside vector

virtual void **fdx_rdatadx_solver**(*realtype* *dx_rdatadx_solver, const *realtype* *x, const *realtype* *tcl, const *realtype* *p, const *realtype* *k)

Compute dx_rdata / dx_solver.

Parameters

- **dx_rdatadx_solver** – dx_rdata / dx_solver
- **p** – parameter vector
- **k** – constant vector
- **x** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws

virtual void **fdx_rdatadx_solver_colptrs**(*SUNMatrixWrapper* &dxrdatadxsolver)

Model-specific implementation of fdx_rdatadx_solver, colptrs part.

Parameters dxrdatadxsolver – sparse matrix to which colptrs will be written

virtual void **fdx_rdatadx_solver_rowvals**(*SUNMatrixWrapper* &dxrdatadxsolver)

Model-specific implementation of fdx_rdatadx_solver, rowvals part.

Parameters dxrdatadxsolver – sparse matrix to which rowvals will be written

virtual void **fdx_rdatadp**(*realtype* *dx_rdatadp, const *realtype* *x, const *realtype* *tcl, const *realtype* *p, const *realtype* *k, const int ip)

Compute dx_rdata / dp.

Parameters

- **dx_rdatadp** – dx_rdata / dp
- **p** – parameter vector
- **k** – constant vector
- **x** – State variables with conservation laws applied

- **tc1** – Total abundances for conservation laws
- **ip** – Sensitivity index

virtual void **fdx_rdatadtcl**(*realtype* *dx_rdatadtcl, const *realtype* *x, const *realtype* *tc1, const *realtype* *p, const *realtype* *k)

Compute dx_rdata / dtcl.

Parameters

- **dx_rdatadtcl** – dx_rdata / dtcl
- **p** – parameter vector
- **k** – constant vector
- **x** – State variables with conservation laws applied
- **tc1** – Total abundances for conservation laws

virtual void **fdx_rdatadtcl_colptrs**(*SUNMatrixWrapper* &dx_rdatadtcl)

Model-specific implementation of fdx_rdatadtcl, colptrs part.

Parameters **dx_rdatadtcl** – sparse matrix to which colptrs will be written

virtual void **fdx_rdatadtcl_rowvals**(*SUNMatrixWrapper* &dx_rdatadtcl)

Model-specific implementation of fdx_rdatadtcl, rowvals part.

Parameters **dx_rdatadtcl** – sparse matrix to which rowvals will be written

virtual void **fdtotal_cldx_rdata**(*realtype* *dtotal_cldx_rdata, const *realtype* *x_rdata, const *realtype* *p, const *realtype* *k, const *realtype* *tc1)

Compute dtotal_cl / dx_rdata.

Parameters

- **dtotal_cldx_rdata** – dtotal_cl / dx_rdata
- **x_rdata** – State variables with conservation laws applied
- **p** – parameter vector
- **k** – constant vector
- **tc1** – Total abundances for conservation laws

virtual void **fdtotal_cldx_rdata_colptrs**(*SUNMatrixWrapper* &dtotal_cldx_rdata)

Model-specific implementation of fdtotal_cldx_rdata, colptrs part.

Parameters **dtotal_cldx_rdata** – sparse matrix to which colptrs will be written

virtual void **fdtotal_cldx_rdata_rowvals**(*SUNMatrixWrapper* &dtotal_cldx_rdata)

Model-specific implementation of fdtotal_cldx_rdata, rowvals part.

Parameters **dtotal_cldx_rdata** – sparse matrix to which rowvals will be written

virtual void **fdtotal_cldp**(*realtype* *dtotal_cldp, const *realtype* *x_rdata, const *realtype* *p, const *realtype* *k, const int ip)

Compute dtotal_cl / dp.

Parameters

- **dtotal_cldp** – dtotal_cl / dp
- **x_rdata** – State variables with conservation laws applied

- **p** – parameter vector
- **k** – constant vector
- **ip** – Sensitivity index

Public Members

bool **pythonGenerated**

Flag indicating Matlab- or Python-based model generation

SecondOrderMode **o2mode** = {*SecondOrderMode::none*}

Flag indicating whether for `amici::Solver::sensi_ == amici::SensitivityOrder::second` directional or full second order derivative will be computed

std::vector<*realtype*> **idlist**

Flag array for DAE equations

Logger ***logger** = nullptr

Logger

Protected Functions

void **writeSliceEvent**(gsl::span<const *realtype*> slice, gsl::span<*realtype*> buffer, const int ie)

Write part of a slice to a buffer according to indices specified in `z2event`.

Parameters

- **slice** – Input data slice
- **buffer** – Output data slice
- **ie** – Event index

void **writeSensitivitySliceEvent**(gsl::span<const *realtype*> slice, gsl::span<*realtype*> buffer, const int ie)

Write part of a sensitivity slice to a buffer according to indices specified in `z2event`.

Parameters

- **slice** – source data slice
- **buffer** – output data slice
- **ie** – event index

void **writeLLHSensitivitySlice**(const std::vector<*realtype*> &dLLhdp, std::vector<*realtype*> &s1lh, std::vector<*realtype*> &s2llh)

Separate first and second order objective sensitivity information and write them into the respective buffers.

Parameters

- **dLLhdp** – Data with mangled first- and second-order information
- **s1lh** – First order buffer
- **s2llh** – Second order buffer

void **checkLLHBufferSize**(const std::vector<*realtype*> &s1lh, const std::vector<*realtype*> &s2lh) const

Verify that the provided buffers have the expected size.

Parameters

- **s1lh** – first order buffer
- **s2lh** – second order buffer

void **initializeVectors**()

Set the nplist-dependent vectors to their proper sizes.

void **fy**(*realtype* t, const *AmiVector* &x)

Compute observables / measurements.

Parameters

- **t** – Current timepoint
- **x** – Current state

void **fdydp**(*realtype* t, const *AmiVector* &x)

Compute partial derivative of observables y w.r.t. model parameters p .

Parameters

- **t** – Current timepoint
- **x** – Current state

void **fdydx**(*realtype* t, const *AmiVector* &x)

Compute partial derivative of observables y w.r.t. state variables x .

Parameters

- **t** – Current timepoint
- **x** – Current state

void **fsigmay**(int it, const *ExpData* *edata)

Compute standard deviation of measurements.

Parameters

- **it** – Timepoint index
- **edata** – Experimental data

void **fdsigmaydp**(int it, const *ExpData* *edata)

Compute partial derivative of standard deviation of measurements w.r.t. model parameters.

Parameters

- **it** – Timepoint index
- **edata** – pointer to `amici::ExpData` data instance holding sigma values

void **fdsigmaydy**(int it, const *ExpData* *edata)

Compute partial derivative of standard deviation of measurements w.r.t. model outputs.

Parameters

- **it** – Timepoint index
- **edata** – pointer to `amici::ExpData` data instance holding sigma values

void **fJy**(*realtype* &Jy, int it, const *AmiVector* &y, const *ExpData* &edata)

Compute negative log-likelihood of measurements y .

Parameters

- **Jy** – Variable to which llh will be added
- **it** – Timepoint index
- **y** – Simulated observable
- **edata** – Pointer to experimental data instance

void **fdJydy**(int it, const *AmiVector* &x, const *ExpData* &edata)

Compute partial derivative of time-resolved measurement negative log-likelihood Jy .

Parameters

- **it** – timepoint index
- **x** – state variables
- **edata** – Pointer to experimental data

void **fdJydsigma**(int it, const *AmiVector* &x, const *ExpData* &edata)

Sensitivity of time-resolved measurement negative log-likelihood Jy w.r.t. standard deviation sigma.

Parameters

- **it** – timepoint index
- **x** – state variables
- **edata** – pointer to experimental data instance

void **fdJydp**(const int it, const *AmiVector* &x, const *ExpData* &edata)

Compute sensitivity of time-resolved measurement negative log-likelihood Jy w.r.t. parameters for the given timepoint.

Parameters

- **it** – timepoint index
- **x** – state variables
- **edata** – pointer to experimental data instance

void **fdJydx**(const int it, const *AmiVector* &x, const *ExpData* &edata)

Sensitivity of time-resolved measurement negative log-likelihood Jy w.r.t. state variables.

Parameters

- **it** – Timepoint index
- **x** – State variables
- **edata** – Pointer to experimental data instance

void **fz**(int ie, *realtype* t, const *AmiVector* &x)

Compute event-resolved output.

Parameters

- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state

void **fdzdp**(int ie, *realtype* t, const *AmiVector* &x)

Compute partial derivative of event-resolved output *z* w.r.t. model parameters *p*

Parameters

- **ie** – event index
- **t** – current timepoint
- **x** – current state

void **fdzdx**(int ie, *realtype* t, const *AmiVector* &x)

Compute partial derivative of event-resolved output *z* w.r.t. model states *x*.

Parameters

- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state

void **frz**(int ie, *realtype* t, const *AmiVector* &x)

Compute event root function of events.

Equal to *Model::froot* but does not include non-output events.

Parameters

- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state

void **fdrzdp**(int ie, *realtype* t, const *AmiVector* &x)

Compute sensitivity of event-resolved root output w.r.t. model parameters *p*.

Parameters

- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state

void **fdrzdx**(int ie, *realtype* t, const *AmiVector* &x)

Compute sensitivity of event-resolved measurements *rz* w.r.t. model states *x*.

Parameters

- **ie** – Event index
- **t** – Current timepoint
- **x** – Current state

void **fsigmaz**(const int ie, const int nroots, const *realtype* t, const *ExpData* *edata)

Compute standard deviation of events.

Parameters

- **ie** – Event index
- **nroots** – Event index
- **t** – Current timepoint

- **edata** – Experimental data

void **fdsigmazdp**(int ie, int nroots, *realtype* t, const *ExpData* *edata)

Compute sensitivity of standard deviation of events measurements w.r.t. model parameters p.

Parameters

- **ie** – Event index
- **nroots** – Event occurrence
- **t** – Current timepoint
- **edata** – Pointer to experimental data instance

void **fJz**(*realtype* &Jz, int nroots, const *AmiVector* &z, const *ExpData* &edata)

Compute negative log-likelihood of event-resolved measurements z.

Parameters

- **Jz** – Variable to which llh will be added
- **nroots** – Event index
- **z** – Simulated event
- **edata** – Experimental data

void **fdJzdz**(const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)

Compute partial derivative of event measurement negative log-likelihood Jz .

Parameters

- **ie** – Event index
- **nroots** – Event index
- **t** – Current timepoint
- **x** – State variables
- **edata** – Experimental data

void **fdJzdsigma**(const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)

Compute sensitivity of event measurement negative log-likelihood Jz w.r.t. standard deviation sigma_z.

Parameters

- **ie** – Event index
- **nroots** – Event index
- **t** – Current timepoint
- **x** – State variables
- **edata** – Pointer to experimental data instance

void **fdJzdp**(const int ie, const int nroots, *realtype* t, const *AmiVector* &x, const *ExpData* &edata)

Compute sensitivity of event-resolved measurement negative log-likelihood Jz w.r.t. parameters.

Parameters

- **ie** – Event index
- **nroots** – Event index
- **t** – Current timepoint

- **x** – State variables
- **edata** – Pointer to experimental data instance

void **fdJzdx**(const int ie, const int nroots, *realtype* t, const *AmiVector* &x, const *ExpData* &edata)

Compute sensitivity of event-resolved measurement negative log-likelihood Jz w.r.t. state variables.

Parameters

- **ie** – Event index
- **nroots** – Event index
- **t** – Current timepoint
- **x** – State variables
- **edata** – Experimental data

void **fJrz**(*realtype* &Jrz, int nroots, const *AmiVector* &rz, const *ExpData* &edata)

Compute regularization of negative log-likelihood with roots of event-resolved measurements rz.

Parameters

- **Jrz** – Variable to which regularization will be added
- **nroots** – Event index
- **rz** – Regularization variable
- **edata** – Experimental data

void **fdJrzd**(const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)

Compute partial derivative of event measurement negative log-likelihood J.

Parameters

- **ie** – Event index
- **nroots** – Event index
- **t** – Current timepoint
- **x** – State variables
- **edata** – Experimental data

void **fdJrzdsigma**(const int ie, const int nroots, const *realtype* t, const *AmiVector* &x, const *ExpData* &edata)

Compute sensitivity of event measurement negative log-likelihood Jz w.r.t. standard deviation sigma.

Parameters

- **ie** – event index
- **nroots** – event index
- **t** – current timepoint
- **x** – state variables
- **edata** – pointer to experimental data instance

void **fw**(*realtype* t, const *realtype* *x)

Compute recurring terms in xdot.

Parameters

- **t** – Timepoint

- **x** – Array with the states

void **fdwdp**(*realtype* t, const *realtype* *x)

Compute parameter derivative for recurring terms in xdot.

Parameters

- **t** – Timepoint
- **x** – Array with the states

void **fdwdx**(*realtype* t, const *realtype* *x)

Compute state derivative for recurring terms in xdot.

Parameters

- **t** – Timepoint
- **x** – Array with the states

void **fdwdw**(*realtype* t, const *realtype* *x)

Compute self derivative for recurring terms in xdot.

Parameters

- **t** – Timepoint
- **x** – Array with the states

virtual void **fx_rdata**(*realtype* *x_rdata, const *realtype* *x_solver, const *realtype* *tcl, const *realtype* *p, const *realtype* *k)

Compute fx_rdata.

To be implemented by derived class if applicable.

Parameters

- **x_rdata** – State variables with conservation laws expanded
- **x_solver** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws
- **p** – parameter vector
- **k** – constant vector

virtual void **fsx_rdata**(*realtype* *sx_rdata, const *realtype* *sx_solver, const *realtype* *stcl, const *realtype* *p, const *realtype* *k, const *realtype* *x_solver, const *realtype* *tcl, const int ip)

Compute fsx_solver.

To be implemented by derived class if applicable.

Parameters

- **sx_rdata** – State sensitivity variables with conservation laws expanded
- **sx_solver** – State sensitivity variables with conservation laws applied
- **stcl** – Sensitivities of total abundances for conservation laws
- **p** – parameter vector
- **k** – constant vector
- **x_solver** – State variables with conservation laws applied
- **tcl** – Total abundances for conservation laws

- **ip** – Sensitivity index

virtual void **fx_solver**(*realtype* *x_solver, const *realtype* *x_rdata)

Compute fx_solver.

To be implemented by derived class if applicable.

Parameters

- **x_solver** – State variables with conservation laws applied
- **x_rdata** – State variables with conservation laws expanded

virtual void **fsx_solver**(*realtype* *sx_solver, const *realtype* *sx_rdata)

Compute fsx_solver.

To be implemented by derived class if applicable.

Parameters

- **sx_rdata** – State sensitivity variables with conservation laws expanded
- **sx_solver** – State sensitivity variables with conservation laws applied

virtual void **ftotal_cl**(*realtype* *total_cl, const *realtype* *x_rdata, const *realtype* *p, const *realtype* *k)

Compute ftotal_cl.

To be implemented by derived class if applicable.

Parameters

- **total_cl** – Total abundances of conservation laws
- **x_rdata** – State variables with conservation laws expanded
- **p** – parameter vector
- **k** – constant vector

virtual void **fstotal_cl**(*realtype* *stotal_cl, const *realtype* *sx_rdata, const int ip, const *realtype* *x_rdata, const *realtype* *p, const *realtype* *k, const *realtype* *tcl)

Compute fstotal_cl.

To be implemented by derived class if applicable.

Parameters

- **stotal_cl** – Sensitivities for the total abundances of conservation laws
- **sx_rdata** – State sensitivity variables with conservation laws expanded
- **ip** – Sensitivity index
- **x_rdata** – State variables with conservation laws expanded
- **p** – parameter vector
- **k** – constant vector
- **tcl** – Total abundances for conservation laws

const_N_Vector **computeX_pos**(*const_N_Vector* x)

Compute non-negative state vector.

Compute non-negative state vector according to stateIsNonNegative. If anyStateNonNegative is set to *false*, i.e., all entries in stateIsNonNegative are *false*, this function directly returns *x*, otherwise all

entries of x are copied in to `amici::Model::x_pos_tmp_` and negative values are replaced by 0 where applicable.

Parameters x – State vector possibly containing negative values

Returns State vector with negative values replaced by 0 according to `stateIsNonNegative`

```
const realtype *computeX_pos(AmiVector const &x)
```

Compute non-negative state vector.

Compute non-negative state vector according to `stateIsNonNegative`. If `anyStateNonNegative` is set to `false`, i.e., all entries in `stateIsNonNegative` are `false`, this function directly returns x , otherwise all entries of x are copied in to `amici::Model::x_pos_tmp_` and negative values are replaced by 0 where applicable.

Parameters x – State vector possibly containing negative values

Returns State vector with negative values replaced by 0 according to `stateIsNonNegative`

Protected Attributes

ModelState **state_**

All variables necessary for function evaluation

ModelStateDerived **derived_state_**

Storage for model quantities beyond *ModelState* for the current timepoint

`std::vector<int>` **z2event_**

index indicating to which event an event output belongs

`std::vector<realtype>` **x0data_**

state initialization (size `nx_solver`)

`std::vector<realtype>` **sx0data_**

sensitivity initialization (size `nx_rdata` x `nplist`, row-major)

`std::vector<bool>` **state_is_non_negative_**

vector of bools indicating whether state variables are to be assumed to be positive

`std::vector<bool>` **root_initial_values_**

Vector of booleans indicating the initial boolean value for every event trigger function. Events at `t0` can only trigger if the initial value is set to `false`. Must be specified during model compilation by setting the `initialValue` attribute of an event trigger.

`bool` **any_state_non_negative_** = {false}

boolean indicating whether any entry in `stateIsNonNegative` is `true`

`int` **nmaxevent_** = {10}

maximal number of events to track

SteadyStateSensitivityMode **steadystate_sensitivity_mode_** =
 {*SteadyStateSensitivityMode::newtonOnly*}

flag indicating whether steadystate sensitivities are to be computed via FSA when steadyStateSimulation is used

bool **always_check_finite_** = {false}

Indicates whether the result of every call to `Model::f*` should be checked for finiteness

bool **sigma_res_** = {false}

indicates whether sigma residuals are to be added for every datapoint

realtype **min_sigma_** = {50.0}

offset to ensure positivity of sigma residuals, only has an effect when `sigma_res_` is true

Friends

template<class **Archive**>
 friend void **serialize**(*Archive* &ar, *Model* &m, unsigned int version)
 Serialize *Model* (see `boost::serialization::serialize`).

Parameters

- **ar** – Archive to serialize to
- **m** – Data to serialize
- **version** – Version number

friend bool **operator==**(const *Model* &a, const *Model* &b)

Check equality of data members.

Parameters

- **a** – First model instance
- **b** – Second model instance

Returns Equality

Class `Model_DAE`

- Defined in `file_include_amici_model_dae.h`

Inheritance Relationships

Base Type

- public `amici::Model` (*Class Model*)

Class Documentation

class **Model_DAE** : public amici::Model

The *Model* class represents an AMICI DAE model.

The model does not contain any data, but represents the state of the model at a specific time t . The states must not always be in sync, but may be updated asynchronously.

Public Functions

Model_DAE() = default

default constructor

inline **Model_DAE**(const *ModelDimensions* &model_dimensions, *SimulationParameters* simulation_parameters, const *SecondOrderMode* o2mode, std::vector<realtype> const &idlist, std::vector<int> const &z2event, const bool pythonGenerated = false, const int ndxdotdp_explicit = 0)

Constructor with model dimensions.

Parameters

- **model_dimensions** – *Model* dimensions
- **simulation_parameters** – Simulation parameters
- **o2mode** – second order sensitivity mode
- **idlist** – indexes indicating algebraic components (DAE only)
- **z2event** – mapping of event outputs to events
- **pythonGenerated** – flag indicating matlab or python wrapping
- **ndxdotdp_explicit** – number of nonzero elements dxdotdp_explicit

virtual void **fJ**(realtype t, realtype cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, SUNMatrix J) override

Dense Jacobian function.

Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **J** – dense matrix to which values of the jacobian will be written

void **fJ**(realtype t, realtype cj, const *N_Vector* x, const *N_Vector* dx, const *N_Vector* xdot, SUNMatrix J)

Jacobian of xdot with respect to states x.

Parameters

- **t** – timepoint
- **cj** – scaling factor, inverse of the step size

- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xdot** – Vector with the right hand side
- **J** – Matrix to which the Jacobian will be written

virtual void **fJB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot, SUNMatrix JB) override

Dense Jacobian function.

Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side (unused)
- **JB** – dense matrix to which values of the jacobian will be written

void **fJB**(*realtype* t, *realtype* cj, const *N_Vector* x, const *N_Vector* dx, const *N_Vector* xB, const *N_Vector* dxB, SUNMatrix JB)

Jacobian of xBdot with respect to adjoint state xB.

Parameters

- **t** – timepoint
- **cj** – scaling factor, inverse of the step size
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **JB** – Matrix to which the Jacobian will be written

virtual void **fJSparse**(*realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, SUNMatrix J) override

Sparse Jacobian function.

Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **J** – sparse matrix to which values of the Jacobian will be written

void **fJSparse**(*realtype* t, *realtype* cj, *const_N_Vector* x, *const_N_Vector* dx, SUNMatrix J)

J in sparse form (for sparse solvers from the SuiteSparse Package)

Parameters

- **t** – timepoint
- **cj** – scalar in Jacobian (inverse stepsize)
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **J** – Matrix to which the Jacobian will be written

virtual void **fJSparseB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot, SUNMatrix JB)
override

Sparse Jacobian function.

Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side (unused)
- **JB** – dense matrix to which values of the jacobian will be written

void **fJSparseB**(*realtype* t, *realtype* cj, *const_N_Vector* x, *const_N_Vector* dx, *const_N_Vector* xB, *const_N_Vector* dxB, SUNMatrix JB)

JB in sparse form (for sparse solvers from the SuiteSparse Package)

Parameters

- **t** – timepoint
- **cj** – scalar in Jacobian
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **JB** – Matrix to which the Jacobian will be written

virtual void **fJDiag**(*realtype* t, *AmiVector* &JDiag, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx)
override

Diagonal of the Jacobian (for preconditioning)

Parameters

- **t** – timepoint
- **JDiag** – Vector to which the Jacobian diagonal will be written

- **cj** – scaling factor, inverse of the step size
- **x** – Vector with the states
- **dx** – Vector with the derivative states

virtual void **fJv**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, const *AmiVector* &v, *AmiVector* &nJv, *realtype* cj) override

Jacobian multiply function.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **v** – multiplication vector (unused)
- **nJv** – array to which result of multiplication will be written
- **cj** – scaling factor (inverse of timestep, DAE only)

void **fJv**(*realtype* t, *const_N_Vector* x, *const_N_Vector* dx, *const_N_Vector* v, *N_Vector* Jv, *realtype* cj)

Matrix vector product of J with a vector v (for iterative solvers)

Parameters

- **t** – timepoint
- **cj** – scaling factor, inverse of the step size
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **v** – Vector with which the Jacobian is multiplied
- **Jv** – Vector to which the Jacobian vector product will be written

void **fJvB**(*realtype* t, *const_N_Vector* x, *const_N_Vector* dx, *const_N_Vector* xB, *const_N_Vector* dxB, *const_N_Vector* vB, *N_Vector* JvB, *realtype* cj)

Matrix vector product of JB with a vector v (for iterative solvers)

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **vB** – Vector with which the Jacobian is multiplied
- **JvB** – Vector to which the Jacobian vector product will be written
- **cj** – scalar in Jacobian (inverse stepsize)

virtual void **froot**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, gsl::span<*realtype*> root) override
Root function.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **root** – array to which values of the root function will be written

void **froot**(*realtype* t, *const_N_Vector* x, *const_N_Vector* dx, gsl::span<*realtype*> root)

Event trigger function for events.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **root** – array with root function values

virtual void **fxdot**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, *AmiVector* &xdot) override

Residual function.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – array to which values of the residual function will be written

void **fxdot**(*realtype* t, *const_N_Vector* x, *const_N_Vector* dx, *N_Vector* xdot)

Residual function of the DAE.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xdot** – Vector with the right hand side

void **fxBdot**(*realtype* t, *const_N_Vector* x, *const_N_Vector* dx, *const_N_Vector* xB, *const_N_Vector* dxB, *N_Vector* xBdot)

Right hand side of differential equation for adjoint state xB.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states

- **xBdot** – Vector with the adjoint right hand side

void **fqBdot**(*realtype* t, *const_N_Vector* x, *const_N_Vector* dx, *const_N_Vector* xB, *const_N_Vector* dxB, *N_Vector* qBdot)

Right hand side of integral equation for quadrature states qB.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **qBdot** – Vector with the adjoint quadrature right hand side

virtual void **fxBdot_ss**(const *realtype* t, const *AmiVector* &xB, const *AmiVector* &dxB, *AmiVector* &xBdot) override

Residual function backward when running in steady state mode.

Parameters

- **t** – time
- **xB** – adjoint state
- **dxB** – time derivative of state (DAE only)
- **xBdot** – array to which values of the residual function will be written

void **fxBdot_ss**(*realtype* t, *const_N_Vector* xB, *const_N_Vector* dxB, *N_Vector* xBdot) const

Implementation of fxBdot for steady state case at the N_Vector level.

Parameters

- **t** – timepoint
- **xB** – Vector with the adjoint state
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side

void **fqBdot_ss**(*realtype* t, *const_N_Vector* xB, *const_N_Vector* dxB, *N_Vector* qBdot) const

Implementation of fqBdot for steady state at the N_Vector level.

Parameters

- **t** – timepoint
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **qBdot** – Vector with the adjoint quadrature right hand side

virtual void **fJSparseB_ss**(SUNMatrix JB) override

Sparse Jacobian function backward, steady state case.

Parameters **JB** – sparse matrix to which values of the Jacobian will be written

virtual void **writeSteadystateJB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot) override

Computes the sparse backward Jacobian for steadystate integration and writes it to the model member.

Parameters

- **t** – timepoint
- **cj** – scalar in Jacobian
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint state right hand side

void **fdxdotdp**(*realtype* t, const *const_N_Vector* x, const *const_N_Vector* dx)

Sensitivity of dx/dt wrt model parameters p.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states

inline virtual void **fdxdotdp**(const *realtype* t, const *AmiVector* &x, const *AmiVector* &dx) override

Model-specific sparse implementation of explicit parameter derivative of right hand side.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)

virtual void **fsxdot**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, int ip, const *AmiVector* &sx, const *AmiVector* &sdx, *AmiVector* &sxdot) override

Sensitivity Residual function.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **ip** – parameter index
- **sx** – sensitivity state
- **sdx** – time derivative of sensitivity state (DAE only)
- **sxdot** – array to which values of the sensitivity residual function will be written

void **fsxdot**(*realtype* t, *const_N_Vector* x, *const_N_Vector* dx, int ip, *const_N_Vector* sx, *const_N_Vector* sdx, *N_Vector* sxdot)

Right hand side of differential equation for state sensitivities sx.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **ip** – parameter index
- **sx** – Vector with the state sensitivities
- **sdx** – Vector with the derivative state sensitivities
- **sxdot** – Vector with the sensitivity right hand side

void **fm**(*realtype* t, *const_N_Vector* x)

Mass matrix for DAE systems.

Parameters

- **t** – timepoint
- **x** – Vector with the states

virtual std::unique_ptr<*Solver*> **getSolver**() override

Retrieves the solver object.

Returns The *Solver* instance

Protected Functions

virtual void **fJSparse**(SUNMatrixContent_Sparse JSparse, *realtype* t, const *realtype* *x, const double *p, const double *k, const *realtype* *h, *realtype* cj, const *realtype* *dx, const *realtype* *w, const *realtype* *dwdx) = 0

Model specific implementation for fJSparse.

Parameters

- **JSparse** – Matrix to which the Jacobian will be written
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **cj** – scaling factor, inverse of the step size
- **dx** – Vector with the derivative states
- **w** – vector with helper variables
- **dwdx** – derivative of w wrt x

virtual void **froot**(*realtype* *root, *realtype* t, const *realtype* *x, const double *p, const double *k, const *realtype* *h, const *realtype* *dx)

Model specific implementation for froot.

Parameters

- **root** – values of the trigger function

- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **dx** – Vector with the derivative states

```
virtual void fxdot(realtype *xdot, realtype t, const realtype *x, const double *p, const double *k, const  
                  realtype *h, const realtype *dx, const realtype *w) = 0
```

Model specific implementation for fxdot.

Parameters

- **xdot** – residual function
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **dx** – Vector with the derivative states

```
virtual void fdxdotdp(realtype *dxdotdp, realtype t, const realtype *x, const realtype *p, const realtype *k,  
                     const realtype *h, int ip, const realtype *dx, const realtype *w, const realtype *dwdp)
```

Model specific implementation of fdxdotdp.

Parameters

- **dxdotdp** – partial derivative xdot wrt p
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **ip** – parameter index
- **dx** – Vector with the derivative states
- **w** – vector with helper variables
- **dwdp** – derivative of w wrt p

```
virtual void fM(realtype *M, const realtype t, const realtype *x, const realtype *p, const realtype *k)
```

Model specific implementation of fM.

Parameters

- **M** – mass matrix
- **t** – timepoint

- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector

Class `Model_ODE`

- Defined in file `include/amici_model_ode.h`

Inheritance Relationships

Base Type

- `public amici::Model` (*Class Model*)

Class Documentation

class **Model_ODE** : public amici::*Model*

The *Model* class represents an AMICI ODE model.

The model does not contain any data, but represents the state of the model at a specific time *t*. The states must not always be in sync, but may be updated asynchronously.

Public Functions

Model_ODE() = default

default constructor

```
inline Model_ODE(ModelDimensions const &model_dimensions, SimulationParameters
simulation_parameters, const SecondOrderMode o2mode, std::vector<realtype> const
&idlist, std::vector<int> const &z2event, const bool pythonGenerated = false, const int
ndxdotdp_explicit = 0, const int ndxdotdx_explicit = 0, const int w_recursion_depth = 0)
```

Constructor with model dimensions.

Parameters

- **model_dimensions** – *Model* dimensions
- **simulation_parameters** – Simulation parameters
- **o2mode** – second order sensitivity mode
- **idlist** – indexes indicating algebraic components (DAE only)
- **z2event** – mapping of event outputs to events
- **pythonGenerated** – flag indicating matlab or python wrapping
- **ndxdotdp_explicit** – number of nonzero elements `dxdotdp_explicit`
- **ndxdotdx_explicit** – number of nonzero elements `dxdotdx_explicit`
- **w_recursion_depth** – Recursion depth of fw

virtual void **fJ**(*realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, SUNMatrix J) override

Dense Jacobian function.

Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **J** – dense matrix to which values of the jacobian will be written

void **fJ**(*realtype* t, *const_N_Vector* x, *const_N_Vector* xdot, SUNMatrix J)

Implementation of fJ at the N_Vector level.

This function provides an interface to the model specific routines for the solver implementation as well as the *AmiVector* level implementation

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **xdot** – Vector with the right hand side
- **J** – Matrix to which the Jacobian will be written

virtual void **fJB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot, SUNMatrix JB) override

Dense Jacobian function.

Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side (unused)
- **JB** – dense matrix to which values of the jacobian will be written

void **fJB**(*realtype* t, *const_N_Vector* x, *const_N_Vector* xB, *const_N_Vector* xBdot, SUNMatrix JB)

Implementation of fJB at the N_Vector level, this function provides an interface to the model specific routines for the solver implementation.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **xB** – Vector with the adjoint states

- **xBdot** – Vector with the adjoint right hand side
- **JB** – Matrix to which the Jacobian will be written

virtual void **fJSparse**(*realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, SUNMatrix J) override

Sparse Jacobian function.

Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **J** – sparse matrix to which values of the Jacobian will be written

void **fJSparse**(*realtype* t, *const_N_Vector* x, SUNMatrix J)

Implementation of fJSparse at the N_Vector level, this function provides an interface to the model specific routines for the solver implementation as well as the *AmiVector* level implementation.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **J** – Matrix to which the Jacobian will be written

virtual void **fJSparseB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot, SUNMatrix JB) override

Sparse Jacobian function.

Parameters

- **t** – time
- **cj** – scaling factor (inverse of timestep, DAE only)
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint right hand side (unused)
- **JB** – dense matrix to which values of the jacobian will be written

void **fJSparseB**(*realtype* t, *const_N_Vector* x, *const_N_Vector* xB, *const_N_Vector* xBdot, SUNMatrix JB)

Implementation of fJSparseB at the N_Vector level, this function provides an interface to the model specific routines for the solver implementation.

Parameters

- **t** – timepoint
- **x** – Vector with the states

- **xB** – Vector with the adjoint states
- **xBdot** – Vector with the adjoint right hand side
- **JB** – Matrix to which the Jacobian will be written

void **fJDiag**(*realtype* t, N_Vector JDiag, *const_N_Vector* x)

Implementation of fJDiag at the N_Vector level, this function provides an interface to the model specific routines for the solver implementation.

Parameters

- **t** – timepoint
- **JDiag** – Vector to which the Jacobian diagonal will be written
- **x** – Vector with the states

virtual void **fJDiag**(*realtype* t, *AmiVector* &JDiag, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx)
override

Diagonal of the Jacobian (for preconditioning)

Parameters

- **t** – timepoint
- **JDiag** – Vector to which the Jacobian diagonal will be written
- **cj** – scaling factor, inverse of the step size
- **x** – Vector with the states
- **dx** – Vector with the derivative states

virtual void **fJv**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xdot, const *AmiVector* &v, *AmiVector* &nJv, *realtype* cj) override

Jacobian multiply function.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – values of residual function (unused)
- **v** – multiplication vector (unused)
- **nJv** – array to which result of multiplication will be written
- **cj** – scaling factor (inverse of timestep, DAE only)

void **fJv**(*const_N_Vector* v, N_Vector Jv, *realtype* t, *const_N_Vector* x)

Implementation of fJv at the N_Vector level.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **v** – Vector with which the Jacobian is multiplied
- **Jv** – Vector to which the Jacobian vector product will be written

void **fJvB**(*const_N_Vector* vB, *N_Vector* JvB, *realtype* t, *const_N_Vector* x, *const_N_Vector* xB)

Implementation of fJvB at the *N_Vector* level.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **xB** – Vector with the adjoint states
- **vB** – Vector with which the Jacobian is multiplied
- **JvB** – Vector to which the Jacobian vector product will be written

virtual void **froot**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, gsl::span<*realtype*> root) override

Root function.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **root** – array to which values of the root function will be written

void **froot**(*realtype* t, *const_N_Vector* x, gsl::span<*realtype*> root)

Implementation of froot at the *N_Vector* level This function provides an interface to the model specific routines for the solver implementation as well as the *AmiVector* level implementation.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **root** – array with root function values

virtual void **fxdot**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, *AmiVector* &xdot) override

Residual function.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **xdot** – array to which values of the residual function will be written

void **fxdot**(*realtype* t, *const_N_Vector* x, *N_Vector* xdot)

Implementation of fxdot at the *N_Vector* level, this function provides an interface to the model specific routines for the solver implementation as well as the *AmiVector* level implementation.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **xdot** – Vector with the right hand side

void **fxBdot**(*realtype* t, N_Vector x, N_Vector xB, N_Vector xBdot)

Implementation of fxBdot at the N_Vector level.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **xB** – Vector with the adjoint states
- **xBdot** – Vector with the adjoint right hand side

void **fqBdot**(*realtype* t, *const_N_Vector* x, *const_N_Vector* xB, N_Vector qBdot)

Implementation of fqBdot at the N_Vector level.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **xB** – Vector with the adjoint states
- **qBdot** – Vector with the adjoint quadrature right hand side

virtual void **fxBdot_ss**(const *realtype* t, const *AmiVector* &xB, const *AmiVector*&, *AmiVector* &xBdot)
override

Residual function backward when running in steady state mode.

Parameters

- **t** – time
- **xB** – adjoint state
- **dxB** – time derivative of state (DAE only)
- **xBdot** – array to which values of the residual function will be written

void **fxBdot_ss**(*realtype* t, *const_N_Vector* xB, N_Vector xBdot) const

Implementation of fxBdot for steady state at the N_Vector level.

Parameters

- **t** – timepoint
- **xB** – Vector with the states
- **xBdot** – Vector with the adjoint right hand side

void **fqBdot_ss**(*realtype* t, N_Vector xB, N_Vector qBdot) const

Implementation of fqBdot for steady state case at the N_Vector level.

Parameters

- **t** – timepoint
- **xB** – Vector with the adjoint states
- **qBdot** – Vector with the adjoint quadrature right hand side

virtual void **fJSparseB_ss**(SUNMatrix JB) override

Sparse Jacobian function backward, steady state case.

Parameters **JB** – sparse matrix to which values of the Jacobian will be written

virtual void **writeSteadystateJB**(const *realtype* t, *realtype* cj, const *AmiVector* &x, const *AmiVector* &dx, const *AmiVector* &xB, const *AmiVector* &dxB, const *AmiVector* &xBdot) override

Computes the sparse backward Jacobian for steadystate integration and writes it to the model member.

Parameters

- **t** – timepoint
- **cj** – scalar in Jacobian
- **x** – Vector with the states
- **dx** – Vector with the derivative states
- **xB** – Vector with the adjoint states
- **dxB** – Vector with the adjoint derivative states
- **xBdot** – Vector with the adjoint state right hand side

virtual void **fsxdot**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx, int ip, const *AmiVector* &sx, const *AmiVector* &sdx, *AmiVector* &sxdot) override

Sensitivity Residual function.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)
- **ip** – parameter index
- **sx** – sensitivity state
- **sdx** – time derivative of sensitivity state (DAE only)
- **sxdot** – array to which values of the sensitivity residual function will be written

void **fsxdot**(*realtype* t, const *N_Vector* x, int ip, const *N_Vector* sx, *N_Vector* sxdot)

Implementation of fsxdot at the *N_Vector* level.

Parameters

- **t** – timepoint
- **x** – Vector with the states
- **ip** – parameter index
- **sx** – Vector with the state sensitivities
- **sxdot** – Vector with the sensitivity right hand side

virtual std::unique_ptr<*Solver*> **getSolver**() override

Retrieves the solver object.

Returns The *Solver* instance

Protected Functions

virtual void **fJSparse**(SUNMatrixContent_Sparse JSparse, *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, const *realtype* *dwdx)

Model specific implementation for fJSparse (Matlab)

Parameters

- **JSparse** – Matrix to which the Jacobian will be written
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **dwdx** – derivative of w wrt x

virtual void **fJSparse**(*realtype* *JSparse, *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w, const *realtype* *dwdx)

Model specific implementation for fJSparse, data only (Py)

Parameters

- **JSparse** – Matrix to which the Jacobian will be written
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables
- **dwdx** – derivative of w wrt x

virtual void **fJSparse_colptrs**(*SUNMatrixWrapper* &JSparse)

Model specific implementation for fJSparse, column pointers.

Parameters **JSparse** – sparse matrix to which colptrs will be written

virtual void **fJSparse_rowvals**(*SUNMatrixWrapper* &JSparse)

Model specific implementation for fJSparse, row values.

Parameters **JSparse** – sparse matrix to which rowvals will be written

virtual void **froot**(*realtype* *root, *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *tcl)

Model specific implementation for froot.

Parameters

- **root** – values of the trigger function
- **t** – timepoint

- \mathbf{x} – Vector with the states
- \mathbf{p} – parameter vector
- \mathbf{k} – constants vector
- \mathbf{h} – Heaviside vector
- \mathbf{tcl} – total abundances for conservation laws

virtual void **fxdot**(*realtype* *xdot, *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w) = 0

Model specific implementation for fxdot.

Parameters

- **xdot** – residual function
- **t** – timepoint
- \mathbf{x} – Vector with the states
- \mathbf{p} – parameter vector
- \mathbf{k} – constants vector
- \mathbf{h} – Heaviside vector
- \mathbf{w} – vector with helper variables

virtual void **fdxdotdp**(*realtype* *dxdotdp, *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, int ip, const *realtype* *w, const *realtype* *dwdp)

Model specific implementation of fdxdotdp, with w chainrule (Matlab)

Parameters

- **dxdotdp** – partial derivative xdot wrt p
- **t** – timepoint
- \mathbf{x} – Vector with the states
- \mathbf{p} – parameter vector
- \mathbf{k} – constants vector
- \mathbf{h} – Heaviside vector
- **ip** – parameter index
- \mathbf{w} – vector with helper variables
- **dwdp** – derivative of w wrt p

virtual void **fdxdotdp_explicit**(*realtype* *dxdotdp_explicit, *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w)

Model specific implementation of fdxdotdp_explicit, no w chainrule (Py)

Parameters

- **dxdotdp_explicit** – partial derivative xdot wrt p
- **t** – timepoint
- \mathbf{x} – Vector with the states
- \mathbf{p} – parameter vector

- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables

virtual void **fdxdotdp_explicit_colptrs**(*SUNMatrixWrapper* &dxdotdp)

Model specific implementation of fdxdotdp_explicit, colptrs part.

Parameters **dxdotdp** – sparse matrix to which colptrs will be written

virtual void **fdxdotdp_explicit_rowvals**(*SUNMatrixWrapper* &dxdotdp)

Model specific implementation of fdxdotdp_explicit, rowvals part.

Parameters **dxdotdp** – sparse matrix to which rowvals will be written

virtual void **fdxdotdx_explicit**(*realtype* *dxdotdx_explicit, *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w)

Model specific implementation of fdxdotdx_explicit, no w chainrule (Py)

Parameters

- **dxdotdx_explicit** – partial derivative xdot wrt x
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – heavyside vector
- **w** – vector with helper variables

virtual void **fdxdotdx_explicit_colptrs**(*SUNMatrixWrapper* &dxdotdx)

Model specific implementation of fdxdotdx_explicit, colptrs part.

Parameters **dxdotdx** – sparse matrix to which colptrs will be written

virtual void **fdxdotdx_explicit_rowvals**(*SUNMatrixWrapper* &dxdotdx)

Model specific implementation of fdxdotdx_explicit, rowvals part.

Parameters **dxdotdx** – sparse matrix to which rowvals will be written

virtual void **fdxdotdw**(*realtype* *dxdotdw, *realtype* t, const *realtype* *x, const *realtype* *p, const *realtype* *k, const *realtype* *h, const *realtype* *w)

Model specific implementation of fdxdotdw, data part.

Parameters

- **dxdotdw** – partial derivative xdot wrt w
- **t** – timepoint
- **x** – Vector with the states
- **p** – parameter vector
- **k** – constants vector
- **h** – Heaviside vector
- **w** – vector with helper variables

virtual void **fdxdotdw_colptrs**(*SUNMatrixWrapper* &dxdotdw)

Model specific implementation of fdxdotdw, colptrs part.

Parameters **dxdotdw** – sparse matrix to which colptrs will be written

virtual void **fdxdotdw_rowvals**(*SUNMatrixWrapper* &dxdotdw)

Model specific implementation of fdxdotdw, rowvals part.

Parameters **dxdotdw** – sparse matrix to which rowvals will be written

void **fdxdotdw**(*realtype* t, *const_N_Vector* x)

Sensitivity of dx/dt wrt model parameters w.

Parameters

- **t** – timepoint
- **x** – Vector with the states

void **fdxdotdp**(*realtype* t, *const_N_Vector* x)

Explicit sensitivity of dx/dt wrt model parameters p

Parameters

- **t** – timepoint
- **x** – Vector with the states

virtual void **fdxdotdp**(*realtype* t, const *AmiVector* &x, const *AmiVector* &dx) override

Model-specific sparse implementation of explicit parameter derivative of right hand side.

Parameters

- **t** – time
- **x** – state
- **dx** – time derivative of state (DAE only)

Class ModelContext

- Defined in file_include_amici_rdata.h

Inheritance Relationships

Base Type

- public amici::ContextManager (*Class ContextManager*)

Class Documentation

class **ModelContext** : public amici::ContextManager

The *ModelContext* temporarily stores amici::Model::state and restores it when going out of scope.

Public Functions

explicit **ModelContext**(*Model* *model)

initialize backup of the original values.

Parameters *model* –

ModelContext &**operator**=(const *ModelContext* &other) = delete

~ModelContext()

void **restore**()

Restore original state on constructor-supplied *amici::Model*. Will be called during destruction. Explicit call is generally not necessary.

Class NewtonFailure

- Defined in file_include_amici_exception.h

Inheritance Relationships

Base Type

- public amici::AmiException (*Class AmiException*)

Class Documentation

class **NewtonFailure** : public amici::AmiException

Newton failure exception.

This exception should be thrown when the steady state computation failed to converge for this exception we can assume that we can recover from the exception and return a solution struct to the user

Public Functions

NewtonFailure(int code, char const *function)

Constructor, simply calls *AmiException* constructor.

Parameters

- **function** – name of the function in which the error occurred
- **code** – error code

Public Members

int **error_code**

error code returned by solver

Class NewtonSolver

- Defined in file_include_amici_newton_solver.h

Inheritance Relationships

Derived Types

- public amici::NewtonSolverDense (*Class NewtonSolverDense*)
- public amici::NewtonSolverSparse (*Class NewtonSolverSparse*)

Class Documentation

class **NewtonSolver**

The *NewtonSolver* class sets up the linear solver for the Newton method.

Subclassed by *amici::NewtonSolverDense*, *amici::NewtonSolverSparse*

Public Functions

explicit **NewtonSolver**(const *Model* &model)

Initializes solver according to the dimensions in the provided model.

Parameters **model** – pointer to the model object

void **getStep**(*AmiVector* &delta, *Model* &model, const *SimulationState* &state)

Computes the solution of one Newton iteration.

Parameters

- **delta** – containing the RHS of the linear system, will be overwritten by solution to the linear system
- **model** – pointer to the model instance
- **state** – current simulation state

void **computeNewtonSensis**(*AmiVectorArray* &sx, *Model* &model, const *SimulationState* &state)

Computes steady state sensitivities.

Parameters

- **sx** – pointer to state variable sensitivities
- **model** – pointer to the model instance
- **state** – current simulation state

virtual void **prepareLinearSystem**(*Model* &model, const *SimulationState* &state) = 0

Writes the Jacobian for the Newton iteration and passes it to the linear solver.

Parameters

- **model** – pointer to the model instance
- **state** – current simulation state

virtual void **prepareLinearSystemB**(*Model* &model, const *SimulationState* &state) = 0

Writes the Jacobian (JB) for the Newton iteration and passes it to the linear solver

Parameters

- **model** – pointer to the model instance
- **state** – current simulation state

virtual void **solveLinearSystem**(*AmiVector* &rhs) = 0

Solves the linear system for the Newton step.

Parameters **rhs** – containing the RHS of the linear system, will be overwritten by solution to the linear system

virtual void **reinitialize**() = 0

Reinitialize the linear solver.

virtual bool **is_singular**(*Model* &model, const *SimulationState* &state) const = 0

Checks whether linear system is singular.

Parameters

- **model** – pointer to the model instance
- **state** – current simulation state

Returns boolean indicating whether the linear system is singular (condition number < 1/machine precision)

virtual ~**NewtonSolver**() = default

Public Static Functions

static std::unique_ptr<*NewtonSolver*> **getSolver**(const *Solver* &simulationSolver, const *Model* &model)

Factory method to create a *NewtonSolver* based on *linsolType*.

Parameters

- **simulationSolver** – solver with settings
- **model** – pointer to the model instance

Returns solver *NewtonSolver* according to the specified *linsolType*

Protected Attributes

AmiVector **xdot_**

dummy rhs, used as dummy argument when computing J and JB

AmiVector **x_**

dummy state, attached to linear solver

AmiVector **xB_**

dummy adjoint state, used as dummy argument when computing JB

AmiVector **dxB_**

dummy differential adjoint state, used as dummy argument when computing JB

Class NewtonSolverDense

- Defined in file_include_amici_newton_solver.h

Inheritance Relationships

Base Type

- public amici::NewtonSolver (*Class NewtonSolver*)

Class Documentation

class **NewtonSolverDense** : public amici::*NewtonSolver*

The *NewtonSolverDense* provides access to the dense linear solver for the Newton method.

Public Functions

explicit **NewtonSolverDense**(const *Model* &model)

constructor for sparse solver

Parameters *model* – model instance that provides problem dimensions

NewtonSolverDense(const *NewtonSolverDense*&) = delete

NewtonSolverDense &**operator**=(const *NewtonSolverDense* &other) = delete

~NewtonSolverDense() override

virtual void **solveLinearSystem**(*AmiVector* &rhs) override

Solves the linear system for the Newton step.

Parameters *rhs* – containing the RHS of the linear system, will be overwritten by solution to the linear system

virtual void **prepareLinearSystem**(*Model* &model, const *SimulationState* &state) override

Writes the Jacobian for the Newton iteration and passes it to the linear solver.

Parameters

- **model** – pointer to the model instance
- **state** – current simulation state

virtual void **prepareLinearSystemB**(*Model* &model, const *SimulationState* &state) override

Writes the Jacobian (JB) for the Newton iteration and passes it to the linear solver

Parameters

- **model** – pointer to the model instance
- **state** – current simulation state

virtual void **reinitialize**() override

Reinitialize the linear solver.

virtual bool **is_singular**(*Model* &model, const *SimulationState* &state) const override

Checks whether linear system is singular.

Parameters

- **model** – pointer to the model instance
- **state** – current simulation state

Returns boolean indicating whether the linear system is singular (condition number < 1/machine precision)

Class *NewtonSolverSparse*

- Defined in file_include_amici_newton_solver.h

Inheritance Relationships

Base Type

- public amici::NewtonSolver (*Class NewtonSolver*)

Class Documentation

class **NewtonSolverSparse** : public amici::*NewtonSolver*

The *NewtonSolverSparse* provides access to the sparse linear solver for the Newton method.

Public Functions

explicit **NewtonSolverSparse**(const *Model* &model)

constructor for dense solver

Parameters *model* – model instance that provides problem dimensions

NewtonSolverSparse(const *NewtonSolverSparse*&) = delete

NewtonSolverSparse &**operator=**(const *NewtonSolverSparse* &other) = delete

~NewtonSolverSparse() override

virtual void **solveLinearSystem**(*AmiVector* &rhs) override

Solves the linear system for the Newton step.

Parameters *rhs* – containing the RHS of the linear system, will be overwritten by solution to the linear system

virtual void **prepareLinearSystem**(*Model* &model, const *SimulationState* &state) override

Writes the Jacobian for the Newton iteration and passes it to the linear solver.

Parameters

- *model* – pointer to the model instance
- *state* – current simulation state

virtual void **prepareLinearSystemB**(*Model* &model, const *SimulationState* &state) override

Writes the Jacobian (JB) for the Newton iteration and passes it to the linear solver

Parameters

- *model* – pointer to the model instance
- *state* – current simulation state

virtual bool **is_singular**(*Model* &model, const *SimulationState* &state) const override

Checks whether linear system is singular.

Parameters

- *model* – pointer to the model instance
- *state* – current simulation state

Returns boolean indicating whether the linear system is singular (condition number < 1/machine precision)

virtual void **reinitialize**() override

Reinitialize the linear solver.

Class ReturnData

- Defined in file_include_amici_rdata.h

Inheritance Relationships

Base Type

- public amici::ModelDimensions (*Struct ModelDimensions*)

Class Documentation

class **ReturnData** : public amici::ModelDimensions

Stores all data to be returned by amici::runAmiciSimulation.

NOTE: multi-dimensional arrays are stored in row-major order (C-style)

Public Functions

ReturnData() = default

Default constructor.

ReturnData(std::vector<realtype> ts, ModelDimensions const &model_dimensions, int nplist, int nmaxevent, int nt, int newton_maxsteps, std::vector<ParameterScaling> pscale, SecondOrderMode o2mode, SensitivityOrder sensi, SensitivityMethod sensi_meth, RDataReporting rdrm, bool quadratic_llh, bool sigma_res, realtype sigma_offset)

Constructor.

Parameters

- **ts** – see amici::SimulationParameters::ts
- **model_dimensions** – Model dimensions
- **nplist** – see amici::ModelDimensions::nplist
- **nmaxevent** – see amici::ModelDimensions::nmaxevent
- **nt** – see amici::ModelDimensions::nt
- **newton_maxsteps** – see amici::Solver::newton_maxsteps
- **pscale** – see amici::SimulationParameters::pscale
- **o2mode** – see amici::SimulationParameters::o2mode
- **sensi** – see amici::Solver::sensi
- **sensi_meth** – see amici::Solver::sensi_meth
- **rdrm** – see amici::Solver::rdata_reporting
- **quadratic_llh** – whether model defines a quadratic nllh and computing res, sres and FIM makes sense
- **sigma_res** – indicates whether additional residuals are to be added for each sigma
- **sigma_offset** – offset to ensure real-valuedness of sigma residuals

ReturnData(*Solver* const &solver, const *Model* &model)

constructor that uses information from model and solver to appropriately initialize fields

Parameters

- **solver** – solver instance
- **model** – model instance

~ReturnData() = default

void **processSimulationObjects**(*SteadystateProblem* const *preeq, *ForwardProblem* const *fwd, *BackwardProblem* const *bwd, *SteadystateProblem* const *posteq, *Model* &model, *Solver* const &solver, *ExpData* const *edata)

constructor that uses information from model and solver to appropriately initialize fields

Parameters

- **preeq** – simulated preequilibration problem, pass nullptr to ignore
- **fwd** – simulated forward problem, pass nullptr to ignore
- **bwd** – simulated backward problem, pass nullptr to ignore
- **posteq** – simulated postequilibration problem, pass nullptr to ignore
- **model** – matching model instance
- **solver** – matching solver instance
- **edata** – matching experimental data

Public Members

std::string **id**

Arbitrary (not necessarily unique) identifier.

std::vector<*realtype*> **ts**

timepoints (shape nt)

std::vector<*realtype*> **xdot**

time derivative (shape nx)

std::vector<*realtype*> **J**

Jacobian of differential equation right hand side (shape nx x nx, row-major)

std::vector<*realtype*> **w**

w data from the model (recurring terms in xdot, for imported SBML models from python, this contains the flux vector) (shape nt x nw, row major)

std::vector<*realtype*> **z**

event output (shape nmaxevent x nz, row-major)

`std::vector<realtype> sigmaz`
event output sigma standard deviation (shape `nmaxevent` x `nz`, row-major)

`std::vector<realtype> sz`
parameter derivative of event output (shape `nmaxevent` x `nplist` x `nz`, row-major)

`std::vector<realtype> ssigmaz`
parameter derivative of event output standard deviation (shape `nmaxevent` x `nplist` x `nz`, row-major)

`std::vector<realtype> rz`
event trigger output (shape `nmaxevent` x `nz`, row-major)

`std::vector<realtype> srz`
parameter derivative of event trigger output (shape `nmaxevent` x `nplist` x `nz`, row-major)

`std::vector<realtype> s2rz`
second-order parameter derivative of event trigger output (shape `nmaxevent` x `nztrue` x `nplist` x `nplist`, row-major)

`std::vector<realtype> x`
state (shape `nt` x `nx`, row-major)

`std::vector<realtype> sx`
parameter derivative of state (shape `nt` x `nplist` x `nx`, row-major)

`std::vector<realtype> y`
observable (shape `nt` x `ny`, row-major)

`std::vector<realtype> sigmay`
observable standard deviation (shape `nt` x `ny`, row-major)

`std::vector<realtype> sy`
parameter derivative of observable (shape `nt` x `nplist` x `ny`, row-major)

`std::vector<realtype> ssigmay`
parameter derivative of observable standard deviation (shape `nt` x `nplist` x `ny`, row-major)

`std::vector<realtype> res`
observable (shape `nt` * `ny`, row-major)

`std::vector<realtype> sres`
parameter derivative of residual (shape `nt` * `ny` x `nplist`, row-major)

`std::vector<realtype> FIM`
fisher information matrix (shape `nplist` x `nplist`, row-major)

`std::vector<int> numsteps`
 number of integration steps forward problem (shape nt)

`std::vector<int> numstepsB`
 number of integration steps backward problem (shape nt)

`std::vector<int> numrhsevals`
 number of right hand side evaluations forward problem (shape nt)

`std::vector<int> numrhsevalsB`
 number of right hand side evaluations backward problem (shape nt)

`std::vector<int> numerrtestfails`
 number of error test failures forward problem (shape nt)

`std::vector<int> numerrtestfailsB`
 number of error test failures backward problem (shape nt)

`std::vector<int> numnonlinsolvconvfails`
 number of linear solver convergence failures forward problem (shape nt)

`std::vector<int> numnonlinsolvconvfailsB`
 number of linear solver convergence failures backward problem (shape nt)

`std::vector<int> order`
 employed order forward problem (shape nt)

`double cpu_time = 0.0`
 computation time of forward solve [ms]
 .. warning:: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

`double cpu_timeB = 0.0`
 computation time of backward solve [ms]
 .. warning:: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

`double cpu_time_total = 0.0`
 total CPU time from entering runAmiciSimulation until exiting [ms]
 .. warning:: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

`std::vector<SteadyStateStatus> preeq_status`
 flags indicating success of steady state solver (preequilibration)

double **preeq_cpu_time** = 0.0

computation time of the steady state solver [ms] (preequilibration)

.. warning:: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

double **preeq_cpu_timeB** = 0.0

computation time of the steady state solver of the backward problem [ms] (preequilibration)

.. warning:: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

std::vector<*SteadyStateStatus*> **posteq_status**

flags indicating success of steady state solver (postequilibration)

double **posteq_cpu_time** = 0.0

computation time of the steady state solver [ms] (postequilibration)

.. warning:: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

double **posteq_cpu_timeB** = 0.0

computation time of the steady state solver of the backward problem [ms] (postequilibration)

.. warning:: This tracks the CPU-time of the current process. Therefore, in a multi-threaded context, this value may be incorrect.

std::vector<int> **preeq_numsteps**

number of Newton steps for steady state problem (preequilibration) [newton, simulation, newton] (length = 3)

int **preeq_numstepsB** = 0

number of simulation steps for adjoint steady state problem (preequilibration) [== 0 if analytical solution worked, > 0 otherwise]

std::vector<int> **posteq_numsteps**

number of Newton steps for steady state problem (preequilibration) [newton, simulation, newton] (shape 3) (postequilibration)

int **posteq_numstepsB** = 0

number of simulation steps for adjoint steady state problem (postequilibration) [== 0 if analytical solution worked, > 0 otherwise]

realtype **preeq_t** = NAN

time when steadystate was reached via simulation (preequilibration)

realtype **preeq_wrms** = NAN

weighted root-mean-square of the rhs when steadystate was reached (preequilibration)

realtype **posteq_t** = NAN

time when steadystate was reached via simulation (postequilibration)

realtype **posteq_wrms** = NAN

weighted root-mean-square of the rhs when steadystate was reached (postequilibration)

std::vector<*realtype*> **x0**

initial state (shape **nx**)

std::vector<*realtype*> **x_ss**

preequilibration steady state found by Newton solver (shape **nx**)

std::vector<*realtype*> **sx0**

initial sensitivities (shape **nplist** x **nx**, row-major)

std::vector<*realtype*> **sx_ss**

preequilibration sensitivities found by Newton solver (shape **nplist** x **nx**, row-major)

realtype **llh** = 0.0

log-likelihood value

realtype **chi2** = 0.0

χ^2 value

std::vector<*realtype*> **s1lh**

parameter derivative of log-likelihood (shape **nplist**)

std::vector<*realtype*> **s21lh**

second-order parameter derivative of log-likelihood (shape **nJ-1** x **nplist**, row-major)

int **status** = *AMICI_NOT_RUN*

Simulation status code.

One of:

- *AMICI_SUCCESS*, indicating successful simulation
- *AMICI_MAX_TIME_EXCEEDED*, indicating that the simulation did not finish within the allowed time (see *Solver*.{set,get}MaxTime)
- *AMICI_ERROR*, indicating that some error occurred during simulation (a more detailed error message will have been printed).
- *AMICI_NOT_RUN*, if no simulation was started

int **nx** = {0}

number of states (alias **nx_rdata**, kept for backward compatibility)

int **nxtrue** = {0}
number of states in the unaugmented system (alias nxtrue_rdata, kept for backward compatibility)

int **nplist** = {0}
number of parameter for which sensitivities were requested

int **nmaxevent** = {0}
maximal number of occurring events (for every event type)

int **nt** = {0}
number of considered timepoints

int **newton_maxsteps** = {0}
maximal number of newton iterations for steady state calculation

std::vector<*ParameterScaling*> **pscale**
scaling of parameterization

SecondOrderMode **o2mode** = {*SecondOrderMode::none*}
flag indicating whether second-order sensitivities were requested

SensitivityOrder **sensi** = {*SensitivityOrder::none*}
sensitivity order

SensitivityMethod **sensi_meth** = {*SensitivityMethod::none*}
sensitivity method

RDataReporting **rdata_reporting** = {*RDataReporting::full*}
reporting mode

bool **sigma_res**
boolean indicating whether residuals for standard deviations have been added

std::vector<*LogItem*> **messages**
log messages

Protected Functions

void **initializeLikelihoodReporting**(bool quadratic_llh)
initializes storage for likelihood reporting mode

Parameters **quadratic_llh** – whether model defines a quadratic nllh and computing res, sres and FIM makes sense.

void **initializeResidualReporting**(bool enable_res)
initializes storage for residual reporting mode

Parameters **enable_res** – whether residuals are to be computed

void **initializeFullReporting**(bool enable_fim)
 initializes storage for full reporting mode

Parameters **enable_fim** – whether FIM Hessian approximation is to be computed

void **initializeObjectiveFunction**(bool enable_chi2)
 initialize values for chi2 and llh and derivatives

Parameters **enable_chi2** – whether chi2 values are to be computed

void **processPreEquilibration**(*SteadystateProblem* const &preeq, *Model* &model)
 extracts data from a preequilibration *SteadystateProblem*

Parameters

- **preeq** – *SteadystateProblem* for preequilibration
- **model** – *Model* instance to compute return values

void **processPostEquilibration**(*SteadystateProblem* const &posteq, *Model* &model, *ExpData* const *edata)
 extracts data from a preequilibration *SteadystateProblem*

Parameters

- **posteq** – *SteadystateProblem* for postequilibration
- **model** – *Model* instance to compute return values
- **edata** – *ExpData* instance containing observable data

void **processForwardProblem**(*ForwardProblem* const &fwd, *Model* &model, *ExpData* const *edata)
 extracts results from forward problem

Parameters

- **fwd** – forward problem
- **model** – model that was used for forward simulation
- **edata** – *ExpData* instance containing observable data

void **processBackwardProblem**(*ForwardProblem* const &fwd, *BackwardProblem* const &bwd, *SteadystateProblem* const *preeq, *Model* &model)
 extracts results from backward problem

Parameters

- **fwd** – forward problem
- **bwd** – backward problem
- **preeq** – *SteadystateProblem* for preequilibration
- **model** – model that was used for forward/backward simulation

void **processSolver**(*Solver* const &solver)
 extracts results from solver

Parameters **solver** – solver that was used for forward/backward simulation

template<class T>

inline void **storeJacobianAndDerivativeInReturnData**(*T* const &problem, *Model* &model)

Evaluates and stores the Jacobian and right hand side at final timepoint.

Parameters

- **problem** – forward problem or steadystate problem
- **model** – model that was used for forward/backward simulation

void **readSimulationState**(*SimulationState* const &state, *Model* &model)

sets member variables and model state according to provided simulation state

Parameters

- **state** – simulation state provided by Problem
- **model** – model that was used for forward/backward simulation

void **fres**(int it, *Model* &model, const *ExpData* &edata)

Residual function.

Parameters

- **it** – time index
- **model** – model that was used for forward/backward simulation
- **edata** – *ExpData* instance containing observable data

void **fchi2**(int it, const *ExpData* &edata)

Chi-squared function.

Parameters

- **it** – time index
- **edata** – *ExpData* instance containing observable data

void **fsres**(int it, *Model* &model, const *ExpData* &edata)

Residual sensitivity function.

Parameters

- **it** – time index
- **model** – model that was used for forward/backward simulation
- **edata** – *ExpData* instance containing observable data

void **ffim**(int it, *Model* &model, const *ExpData* &edata)

Fisher information matrix function.

Parameters

- **it** – time index
- **model** – model that was used for forward/backward simulation
- **edata** – *ExpData* instance containing observable data

void **invalidate**(int it_start)

Set likelihood, state variables, outputs and respective sensitivities to NaN (typically after integration failure)

Parameters **it_start** – time index at which to start invalidating

void **invalidateLLH**()

Set likelihood and chi2 to NaN (typically after integration failure)

void **invalidateSLLH**()

Set likelihood sensitivities to NaN (typically after integration failure)

void **applyChainRuleFactorToSimulationResults**(const *Model* &model)

applies the chain rule to account for parameter transformation in the sensitivities of simulation results

Parameters **model** – *Model* from which the *ReturnData* was obtained

inline bool **computingFSA**() const

Checks whether forward sensitivity analysis is performed.

Returns boolean indicator

void **getDataOutput**(int it, *Model* &model, *ExpData* const *edata)

Extracts output information for data-points, expects that x_solver_ and sx_solver_ were set appropriately.

Parameters

- **it** – timepoint index
- **model** – model that was used in forward solve
- **edata** – *ExpData* instance carrying experimental data

void **getDataSensisFSA**(int it, *Model* &model, *ExpData* const *edata)

Extracts data information for forward sensitivity analysis, expects that x_solver_ and sx_solver_ were set appropriately.

Parameters

- **it** – index of current timepoint
- **model** – model that was used in forward solve
- **edata** – *ExpData* instance carrying experimental data

void **getEventOutput**(*realtype* t, const std::vector<int> rootidx, *Model* &model, *ExpData* const *edata)

Extracts output information for events, expects that x_solver_ and sx_solver_ were set appropriately.

Parameters

- **t** – event timepoint
- **rootidx** – information about which roots fired (1 indicating fired, 0/-1 for not)
- **model** – model that was used in forward solve
- **edata** – *ExpData* instance carrying experimental data

void **getEventSensisFSA**(int ie, *realtype* t, *Model* &model, *ExpData* const *edata)

Extracts event information for forward sensitivity analysis, expects that x_solver_ and sx_solver_ were set appropriately.

Parameters

- **ie** – index of event type
- **t** – event timepoint
- **model** – model that was used in forward solve
- **edata** – *ExpData* instance carrying experimental data

```
void handleSx0Backward(const Model &model, SteadystateProblem const &preeq, std::vector<realtype> &llhS0, AmiVector &xQB) const
```

Updates contribution to likelihood from quadratures (xQB), if preequilibration was run in adjoint mode.

Parameters

- **model** – model that was used for forward/backward simulation
- **preeq** – *SteadystateProblem* for preequilibration
- **llhS0** – contribution to likelihood for initial state sensitivities of preequilibration
- **xQB** – vector with quadratures from adjoint computation

```
void handleSx0Forward(const Model &model, std::vector<realtype> &llhS0, AmiVector &xB) const
```

Updates contribution to likelihood for initial state sensitivities (llhS0), if no preequilibration was run or if forward sensitivities were used.

Parameters

- **model** – model that was used for forward/backward simulation
- **llhS0** – contribution to likelihood for initial state sensitivities
- **xB** – vector with final adjoint state (excluding conservation laws)

Protected Attributes

realtype **sigma_offset**

offset for sigma_residuals

realtype **t_**

timepoint for model evaluation

AmiVector **x_solver_**

partial state vector, excluding states eliminated from conservation laws

AmiVector **dx_solver_**

partial time derivative of state vector, excluding states eliminated from conservation laws

AmiVectorArray **sx_solver_**

partial sensitivity state vector array, excluding states eliminated from conservation laws

AmiVector **x_rdata_**

full state vector, including states eliminated from conservation laws

AmiVectorArray **sx_rdata_**

full sensitivity state vector array, including states eliminated from conservation laws

std::vector<int> **nroots_**

array of number of found roots for a certain event type (shape ne)

Friends

```
template<class Archive>
friend void serialize(Archive &ar, ReturnData &r, unsigned int version)
    Serialize ReturnData (see boost::serialization::serialize)
```

Parameters

- **ar** – Archive to serialize to
- **r** – Data to serialize
- **version** – Version number

Class SetupFailure

- Defined in file_include_amici_exception.h

Inheritance Relationships

Base Type

- public amici::AmiException (*Class AmiException*)

Class Documentation

class **SetupFailure** : public amici::AmiException

Setup failure exception.

This exception should be thrown when the solver setup failed for this exception we can assume that we cannot recover from the exception and an error will be thrown

Public Functions

explicit **SetupFailure**(char const *fmt, ...)

Constructor with printf style interface.

Parameters

- **fmt** – error message with printf format
- ... – printf formatting variables

Class SimulationParameters

- Defined in file_include_amici_simulation_parameters.h

Inheritance Relationships

Derived Type

- public amici::ExpData (*Class ExpData*)

Class Documentation

class **SimulationParameters**

Container for various simulation parameters.

Subclassed by *amici::ExpData*

Public Functions

SimulationParameters() = default

inline explicit **SimulationParameters**(std::vector<*realtype*> timepoints)

Constructor.

Parameters **timepoints** – Timepoints for which simulation results are requested

inline **SimulationParameters**(std::vector<*realtype*> fixedParameters, std::vector<*realtype*> parameters)

Constructor.

Parameters

- **fixedParameters** – *Model* constants
- **parameters** – *Model* parameters

inline **SimulationParameters**(std::vector<*realtype*> fixedParameters, std::vector<*realtype*> parameters, std::vector<int> plist)

Constructor.

Parameters

- **fixedParameters** – *Model* constants
- **parameters** – *Model* parameters
- **plist** – *Model* parameter indices w.r.t. which sensitivities are to be computed

inline **SimulationParameters**(std::vector<*realtype*> timepoints, std::vector<*realtype*> fixedParameters, std::vector<*realtype*> parameters)

Constructor.

Parameters

- **timepoints** – Timepoints for which simulation results are requested
- **fixedParameters** – *Model* constants

- **parameters** – *Model* parameters

void **reinitializeAllFixedParameterDependentInitialStatesForPresimulation**(int nx_rdata)

Set reinitialization of all states based on model constants for presimulation (only meaningful if preequilibration is performed).

Convenience function to populate `reinitialization_state_idxes_presim` and `reinitialization_state_idxes_sim`

Parameters `nx_rdata` – Number of states (*Model::nx_rdata*)

void **reinitializeAllFixedParameterDependentInitialStatesForSimulation**(int nx_rdata)

Set reinitialization of all states based on model constants for the ‘main’ simulation (only meaningful if presimulation or preequilibration is performed).

Convenience function to populate `reinitialization_state_idxes_presim` and `reinitialization_state_idxes_sim`

Parameters `nx_rdata` – Number of states (*Model::nx_rdata*)

void **reinitializeAllFixedParameterDependentInitialStates**(int nx_rdata)

Set reinitialization of all states based on model constants for all simulation phases.

Convenience function to populate `reinitialization_state_idxes_presim` and `reinitialization_state_idxes_sim`

Parameters `nx_rdata` – Number of states (*Model::nx_rdata*)

Public Members

std::vector<*realtype*> **fixedParameters**

Model constants.

Vector of size *Model::nk()* or empty

std::vector<*realtype*> **fixedParametersPreequilibration**

Model constants for pre-equilibration.

Vector of size *Model::nk()* or empty.

std::vector<*realtype*> **fixedParametersPresimulation**

Model constants for pre-simulation.

Vector of size *Model::nk()* or empty.

std::vector<*realtype*> **parameters**

Model parameters.

Vector of size *Model::np()* or empty with parameter scaled according to `SimulationParameter::pscale`.

std::vector<*realtype*> **x0**

Initial state.

Vector of size *Model::nx()* or empty

`std::vector<realtype> sx0`

Initial state sensitivities.

Dimensions: `Model::nx() * Model::nplist()`, `Model::nx() * ExpData::plist.size()`, if `ExpData::plist` is not empty, or empty

`std::vector<ParameterScaling> pscale`

Parameter scales.

Vector of parameter scale of size `Model::np()`, indicating how/if each parameter is to be scaled.

`std::vector<int> plist`

Parameter indices w.r.t. which to compute sensitivities.

`realtype tstart_ = {0.0}`

starting time

`realtype t_presim = {0.0}`

Duration of pre-simulation.

If this is > 0 , presimulation will be performed from $(\text{model} \rightarrow t_0 - t_{\text{presim}})$ to $\text{model} \rightarrow t_0$ using the fixed-Parameters in `fixedParametersPresimulation`

`std::vector<realtype> ts_`

Timepoints for which model state/outputs/... are requested.

Vector of timepoints.

`bool reinitializeFixedParameterInitialStates = {false}`

Flag indicating whether reinitialization of states depending on fixed parameters is activated.

`std::vector<int> reinitialization_state_idxes_presim`

Indices of states to be reinitialized based on provided presimulation constants / fixed parameters.

`std::vector<int> reinitialization_state_idxes_sim`

Indices of states to be reinitialized based on provided constants / fixed parameters.

Class Solver

- Defined in `file_include_amici_solver.h`

Inheritance Relationships

Derived Types

- `public amici::CVodeSolver` (*Class CVodeSolver*)
- `public amici::IDASolver` (*Class IDASolver*)

Class Documentation

class `Solver`

The *Solver* class provides a generic interface to CVODES and IDAS solvers, individual realizations are realized in the *CVodeSolver* and the *IDASolver* class. All transient private/protected members (CVODES/IDAS memory, interface variables and status flags) are specified as mutable and not included in serialization or equality checks. No solver setting parameter should be marked mutable.

NOTE: Any changes in data members here must be propagated to copy ctor, equality operator, serialization functions in `serialization.h`, and `amici::hdf5::(read/write)SolverSettings(From/To)HDF5` in `hdf5.cpp`.

Subclassed by *amici::CVodeSolver*, *amici::IDASolver*

Public Types

using `user_data_type` = `std::pair<Model*, Solver const*>`

Type of what is passed to Sundials solvers as `user_data`

Public Functions

`Solver()` = default

Default constructor.

`Solver(const Solver &other)`

Solver copy constructor.

Parameters `other` –

virtual `~Solver()` = default

virtual `Solver *clone()` const = 0

Clone this instance.

Returns The clone

int `run(realtype tout)` const

runs a forward simulation until the specified timepoint

Parameters `tout` – next timepoint

Returns status flag

int **step**(*realtype* tout) const

makes a single step in the simulation

Parameters tout – next timepoint

Returns status flag

void **runB**(*realtype* tout) const

runs a backward simulation until the specified timepoint

Parameters tout – next timepoint

void **setup**(*realtype* t0, *Model* *model, const *AmiVector* &x0, const *AmiVector* &dx0, const *AmiVectorArray* &sx0, const *AmiVectorArray* &sdx0) const

Initializes the ami memory object and applies specified options.

Parameters

- **t0** – initial timepoint
- **model** – pointer to the model instance
- **x0** – initial states
- **dx0** – initial derivative states
- **sx0** – initial state sensitivities
- **sdx0** – initial derivative state sensitivities

void **setupB**(int *which, *realtype* tf, *Model* *model, const *AmiVector* &xB0, const *AmiVector* &dxB0, const *AmiVector* &xQB0) const

Initializes the AMI memory object for the backwards problem.

Parameters

- **which** – index of the backward problem, will be set by this routine
- **tf** – final timepoint (initial timepoint for the bwd problem)
- **model** – pointer to the model instance
- **xB0** – initial adjoint states
- **dxB0** – initial adjoint derivative states
- **xQB0** – initial adjoint quadratures

void **setupSteadystate**(const *realtype* t0, *Model* *model, const *AmiVector* &x0, const *AmiVector* &dx0, const *AmiVector* &xB0, const *AmiVector* &dxB0, const *AmiVector* &xQ0) const

Initializes the ami memory for quadrature computation.

Parameters

- **t0** – initial timepoint
- **model** – pointer to the model instance
- **x0** – initial states
- **dx0** – initial derivative states
- **xB0** – initial adjoint states
- **dxB0** – initial derivative adjoint states
- **xQ0** – initial quadrature vector

void **updateAndReinitStatesAndSensitivities**(*Model* *model) const

Reinitializes state and respective sensitivities (if necessary) according to changes in fixedParameters.

Parameters *model* – pointer to the model instance

virtual void **getRootInfo**(int *rootsfound) const = 0

getRootInfo extracts information which event occurred

Parameters *rootsfound* – array with flags indicating whether the respective event occurred

virtual void **calcIC**(*realtype* tout1) const = 0

Calculates consistent initial conditions, assumes initial states to be correct (DAE only)

Parameters *tout1* – next timepoint to be computed (sets timescale)

virtual void **calcICB**(int which, *realtype* tout1) const = 0

Calculates consistent initial conditions for the backwards problem, assumes initial states to be correct (DAE only)

Parameters

- **which** – identifier of the backwards problem
- **tout1** – next timepoint to be computed (sets timescale)

virtual void **solveB**(*realtype* tBout, int itaskB) const = 0

Solves the backward problem until a predefined timepoint (adjoint only)

Parameters

- **tBout** – timepoint until which simulation should be performed
- **itaskB** – task identifier, can be CV_NORMAL or CV_ONE_STEP

virtual void **turnOffRootFinding**() const = 0

Disable rootfinding.

SensitivityMethod **getSensitivityMethod**() const

Return current sensitivity method.

Returns method enum

void **setSensitivityMethod**(*SensitivityMethod* sensi_meth)

Set sensitivity method.

Parameters *sensi_meth* –

SensitivityMethod **getSensitivityMethodPreequilibration**() const

Return current sensitivity method during preequilibration.

Returns method enum

void **setSensitivityMethodPreequilibration**(*SensitivityMethod* sensi_meth_preeq)

Set sensitivity method for preequilibration.

Parameters *sensi_meth_preeq* –

void **switchForwardSensisOff**() const

Disable forward sensitivity integration (used in steady state sim)

int **getNewtonMaxSteps**() const

Get maximum number of allowed Newton steps for steady state computation.

Returns

void **setNewtonMaxSteps**(int newton_maxsteps)

Set maximum number of allowed Newton steps for steady state computation.

Parameters **newton_maxsteps** –

NewtonDampingFactorMode **getNewtonDampingFactorMode**() const

Get a state of the damping factor used in the Newton solver.

Returns

void **setNewtonDampingFactorMode**(*NewtonDampingFactorMode* dampingFactorMode)

Turn on/off a damping factor in the Newton method.

Parameters **dampingFactorMode** –

double **getNewtonDampingFactorLowerBound**() const

Get a lower bound of the damping factor used in the Newton solver.

Returns

void **setNewtonDampingFactorLowerBound**(double dampingFactorLowerBound)

Set a lower bound of the damping factor in the Newton solver.

Parameters **dampingFactorLowerBound** –

SensitivityOrder **getSensitivityOrder**() const

Get sensitivity order.

Returns sensitivity order

void **setSensitivityOrder**(*SensitivityOrder* sensi)

Set the sensitivity order.

Parameters **sensi** – sensitivity order

double **getRelativeTolerance**() const

Get the relative tolerances for the forward problem.

Same tolerance is used for the backward problem if not specified differently via setRelativeToleranceASA.

Returns relative tolerances

void **setRelativeTolerance**(double rtol)

Sets the relative tolerances for the forward problem.

Same tolerance is used for the backward problem if not specified differently via setRelativeToleranceASA.

Parameters **rtol** – relative tolerance (non-negative number)

double **getAbsoluteTolerance**() const

Get the absolute tolerances for the forward problem.

Same tolerance is used for the backward problem if not specified differently via setAbsoluteToleranceASA.

Returns absolute tolerances

void **setAbsoluteTolerance**(double atol)

Sets the absolute tolerances for the forward problem.

Same tolerance is used for the backward problem if not specified differently via setAbsoluteToleranceASA.

Parameters **atol** – absolute tolerance (non-negative number)

double **getRelativeToleranceFSA**() const
 Returns the relative tolerances for the forward sensitivity problem.
Returns relative tolerances

void **setRelativeToleranceFSA**(double rtol)
 Sets the relative tolerances for the forward sensitivity problem.
Parameters **rtol** – relative tolerance (non-negative number)

double **getAbsoluteToleranceFSA**() const
 Returns the absolute tolerances for the forward sensitivity problem.
Returns absolute tolerances

void **setAbsoluteToleranceFSA**(double atol)
 Sets the absolute tolerances for the forward sensitivity problem.
Parameters **atol** – absolute tolerance (non-negative number)

double **getRelativeToleranceB**() const
 Returns the relative tolerances for the adjoint sensitivity problem.
Returns relative tolerances

void **setRelativeToleranceB**(double rtol)
 Sets the relative tolerances for the adjoint sensitivity problem.
Parameters **rtol** – relative tolerance (non-negative number)

double **getAbsoluteToleranceB**() const
 Returns the absolute tolerances for the backward problem for adjoint sensitivity analysis.
Returns absolute tolerances

void **setAbsoluteToleranceB**(double atol)
 Sets the absolute tolerances for the backward problem for adjoint sensitivity analysis.
Parameters **atol** – absolute tolerance (non-negative number)

double **getRelativeToleranceQuadratures**() const
 Returns the relative tolerance for the quadrature problem.
Returns relative tolerance

void **setRelativeToleranceQuadratures**(double rtol)
 sets the relative tolerance for the quadrature problem
Parameters **rtol** – relative tolerance (non-negative number)

double **getAbsoluteToleranceQuadratures**() const
 returns the absolute tolerance for the quadrature problem
Returns absolute tolerance

void **setAbsoluteToleranceQuadratures**(double atol)
 sets the absolute tolerance for the quadrature problem
Parameters **atol** – absolute tolerance (non-negative number)

double **getSteadyStateToleranceFactor()** const

returns the steady state simulation tolerance factor.

Steady state simulation tolerances are the product of the simulation tolerances and this factor, unless manually set with `set(Absolute/Relative)ToleranceSteadyState()`.

Returns steady state simulation tolerance factor

void **setSteadyStateToleranceFactor**(double factor)

set the steady state simulation tolerance factor.

Steady state simulation tolerances are the product of the simulation tolerances and this factor, unless manually set with `set(Absolute/Relative)ToleranceSteadyState()`.

Parameters **factor** – tolerance factor (non-negative number)

double **getRelativeToleranceSteadyState()** const

returns the relative tolerance for the steady state problem

Returns relative tolerance

void **setRelativeToleranceSteadyState**(double rtol)

sets the relative tolerance for the steady state problem

Parameters **rtol** – relative tolerance (non-negative number)

double **getAbsoluteToleranceSteadyState()** const

returns the absolute tolerance for the steady state problem

Returns absolute tolerance

void **setAbsoluteToleranceSteadyState**(double atol)

sets the absolute tolerance for the steady state problem

Parameters **atol** – absolute tolerance (non-negative number)

double **getSteadyStateSensiToleranceFactor()** const

returns the steady state sensitivity simulation tolerance factor.

Steady state sensitivity simulation tolerances are the product of the sensitivity simulation tolerances and this factor, unless manually set with `set(Absolute/Relative)ToleranceSteadyStateSensi()`.

Returns steady state simulation tolerance factor

void **setSteadyStateSensiToleranceFactor**(double factor)

set the steady state sensitivity simulation tolerance factor.

Steady state sensitivity simulation tolerances are the product of the sensitivity simulation tolerances and this factor, unless manually set with `set(Absolute/Relative)ToleranceSteadyStateSensi()`.

Parameters **factor** – tolerance factor (non-negative number)

double **getRelativeToleranceSteadyStateSensi()** const

returns the relative tolerance for the sensitivities of the steady state problem

Returns relative tolerance

void **setRelativeToleranceSteadyStateSensi**(double rtol)

sets the relative tolerance for the sensitivities of the steady state problem

Parameters **rtol** – relative tolerance (non-negative number)

double **getAbsoluteToleranceSteadyStateSensi()** const
 returns the absolute tolerance for the sensitivities of the steady state problem
Returns absolute tolerance

void **setAbsoluteToleranceSteadyStateSensi**(double atol)
 sets the absolute tolerance for the sensitivities of the steady state problem
Parameters **atol** – absolute tolerance (non-negative number)

long int **getMaxSteps()** const
 returns the maximum number of solver steps for the forward problem
Returns maximum number of solver steps

void **setMaxSteps**(long int maxsteps)
 sets the maximum number of solver steps for the forward problem
Parameters **maxsteps** – maximum number of solver steps (positive number)

double **getMaxTime()** const
 Returns the maximum time allowed for integration.
Returns Time in seconds

void **setMaxTime**(double maxtime)
 Set the maximum CPU time allowed for integration.
Parameters **maxtime** – Time in seconds. Zero means infinite time.

void **startTimer()** const
 Start timer for tracking integration time.

bool **timeExceeded**(int interval = 1) const
 Check whether maximum integration time was exceeded.
Parameters **interval** – Only check the time every **interval** ths call to avoid potentially relatively expensive syscalls
Returns True if the maximum integration time was exceeded, false otherwise.

long int **getMaxStepsBackwardProblem()** const
 returns the maximum number of solver steps for the backward problem
Returns maximum number of solver steps

void **setMaxStepsBackwardProblem**(long int maxsteps)
 sets the maximum number of solver steps for the backward problem

Note: default behaviour (100 times the value for the forward problem) can be restored by passing maxsteps=0

Parameters **maxsteps** – maximum number of solver steps (non-negative number)

LinearMultistepMethod **getLinearMultistepMethod()** const
 returns the linear system multistep method
Returns linear system multistep method

void **setLinearMultistepMethod**(*LinearMultistepMethod* lmm)

sets the linear system multistep method

Parameters **lmm** – linear system multistep method

NonlinearSolverIteration **getNonlinearSolverIteration**() const

returns the nonlinear system solution method

Returns

void **setNonlinearSolverIteration**(*NonlinearSolverIteration* iter)

sets the nonlinear system solution method

Parameters **iter** – nonlinear system solution method

InterpolationType **getInterpolationType**() const

getInterpolationType

Returns

void **setInterpolationType**(*InterpolationType* interpType)

sets the interpolation of the forward solution that is used for the backwards problem

Parameters **interpType** – interpolation type

int **getStateOrdering**() const

Gets KLU / SuperLUMT state ordering mode.

Returns State-ordering as integer according to *SUNLinSolKLU::StateOrdering* or *SUNLinSol-SuperLUMT::StateOrdering* (which differ).

void **setStateOrdering**(int ordering)

Sets KLU / SuperLUMT state ordering mode.

This only applies when linsol is set to *LinearSolver::KLU* or *LinearSolver::SuperLUMT*. Mind the difference between *SUNLinSolKLU::StateOrdering* and *SUNLinSolSuperLUMT::StateOrdering*.

Parameters **ordering** – state ordering

bool **getStabilityLimitFlag**() const

returns stability limit detection mode

Returns stldet can be false (deactivated) or true (activated)

void **setStabilityLimitFlag**(bool stldet)

set stability limit detection mode

Parameters **stldet** – can be false (deactivated) or true (activated)

LinearSolver **getLinearSolver**() const

getLinearSolver

Returns

void **setLinearSolver**(*LinearSolver* linsol)

setLinearSolver

Parameters **linsol** –

InternalSensitivityMethod **getInternalSensitivityMethod**() const

returns the internal sensitivity method

Returns internal sensitivity method

void **setInternalSensitivityMethod**(*InternalSensitivityMethod* ism)

sets the internal sensitivity method

Parameters **ism** – internal sensitivity method

RDataReporting **getReturnDataReportingMode**() const

returns the *ReturnData* reporting mode

Returns *ReturnData* reporting mode

void **setReturnDataReportingMode**(*RDataReporting* rdrm)

sets the *ReturnData* reporting mode

Parameters **rdrm** – *ReturnData* reporting mode

void **writeSolution**(*realtype* *t, *AmiVector* &x, *AmiVector* &dx, *AmiVectorArray* &sx, *AmiVector* &xQ)
const

write solution from forward simulation

Parameters

- **t** – time
- **x** – state
- **dx** – derivative state
- **sx** – state sensitivity
- **xQ** – quadrature

void **writeSolutionB**(*realtype* *t, *AmiVector* &xB, *AmiVector* &dxB, *AmiVector* &xQB, int which) const
write solution from backward simulation

Parameters

- **t** – time
- **xB** – adjoint state
- **dxB** – adjoint derivative state
- **xQB** – adjoint quadrature
- **which** – index of adjoint problem

const *AmiVector* &**getState**(*realtype* t) const

Access state solution at time t.

Parameters **t** – time

Returns x or interpolated solution dky

const *AmiVector* &**getDerivativeState**(*realtype* t) const

Access derivative state solution at time t.

Parameters **t** – time

Returns dx or interpolated solution dky

const *AmiVectorArray* &**getStateSensitivity**(*realtype* t) const

Access state sensitivity solution at time t.

Parameters **t** – time

Returns (interpolated) solution sx

const *AmiVector* &getAdjointState(int which, *realtype* t) const

Access adjoint solution at time t.

Parameters

- **which** – adjoint problem index
- **t** – time

Returns (interpolated) solution xB

const *AmiVector* &getAdjointDerivativeState(int which, *realtype* t) const

Access adjoint derivative solution at time t.

Parameters

- **which** – adjoint problem index
- **t** – time

Returns (interpolated) solution dxB

const *AmiVector* &getAdjointQuadrature(int which, *realtype* t) const

Access adjoint quadrature solution at time t.

Parameters

- **which** – adjoint problem index
- **t** – time

Returns (interpolated) solution xQB

const *AmiVector* &getQuadrature(*realtype* t) const

Access quadrature solution at time t.

Parameters **t** – time

Returns (interpolated) solution xQ

virtual void reInit(*realtype* t0, const *AmiVector* &yy0, const *AmiVector* &yp0) const = 0

Reinitializes the states in the solver after an event occurrence.

Parameters

- **t0** – reinitialization timepoint
- **yy0** – initial state variables
- **yp0** – initial derivative state variables (DAE only)

virtual void sensReInit(const *AmiVectorArray* &yyS0, const *AmiVectorArray* &ypS0) const = 0

Reinitializes the state sensitivities in the solver after an event occurrence.

Parameters

- **yyS0** – new state sensitivity
- **ypS0** – new derivative state sensitivities (DAE only)

virtual void sensToggleOff() const = 0

Switches off computation of state sensitivities without deallocating the memory for sensitivities.

virtual void **reInitB**(int which, *realtype* tB0, const *AmiVector* &yyB0, const *AmiVector* &ypB0) const = 0

Reinitializes the adjoint states after an event occurrence.

Parameters

- **which** – identifier of the backwards problem
- **tB0** – reinitialization timepoint
- **yyB0** – new adjoint state
- **ypB0** – new adjoint derivative state

virtual void **quadReInitB**(int which, const *AmiVector* &yQB0) const = 0

Reinitialize the adjoint states after an event occurrence.

Parameters

- **which** – identifier of the backwards problem
- **yQB0** – new adjoint quadrature state

realtype **gett**() const

current solver timepoint

Returns t

realtype **getCpuTime**() const

Reads out the CPU time needed for forward solve.

Returns cpu_time

realtype **getCpuTimeB**() const

Reads out the CPU time needed for backward solve.

Returns cpu_timeB

int **nx**() const

number of states with which the solver was initialized

Returns x.getLength()

int **nplist**() const

number of parameters with which the solver was initialized

Returns sx.getLength()

int **nquad**() const

number of quadratures with which the solver was initialized

Returns xQB.getLength()

inline bool **computingFSA**() const

check if FSA is being computed

Returns flag

inline bool **computingASA**() const

check if ASA is being computed

Returns flag

void **resetDiagnosis**() const

Resets vectors containing diagnosis information.

void **storeDiagnosis()** const

Stores diagnosis information from solver memory block for forward problem.

void **storeDiagnosisB**(int which) const

Stores diagnosis information from solver memory block for backward problem.

Parameters **which** – identifier of the backwards problem

inline std::vector<int> const &**getNumSteps()** const

Accessor ns.

Returns ns

inline std::vector<int> const &**getNumStepsB()** const

Accessor nsB.

Returns nsB

inline std::vector<int> const &**getNumRhsEvals()** const

Accessor nrhs.

Returns nrhs

inline std::vector<int> const &**getNumRhsEvalsB()** const

Accessor nrhsB.

Returns nrhsB

inline std::vector<int> const &**getNumErrTestFails()** const

Accessor netf.

Returns netf

inline std::vector<int> const &**getNumErrTestFailsB()** const

Accessor netfB.

Returns netfB

inline std::vector<int> const &**getNumNonlinSolvConvFails()** const

Accessor nnlscf.

Returns nnlscf

inline std::vector<int> const &**getNumNonlinSolvConvFailsB()** const

Accessor nnlscfB.

Returns nnlscfB

inline std::vector<int> const &**getLastOrder()** const

Accessor order.

Returns order

inline bool **getNewtonStepSteadyStateCheck()** const

Returns how convergence checks for steadystate computation are performed. If activated, convergence checks are limited to every 25 steps in the simulation solver to limit performance impact.

Returns boolean flag indicating newton step (true) or the right hand side (false)

inline bool **getSensiSteadyStateCheck()** const

Returns how convergence checks for steadystate computation are performed.

Returns boolean flag indicating state and sensitivity equations (true) or only state variables (false).

inline void **setNewtonStepSteadyStateCheck**(bool flag)

Sets how convergence checks for steadystate computation are performed.

Parameters flag – boolean flag to pick newton step (true) or the right hand side (false, default)

inline void **setSensiSteadyStateCheck**(bool flag)

Sets for which variables convergence checks for steadystate computation are performed.

Parameters flag – boolean flag to pick state and sensitivity equations (true, default) or only state variables (false).

Public Members

Logger ***logger** = nullptr

logger

Protected Functions

virtual void **setStopTime**(*realtype* tstop) const = 0

Sets a timepoint at which the simulation will be stopped.

Parameters tstop – timepoint until which simulation should be performed

virtual int **solve**(*realtype* tout, int itask) const = 0

Solves the forward problem until a predefined timepoint.

Parameters

- **tout** – timepoint until which simulation should be performed
- **itask** – task identifier, can be CV_NORMAL or CV_ONE_STEP

Returns status flag indicating success of execution

virtual int **solveF**(*realtype* tout, int itask, int *ncheckPtr) const = 0

Solves the forward problem until a predefined timepoint (adjoint only)

Parameters

- **tout** – timepoint until which simulation should be performed
- **itask** – task identifier, can be CV_NORMAL or CV_ONE_STEP
- **ncheckPtr** – pointer to a number that counts the internal checkpoints

Returns status flag indicating success of execution

virtual void **reInitPostProcessF**(*realtype* tnext) const = 0

reInitPostProcessF postprocessing of the solver memory after a discontinuity in the forward problem

Parameters tnext – next timepoint (defines integration direction)

virtual void **reInitPostProcessB**(*realtype* tnext) const = 0

reInitPostProcessB postprocessing of the solver memory after a discontinuity in the backward problem

Parameters **tnext** – next timepoint (defines integration direction)

virtual void **getSens**() const = 0

extracts the state sensitivity at the current timepoint from solver memory and writes it to the sx member variable

virtual void **getB**(int which) const = 0

extracts the adjoint state at the current timepoint from solver memory and writes it to the xB member variable

Parameters **which** – index of the backwards problem

virtual void **getQuadB**(int which) const = 0

extracts the adjoint quadrature state at the current timepoint from solver memory and writes it to the xQB member variable

Parameters **which** – index of the backwards problem

virtual void **getQuad**(*realtype* &t) const = 0

extracts the quadrature at the current timepoint from solver memory and writes it to the xQ member variable

Parameters **t** – timepoint for quadrature extraction

virtual void **init**(*realtype* t0, const *AmiVector* &x0, const *AmiVector* &dx0) const = 0

Initializes the states at the specified initial timepoint.

Parameters

- **t0** – initial timepoint
- **x0** – initial states
- **dx0** – initial derivative states

virtual void **initSteadystate**(*realtype* t0, const *AmiVector* &x0, const *AmiVector* &dx0) const = 0

Initializes the states at the specified initial timepoint.

Parameters

- **t0** – initial timepoint
- **x0** – initial states
- **dx0** – initial derivative states

virtual void **sensInit1**(const *AmiVectorArray* &sx0, const *AmiVectorArray* &sdx0) const = 0

Initializes the forward sensitivities.

Parameters

- **sx0** – initial states sensitivities
- **sdx0** – initial derivative states sensitivities

virtual void **binit**(int which, *realtype* tf, const *AmiVector* &xB0, const *AmiVector* &dxB0) const = 0

Initialize the adjoint states at the specified final timepoint.

Parameters

- **which** – identifier of the backwards problem
- **tf** – final timepoint

- **xB0** – initial adjoint state
- **dxB0** – initial adjoint derivative state

virtual void **qbinit**(int which, const *AmiVector* &xQB0) const = 0

Initialize the quadrature states at the specified final timepoint.

Parameters

- **which** – identifier of the backwards problem
- **xQB0** – initial adjoint quadrature state

virtual void **rootInit**(int ne) const = 0

Initializes the rootfinding for events.

Parameters **ne** – number of different events

void **initializeNonLinearSolverSens**(const *Model* *model) const

Initialize non-linear solver for sensitivities.

Parameters **model** – *Model* instance

virtual void **setDenseJacFn**() const = 0

Set the dense Jacobian function.

virtual void **setSparseJacFn**() const = 0

sets the sparse Jacobian function

virtual void **setBandJacFn**() const = 0

sets the banded Jacobian function

virtual void **setJacTimesVecFn**() const = 0

sets the Jacobian vector multiplication function

virtual void **setDenseJacFnB**(int which) const = 0

sets the dense Jacobian function

Parameters **which** – identifier of the backwards problem

virtual void **setSparseJacFnB**(int which) const = 0

sets the sparse Jacobian function

Parameters **which** – identifier of the backwards problem

virtual void **setBandJacFnB**(int which) const = 0

sets the banded Jacobian function

Parameters **which** – identifier of the backwards problem

virtual void **setJacTimesVecFnB**(int which) const = 0

sets the Jacobian vector multiplication function

Parameters **which** – identifier of the backwards problem

virtual void **setSparseJacFn_ss**() const = 0

sets the sparse Jacobian function for backward steady state case

virtual void **allocateSolver**() const = 0

Create specifies solver method and initializes solver memory for the forward problem.

virtual void **setSStolerances**(double rtol, double atol) const = 0

sets scalar relative and absolute tolerances for the forward problem

Parameters

- **rtol** – relative tolerances
- **atol** – absolute tolerances

virtual void **setSensSStolerances**(double rtol, const double *atol) const = 0

activates sets scalar relative and absolute tolerances for the sensitivity variables

Parameters

- **rtol** – relative tolerances
- **atol** – array of absolute tolerances for every sensitivity variable

virtual void **setSensErrCon**(bool error_corr) const = 0

SetSensErrCon specifies whether error control is also enforced for sensitivities for the forward problem

Parameters **error_corr** – activation flag

virtual void **setQuadErrConB**(int which, bool flag) const = 0

Specifies whether error control is also enforced for the backward quadrature problem.

Parameters

- **which** – identifier of the backwards problem
- **flag** – activation flag

virtual void **setQuadErrCon**(bool flag) const = 0

Specifies whether error control is also enforced for the forward quadrature problem.

Parameters **flag** – activation flag

virtual void **setErrHandlerFn**() const = 0

Attaches the error handler function (errMsgIdAndTxt) to the solver.

virtual void **setUserData**() const = 0

Attaches the user data to the forward problem.

virtual void **setUserDataB**(int which) const = 0

attaches the user data to the backward problem

Parameters **which** – identifier of the backwards problem

virtual void **setMaxNumSteps**(long int mxsteps) const = 0

specifies the maximum number of steps for the forward problem

Note: in contrast to the SUNDIALS method, this sets the overall maximum, not the maximum between output times.

Parameters **mxsteps** – number of steps

virtual void **setMaxNumStepsB**(int which, long int mxstepsB) const = 0
 specifies the maximum number of steps for the forward problem

Note: in contrast to the SUNDIALS method, this sets the overall maximum, not the maximum between output times.

Parameters

- **which** – identifier of the backwards problem
- **mxstepsB** – number of steps

virtual void **setStabLimDet**(int stldet) const = 0
 activates stability limit detection for the forward problem

Parameters **stldet** – flag for stability limit detection (TRUE or FALSE)

virtual void **setStabLimDetB**(int which, int stldet) const = 0
 activates stability limit detection for the backward problem

Parameters

- **which** – identifier of the backwards problem
- **stldet** – flag for stability limit detection (TRUE or FALSE)

virtual void **setId**(const *Model* *model) const = 0
 specify algebraic/differential components (DAE only)

Parameters **model** – model specification

virtual void **setSuppressAlg**(bool flag) const = 0
 deactivates error control for algebraic components (DAE only)

Parameters **flag** – deactivation flag

virtual void **setSensParams**(const *realtype* *p, const *realtype* *pbar, const int *plist) const = 0
 specifies the scaling and indexes for sensitivity computation

Parameters

- **p** – parameters
- **pbar** – parameter scaling constants
- **plist** – parameter index list

virtual void **getDky**(*realtype* t, int k) const = 0
 interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order

virtual void **getDkyB**(*realtype* t, int k, int which) const = 0
 interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint

- **k** – derivative order
- **which** – index of backward problem

virtual void **getSensDky**(*realtype* t, int k) const = 0

interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order

virtual void **getQuadDkyB**(*realtype* t, int k, int which) const = 0

interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order
- **which** – index of backward problem

virtual void **getQuadDky**(*realtype* t, int k) const = 0

interpolates the (derivative of the) solution at the requested timepoint

Parameters

- **t** – timepoint
- **k** – derivative order

virtual void **adjInit**() const = 0

initializes the adjoint problem

virtual void **quadInit**(const *AmiVector* &xQ0) const = 0

initializes the quadratures

Parameters **xQ0** – vector with initial values for xQ

virtual void **allocateSolverB**(int *which) const = 0

Specifies solver method and initializes solver memory for the backward problem.

Parameters **which** – identifier of the backwards problem

virtual void **setSStolerancesB**(int which, *realtype* relTolB, *realtype* absTolB) const = 0

sets relative and absolute tolerances for the backward problem

Parameters

- **which** – identifier of the backwards problem
- **relTolB** – relative tolerances
- **absTolB** – absolute tolerances

virtual void **quadSStolerancesB**(int which, *realtype* reltolQB, *realtype* abstolQB) const = 0

sets relative and absolute tolerances for the quadrature backward problem

Parameters

- **which** – identifier of the backwards problem
- **reltolQB** – relative tolerances
- **abstolQB** – absolute tolerances

virtual void **quadSStolerances**(*realtype* reltolQB, *realtype* abstolQB) const = 0

sets relative and absolute tolerances for the quadrature problem

Parameters

- **reltolQB** – relative tolerances
- **abstolQB** – absolute tolerances

virtual void **getNumSteps**(const void *ami_mem, long int *numsteps) const = 0

reports the number of solver steps

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numsteps** – output array

virtual void **getNumRhsEvals**(const void *ami_mem, long int *numrhsevals) const = 0

reports the number of right hand evaluations

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numrhsevals** – output array

virtual void **getNumErrTestFails**(const void *ami_mem, long int *numerrtestfails) const = 0

reports the number of local error test failures

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numerrtestfails** – output array

virtual void **getNumNonlinSolvConvFails**(const void *ami_mem, long int *numnonlinsolvconvfails) const = 0

reports the number of nonlinear convergence failures

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **numnonlinsolvconvfails** – output array

virtual void **getLastOrder**(const void *ami_mem, int *order) const = 0

Reports the order of the integration method during the last internal step.

Parameters

- **ami_mem** – pointer to the solver memory instance (can be from forward or backward problem)
- **order** – output array

void **initializeLinearSolver**(const *Model* *model) const

Initializes and sets the linear solver for the forward problem.

Parameters **model** – pointer to the model object

void **initializeNonLinearSolver**() const
Sets the non-linear solver.

virtual void **setLinearSolver**() const = 0
Sets the linear solver for the forward problem.

virtual void **setLinearSolverB**(int which) const = 0
Sets the linear solver for the backward problem.
Parameters **which** – index of the backward problem

virtual void **setNonLinearSolver**() const = 0
Set the non-linear solver for the forward problem.

virtual void **setNonLinearSolverB**(int which) const = 0
Set the non-linear solver for the backward problem.
Parameters **which** – index of the backward problem

virtual void **setNonLinearSolverSens**() const = 0
Set the non-linear solver for sensitivities.

void **initializeLinearSolverB**(const *Model* *model, int which) const
Initializes the linear solver for the backward problem.
Parameters

- **model** – pointer to the model object
- **which** – index of the backward problem

void **initializeNonLinearSolverB**(int which) const
Initializes the non-linear solver for the backward problem.
Parameters **which** – index of the backward problem

virtual const *Model* ***getModel**() const = 0
Accessor function to the model stored in the user data
Returns user data model

bool **getInitDone**() const
checks whether memory for the forward problem has been allocated
Returns proxy for solverMemory->(cv|ida)_MallocDone

bool **getSensInitDone**() const
checks whether memory for forward sensitivities has been allocated
Returns proxy for solverMemory->(cv|ida)_SensMallocDone

bool **getAdjInitDone**() const
checks whether memory for forward interpolation has been allocated
Returns proxy for solverMemory->(cv|ida)_adjMallocDone

bool **getInitDoneB**(int which) const
checks whether memory for the backward problem has been allocated
Parameters **which** – adjoint problem index
Returns proxy for solverMemoryB->(cv|ida)_MallocDone

bool **getQuadInitDoneB**(int which) const
 checks whether memory for backward quadratures has been allocated
Parameters **which** – adjoint problem index
Returns proxy for solverMemoryB->(cv|ida)_QuadMallocDone

bool **getQuadInitDone**() const
 checks whether memory for quadratures has been allocated
Returns proxy for solverMemory->(cv|ida)_QuadMallocDone

virtual void **diag**() const = 0
 attaches a diagonal linear solver to the forward problem

virtual void **diagB**(int which) const = 0
 attaches a diagonal linear solver to the backward problem
Parameters **which** – identifier of the backwards problem

void **resetMutableMemory**(int nx, int nplist, int nquad) const
 resets solverMemory and solverMemoryB
Parameters

- **nx** – new number of state variables
- **nplist** – new number of sensitivity parameters
- **nquad** – new number of quadratures (only differs from nplist for higher order sensitivity computation)

virtual void ***getAdjBmem**(void *ami_mem, int which) const = 0
 Retrieves the solver memory instance for the backward problem.
Parameters

- **which** – identifier of the backwards problem
- **ami_mem** – pointer to the forward solver memory instance

Returns A (void *) pointer to the CVODES memory allocated for the backward problem.

void **applyTolerances**() const
 updates solver tolerances according to the currently specified member variables

void **applyTolerancesFSA**() const
 updates FSA solver tolerances according to the currently specified member variables

void **applyTolerancesASA**(int which) const
 updates ASA solver tolerances according to the currently specified member variables
Parameters **which** – identifier of the backwards problem

void **applyQuadTolerancesASA**(int which) const
 updates ASA quadrature solver tolerances according to the currently specified member variables
Parameters **which** – identifier of the backwards problem

void **applyQuadTolerances**() const
 updates quadrature solver tolerances according to the currently specified member variables

void **applySensitivityTolerances**() const
updates all sensitivity solver tolerances according to the currently specified member variables

void **setInitDone**() const
sets that memory for the forward problem has been allocated

void **setSensInitDone**() const
sets that memory for forward sensitivities has been allocated

void **setSensInitOff**() const
sets that memory for forward sensitivities has not been allocated

void **setAdjInitDone**() const
sets that memory for forward interpolation has been allocated

void **setInitDoneB**(int which) const
sets that memory for the backward problem has been allocated
Parameters **which** – adjoint problem index

void **setQuadInitDoneB**(int which) const
sets that memory for backward quadratures has been allocated
Parameters **which** – adjoint problem index

void **setQuadInitDone**() const
sets that memory for quadratures has been allocated

void **checkSensitivityMethod**(const *SensitivityMethod* sensi_meth, bool preequilibration) const
Sets sensitivity method (for simulation or preequilibration)
Parameters

- **sensi_meth** – new value for sensi_meth[_preeq]
- **preequilibration** – flag indicating preequilibration or simulation

Protected Attributes

mutable std::unique_ptr<void, std::function<void(void*)>> **solver_memory_**
pointer to solver memory block

mutable std::vector<std::unique_ptr<void, std::function<void(void*)>>> **solver_memory_B_**
pointer to solver memory block

mutable *user_data_type* **user_data**
Sundials user_data

InternalSensitivityMethod **ism_** = {*InternalSensitivityMethod::simultaneous*}

internal sensitivity method flag used to select the sensitivity solution method. Only applies for Forward Sensitivities.

LinearMultistepMethod **lmm_** = {*LinearMultistepMethod::BDF*}

specifies the linear multistep method.

NonlinearSolverIteration **iter_** = {*NonlinearSolverIteration::newton*}

specifies the type of nonlinear solver iteration

InterpolationType **interp_type_** = {*InterpolationType::polynomial*}

interpolation type for the forward problem solution which is then used for the backwards problem.

long int **maxsteps_** = {10000}

maximum number of allowed integration steps

std::chrono::duration<double, std::ratio<1>> **maxtime_** = {0}

Maximum CPU-time for integration in seconds

mutable std::clock_t **starttime_**

Time at which solver timer was started

mutable std::unique_ptr<*SUNLinSolWrapper*> **linear_solver_**

linear solver for the forward problem

mutable std::unique_ptr<*SUNLinSolWrapper*> **linear_solver_B_**

linear solver for the backward problem

mutable std::unique_ptr<*SUNNonLinSolWrapper*> **non_linear_solver_**

non-linear solver for the forward problem

mutable std::unique_ptr<*SUNNonLinSolWrapper*> **non_linear_solver_B_**

non-linear solver for the backward problem

mutable std::unique_ptr<*SUNNonLinSolWrapper*> **non_linear_solver_sens_**

non-linear solver for the sensitivities

mutable bool **solver_was_called_F_** = {false}

flag indicating whether the forward solver has been called

mutable bool **solver_was_called_B_** = {false}

flag indicating whether the backward solver has been called

mutable *AmiVector* **x_** = {0}

state (dimension: nx_solver)

mutable *AmiVector* **dky_** = {0}

state interface variable (dimension: nx_solver)

mutable *AmiVector* **dx_** = {0}

state derivative dummy (dimension: nx_solver)

mutable *AmiVectorArray* **sx_** = {0, 0}
state sensitivities interface variable (dimension: nx_solver x nplist)

mutable *AmiVectorArray* **sdx_** = {0, 0}
state derivative sensitivities dummy (dimension: nx_solver x nplist)

mutable *AmiVector* **xB_** = {0}
adjoint state interface variable (dimension: nx_solver)

mutable *AmiVector* **dxB_** = {0}
adjoint derivative dummy variable (dimension: nx_solver)

mutable *AmiVector* **xQB_** = {0}
adjoint quadrature interface variable (dimension: nJ x nplist)

mutable *AmiVector* **xQ_** = {0}
forward quadrature interface variable (dimension: nx_solver)

mutable *realtype* **t_** = {std::nan("")}
integration time of the forward problem

mutable bool **force_reinit_postprocess_F_** = {false}
flag to force reInitPostProcessF before next call to solve

mutable bool **force_reinit_postprocess_B_** = {false}
flag to force reInitPostProcessB before next call to solveB

mutable bool **sens_initialized_** = {false}
flag indicating whether sensInit1 was called

Friends

template<class **Archive**>
friend void **serialize**(*Archive* &ar, *Solver* &s, unsigned int version)
Serialize *Solver* (see boost::serialization::serialize)

Parameters

- **ar** – Archive to serialize to
- **s** – Data to serialize
- **version** – Version number

friend bool **operator==**(const *Solver* &a, const *Solver* &b)
Check equality of data members excluding solver memory.

Parameters

- **a** –

- **b** –

Returns

Class SteadystateProblem

- Defined in file_include_amici_steadystateproblem.h

Class Documentation

class **SteadystateProblem**

The *SteadystateProblem* class solves a steady-state problem using Newton's method and falls back to integration on failure.

Public Functions

explicit **SteadystateProblem**(const *Solver* &solver, const *Model* &model)

constructor

Parameters

- **solver** – *Solver* instance
- **model** – *Model* instance

void **workSteadyStateProblem**(const *Solver* &solver, *Model* &model, int it)

Handles steady state computation in the forward case: tries to determine the steady state of the ODE system and computes steady state sensitivities if requested.

Parameters

- **solver** – pointer to the solver object
- **model** – pointer to the model object
- **it** – integer with the index of the current time step

void **workSteadyStateBackwardProblem**(const *Solver* &solver, *Model* &model, const *BackwardProblem* *bwd)

Integrates over the adjoint state backward in time by solving a linear system of equations, which gives the analytical solution. Computes the gradient via adjoint steady state sensitivities

Parameters

- **solver** – pointer to the solver object
- **model** – pointer to the model object
- **bwd** – backward problem

inline const *SimulationState* &**getFinalSimulationState**() const

Returns the stored *SimulationState*.

Returns stored *SimulationState*

inline const *AmiVector* &getEquilibrationQuadratures() const

Returns the quadratures from pre- or postequilibration.

Returns xQB Vector with quadratures

inline const *AmiVector* &getState() const

Returns state at steadystate.

Returns x

inline const *AmiVectorArray* &getStateSensitivity() const

Returns state sensitivity at steadystate.

Returns sx

inline std::vector<*realtype*> const &getDJydx() const

Accessor for dJydx.

Returns dJydx

inline double getCPUTime() const

Accessor for run_time of the forward problem.

Returns run_time

inline double getCPUTimeB() const

Accessor for run_time of the backward problem.

Returns run_time

inline std::vector<*SteadyStateStatus*> const &getSteadyStateStatus() const

Accessor for steady_state_status.

Returns steady_state_status

inline *realtype* getSteadyStateTime() const

Get model time at which steadystate was found through simulation.

Returns t

inline *realtype* getResidualNorm() const

Accessor for wrms.

Returns wrms

inline const std::vector<int> &getNumSteps() const

Accessor for numsteps.

Returns numsteps

inline int getNumStepsB() const

Accessor for numstepsB.

Returns numstepsB

void getAdjointUpdates(*Model* &model, const *ExpData* &edata)

computes adjoint updates dJydx according to provided model and expdata

Parameters

- **model** – *Model* instance
- **edata** – experimental data

inline *AmiVector* const &**getAdjointState**() const

Return the adjoint state.

Returns xB adjoint state

inline *AmiVector* const &**getAdjointQuadrature**() const

Accessor for xQB.

Returns xQB

inline bool **hasQuadrature**() const

Accessor for hasQuadrature_.

Returns hasQuadrature_

bool **checkSteadyStateSuccess**() const

computes adjoint updates dJydx according to provided model and expdata

Returns convergence of steady state solver

Class SUNLinSolBand

- Defined in file_include_amici_sundials_linsol_wrapper.h

Inheritance Relationships

Base Type

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

Class Documentation

class **SUNLinSolBand** : public amici::SUNLinSolWrapper

SUNDIALS band direct solver.

Public Functions

SUNLinSolBand(N_Vector x, SUNMatrix A)

Create solver using existing matrix A without taking ownership of A.

Parameters

- **x** – A template for cloning vectors needed within the solver.
- **A** – square matrix

SUNLinSolBand(*AmiVector* const &x, int ubw, int lbw)

Create new band solver and matrix A.

Parameters

- **x** – A template for cloning vectors needed within the solver.
- **ubw** – upper bandwidth of band matrix A

- **lbw** – lower bandwidth of band matrix A

virtual SUNMatrix **getMatrix**() const override

Get the matrix A (matrix solvers only).

Returns A

Class SUNLinSolDense

- Defined in file_include_amici_sundials_linsol_wrapper.h

Inheritance Relationships

Base Type

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

Class Documentation

class **SUNLinSolDense** : public amici::SUNLinSolWrapper
SUNDIALS dense direct solver.

Public Functions

explicit **SUNLinSolDense**(*AmiVector* const &x)

Create dense solver.

Parameters **x** – A template for cloning vectors needed within the solver.

virtual SUNMatrix **getMatrix**() const override

Get the matrix A (matrix solvers only).

Returns A

Class SUNLinSolKLU

- Defined in file_include_amici_sundials_linsol_wrapper.h

Inheritance Relationships

Base Type

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

Class Documentation

class **SUNLinSolKLU** : public amici::SUNLinSolWrapper

SUNDIALS KLU sparse direct solver.

Public Types

enum class **StateOrdering**

KLU state reordering (different from SuperLUMT ordering!)

Values:

enumerator **AMD**

enumerator **COLAMD**

enumerator **natural**

Public Functions

SUNLinSolKLU(N_Vector x, SUNMatrix A)

Create KLU solver with given matrix.

Parameters

- **x** – A template for cloning vectors needed within the solver.
- **A** – sparse matrix

SUNLinSolKLU(AmiVector const &x, int nnz, int sparsetype, StateOrdering ordering)

Create KLU solver and matrix to operate on.

Parameters

- **x** – A template for cloning vectors needed within the solver.
- **nnz** – Number of non-zeros in matrix A
- **sparsetype** – Sparse matrix type (CSC_MAT, CSR_MAT)
- **ordering** –

virtual SUNMatrix **getMatrix**() const override

Get the matrix A (matrix solvers only).

Returns

A

void **reInit**(int nnz, int reinit_type)

Reinitializes memory and flags for a new factorization (symbolic and numeric) to be conducted at the next solver setup call.

For more details see sunlinsol/sunlinsol_klu.h

Parameters

- **nnz** – Number of non-zeros

- **reinit_type** – SUNKLU_REINIT_FULL or SUNKLU_REINIT_PARTIAL

void **setOrdering**(*StateOrdering* ordering)

Sets the ordering used by KLU for reducing fill in the linear solve.

Parameters **ordering** –

Class SUNLinSolPCG

- Defined in file_include_amici_sundials_linsol_wrapper.h

Inheritance Relationships

Base Type

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

Class Documentation

class **SUNLinSolPCG** : public amici::*SUNLinSolWrapper*

SUNDIALS scaled preconditioned CG (Conjugate Gradient method) (PCG) solver.

Public Functions

SUNLinSolPCG(N_Vector y, int pretype, int maxl)

Create PCG solver.

Parameters

- **y** –
- **pretype** – Preconditioner type (PREC_NONE, PREC_LEFT, PREC_RIGHT, PREC_BOTH)
- **maxl** – Maximum number of solver iterations

int **setATimes**(void *A_data, ATimesFn ATimes)

Sets the function pointer for ATimes (see sundials/sundials_linearsolver.h).

Parameters

- **A_data** –
- **ATimes** –

Returns

int **setPreconditioner**(void *P_data, PSetupFn Pset, PSolveFn Psol)

Sets function pointers for PSetup and PSolve routines inside of iterative linear solver objects (see sundials/sundials_linearsolver.h).

Parameters

- **P_data** –

- **Pset** –
- **Psol** –

Returns

int **setScalingVectors**(N_Vector s, N_Vector nul)

Sets pointers to left/right scaling vectors for the linear system solve (see sundials/sundials_linearsolver.h).

Parameters

- **s** –
- **nul** –

Returns

int **getNumIters**() const

Returns the number of linear iterations performed in the last ‘Solve’ call.

Returns Number of iterations

realtype **getResNorm**() const

Returns the final residual norm from the last ‘Solve’ call.

Returns residual norm

N_Vector **getResid**() const

Get preconditioned initial residual (see sundials/sundials_linearsolver.h).

Returns**Class SUNLinSolSPBCGS**

- Defined in file_include_amici_sundials_linsol_wrapper.h

Inheritance Relationships**Base Type**

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

Class Documentation

class **SUNLinSolSPBCGS** : public amici::SUNLinSolWrapper

SUNDIALS scaled preconditioned Bi-CGStab (Bi-Conjugate Gradient Stable method) (SPBCGS) solver.

Public Functions

explicit **SUNLinSolSPBCGS**(N_Vector x, int pretype = PREC_NONE, int maxl = SUNSPBCGS_MAXL_DEFAULT)

SUNLinSolSPBCGS.

Parameters

- **x** – A template for cloning vectors needed within the solver.
- **pretype** – Preconditioner type (PREC_NONE, PREC_LEFT, PREC_RIGHT, PREC_BOTH)
- **maxl** – Maximum number of solver iterations

explicit **SUNLinSolSPBCGS**(*AmiVector* const &x, int pretype = PREC_NONE, int maxl = SUNSPBCGS_MAXL_DEFAULT)

SUNLinSolSPBCGS.

Parameters

- **x** – A template for cloning vectors needed within the solver.
- **pretype** – Preconditioner type (PREC_NONE, PREC_LEFT, PREC_RIGHT, PREC_BOTH)
- **maxl** – Maximum number of solver iterations

int **setATimes**(void *A_data, ATimesFn ATimes)

Sets the function pointer for ATimes (see sundials/sundials_linearsolver.h).

Parameters

- **A_data** –
- **ATimes** –

Returns

int **setPreconditioner**(void *P_data, PSetupFn Pset, PSolveFn Psol)

Sets function pointers for Pset and Psolve routines inside of iterative linear solver objects (see sundials/sundials_linearsolver.h).

Parameters

- **P_data** –
- **Pset** –
- **Psol** –

Returns

int **setScalingVectors**(N_Vector s, N_Vector nul)

Sets pointers to left/right scaling vectors for the linear system solve (see sundials/sundials_linearsolver.h).

Parameters

- **s** –
- **nul** –

Returns

int **getNumIters()** const

Returns the number of linear iterations performed in the last ‘Solve’ call.

Returns Number of iterations

realtype **getResNorm()** const

Returns the final residual norm from the last ‘Solve’ call.

Returns residual norm

N_Vector **getResid()** const

Get preconditioned initial residual (see sundials/sundials_linearsolver.h).

Returns

Class SUNLinSolSPFGMR

- Defined in file_include_amici_sundials_linsol_wrapper.h

Inheritance Relationships

Base Type

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

Class Documentation

class **SUNLinSolSPFGMR** : public amici::SUNLinSolWrapper

SUNDIALS scaled preconditioned FGMRES (Flexible Generalized Minimal Residual method) (SPFGMR) solver.

Public Functions

SUNLinSolSPFGMR(*AmiVector* const &x, int pretype, int maxl)

SUNLinSolSPFGMR.

Parameters

- **x** – A template for cloning vectors needed within the solver.
- **pretype** – Preconditioner type (PREC_NONE, PREC_LEFT, PREC_RIGHT, PREC_BOTH)
- **maxl** – Maximum number of solver iterations

int **setATimes**(void *A_data, ATimesFn ATimes)

Sets the function pointer for ATimes (see sundials/sundials_linearsolver.h).

Parameters

- **A_data** –
- **ATimes** –

Returns

int **setPreconditioner**(void *P_data, PSetupFn Pset, PSolveFn Psol)

Sets function pointers for PSetup and PSolve routines inside of iterative linear solver objects (see sundials/sundials_linearsolver.h).

Parameters

- **P_data** –
- **Pset** –
- **Psol** –

Returns

int **setScalingVectors**(N_Vector s, N_Vector nul)

Sets pointers to left/right scaling vectors for the linear system solve (see sundials/sundials_linearsolver.h).

Parameters

- **s** –
- **nul** –

Returns

int **getNumIters**() const

Returns the number of linear iterations performed in the last ‘Solve’ call.

Returns Number of iterations

realtype **getResNorm**() const

Returns the final residual norm from the last ‘Solve’ call.

Returns residual norm

N_Vector **getResid**() const

Get preconditioned initial residual (see sundials/sundials_linearsolver.h).

Returns

Class SUNLinSolSPGMR

- Defined in file_include_amici_sundials_linsol_wrapper.h

Inheritance Relationships

Base Type

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

Class Documentation

class **SUNLinSolSPGMR** : public amici::SUNLinSolWrapper

SUNDIALS scaled preconditioned GMRES (Generalized Minimal Residual method) solver (SPGMR).

Public Functions

explicit **SUNLinSolSPGMR**(AmiVector const &x, int pretype = PREC_NONE, int maxl = SUNSPGMR_MAXL_DEFAULT)

Create SPGMR solver.

Parameters

- **x** – A template for cloning vectors needed within the solver.
- **pretype** – Preconditioner type (PREC_NONE, PREC_LEFT, PREC_RIGHT, PREC_BOTH)
- **maxl** – Maximum number of solver iterations

int **setATimes**(void *A_data, ATimesFn ATimes)

Sets the function pointer for ATimes (see sundials/sundials_linearsolver.h).

Parameters

- **A_data** –
- **ATimes** –

Returns

int **setPreconditioner**(void *P_data, PSetupFn Pset, PSolveFn Psol)

Sets function pointers for PSetup and PSolve routines inside of iterative linear solver objects (see sundials/sundials_linearsolver.h).

Parameters

- **P_data** –
- **Pset** –
- **Psol** –

Returns

int **setScalingVectors**(N_Vector s, N_Vector nul)

Sets pointers to left/right scaling vectors for the linear system solve (see sundials/sundials_linearsolver.h).

Parameters

- **s** –
- **nul** –

Returns

int **getNumIters**() const

Returns the number of linear iterations performed in the last ‘Solve’ call.

Returns Number of iterations

realtype **getResNorm()** const

Returns the final residual norm from the last ‘Solve’ call.

Returns residual norm

N_Vector **getResid()** const

Get preconditioned initial residual (see sundials/sundials_linearsolver.h).

Returns

Class SUNLinSolSPTFQMR

- Defined in file_include_amici_sundials_linsol_wrapper.h

Inheritance Relationships

Base Type

- public amici::SUNLinSolWrapper (*Class SUNLinSolWrapper*)

Class Documentation

class **SUNLinSolSPTFQMR** : public amici::SUNLinSolWrapper

SUNDIALS scaled preconditioned TFQMR (Transpose-Free Quasi-Minimal Residual method) (SPTFQMR) solver.

Public Functions

explicit **SUNLinSolSPTFQMR**(N_Vector x, int pretype = PREC_NONE, int maxl = SUNSPTFQMR_MAXL_DEFAULT)

Create SPTFQMR solver.

Parameters

- **x** – A template for cloning vectors needed within the solver.
- **pretype** – Preconditioner type (PREC_NONE, PREC_LEFT, PREC_RIGHT, PREC_BOTH)
- **maxl** – Maximum number of solver iterations

explicit **SUNLinSolSPTFQMR**(*AmiVector* const &x, int pretype = PREC_NONE, int maxl = SUNSPTFQMR_MAXL_DEFAULT)

Create SPTFQMR solver.

Parameters

- **x** – A template for cloning vectors needed within the solver.
- **pretype** – Preconditioner type (PREC_NONE, PREC_LEFT, PREC_RIGHT, PREC_BOTH)
- **maxl** – Maximum number of solver iterations

int **setATimes**(void *A_data, ATimesFn ATimes)

Sets the function pointer for ATimes (see sundials/sundials_linearsolver.h).

Parameters

- **A_data** –
- **ATimes** –

Returns

int **setPreconditioner**(void *P_data, PSetupFn Pset, PSolveFn Psol)

Sets function pointers for PSetup and PSolve routines inside of iterative linear solver objects (see sundials/sundials_linearsolver.h).

Parameters

- **P_data** –
- **Pset** –
- **Psol** –

Returns

int **setScalingVectors**(N_Vector s, N_Vector nul)

Sets pointers to left/right scaling vectors for the linear system solve (see sundials/sundials_linearsolver.h).

Parameters

- **s** –
- **nul** –

Returns

int **getNumIters**() const

Returns the number of linear iterations performed in the last ‘Solve’ call.

Returns Number of iterations

realtype **getResNorm**() const

Returns the final residual norm from the last ‘Solve’ call.

Returns residual norm

N_Vector **getResid**() const

Get preconditioned initial residual (see sundials/sundials_linearsolver.h).

Returns

Class SUNLinSolWrapper

- Defined in file_include_amici_sundials_linsol_wrapper.h

Inheritance Relationships

Derived Types

- `public amici::SUNLinSolBand` (*Class `SUNLinSolBand`*)
- `public amici::SUNLinSolDense` (*Class `SUNLinSolDense`*)
- `public amici::SUNLinSolKLU` (*Class `SUNLinSolKLU`*)
- `public amici::SUNLinSolPCG` (*Class `SUNLinSolPCG`*)
- `public amici::SUNLinSolSPBCGS` (*Class `SUNLinSolSPBCGS`*)
- `public amici::SUNLinSolSPFGMR` (*Class `SUNLinSolSPFGMR`*)
- `public amici::SUNLinSolSPGMR` (*Class `SUNLinSolSPGMR`*)
- `public amici::SUNLinSolSPTFQMR` (*Class `SUNLinSolSPTFQMR`*)

Class Documentation

class **SUNLinSolWrapper**

A RAII wrapper for SUNLinearSolver structs.

For details on member functions see documentation in `sunlinSol/sundials_linearsolver.h`.

Subclassed by `amici::SUNLinSolBand`, `amici::SUNLinSolDense`, `amici::SUNLinSolKLU`, `amici::SUNLinSolPCG`, `amici::SUNLinSolSPBCGS`, `amici::SUNLinSolSPFGMR`, `amici::SUNLinSolSPGMR`, `amici::SUNLinSolSPTFQMR`

Public Functions

SUNLinSolWrapper() = default

explicit **SUNLinSolWrapper**(SUNLinearSolver linsol)

Wrap existing SUNLinearSolver.

Parameters `linsol` –

virtual **~SUNLinSolWrapper**()

SUNLinSolWrapper(const *SUNLinSolWrapper* &other) = delete

Copy constructor.

Parameters `other` –

SUNLinSolWrapper(*SUNLinSolWrapper* &&other) noexcept

Move constructor.

Parameters `other` –

SUNLinSolWrapper &**operator**=(const *SUNLinSolWrapper* &other) = delete

Copy assignment.

Parameters `other` –

Returns

SUNLinSolWrapper &operator=(*SUNLinSolWrapper* &&other) noexcept

Move assignment.

Parameters *other* –

Returns

SUNLinearSolver **get**() const

Returns the wrapped SUNLinSol.

Returns SUNLinearSolver

SUNLinearSolver_Type **getType**() const

Returns an identifier for the linear solver type.

Returns

void **setup**(SUNMatrix A) const

Performs any linear solver setup needed, based on an updated system matrix A.

Parameters *A* –

void **setup**(const *SUNMatrixWrapper* &A) const

Performs any linear solver setup needed, based on an updated system matrix A.

Parameters *A* –

int **Solve**(SUNMatrix A, N_Vector x, N_Vector b, *realtype* tol) const

Solves a linear system $A \cdot x = b$.

Parameters

- *A* –
- *x* – A template for cloning vectors needed within the solver.
- *b* –
- *tol* – Tolerance (weighted 2-norm), iterative solvers only

Returns error flag

long int **getLastFlag**() const

Returns the last error flag encountered within the linear solver.

Returns error flag

int **space**(long int *lenrwLS, long int *leniwLS) const

Returns the integer and real workspace sizes for the linear solver.

Parameters

- *lenrwLS* – output argument for size of real workspace
- *leniwLS* – output argument for size of integer workspace

Returns workspace size

virtual SUNMatrix **getMatrix**() const

Get the matrix A (matrix solvers only).

Returns A

Protected Functions

int **initialize()**

Performs linear solver initialization (assumes that all solver-specific options have been set).

Returns error code

Protected Attributes

SUNLinearSolver **solver_** = {nullptr}

Wrapped solver

Class SUNMatrixWrapper

- Defined in file_include_amici_sundials_matrix_wrapper.h

Class Documentation

class **SUNMatrixWrapper**

A RAII wrapper for SUNMatrix structs.

This can create dense, sparse, or banded matrices using the respective constructor.

Public Functions

SUNMatrixWrapper() = default

SUNMatrixWrapper(sunindextype M, sunindextype N, sunindextype NNZ, int sparsetype)

Create sparse matrix. See SUNSparseMatrix in sunmatrix_sparse.h.

Parameters

- **M** – Number of rows
- **N** – Number of columns
- **NNZ** – Number of nonzeros
- **sparsetype** – Sparse type

SUNMatrixWrapper(sunindextype M, sunindextype N)

Create dense matrix. See SUNDenseMatrix in sunmatrix_dense.h.

Parameters

- **M** – Number of rows
- **N** – Number of columns

SUNMatrixWrapper(sunindextype M, sunindextype ubw, sunindextype lbw)

Create banded matrix. See SUNBandMatrix in sunmatrix_band.h.

Parameters

- **M** – Number of rows and columns

- **ubw** – Upper bandwidth
- **lbw** – Lower bandwidth

SUNMatrixWrapper(const *SUNMatrixWrapper* &A, *realtype* droptol, int sparsetype)

Create sparse matrix from dense or banded matrix. See SUNSparseFromDenseMatrix and SUNSparseFromBandMatrix in sunmatrix_sparse.h.

Parameters

- **A** – Wrapper for dense matrix
- **droptol** – tolerance for dropping entries
- **sparsetype** – Sparse type

explicit **SUNMatrixWrapper**(SUNMatrix mat)

Wrap existing SUNMatrix.

Parameters mat –

~SUNMatrixWrapper()

SUNMatrixWrapper(const *SUNMatrixWrapper* &other)

Copy constructor.

Parameters other –

SUNMatrixWrapper(*SUNMatrixWrapper* &&other)

Move constructor.

Parameters other –

SUNMatrixWrapper &**operator=**(const *SUNMatrixWrapper* &other)

Copy assignment.

Parameters other –

Returns

SUNMatrixWrapper &**operator=**(*SUNMatrixWrapper* &&other)

Move assignment.

Parameters other –

Returns

void **reallocate**(sunindextype nnz)

Reallocate space for sparse matrix according to specified nnz.

Parameters nnz – new number of nonzero entries

void **realloc**()

Reallocate space for sparse matrix to used space according to last entry in indexptrs.

SUNMatrix **get**() const

Get the wrapped SUNMatrix.

Note: Even though the returned matrix_ pointer is const qualified, matrix_>content will not be const. This is a shortcoming in the underlying C library, which we cannot address and it is not intended that any of those values are modified externally. If matrix_>content is manipulated, cpp:meth:SUNMatrixWrapper:refresh needs to be called.

Returns raw SunMatrix object

inline sunindextype **rows**() const

Get the number of rows.

Returns number of rows

inline sunindextype **columns**() const

Get the number of columns.

Returns number of columns

sunindextype **num_nonzeros**() const

Get the number of specified non-zero elements (sparse matrices only)

Note: value will be 0 before indexptrs are set.

Returns number of nonzero entries

sunindextype **num_indexptrs**() const

Get the number of indexptrs that can be specified (sparse matrices only)

Returns number of indexptrs

sunindextype **capacity**() const

Get the number of allocated data elements.

Returns number of allocated entries

realtype ***data**()

Get raw data of a sparse matrix.

Returns pointer to first data entry

const *realtype* ***data**() const

Get const raw data of a sparse matrix.

Returns pointer to first data entry

inline *realtype* **get_data**(sunindextype idx) const

Get data of a sparse matrix.

Parameters **idx** – data index

Returns idx-th data entry

inline *realtype* **get_data**(sunindextype irow, sunindextype icol) const

Get data entry for a dense matrix.

Parameters

- **irow** – row
- **icol** – col

Returns A(irow,icol)

inline void **set_data**(sunindextype idx, *realtype* data)

Set data entry for a sparse matrix.

Parameters

- **idx** – data index
- **data** – data for idx-th entry

inline void **set_data**(sunindextype irow, sunindextype icol, *realtype* data)

Set data entry for a dense matrix.

Parameters

- **irow** – row
- **icol** – col
- **data** – data for idx-th entry

inline sunindextype **get_indexval**(sunindextype idx) const

Get the index value of a sparse matrix.

Parameters **idx** – data index

Returns row (CSC) or column (CSR) for idx-th data entry

inline void **set_indexval**(sunindextype idx, sunindextype val)

Set the index value of a sparse matrix.

Parameters

- **idx** – data index
- **val** – row (CSC) or column (CSR) for idx-th data entry

inline void **set_indexvals**(const gsl::span<const sunindextype> vals)

Set the index values of a sparse matrix.

Parameters **vals** – rows (CSC) or columns (CSR) for data entries

inline sunindextype **get_indexptr**(sunindextype ptr_idx) const

Get the index pointer of a sparse matrix.

Parameters **ptr_idx** – pointer index

Returns index where the ptr_idx-th column (CSC) or row (CSR) starts

inline void **set_indexptr**(sunindextype ptr_idx, sunindextype ptr)

Set the index pointer of a sparse matrix.

Parameters

- **ptr_idx** – pointer index
- **ptr** – data-index where the ptr_idx-th column (CSC) or row (CSR) starts

inline void **set_indexptrs**(const gsl::span<const sunindextype> ptrs)

Set the index pointers of a sparse matrix.

Parameters **ptrs** – starting data-indices where the columns (CSC) or rows (CSR) start

int **sparsetype**() const

Get the type of sparse matrix.

Returns matrix type

void **scale**(*realtype* a)

multiply with a scalar (in-place)

Parameters **a** – scalar value to multiply matrix

void **multiply**(N_Vector c, *const_N_Vector* b, *realtype* alpha = 1.0) const

N_Vector interface for multiply.

Parameters

- **c** – output vector, may already contain values
- **b** – multiplication vector
- **alpha** – scalar coefficient for matrix

inline void **multiply**(*AmiVector* &c, *AmiVector* const &b, *realtype* alpha = 1.0) const

AmiVector interface for multiply.

Parameters

- **c** – output vector, may already contain values
- **b** – multiplication vector
- **alpha** – scalar coefficient for matrix

void **multiply**(gsl::span<*realtype*> c, gsl::span<const *realtype*> b, const *realtype* alpha = 1.0) const

Perform matrix vector multiplication $c += \alpha * A * b$.

Parameters

- **c** – output vector, may already contain values
- **b** – multiplication vector
- **alpha** – scalar coefficient

void **multiply**(N_Vector c, *const_N_Vector* b, gsl::span<const int> cols, bool transpose) const

Perform reordered matrix vector multiplication $c += A[:,cols]*b$.

Parameters

- **c** – output vector, may already contain values
- **b** – multiplication vector
- **cols** – int vector for column reordering
- **transpose** – bool transpose A before multiplication

void **multiply**(gsl::span<*realtype*> c, gsl::span<const *realtype*> b, gsl::span<const int> cols, bool transpose) const

Perform reordered matrix vector multiplication $c += A[:,cols]*b$.

Parameters

- **c** – output vector, may already contain values
- **b** – multiplication vector
- **cols** – int vector for column reordering

- **transpose** – bool transpose A before multiplication

void **sparse_multiply**(*SUNMatrixWrapper* &C, const *SUNMatrixWrapper* &B) const

Perform matrix matrix multiplication $C = A * B$ for sparse A, B, C.

Note: will overwrite existing data, indexptrs, indexvals for C, but will use preallocated space for these vars

Parameters

- **C** – output matrix,
- **B** – multiplication matrix

void **sparse_add**(const *SUNMatrixWrapper* &A, *realtype* alpha, const *SUNMatrixWrapper* &B, *realtype* beta)

Perform sparse matrix matrix addition $C = \alpha * A + \beta * B$.

Note: will overwrite existing data, indexptrs, indexvals for C, but will use preallocated space for these vars

Parameters

- **A** – addition matrix
- **alpha** – scalar A
- **B** – addition matrix
- **beta** – scalar B

void **sparse_sum**(const std::vector<*SUNMatrixWrapper*> &mats)

Perform matrix-matrix addition $A = \text{sum}(\text{mats}(0) \dots \text{mats}(\text{len}(\text{mats})))$

Note: will overwrite existing data, indexptrs, indexvals for A, but will use preallocated space for these vars

Parameters **mats** – vector of sparse matrices

sunindextype **scatter**(const sunindextype k, const *realtype* beta, sunindextype *w, gsl::span<*realtype*> x, const sunindextype mark, *SUNMatrixWrapper* *C, sunindextype nnz) const

Compute $x = x + \beta * A(:,k)$, where x is a dense vector and $A(:,k)$ is sparse, and update the sparsity pattern for $C(:,j)$ if applicable.

This function currently has two purposes:

- perform parts of sparse matrix-matrix multiplication $C(:,j) = A(:,k) * B(k,j)$ enabled by passing $\beta = B(k,j)$, $x = C(:,j)$, $C = C$, $w = \text{sparsity of } C(:,j) \text{ from } B(k, 0 \dots j-1)$, $\text{nnz} = \text{nnz}(C(:, 0 \dots j-1))$
- add the k-th column of the sparse matrix A multiplied by beta to the dense vector x. enabled by passing $\beta = *$, $x = x$, $C = \text{nullptr}$, $w = \text{nullptr}$, $\text{nnz} = *$

Parameters

- **k** – column index

- **beta** – scaling factor
- **w** – index workspace, ($w[i] < \text{mark}$) indicates non-zeros of $C(i,j)$ (dimension: m), if this is a nullptr, sparsity pattern of C will not be updated (if applicable).
- **x** – dense output vector (dimension: m)
- **mark** – marker for w to indicate nonzero pattern
- **C** – sparse output matrix, if this is a nullptr, sparsity pattern of C will not be updated
- **nnz** – number of nonzeros that were already written to C

Returns updated number of nonzeros in C

void **transpose**(*SUNMatrixWrapper* & C , const *realtype* α , sunindextype blocksize) const

Compute transpose A' of sparse matrix A and writes it to the matrix $C = \alpha * A'$.

Parameters

- **C** – output matrix (sparse or dense)
- **alpha** – scalar multiplier
- **blocksize** – blocksize for transposition. For full matrix transpose set to $\text{ncols}/\text{nrows}$

void **to_dense**(*SUNMatrixWrapper* & D) const

Writes a sparse matrix A to a dense matrix D .

Parameters **D** – dense output matrix

void **to_diag**(N_Vector v) const

Writes the diagonal of sparse matrix A to a dense vector v .

Parameters **v** – dense output vector

void **zero**()

Set to 0.0, for sparse matrices also resets $\text{indexptr}/\text{indexvals}$.

inline SUNMatrix_ID **matrix_id**() const

Get matrix id.

Returns SUNMatrix_ID

void **refresh**()

Update internal cache, needs to be called after external manipulation of $\text{matrix_}\rightarrow\text{content}$.

Class **SUNNonLinSolFixedPoint**

- Defined in `file_include_amici_sundials_linsol_wrapper.h`

Inheritance Relationships

Base Type

- `public amici::SUNNonLinSolWrapper` (*Class `SUNNonLinSolWrapper`*)

Class Documentation

class **SUNNonLinSolFixedPoint** : public amici::SUNNonLinSolWrapper
 SUNDIALS Fixed point non-linear solver to solve $G(y) = y$.

Public Functions

explicit **SUNNonLinSolFixedPoint**(*const_N_Vector* x, int m = 0)
 Create fixed-point solver.

Parameters

- **x** – template for cloning vectors needed within the solver.
- **m** – number of acceleration vectors to use

SUNNonLinSolFixedPoint(int count, *const_N_Vector* x, int m = 0)
 Create fixed-point solver for use with sensitivity analysis.

Parameters

- **count** – Number of vectors in the nonlinear solve. When integrating a system containing N_s sensitivities the value of count is:
 - N_s+1 if using a simultaneous corrector approach.
 - N_s if using a staggered corrector approach.
- **x** – template for cloning vectors needed within the solver.
- **m** – number of acceleration vectors to use

int **getSysFn**(SUNNonlinSolSysFn *SysFn) const
 Get function to evaluate the fixed point function $G(y) = y$.

Parameters **SysFn** –

Returns

Class SUNNonLinSolNewton

- Defined in file_include_amici_sundials_linsol_wrapper.h

Inheritance Relationships

Base Type

- `public amici::SUNNonLinSolWrapper` (*Class `SUNNonLinSolWrapper`*)

Class Documentation

class **SUNNonLinSolNewton** : public amici::*SUNNonLinSolWrapper*

SUNDIALS Newton non-linear solver to solve $F(y) = 0$.

Public Functions

explicit **SUNNonLinSolNewton**(N_Vector x)

Create Newton solver.

Parameters **x** – A template for cloning vectors needed within the solver.

SUNNonLinSolNewton(int count, N_Vector x)

Create Newton solver for enabled sensitivity analysis.

Parameters

- **count** – Number of vectors in the nonlinear solve. When integrating a system containing N_s sensitivities the value of count is:
 - N_s+1 if using a simultaneous corrector approach.
 - N_s if using a staggered corrector approach.
- **x** – A template for cloning vectors needed within the solver.

int **getSysFn**(SUNNonlinSolSysFn *SysFn) const

Get function to evaluate the nonlinear residual function $F(y) = 0$.

Parameters **SysFn** –

Returns

Class **SUNNonLinSolWrapper**

- Defined in file_include_amici_sundials_linsol_wrapper.h

Inheritance Relationships

Derived Types

- `public amici::SUNNonLinSolFixedPoint` (*Class `SUNNonLinSolFixedPoint`*)
- `public amici::SUNNonLinSolNewton` (*Class `SUNNonLinSolNewton`*)

Class Documentation

class **SUNNonLinSolWrapper**

A RAI wrapper for SUNNonLinearSolver structs which solve the nonlinear system $F(y) = 0$ or $G(y) = y$.

Subclassed by *amici::SUNNonLinSolFixedPoint*, *amici::SUNNonLinSolNewton*

Public Functions

explicit **SUNNonLinSolWrapper**(SUNNonlinearSolver sol)

SUNNonLinSolWrapper from existing SUNNonlinearSolver.

Parameters *sol* –

virtual **~SUNNonLinSolWrapper**()

SUNNonLinSolWrapper(const *SUNNonLinSolWrapper* &other) = delete

Copy constructor.

Parameters *other* –

SUNNonLinSolWrapper(*SUNNonLinSolWrapper* &&other) noexcept

Move constructor.

Parameters *other* –

SUNNonLinSolWrapper &**operator**=(const *SUNNonLinSolWrapper* &other) = delete

Copy assignment.

Parameters *other* –

Returns

SUNNonLinSolWrapper &**operator**=(*SUNNonLinSolWrapper* &&other) noexcept

Move assignment.

Parameters *other* –

Returns

SUNNonlinearSolver **get**() const

Get the wrapped SUNNonlinearSolver.

Returns SUNNonlinearSolver

SUNNonlinearSolver_Type **getType**() const

Get type ID of the solver.

Returns

int **setup**(N_Vector y, void *mem)

Setup solver.

Parameters

- *y* – the initial iteration passed to the nonlinear solver.
- *mem* – the sundials integrator memory structure.

Returns

int **Solve**(N_Vector y0, N_Vector y, N_Vector w, *realtype* tol, bool callLSetup, void *mem)

Solve the nonlinear system $F(y) = 0$ or $G(y) = y$.

Parameters

- **y0** – the initial iterate for the nonlinear solve. This must remain unchanged throughout the solution process.
- **y** – the solution to the nonlinear system
- **w** – the solution error weight vector used for computing weighted error norms.
- **tol** – the requested solution tolerance in the weighted root-mean- squared norm.
- **callLSetup** – a flag indicating that the integrator recommends for the linear solver setup function to be called.
- **mem** – the sundials integrator memory structure.

Returns

int **setSysFn**(SUNNonlinSolSysFn SysFn)

Set function to evaluate the nonlinear residual function $F(y) = 0$ or the fixed point function $G(y) = y$.

Parameters SysFn –

Returns

int **setLSetupFn**(SUNNonlinSolLSetupFn SetupFn)

Set linear solver setup function.

Parameters SetupFn –

Returns

int **setLSolveFn**(SUNNonlinSolLSolveFn SolveFn)

Set linear solver solve function.

Parameters SolveFn –

Returns

int **setConvTestFn**(SUNNonlinSolConvTestFn CTestFn, void *ctest_data)

Set function to test for convergence.

Parameters

- **CTestFn** –
- **ctest_data** –

Returns

int **setMaxIters**(int maxiters)

Set maximum number of non-linear iterations.

Parameters maxiters –

Returns

long int **getNumIters**() const

getNumIters

Returns

int **getCurIter**() const

getCurIter

Returns

long int **getNumConvFails**() const

getNumConvFails

Returns

Protected Functions

void **initialize**()

initialize

Protected Attributes

SUNNonlinearSolver **solver** = nullptr

the wrapper solver

Enums

Enum BLASLayout

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::BLASLayout

BLAS Matrix Layout, affects dgemm and gemv calls

Values:

enumerator **rowMajor**

enumerator **colMajor**

Enum BLASTranspose

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::**BLASTranspose**

BLAS Matrix Transposition, affects dgemm and gemv calls

Values:

enumerator **noTrans**

enumerator **trans**

enumerator **conjTrans**

Enum FixedParameterContext

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::**FixedParameterContext**

fixedParameter to be used in condition context

Values:

enumerator **simulation**

enumerator **preequilibration**

enumerator **presimulation**

Enum InternalSensitivityMethod

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::**InternalSensitivityMethod**

CVODES/IDAS forward sensitivity computation method

Values:

enumerator **simultaneous**

enumerator **staggered**

enumerator **staggered1**

Enum InterpolationType

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::InterpolationType

CVODES/IDAS state interpolation for adjoint sensitivity analysis

Values:

enumerator **hermite**

enumerator **polynomial**

Enum LinearMultistepMethod

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::LinearMultistepMethod

CVODES/IDAS linear multistep method

Values:

enumerator **adams**

enumerator **BDF**

Enum LinearSolver

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::LinearSolver
linear solvers for CVODES/IDAS
Values:

enumerator **dense**

enumerator **band**

enumerator **LAPACKDense**

enumerator **LAPACKBand**

enumerator **diag**

enumerator **SPGMR**

enumerator **SPBCG**

enumerator **SPTFQMR**

enumerator **KLU**

enumerator **SuperLUMT**

Enum LogSeverity

- Defined in file_include_amici_logging.h

Enum Documentation

enum class amici::LogSeverity
Severity levels for logging.
Values:

enumerator **error**

enumerator **warning**

enumerator **debug**

Enum `ModelQuantity`

- Defined in file `_include_amici_model.h`

Enum Documentation

enum class `amici::ModelQuantity`

Describes the various model quantities.

Values:

enumerator `J`

enumerator `JB`

enumerator `Jv`

enumerator `JvB`

enumerator `JDiag`

enumerator `sx`

enumerator `sy`

enumerator `sz`

enumerator `srz`

enumerator `ssigmay`

enumerator `ssigmaz`

enumerator `xdot`

enumerator `sxdot`

enumerator `xBdot`

enumerator `x0_rdata`

enumerator `x0`

enumerator **x_rdata**

enumerator **x**

enumerator **dwdw**

enumerator **dwdx**

enumerator **dwdp**

enumerator **y**

enumerator **dydp**

enumerator **dydx**

enumerator **w**

enumerator **root**

enumerator **qBdot**

enumerator **qBdot_ss**

enumerator **xBdot_ss**

enumerator **JSparseB_ss**

enumerator **deltax**

enumerator **deltasx**

enumerator **deltaxB**

enumerator **k**

enumerator **p**

enumerator **ts**

enumerator **dJydy**

enumerator **dJydy_matlab**

enumerator **deltaqB**

enumerator **dsigmaydp**

enumerator **dsigmaydy**

enumerator **dsigmazdp**

enumerator **dJydsigma**

enumerator **dJydx**

enumerator **dzdx**

enumerator **dzdp**

enumerator **dJrzdsigma**

enumerator **dJrzdz**

enumerator **dJrzdx**

enumerator **dJzdsigma**

enumerator **dJzdz**

enumerator **dJzdx**

enumerator **drzdp**

enumerator **drzdx**

Enum `NewtonDampingFactorMode`

- Defined in `file_include_amici_defines.h`

Enum Documentation

enum class amici::NewtonDampingFactorMode

Damping factor flag for the Newton method

Values:

enumerator **off**

enumerator **on**

Enum NonlinearSolverIteration

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::NonlinearSolverIteration

CVODES/IDAS Nonlinear Iteration method

Values:

enumerator **functional**

enumerator **fixedpoint**
deprecated

enumerator **newton**

Enum ObservableScaling

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::ObservableScaling

modes for observable scaling

Values:

enumerator **lin**

enumerator **log**

enumerator **log10**

Enum ParameterScaling

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::ParameterScaling

modes for parameter transformations

Values:

enumerator **none**

enumerator **ln**

enumerator **log10**

Enum RDataReporting

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::RDataReporting

Values:

enumerator **full**

enumerator **residuals**

enumerator **likelihood**

Enum SecondOrderMode

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::SecondOrderMode
modes for second order sensitivity analysis
Values:

enumerator **none**

enumerator **full**

enumerator **directional**

Enum SensitivityMethod

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::SensitivityMethod
methods for sensitivity computation
Values:

enumerator **none**
Don't compute sensitivities.

enumerator **forward**
Forward sensitivity analysis.

enumerator **adjoint**
Adjoint sensitivity analysis.

Enum SensitivityOrder

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::SensitivityOrder

orders of sensitivity analysis

Values:

enumerator **none**

Don't compute sensitivities.

enumerator **first**

First-order sensitivities.

enumerator **second**

Second-order sensitivities.

Enum SteadyStateContext

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::SteadyStateContext

Context for which the sensitivity flag should be computed

Values:

enumerator **newtonSensi**

enumerator **sensiStorage**

enumerator **solverCreation**

Enum SteadyStateSensitivityMode

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::SteadyStateSensitivityMode
Sensitivity computation mode in steadyStateProblem
Values:

enumerator **newtonOnly**

enumerator **integrationOnly**

enumerator **integrateIfNewtonFails**

Enum SteadyStateStatus

- Defined in file_include_amici_defines.h

Enum Documentation

enum class amici::SteadyStateStatus
State in which the steady state computation finished
Values:

enumerator **failed_too_long_simulation**

enumerator **failed_damping**

enumerator **failed_factorization**

enumerator **failed_convergence**

enumerator **failed**

enumerator **not_run**

enumerator **success**

Functions

Template Function amici::addSlice(const gsl::span<T const>, gsl::span<T>)

- Defined in file_include_amici_misc.h

Function Documentation

```
template<class T>
void amici::addSlice(const gsl::span<T const> slice, gsl::span<T> buffer)
    local helper function to add the computed slice to provided buffer (span)
```

Parameters

- **slice** – computed value
- **buffer** – buffer to which values are to be added

Template Function amici::addSlice(std::vector<T> const&, gsl::span<T>)

- Defined in file_include_amici_misc.h

Function Documentation

```
template<class T>
void amici::addSlice(std::vector<T> const &s, gsl::span<T> b)
    local helper function to add the computed slice to provided buffer (vector/span)
```

Parameters

- **s** – computed value
- **b** – buffer to which values are to be written

Function amici::amici_daxpy

- Defined in file_include_amici_cblas.h

Function Documentation

```
void amici::amici_daxpy(int n, double alpha, const double *x, int incx, double *y, int incy)
    Compute  $y = \alpha x + y$ .
```

Parameters

- **n** – number of elements in y
- **alpha** – scalar coefficient of x
- **x** – vector of length $n \cdot \text{incx}$
- **incx** – x stride
- **y** – vector of length $n \cdot \text{incy}$

- **incy** – y stride

Function amici::amici_dgemm

- Defined in file_include_amici_cblas.h

Function Documentation

void amici::amici_dgemm(*BLASLayout* layout, *BLASTranspose* TransA, *BLASTranspose* TransB, int M, int N, int K, double alpha, const double *A, int lda, const double *B, int ldb, double beta, double *C, int ldc)

CBLAS matrix matrix multiplication (dgemm)

This routines computes $C = \alpha * A * B + \beta * C$ with A: [MxK] B:[KxN] C:[MxN]

Parameters

- **layout** – memory layout.
- **TransA** – flag indicating whether A should be transposed before multiplication
- **TransB** – flag indicating whether B should be transposed before multiplication
- **M** – number of rows in A/C
- **N** – number of columns in B/C
- **K** – number of rows in B, number of columns in A
- **alpha** – coefficient alpha
- **A** – matrix A
- **lda** – leading dimension of A ($\geq M$ or $\geq K$)
- **B** – matrix B
- **ldb** – leading dimension of B ($\geq K$ or $\geq N$)
- **beta** – coefficient beta
- **C** – matrix C
- **ldc** – leading dimension of C ($\geq M$ or $\geq N$)

Function amici::amici_dgemv

- Defined in file_include_amici_cblas.h

Function Documentation

void amici::amici_dgemv(*BLASLayout* layout, *BLASTranspose* TransA, int M, int N, double alpha, const double *A, int lda, const double *X, int incX, double beta, double *Y, int incY)

CBLAS matrix vector multiplication (dgemv).

Computes $y = \alpha * A * x + \beta * y$ with A: [MxN] x:[Nx1] y:[Mx1]

Parameters

- **layout** – Matrix layout, column major or row major.
- **TransA** – flag indicating whether A should be transposed before multiplication
- **M** – number of rows in A
- **N** – number of columns in A
- **alpha** – coefficient alpha
- **A** – matrix A
- **lda** – leading dimension / stride of A ($\geq N$ if row-major, $\geq M$ if col-major)
- **X** – vector X
- **incX** – increment for entries of X
- **beta** – coefficient beta
- **Y** – vector Y
- **incY** – increment for entries of Y

Function amici::backtraceString

- Defined in file_include_amici_misc.h

Function Documentation

std::string amici::backtraceString(int maxFrames, int const first_frame = 0)

Returns the current backtrace as std::string.

Parameters

- **maxFrames** – Number of frames to include
- **first_frame** – Index of first frame to include

Returns Backtrace

Template Function amici::checkBufferSize

- Defined in file_include_amici_misc.h

Function Documentation

template<class T>
void amici::checkBufferSize(gsl::span<T> buffer, typename gsl::span<T>::index_type expected_size)
local helper to check whether the provided buffer has the expected size

Parameters

- **buffer** – buffer to which values are to be written
- **expected_size** – expected size of the buffer

Function amici::checkSigmaPositivity(std::vector<realtype> const&, char const *)

- Defined in file_include_amici_edata.h

Function Documentation

void amici::checkSigmaPositivity(std::vector<realtype> const &sigmaVector, char const *vectorName)
checks input vector of sigmas for not strictly positive values

Parameters

- **sigmaVector** – vector input to be checked
- **vectorName** – name of the input

Function amici::checkSigmaPositivity(realtype, char const *)

- Defined in file_include_amici_edata.h

Function Documentation

void amici::checkSigmaPositivity(realtype sigma, char const *sigmaName)
checks input scalar sigma for not strictly positive value

Parameters

- **sigma** – input to be checked
- **sigmaName** – name of the input

Template Function amici::deserializeFromChar

- Defined in file_include_amici_serialization.h

Function Documentation

template<typename T>
T amici::deserializeFromChar(const char *buffer, int size)
 Deserialize object that has been serialized using serializeToChar.

Parameters

- **buffer** – serialized object
- **size** – length of buffer

Returns The deserialized object

Template Function amici::deserializeFromString

- Defined in file_include_amici_serialization.h

Function Documentation

template<typename T>
T amici::deserializeFromString(std::string const &serialized)
 Deserialize object that has been serialized using serializeToString.

Parameters **serialized** – serialized object

Returns The deserialized object

Function amici::dotProd

- Defined in file_include_amici_vector.h

Function Documentation

inline *realt*type amici::dotProd(*AmiVector* const &x, *AmiVector* const &y)
 Compute dot product of x and y.

Parameters

- **x** – vector
- **y** – vector

Returns dot product of x and y

Function amici::getScaledParameter

- Defined in file_include_amici_misc.h

Function Documentation

double amici::getScaledParameter(double unscaledParameter, *ParameterScaling* scaling)

Apply parameter scaling according to scaling

Parameters

- **unscaledParameter** –
- **scaling** – parameter scaling

Returns Scaled parameter

Function amici::getUnscaledParameter

- Defined in file_include_amici_misc.h

Function Documentation

double amici::getUnscaledParameter(double scaledParameter, *ParameterScaling* scaling)

Remove parameter scaling according to scaling

Parameters

- **scaledParameter** – scaled parameter
- **scaling** – parameter scaling

Returns Unscaled parameter

Function amici::hdf5::attributeExists(H5::H5File const&, const std::string&, const std::string&)

- Defined in file_include_amici_hdf5.h

Function Documentation

bool amici::hdf5::attributeExists(H5::H5File const &file, const std::string &optionsObject, const std::string &attributeName)

Check whether an attribute with the given name exists on the given dataset.

Parameters

- **file** – The HDF5 file object
- **optionsObject** – Dataset of which attributes should be checked
- **attributeName** – Name of the attribute of interest

Returns true if attribute exists, false otherwise

Function amici::hdf5::attributeExists(H5::H5Object const&, const std::string&)

- Defined in file_include_amici_hdf5.h

Function Documentation

bool amici::hdf5::attributeExists(H5::H5Object const &object, const std::string &attributeName)

Check whether an attribute with the given name exists on the given object.

Parameters

- **object** – An HDF5 object
- **attributeName** – Name of the attribute of interest

Returns true if attribute exists, false otherwise

Function amici::hdf5::createAndWriteDouble1DDataset

- Defined in file_include_amici_hdf5.h

Function Documentation

void amici::hdf5::createAndWriteDouble1DDataset(H5::H5File const &file, std::string const &datasetName, gsl::span<const double> buffer)

Create and write to 1-dimensional native double dataset.

Parameters

- **file** – HDF5 file object
- **datasetName** – Name of dataset to create
- **buffer** – Data to write to dataset

Function amici::hdf5::createAndWriteDouble2DDataset

- Defined in file_include_amici_hdf5.h

Function Documentation

void amici::hdf5::createAndWriteDouble2DDataset(H5::H5File const &file, std::string const &datasetName, gsl::span<const double> buffer, hsize_t m, hsize_t n)

Create and write to 2-dimensional native double dataset.

Parameters

- **file** – HDF5 file object
- **datasetName** – Name of dataset to create
- **buffer** – Flattened data to write to dataset (assuming row-major)
- **m** – Number of rows in buffer

- **n** – Number of columns buffer

Function amici::hdf5::createAndWriteDouble3DDataset

- Defined in file_include_amici_hdf5.h

Function Documentation

```
void amici::hdf5::createAndWriteDouble3DDataset(H5::H5File const &file, std::string const &datasetName,  
                                                  gsl::span<const double> buffer, hsize_t m, hsize_t n,  
                                                  hsize_t o)
```

Create and write to 3-dimensional native double dataset.

Parameters

- **file** – HDF5 file object
- **datasetName** – Name of dataset to create
- **buffer** – Flattened data to write to dataset (assuming row-major)
- **m** – Length of first dimension in buffer
- **n** – Length of first dimension in buffer
- **o** – Length of first dimension in buffer

Function amici::hdf5::createAndWriteInt1DDataset

- Defined in file_include_amici_hdf5.h

Function Documentation

```
void amici::hdf5::createAndWriteInt1DDataset(H5::H5File const &file, std::string const &datasetName,  
                                              gsl::span<const int> buffer)
```

Create and write to 1-dimensional native integer dataset.

Parameters

- **file** – HDF5 file object
- **datasetName** – Name of dataset to create
- **buffer** – Data to write to dataset

Function `amici::hdf5::createAndWriteInt2DDataset`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`void amici::hdf5::createAndWriteInt2DDataset`(H5::H5File const &file, std::string const &datasetName, gsl::span<const int> buffer, hsize_t m, hsize_t n)

Create and write to 2-dimensional native integer dataset.

Parameters

- **file** – HDF5 file object
- **datasetName** – Name of dataset to create
- **buffer** – Flattened data to write to dataset (assuming row-major)
- **m** – Number of rows in buffer
- **n** – Number of columns buffer

Function `amici::hdf5::createGroup`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`void amici::hdf5::createGroup`(const H5::H5File &file, std::string const &groupPath, bool recursively = true)

Create the given group and possibly parents.

Parameters

- **file** – HDF5 file to write to
- **groupPath** – Path to the group to be created
- **recursively** – Create intermediary groups

Function `amici::hdf5::createOrOpenForWriting`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`H5::H5File amici::hdf5::createOrOpenForWriting`(std::string const &hdf5filename)

Open the given file for writing.

Append if exists, create if not.

Parameters `hdf5filename` – File to open

Returns File object

Function `amici::hdf5::getDoubleDataset1D`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`std::vector<double> amici::hdf5::getDoubleDataset1D(const H5::H5File &file, std::string const &name)`

Read 1-dimensional native double dataset from HDF5 file.

Parameters

- **file** – HDF5 file object
- **name** – Name of dataset to read

Returns Data read

Function `amici::hdf5::getDoubleDataset2D`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`std::vector<double> amici::hdf5::getDoubleDataset2D(const H5::H5File &file, std::string const &name, hsize_t &m, hsize_t &n)`

Read 2-dimensional native double dataset from HDF5 file.

Parameters

- **file** – HDF5 file object
- **name** – Name of dataset to read
- **m** – Number of rows in the dataset
- **n** – Number of columns in the dataset

Returns Flattened data (row-major)

Function `amici::hdf5::getDoubleDataset3D`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`std::vector<double> amici::hdf5::getDoubleDataset3D(const H5::H5File &file, std::string const &name, hsize_t &m, hsize_t &n, hsize_t &o)`

Read 3-dimensional native double dataset from HDF5 file.

Parameters

- **file** – HDF5 file object
- **name** – Name of dataset to read

- **m** – Length of first dimension in dataset
- **n** – Length of first dimension in dataset
- **o** – Length of first dimension in dataset

Returns Flattened data (row-major)

Function `amici::hdf5::getDoubleScalarAttribute`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`double amici::hdf5::getDoubleScalarAttribute(const H5::H5File &file, const std::string &optionsObject, const std::string &attributeName)`

Read scalar native double attribute from HDF5 object.

Parameters

- **file** – HDF5 file
- **optionsObject** – Object to read attribute from
- **attributeName** – Name of attribute to read

Returns Attribute value

Function `amici::hdf5::getIntDataset1D`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`std::vector<int> amici::hdf5::getIntDataset1D(const H5::H5File &file, std::string const &name)`

Read 1-dimensional native integer dataset from HDF5 file.

Parameters

- **file** – HDF5 file object
- **name** – Name of dataset to read

Returns Data read

Function `amici::hdf5::getIntScalarAttribute`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`int amici::hdf5::getIntScalarAttribute(const H5::H5File &file, const std::string &optionsObject, const std::string &attributeName)`

Read scalar native integer attribute from HDF5 object.

Parameters

- **file** – HDF5 file
- **optionsObject** – Object to read attribute from
- **attributeName** – Name of attribute to read

Returns Attribute value

Function `amici::hdf5::getStringAttribute`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`std::string amici::hdf5::getStringAttribute(H5::H5File const &file, std::string const &optionsObject, std::string const &attributeName)`

Read string attribute from HDF5 object.

Parameters

- **file** – HDF5 file
- **optionsObject** – Object to read attribute from
- **attributeName** – Name of attribute to read

Returns Attribute value

Function `amici::hdf5::locationExists(std::string const&, std::string const&)`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`bool amici::hdf5::locationExists(std::string const &filename, std::string const &location)`

Check if the given location (group, link or dataset) exists in the given file.

Parameters

- **filename** – HDF5 filename
- **location** – Location to test for

Returns true if exists, false otherwise

Function amici::hdf5::locationExists(H5::H5File const&, std::string const&)

- Defined in file_include_amici_hdf5.h

Function Documentation

bool amici::hdf5::locationExists(H5::H5File const &file, std::string const &location)

Check if the given location (group, link or dataset) exists in the given file.

Parameters

- **file** – HDF5 file object
- **location** – Location to test for

Returns true if exists, false otherwise

Function amici::hdf5::readModelDataFromHDF5(std::string const&, Model&, std::string const&)

- Defined in file_include_amici_hdf5.h

Function Documentation

void amici::hdf5::readModelDataFromHDF5(std::string const &hdfFile, *Model* &model, std::string const &datasetPath)

Read model data from HDF5 file.

Parameters

- **hdfFile** – Name of HDF5 file
- **model** – *Model* to set data on
- **datasetPath** – Path inside the HDF5 file

Function amici::hdf5::readModelDataFromHDF5(H5::H5File const&, Model&, std::string const&)

- Defined in file_include_amici_hdf5.h

Function Documentation

void amici::hdf5::readModelDataFromHDF5(H5::H5File const &file, *Model* &model, std::string const &datasetPath)

Read model data from HDF5 file.

Parameters

- **file** – HDF5 file handle to read from
- **model** – *Model* to set data on
- **datasetPath** – Path inside the HDF5 file

Function amici::hdf5::readSimulationExpData

- Defined in file_include_amici_hdf5.h

Function Documentation

std::unique_ptr<*ExpData*> amici::hdf5::readSimulationExpData(const std::string &hdf5Filename, const std::string &hdf5Root, const *Model* &model)

Read AMICI *ExpData* data from HDF5 file.

Parameters

- **hdf5Filename** – Name of HDF5 file
- **hdf5Root** – Path inside the HDF5 file to object having *ExpData*
- **model** – The model for which data is to be read

Returns *ExpData* created from data in the given location

Function amici::hdf5::readSolverSettingsFromHDF5(const H5::H5File&, Solver&, std::string const&)

- Defined in file_include_amici_hdf5.h

Function Documentation

void amici::hdf5::readSolverSettingsFromHDF5(const H5::H5File &file, *Solver* &solver, std::string const &datasetPath)

Read solver options from HDF5 file.

Parameters

- **file** – HDF5 file to read from
- **solver** – *Solver* to set options on
- **datasetPath** – Path inside the HDF5 file

Function amici::hdf5::readSolverSettingsFromHDF5(std::string const&, Solver&, std::string const&)

- Defined in file_include_amici_hdf5.h

Function Documentation

void amici::hdf5::readSolverSettingsFromHDF5(std::string const &hdffile, *Solver* &solver, std::string const &datasetPath)

Read solver options from HDF5 file.

Parameters

- **hdffile** – Name of HDF5 file
- **solver** – *Solver* to set options on
- **datasetPath** – Path inside the HDF5 file

Function amici::hdf5::writeReturnData(const ReturnData&, H5::H5File const&, const std::string&)

- Defined in file_include_amici_hdf5.h

Function Documentation

void amici::hdf5::writeReturnData(const *ReturnData* &rdata, H5::H5File const &file, const std::string &hdf5Location)

Write *ReturnData* to HDF5 file.

Parameters

- **rdata** – Data to write
- **file** – HDF5 file to write to
- **hdf5Location** – Full dataset path inside the HDF5 file (will be created)

Function amici::hdf5::writeReturnData(const ReturnData&, std::string const&, const std::string&)

- Defined in file_include_amici_hdf5.h

Function Documentation

void amici::hdf5::writeReturnData(const *ReturnData* &rdata, std::string const &hdf5Filename, const std::string &hdf5Location)

Write *ReturnData* to HDF5 file.

Parameters

- **rdata** – Data to write
- **hdf5Filename** – Filename of HDF5 file
- **hdf5Location** – Full dataset path inside the HDF5 file (will be created)

Function `amici::hdf5::writeReturnDataDiagnosis`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`void amici::hdf5::writeReturnDataDiagnosis(const ReturnData &rdata, H5::H5File const &file, const std::string &hdf5Location)`

Write *ReturnData* diagnosis data to HDF5 file.

Parameters

- **rdata** – Data to write
- **file** – HDF5 file to write to
- **hdf5Location** – Full dataset path inside the HDF5 file (will be created)

Function `amici::hdf5::writeSimulationExpData`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`void amici::hdf5::writeSimulationExpData(const ExpData &edata, H5::H5File const &file, const std::string &hdf5Location)`

Write AMICI experimental data to HDF5 file.

Parameters

- **edata** – The experimental data which is to be written
- **file** – Name of HDF5 file
- **hdf5Location** – Path inside the HDF5 file to object having *ExpData*

Function `amici::hdf5::writeSolverSettingsToHDF5(Solver const&, std::string const&, std::string const&)`

- Defined in `file_include_amici_hdf5.h`

Function Documentation

`void amici::hdf5::writeSolverSettingsToHDF5(Solver const &solver, std::string const &hdf5Filename, std::string const &hdf5Location)`

Write solver options to HDF5 file.

Parameters

- **hdf5Filename** – Name of HDF5 file to write to
- **solver** – *Solver* to write options from
- **hdf5Location** – Path inside the HDF5 file

Function amici::hdf5::writeSolverSettingsToHDF5(Solver const&, H5::H5File const&, std::string const&)

- Defined in file_include_amici_hdf5.h

Function Documentation

void amici::hdf5::writeSolverSettingsToHDF5(*Solver* const &solver, H5::H5File const &file, std::string const &hdf5Location)

Write solver options to HDF5 file.

Parameters

- **file** – File to read from
- **solver** – *Solver* to write options from
- **hdf5Location** – Path inside the HDF5 file

Template Function amici::is_equal

- Defined in file_include_amici_misc.h

Function Documentation

template<class T>
bool amici::is_equal(*T* const &a, *T* const &b)

Check if two spans are equal, treating NaNs in the same position as equal.

Parameters

- **a** –
- **b** –

Returns Whether the contents of the two spans are equal.

Function amici::linearSum

- Defined in file_include_amici_vector.h

Function Documentation

inline void amici::linearSum(*realtype* a, *AmiVector* const &x, *realtype* b, *AmiVector* const &y, *AmiVector* &z)

Computes $z = a*x + b*y$.

Parameters

- **a** – coefficient for x
- **x** – a vector
- **b** – coefficient for y

- **y** – another vector with same size as **x**
- **z** – result vector of same size as **x** and **y**

Function amici::N_VGetArrayPointerConst

- Defined in file_include_amici_vector.h

Function Documentation

inline const *realttype* *amici::N_VGetArrayPointerConst(const *N_Vector* x)

Function amici::operator==(ExpData const&, ExpData const&)

- Defined in file_include_amici_edata.h

Function Documentation

inline bool amici::operator==(ExpData const &lhs, ExpData const &rhs)

Equality operator.

Parameters

- **lhs** – some object
- **rhs** – another object

Returns true, if both arguments are equal; false otherwise.

Function amici::operator==(const Model&, const Model&)

- Defined in file_include_amici_model.h

Function Documentation

bool amici::operator==(const *Model* &a, const *Model* &b)

Parameters

- **a** – First model instance
- **b** – Second model instance

Returns Equality

Function amici::operator==(const ModelDimensions&, const ModelDimensions&)

- Defined in file_include_amici_model.h

Function Documentation

bool amici::operator==(const *ModelDimensions* &a, const *ModelDimensions* &b)

Function amici::operator==(const ModelState&, const ModelState&)

- Defined in file_include_amici_model_state.h

Function Documentation

inline bool amici::operator==(const *ModelState* &a, const *ModelState* &b)

Function amici::operator==(const SimulationParameters&, const SimulationParameters&)

- Defined in file_include_amici_simulation_parameters.h

Function Documentation

bool amici::operator==(const *SimulationParameters* &a, const *SimulationParameters* &b)

Function amici::operator==(const Solver&, const Solver&)

- Defined in file_include_amici_solver.h

Function Documentation

bool amici::operator==(const *Solver* &a, const *Solver* &b)

Parameters

- **a** –
- **b** –

Returns

Function amici::printfToString

- Defined in file_include_amici_misc.h

Function Documentation

std::string amici::printfToString(char const *fmt, va_list ap)

Format printf-style arguments to std::string.

Parameters

- **fmt** – Format string
- **ap** – Argument list pointer

Returns Formatted String

Function amici::regexErrorToString

- Defined in file_include_amici_misc.h

Function Documentation

std::string amici::regexErrorToString(std::regex_constants::error_type err_type)

Convert std::regex_constants::error_type to string.

Parameters **err_type** – error type

Returns Error type as string

Function amici::runAmiciSimulation

- Defined in file_include_amici_amici.h

Function Documentation

std::unique_ptr<ReturnData> amici::runAmiciSimulation(*Solver* &solver, *ExpData* const *edata, *Model* &model, bool rethrow = false)

Core integration routine. Initializes the solver and runs the forward and backward problem.

Parameters

- **solver** – *Solver* instance
- **edata** – pointer to experimental data object
- **model** – model specification object
- **rethrow** – rethrow integration exceptions?

Returns rdata pointer to return data object

Function amici::runAmiciSimulations

- Defined in file_include_amici_amici.h

Function Documentation

```
std::vector<std::unique_ptr<ReturnData>> amici::runAmiciSimulations(Solver const &solver,
                                                                std::vector<ExpData*> const
                                                                &edatas, Model const &model, bool
                                                                failfast, int num_threads)
```

Same as runAmiciSimulation, but for multiple *ExpData* instances. When compiled with OpenMP support, this function runs multi-threaded.

Parameters

- **solver** – *Solver* instance
- **edatas** – experimental data objects
- **model** – model specification object
- **failfast** – flag to allow early termination
- **num_threads** – number of threads for parallel execution

Returns vector of pointers to return data objects

Function amici::scaleParameters

- Defined in file_include_amici_misc.h

Function Documentation

```
void amici::scaleParameters(gsl::span<realtype> const& bufferUnscaled, gsl::span<ParameterScaling> const&
                             pscale, gsl::span<realtype> bufferScaled)
```

Apply parameter scaling according to **scaling**

Parameters

- **bufferUnscaled** –
- **pscale** – parameter scaling
- **bufferScaled** – destination

Template Function amici::serializeToChar

- Defined in file_include_amici_serialization.h

Function Documentation

```
template<typename T>
char *amici::serializeToChar(T const &data, int *size)
```

Serialize object to char array.

Parameters

- **data** – input object
- **size** – maximum char length

Returns The object serialized as char

Template Function amici::serializeToStdVec

- Defined in file_include_amici_serialization.h

Function Documentation

```
template<typename T>
std::vector<char> amici::serializeToStdVec(T const &data)
```

Serialize object to std::vector<char>

Parameters **data** – input object

Returns The object serialized as std::vector<char>

Template Function amici::serializeToString

- Defined in file_include_amici_serialization.h

Function Documentation

```
template<typename T>
std::string amici::serializeToString(T const &data)
```

Serialize object to string.

Parameters **data** – input object

Returns The object serialized as string

Function amici::simulation_status_to_str

- Defined in file_include_amici_amici.h

Function Documentation

`std::string amici::simulation_status_to_str(int status)`

Get the string representation of the given simulation status code (see *ReturnData::status*).

Parameters `status` – Status code

Returns Name of the variable representing this status code.

Template Function `amici::slice(std::vector<T>&, int, unsigned)`

- Defined in `file_include_amici_misc.h`

Function Documentation

`template<class T>`

`gsl::span<T> amici::slice(std::vector<T> &data, int index, unsigned size)`

creates a slice from existing data

Parameters

- `data` – to be sliced
- `index` – slice index
- `size` – slice size

Returns span of the slice

Template Function `amici::slice(std::vector<T> const&, int, unsigned)`

- Defined in `file_include_amici_misc.h`

Function Documentation

`template<class T>`

`gsl::span<T const> amici::slice(std::vector<T> const &data, int index, unsigned size)`

creates a constant slice from existing constant data

Parameters

- `data` – to be sliced
- `index` – slice index
- `size` – slice size

Returns span of the slice

Function amici::unravel_index(size_t, size_t)

- Defined in file_include_amici_misc.h

Function Documentation

auto amici::unravel_index(size_t flat_idx, size_t num_cols) -> std::pair<size_t, size_t>

Convert a flat index to a pair of row/column indices, assuming row-major order.

Parameters

- **flat_idx** – flat index
- **num_cols** – number of columns of referred to matrix

Returns row index, column index

Function amici::unravel_index(sunindextype, SUNMatrix)

- Defined in file_include_amici_sundials_matrix_wrapper.h

Function Documentation

auto amici::unravel_index(sunindextype i, SUNMatrix m) -> std::pair<sunindextype, sunindextype>

Convert a flat index to a pair of row/column indices.

Parameters

- **i** – flat index
- **m** – referred to matrix

Returns row index, column index

Function amici::unscaleParameters

- Defined in file_include_amici_misc.h

Function Documentation

void amici::unscaleParameters(gsl::span<*realtype* const> bufferScaled, gsl::span<*ParameterScaling* const> pscale, gsl::span<*realtype*> bufferUnscaled)

Remove parameter scaling according to the parameter scaling in pscale.

All vectors must be of same length.

Parameters

- **bufferScaled** – scaled parameters
- **pscale** – parameter scaling
- **bufferUnscaled** – unscaled parameters are written to the array

Function amici::wrapErrorHandlerFn

- Defined in file_include_amici_solver.h

Function Documentation

```
void amici::wrapErrorHandlerFn(int error_code, const char *module, const char *function, char *msg, void
                               *eh_data)
```

Extracts diagnosis information from solver memory block and passes them to the specified output function.

Parameters

- **error_code** – error identifier
- **module** – name of the module in which the error occurred
- **function** – name of the function in which the error occurred
- **msg** – error message
- **eh_data** – *amici::Solver* as void*

Template Function amici::writeSlice(const gsl::span<T const>, gsl::span<T>)

- Defined in file_include_amici_misc.h

Function Documentation

```
template<class T>
void amici::writeSlice(const gsl::span<T const> slice, gsl::span<T> buffer)
    local helper function to write computed slice to provided buffer (span)
```

Parameters

- **slice** – computed value
- **buffer** – buffer to which values are to be written

Template Function amici::writeSlice(std::vector<T> const&, std::vector<T>&)

- Defined in file_include_amici_misc.h

Function Documentation

```
template<class T>
void amici::writeSlice(std::vector<T> const &s, std::vector<T> &b)
    local helper function to write computed slice to provided buffer (vector)
```

Parameters

- **s** – computed value
- **b** – buffer to which values are to be written

Template Function amici::writeSlice(std::vector<T> const&, gsl::span<T>)

- Defined in file_include_amici_misc.h

Function Documentation

template<class **T**>
void amici::writeSlice(std::vector<*T*> const &s, gsl::span<*T*> b)
local helper function to write computed slice to provided buffer (vector/span)

Parameters

- **s** – computed value
- **b** – buffer to which values are to be written

Function amici::writeSlice(AmiVector const&, gsl::span<realtype>)

- Defined in file_include_amici_misc.h

Function Documentation

void amici::writeSlice(*AmiVector* const &s, gsl::span<*realtype*> b)
local helper function to write computed slice to provided buffer (AmiVector/span)

Parameters

- **s** – computed value
- **b** – buffer to which values are to be written

Template Function boost::serialization::archiveVector

- Defined in file_include_amici_serialization.h

Function Documentation

template<class **Archive**, typename **T**>
void boost::serialization::archiveVector(*Archive* &ar, *T* **p, int size)
Serialize a raw array to a boost archive.

Parameters

- **ar** – archive
- **p** – Pointer to array
- **size** – Size of p

Template Function `boost::serialization::serialize(Archive&, amici::Model&, unsigned int)`

- Defined in `file_include_amici_model.h`

Function Documentation

```
template<class Archive>
void boost::serialization::serialize(Archive &ar, amici::Model &m, unsigned int version)
```

Template Function `boost::serialization::serialize(Archive&, amici::ReturnData&, unsigned int)`

- Defined in `file_include_amici_rdata.h`

Function Documentation

```
template<class Archive>
void boost::serialization::serialize(Archive &ar, amici::ReturnData &r, unsigned int version)
```

Template Function `boost::serialization::serialize(Archive&, amici::Solver&, unsigned int)`

- Defined in `file_include_amici_solver.h`

Function Documentation

```
template<class Archive>
void boost::serialization::serialize(Archive &ar, amici::Solver &s, unsigned int version)
```

Template Function `boost::serialization::serialize(Archive&, amici::CNodeSolver&, unsigned int)`

- Defined in `file_include_amici_solver_cnodes.h`

Function Documentation

```
template<class Archive>
void boost::serialization::serialize(Archive &ar, amici::CNodeSolver &s, unsigned int version)
```

Template Function `boost::serialization::serialize(Archive&, amici::IDASolver&, unsigned int)`

- Defined in `file_include_amici_solver_idas.h`

Function Documentation

```
template<class Archive>
void boost::serialization::serialize(Archive &ar, amici::IDASolver &s, unsigned int version)
```

Function `gsl::make_span(SUNMatrix)`

- Defined in `file_include_amici_sundials_matrix_wrapper.h`

Function Documentation

```
inline span<realtype> gsl::make_span(SUNMatrix m)
```

Create span from SUNMatrix.

Parameters `m` – SUNMatrix

Returns Created span

Function `gsl::make_span(N_Vector)`

- Defined in `file_include_amici_vector.h`

Function Documentation

```
inline span<realtype> gsl::make_span(N_Vector nv)
```

Create span from N_Vector.

Parameters `nv` –

Returns

Variables

Variable `amici::AMICI_CONV_FAILURE`

- Defined in `file_include_amici_defines.h`

Variable Documentation

constexpr int amici::AMICI_CONV_FAILURE = -4

Variable amici::AMICI_DAMPING_FACTOR_ERROR

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_DAMPING_FACTOR_ERROR = -86

Variable amici::AMICI_DATA_RETURN

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_DATA_RETURN = 1

Variable amici::AMICI_ERR_FAILURE

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_ERR_FAILURE = -3

Variable amici::AMICI_ERROR

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_ERROR = -99

Variable amici::AMICI_FIRST_RHSFUNC_ERR

- Defined in file_include_amici_defines.h

Variable Documentation

```
constexpr int amici::AMICI_FIRST_RHSFUNC_ERR = -9
```

Variable amici::AMICI_ILL_INPUT

- Defined in file_include_amici_defines.h

Variable Documentation

```
constexpr int amici::AMICI_ILL_INPUT = -22
```

Variable amici::AMICI_MAX_TIME_EXCEEDED

- Defined in file_include_amici_defines.h

Variable Documentation

```
constexpr int amici::AMICI_MAX_TIME_EXCEEDED = -1000
```

Variable amici::AMICI_NO_STEADY_STATE

- Defined in file_include_amici_defines.h

Variable Documentation

```
constexpr int amici::AMICI_NO_STEADY_STATE = -81
```

Variable amici::AMICI_NORMAL

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_NORMAL = 1

Variable amici::AMICI_NOT_IMPLEMENTED

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_NOT_IMPLEMENTED = -999

Variable amici::AMICI_NOT_RUN

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_NOT_RUN = -1001

Variable amici::AMICI_ONE_STEP

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_ONE_STEP = 2

Variable amici::AMICI_ONEOUTPUT

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_ONEOUTPUT = 5

Variable amici::AMICI_PREEQUILIBRATE

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_PREEQUILIBRATE = -1

Variable amici::AMICI_RECOVERABLE_ERROR

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_RECOVERABLE_ERROR = 1

Variable amici::AMICI_RHSFUNC_FAIL

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_RHSFUNC_FAIL = -8

Variable amici::AMICI_ROOT_RETURN

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_ROOT_RETURN = 2

Variable amici::AMICI_SINGULAR_JACOBIAN

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_SINGULAR_JACOBIAN = -809

Variable amici::AMICI_SUCCESS

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_SUCCESS = 0

Variable amici::AMICI_TOO_MUCH_ACC

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_TOO_MUCH_ACC = -2

Variable amici::AMICI_TOO_MUCH_WORK

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_TOO_MUCH_WORK = -1

Variable amici::AMICI_UNRECOVERABLE_ERROR

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr int amici::AMICI_UNRECOVERABLE_ERROR = -10

Variable amici::model_quantity_to_str

- Defined in file_include_amici_model.h

Variable Documentation

const std::map<*ModelQuantity*, std::string> amici::model_quantity_to_str

Variable amici::pi

- Defined in file_include_amici_defines.h

Variable Documentation

constexpr double amici::pi = 3.14159265358979323846

Defines

Define _USE_MATH_DEFINES

- Defined in file_include_amici_defines.h

Define Documentation

_USE_MATH_DEFINES

Define AMICI_H5_RESTORE_ERROR_HANDLER

- Defined in file_include_amici_hdf5.h

Define Documentation

AMICI_H5_RESTORE_ERROR_HANDLER

Define AMICI_H5_SAVE_ERROR_HANDLER

- Defined in file_include_amici_hdf5.h

Define Documentation**AMICI_H5_SAVE_ERROR_HANDLER****Define AMICI_VERSION**

- Defined in file_include_amici_version.in.h

Define Documentation**AMICI_VERSION****Define M_1_PI**

- Defined in file_include_amici_defines.h

Define Documentation**M_1_PI****Define M_2_PI**

- Defined in file_include_amici_defines.h

Define Documentation**M_2_PI****Define M_2_SQRTPI**

- Defined in file_include_amici_defines.h

Define Documentation

M_2_SQRTPI

Define M_E

- Defined in file_include_amici_defines.h

Define Documentation

M_E

Define M_LN10

- Defined in file_include_amici_defines.h

Define Documentation

M_LN10

Define M_LN2

- Defined in file_include_amici_defines.h

Define Documentation

M_LN2

Define M_LOG10E

- Defined in file_include_amici_defines.h

Define Documentation

M_LOG10E

Define M_LOG2E

- Defined in file_include_amici_defines.h

Define Documentation**M_LOG2E****Define M_PI**

- Defined in file_include_amici_defines.h

Define Documentation**M_PI****Define M_PI_2**

- Defined in file_include_amici_defines.h

Define Documentation**M_PI_2****Define M_PI_4**

- Defined in file_include_amici_defines.h

Define Documentation**M_PI_4****Define M_SQRT1_2**

- Defined in file_include_amici_defines.h

Define Documentation

M_SQRT1_2

Define M_SQRT2

- Defined in file_include_amici_defines.h

Define Documentation

M_SQRT2

Typedefs

Typedef amici::const_N_Vector

- Defined in file_include_amici_vector.h

Typedef Documentation

using amici::const_N_Vector = std::add_const_t<typename std::remove_pointer_t<N_Vector>>*

Since const N_Vector is not what we want

Typedef amici::realtype

- Defined in file_include_amici_defines.h

Typedef Documentation

using amici::realtype = double

defines variable type for simulation variables (determines numerical accuracy)

MATLAB INTERFACE

12.1 Installing the AMICI MATLAB toolbox

To use AMICI from MATLAB, start MATLAB and add the `AMICI/matlab` directory to the MATLAB path. To add all toolbox directories to the MATLAB path, execute the matlab script:

```
installAMICI.m
```

To store the installation for further MATLAB session, the path can be saved via:

```
savepath
```

For the compilation of `.mex` files, MATLAB needs to be configured with a working C++ compiler. The C++ compiler needs to be installed and configured via:

```
mex -setup c++
```

For a list of supported compilers we refer to the respective MathWorks [documentation](#).

12.2 Using AMICI's MATLAB interface

In the following we will give a detailed overview how to specify models in MATLAB and how to call the generated simulation files.

Note: The MATLAB interface requires the MathWorks [Symbolic Math Toolbox](#) for model import (but not for model simulation).

The Symbolic Math Toolbox requirement can be circumvented by performing model import using the Python interface. The resulting code can then be used from Matlab (see [Compiling a Python-generated model](#)).

Warning: Due to changes in the Symbolic Math Toolbox, the last MATLAB release with working AMICI model import is R2017b (see <https://github.com/AMICI-dev/AMICI/issues/307>).

12.2.1 Specifying models in Matlab

This guide will guide the user on how to specify models in MATLAB. For example implementations see the examples in the `matlab/examples` directory.

Header

The model definition needs to be defined as a function which returns a `struct` with all symbolic definitions and options.

```
function [model] = example_model_syms()
```

Options

Set the options by specifying the respective field of the model struct

```
model.(fieldname) = value
```

The options specify default options for simulation, parametrisation and compilation. All of these options are optional.

field	description	default
.param	default parametrisation 'log'/'log10'/'lin'	'lin'
.debug	flag to compile with debug symbols	false
.forward	flag to activate forward sensitivities	true
.adjoint	flag to activate adjoint sensitivities	true

When set to false, the fields `forward` and `adjoint` will speed up the time required to compile the model but also disable the respective sensitivity computation.

States

Create the respective symbolic variables. The name of the symbolic variable can be chosen arbitrarily.

```
syms state1 state2 state3
```

Create the state vector containing all states:

```
model.sym.x = [ state1 state2 state3 ];
```

Parameters

Create the respective symbolic variables. The name of the symbolic variable can be chosen arbitrarily. Sensitivities will be derived for all *parameters*.

```
syms param1 param2 param3 param4 param5 param6
```

Create the parameters vector

```
model.sym.p = [ param1 param2 param3 param4 param5 param6 ];
```

Constants

Create the respective symbolic variables. The name of the symbolic variable can be chosen arbitrarily. Sensitivities with respect to *constants* will not be derived.

```
syms const1 const2
```

Create the constants vector

```
model.sym.k = [ const1 const2 ];
```

Differential equations

For time-dependent differential equations you can specify a symbolic variable for time. This **needs** to be denoted by `t`.

```
syms t
```

Specify the right hand side of the differential equation `f` or `xdot`

```
model.sym.xdot(1) = [ const1 - param1*state1 ];
model.sym.xdot(2) = [ +param2*state1 + dirac(t-param3) - const2*state2 ];
model.sym.xdot(3) = [ param4*state2 ];
```

or

```
model.sym.f(1) = [ const1 - param1*state1 ];
model.sym.f(2) = [ +param2*state1 + dirac(t-param3) - const2*state2 ];
model.sym.f(3) = [ param4*state2 ];
```

The specification of `f` or `xdot` may depend on states, parameters and constants.

For DAEs also specify the mass matrix.

```
model.sym.M = [1, 0, 0;...
               0, 1, 0;...
               0, 0, 0];
```

The specification of `M` may depend on parameters and constants.

For ODEs the integrator will solve the equation $\dot{x} = f$ and for DAEs the equations $M \cdot \dot{x} = f$. AMICI will decide whether to use CVODES (for ODEs) or IDAS (for DAEs) based on whether the mass matrix is defined or not.

In the definition of the differential equation you can use certain symbolic functions. For a full list of available functions see `src/symbolic_functions.cpp`.

Dirac functions can be used to cause a jump in the respective states at the specified time-point. This is typically used to model injections, or other external stimuli. Spline functions can be used to model time/state dependent response with unknown time/state dependence.

Initial Conditions

Specify the initial conditions. These may depend on parameters on constants and must have the same size as `x`.

```
model.sym.x0 = [ param4, 0, 0 ];
```

Observables

Specify the observables. These may depend on parameters and constants.

```
model.sym.y(1) = state1 + state2;  
model.sym.y(2) = state3 - state2;
```

In the definition of the observable you can use certain symbolic functions. For a full list of available functions see `src/symbolic_functions.cpp`. Dirac functions in observables will have no effect.

Events

Specifying events is optional. Events are specified in terms of a trigger function, a bolus function and an output function. The roots of the trigger function defines the occurrences of the event. The bolus function defines the change in the state on event occurrences. The output function defines the expression which is evaluated and reported by the simulation routine on every event occurrence. The user can create events by constructing a vector of objects of the class [amievent](#).

```
model.sym.event(1) = amievent(state1 - state2,0,[]);
```

Events may depend on states, parameters and constants but *not* on observables.

For more details about event support see:

Fröhlich, F., Theis, F. J., Rädler, J. O., & Hasenauer, J. (2017). Parameter estimation for dynamical systems with discrete events and logical operations. *Bioinformatics*, 33(7), 1049-1056. doi:10.1093/bioinformatics/btw764.

Standard deviation

Specifying standard deviations is optional. It only has an effect when computing adjoint sensitivities. It allows the user to specify standard deviations of experimental data for observables and events.

Standard deviation for observable data is denoted by `sigma_y`

```
model.sym.sigma_y(1) = param5;
```

Standard deviation for event data is denoted by `sigma_t`

```
model.sym.sigma_t(1) = param6;
```

Both `sigma_y` and `sigma_t` can either be a scalar or of the same dimension as the observables / events function. They can depend on time and parameters but must not depend on the states or observables. The values provided in `sigma_y` and `sigma_t` will only be used if the value in `D.Sigma_Y` or `D.Sigma_T` in the user-provided data struct is NaN. See simulation for details.

Objective Function

By default, AMICI assumes a normal noise model and uses the corresponding negative log-likelihood

$$J = 1/2 * \text{sum}(((y_i(t) - my_{ti})/\sigma_{y_i})^2 + \log(2 * \pi * \sigma_{y_i}^2))$$

as objective function. A user provided objective function can be specified in

```
model.sym.Jy
```

As reference see the default specification of `this.sym.Jy` in `amimodel.makeSyms`.

12.2.2 SBML

AMICI can also import SBML models using the command `SBML2AMICI`. This will generate a model specification as described above, which may be edited by the user to apply further changes.

12.2.3 Model Compilation

The model can then be compiled by calling `amiwrap.m`:

```
amiwrap(modelname, 'example_model_syms', dir, o2flag)
```

Here `modelname` should be a string defining the name of the model, `dir` should be a string containing the path to the directory in which simulation files should be placed and `o2flag` is a flag indicating whether second order sensitivities should also be compiled. The user should make sure that the previously defined function `example_model_syms` is in the user path. Alternatively, the user can also call the function `example_model_syms`

```
[model] = example_model_syms()
```

and subsequently provide the generated struct to `amiwrap(...)`, instead of providing the symbolic function:

```
amiwrap(modelname, model, dir, o2flag)
```

In a similar fashion, the user could also generate multiple models and pass them directly to `amiwrap(...)` without generating respective model definition scripts.

Compiling a Python-generated model

For better performance or to avoid the Symbolic Math Toolbox requirement, it might be desirable to import a model in Python and compile the resulting code into a mex file. For Python model import, consult the respective section of the Python documentation. Once the import succeeded, there will be a `compileMexFile.m` script inside the newly created model directory which can be invoked to compile the mex file. This mex file and `simulate_*.m` can be used as if fully created by matlab.

Using Python-AMICI model import from Matlab

With recent matlab versions it is possible to use the AMICI python package from within Matlab. This not quite comfortable yet, but it is possible.

Here for proof of concept:

- Install the python package as described in the documentation
- Ensure pyversion shows the correct python version (3.6 or 3.7)
- Then, from within the AMICI matlab/ directory:

```
sbml_importer = py.amici.SbmlImporter('../python/examples/example_steadystate/model_
↪steadystate_scaled.xml')
sbml_importer.sbml2amici('steadystate', 'steadystate_example_from_python')
model = py.steadystate.getModel()
solver = model.getSolver()
model.setTimepoints(linspace(0, 50, 51))
rdata = py.amici.runAmiciSimulation(model, solver)
result = struct(py.dict(rdata.items()))
t = double(py.array.array('d', result.ts))
x = double(py.array.array('d', result.x.flatten()))
x = reshape(x, flip(double(py.array.array('d', result.x.shape))))
plot(t, x)
```

12.2.4 Model simulation

After the call to `amiwrap(...)` two files will be placed in the specified directory. One is a `_modelname_.mex` and the other is `simulate_*modelname*.m`. The mex file should never be called directly. Instead the MATLAB script, which acts as a wrapper around the .mex simulation file should be used.

The `simulate_ _modelname_.m` itself carries extensive documentation on how to call the function, what it returns and what additional options can be specified. In the following we will give a short overview of possible function calls.

Integration

Define a time vector:

```
t = linspace(0,10,100)
```

Generate a parameter vector:

```
theta = ones(6,1);
```

Generate a constants vector:

```
kappa = ones(2,1);
```

Integrate:

```
sol = simulate_modelname(t,theta,kappa,[],options)
```

The integration status will be indicated by the `sol.status` flag. Negative values indicated failed integration. The states will then be available as `sol.x`. The observables will then be available as `sol.y`. The event outputs will then

be available as `sol.z`. If no event occurred there will be an event at the end of the considered interval with the final value of the root function is stored in `sol.rz`.

Alternatively the integration can also be called via

```
[status,t,x,y] = simulate_modelname(t,theta,kappa,[],options)
```

The integration status will be indicated by the flag `status`. Negative values indicated failed integration. The states will then be available as `x`. The observables will then be available as `y`. No event output will be given.

Forward Sensitivities

Set the sensitivity computation to forward sensitivities and integrate:

```
options.sensi = 1;
options.sensi_meth = 'forward';
sol = simulate_modelname(t,theta,kappa,[],options)
```

The integration status will be indicated by the `sol.status` flag. Negative values indicate failed integration. The states will be available as `sol.x`, with the derivative with respect to the parameters in `sol.sx`. The observables will be available as `sol.y`, with the derivative with respect to the parameters in `sol.sy`. The event outputs will be available as `sol.z`, with the derivative with respect to the parameters in `sol.sz`. If no event occurred there will be an event at the end of the considered interval with the final value of the root function stored in `sol.rz`, with the derivative with respect to the parameters in `sol.srz`.

Alternatively the integration can also be called via

```
[status,t,x,y,sx,sy] = simulate_modelname(t,theta,kappa,[],options)
```

The integration status will be indicated by the `status` flag. Negative values indicate failed integration. The states will then be available as `x`, with derivative with respect to the parameters in `sx`. The observables will then be available as `y`, with derivative with respect to the parameters in `sy`. No event output will be given.

Adjoint sensitivities

Set the sensitivity computation to adjoint sensitivities:

```
options.sensi = 1;
options.sensi_meth = 'adjoint';
```

Define Experimental Data:

```
D.Y = [NaN(1,2)],ones(length(t)-1,2)];
D.Sigma_Y = [0.1*ones(length(t)-1,2),NaN(1,2)];
D.T = ones(1,1);
D.Sigma_T = NaN;
```

The NaN values in `Sigma_Y` and `Sigma_T` will be replaced by the specification in `model.sym.sigma_y` and `model.sym.sigma_t`. Data points with NaN value will be completely ignored.

Integrate:

```
sol = simulate_modelname(t,theta,kappa,D,options)
```

The integration status will be indicated by the `sol.status` flag. Negative values indicate failed integration. The log-likelihood will then be available as `sol.llh` and the derivative with respect to the parameters in `sol.sllh`. Note that for adjoint sensitivities no state, observable and event sensitivities will be available. Yet this approach can be expected to be significantly faster for systems with a large number of parameters.

Steady-state sensitivities

This will compute state sensitivities according to the formula

$$s_k^x = - \left(\frac{\partial f}{\partial x} \right)^{-1} \frac{\partial f}{\partial \theta_k}$$

In the current implementation this formulation does not allow for conservation laws as this would result in a singular Jacobian.

Set the final timepoint as infinity, this will indicate the solver to compute the steadystate:

```
t = Inf;
```

Set the sensitivity computation to steady state sensitivities:

```
options.sensi = 1;
```

Integrate:

```
sol = simulate_modelname(t,theta,kappa,D,options)
```

The states will be available as `sol.x`, with the derivative with respect to the parameters in `sol.sx`. The observables will be available as `sol.y`, with the derivative with respect to the parameters in `sol.sy`. Notice that for steady state sensitivities no event sensitivities will be available. For the accuracy of the computed derivatives it is essential that the system is sufficiently close to a steady state. This can be checked by examining the right hand side of the system at the final time-point via `sol.diagnosis.xdot`.

12.3 FAQ

Q: My model fails to build.

A: Remove the corresponding model directory located in `AMICI/models/yourmodelname` and compile again.

Q: It still does not compile.

A: Remove the directory `AMICI/models/mexext` and compile again.

Q: It still does not compile.

A: Make an [issue](#) and we will have a look.

Q: My Python-generated model does not compile from MATLAB.

A: Try building any of the available examples before. If this succeeds, retry building the original model. Some dependencies might not be built correctly when using only the `compileMexFile.m` script.

Q: I get an out of memory error while compiling my model on a Windows machine.

A: This may be due to an old compiler version. See [issue #161](#) for instructions on how to install a new compiler.

Q: How are events interpreted in a DAE context?

A: Currently we only support impulse free events. Also sensitivities have never been tested. Proceed with care and create an [issue](#) if any problems arise!

Q: The simulation/sensitivities I get are incorrect.

A: There are some known issues, especially with adjoint sensitivities, events and DAEs. If your particular problem is not featured in the [issues](#) list, please add it!

12.4 AMICI Matlab API

AMICI Matlab library functions

12.4.1 Class Hierarchy

12.4.2 File Hierarchy

12.4.3 Full API

Namespaces

Namespace matlab

Contents

- [Namespaces](#)

Namespaces

- [Namespace matlab::mixin](#)

Namespace matlab::mixin

Classes and Structs

Class amidata

- Defined in file_matlab_@amidata_amidata.m

Inheritance Relationships

Base Type

- public handle

Class Documentation

amidata : public handle

AMIDATA provides a data container to pass experimental data to the simulation routine for likelihood computation. when any of the properties are updated, the class automatically checks consistency of dimension and updates related properties and initialises them with NaNs.

Public Functions

amidata::amidata(matlabtypesubstitute varargin)

amidata creates an amidata container for experimental data with specified dimensions amidata.

AMIDATA(amidata) creates a copy of the input container

AMIDATA(struct) tries to creates an amidata container from the input struct. the struct should have the following

AMIDATA(nt,ny,nz,ne,nk) constructs an empty data container with in the provided dimensions intialised with NaNs

fields t [nt,1] Y [nt,ny] Sigma_Y [nt,ny] Z [ne,nz] Sigma_Z [ne,nz] condition [nk,1] conditionPreequilibration [nk,1] if some fields are missing the function will try to initialise them with NaNs with consistent dimensions

param varargin

Public Members

matlabtypesubstitute nt = 0

number of timepoints

Default: 0

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute ny = 0

number of observables

Default: 0

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute nz = 0

number of event observables

Default: 0

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute ne = 0

number of events

Default: 0

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute nk = 0

number of conditions/constants

Default: 0

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute t = double.empty("")

timepoints of observations

Default: double.empty("")

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute Y = double.empty("")

observations

Default: double.empty("")

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute Sigma_Y = double.empty("")

standard deviation of observations

Default: double.empty("")

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute Z = **double.empty("")**

event observations

Default: double.empty("")

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute Sigma_Z = **double.empty("")**

standard deviation of event observations

Default: double.empty("")

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute condition = **double.empty("")**

experimental condition

Default: double.empty("")

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute conditionPreequilibration = **double.empty("")**

experimental condition for preequilibration

Default: double.empty("")

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute reinitializeStates = **false**

reinitialize states based on fixed parameters after preeq.?

Default: false

Class amievent

- Defined in file_matlab_@amievent_amievent.m

Class Documentation

class amievent

AMIEVENT defines events which later on will be transformed into appropriate C code.

Public Functions

amievent::amievent(matlabtypesubstitute trigger, matlabtypesubstitute bolus, matlabtypesubstitute z)

amievent constructs an amievent object from the provided input.

param trigger trigger function, the event will be triggered on at all roots of this function

param bolus the bolus that will be added to all states on every occurrence of the event

param z the event output that will be reported on every occurrence of the event

mlhsInnerSubst<::amievent > amievent::setHflag(matlabtypesubstitute hflag)

setHflag sets the hflag property.

param hflag value for the hflag property, type double

retval this updated event definition object

Public Members

::symbolic trigger = sym.empty("")

the trigger function activates the event on every zero crossing

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** sym.empty("")

::symbolic bolus = sym.empty("")

the bolus function defines the change in states that is applied on every event occurrence

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** sym.empty("")

```
::symbolic z = sym.empty("")
```

output function for the event

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** sym.empty("")

```
matlabtypesubstitute hflag = logical.empty("")
```

flag indicating that a heaviside function is present, this helps to speed up symbolic computations

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** logical.empty("")

Class amifun

- Defined in file_matlab_@amifun_amifun.m

Class Documentation

class amifun

AMIFUN defines functions which later on will be transformed into appropriate C code.

Public Functions

```
amifun::amifun(matlabtypesubstitute funstr, matlabtypesubstitute model)
```

amievent constructs an amifun object from the provided input.

param funstr name of the requested function

param model amimodel object which carries all symbolic definitions to construct the function

```
noret::substitute amifun::writeCcode_sensi(::amimodel model, ::fileid fid)
```

writeCcode_sensi is a wrapper for writeCcode which loops over parameters and reduces overhead by check nonzero values

param model model definition object

param fid file id in which the final expression is written

retval fid void

noret::substitute amifun::writeCcode(::amimodel model, ::fileid fid)

writeCcode is a wrapper for gccode which initialises data and reduces overhead by check nonzero values

param model model definition object

param fid file id in which the final expression is written

retval fid void

noret::substitute amifun::writeMcode(::amimodel model)

writeMcode generates matlab evaluable code for specific model functions

param model model definition object

retval model void

mlhsInnerSubst<::amifun > amifun::gccode(::amimodel model, ::fileid fid)

gccode transforms symbolic expressions into c code and writes the respective expression into a specified file

param model model definition object

param fid file id in which the expression should be written

retval this function definition object

mlhsInnerSubst<::amifun > amifun::getDeps(::amimodel model)

getDeps populates the sensiflag for the requested function

param model model definition object

retval this updated function definition object

mlhsInnerSubst<::amifun > amifun::getArgs(::amimodel model)

getFArgs populates the fargstr property with the argument string of the respective model function (if applicable). model functions are not wrapped versions of functions which have a model specific name and for which the call is solver specific.

param model model definition object

retval this updated function definition object

mlhsInnerSubst<::amifun > amifun::getNVecs()

getfunargs populates the nvecs property with the names of the N_Vector elements which are required in the execution of the function (if applicable). the information is directly extracted from the argument string

retval this updated function definition object

mlhsInnerSubst<::amifun > amifun::getCVar()

getCVar populates the cvar property

retval this updated function definition object

mlhsInnerSubst<::amifun > amifun::getSensiFlag()

getSensiFlag populates the sensiflag property

retval this updated function definition object

```
mlhsSubst< mlhsInnerSubst<::amifun >,mlhsInnerSubst<::amimodel > > amifun::getSyms(:  
:amimodel model)
```

getSyms computes the symbolic expression for the requested function

param model model definition object

retval this updated function definition object

retval model updated model definition object

Public Members

```
::symbolic sym = sym("[]")
```

symbolic definition struct

Default: sym("")

```
::symbolic sym_noopt = sym("[]")
```

symbolic definition which was not optimized (no dependencies on w)

Default: sym("")

```
::symbolic strsym = sym("[]")
```

short symbolic string which can be used for the reuse of precomputed values

Default: sym("")

```
::symbolic strsym_old = sym("[]")
```

short symbolic string which can be used for the reuse of old values

Default: sym("")

```
::char funstr = char.empty("")
```

name of the model

Default: char.empty("")

```
::char cvar = char.empty("")
```

name of the c variable

Default: char.empty("")

```
::char argstr = char.empty("")
```

argument string (solver specific)

Default: char.empty("")

```
::cell deps = cell.empty("")
```

dependencies on other functions

Default: cell.empty("")

matlabtypesubstitute nvecs = `cell.empty("")`

nvec dependencies

Default: `cell.empty("")`

matlabtypesubstitute sensiflag = `logical.empty("")`

indicates whether the function is a sensitivity or derivative with respect to parameters

Default: `logical.empty("")`

Class amimodel

- Defined in file_matlab_@amimodel_amimodel.m

Inheritance Relationships

Base Type

- public handle

Class Documentation

amimodel : public handle

AMIMODEL carries all model definitions including functions and events.

Public Functions

amimodel::amimodel(::string symfun, ::string modelname)

amimodel initializes the model object based on the provided symfun and modelname

param symfun this is the string to the function which generates the modelstruct. You can also directly pass the struct here

param modelname name of the model

noret::substitute amimodel::updateRHS(matlabtypesubstitute xdot)

updateRHS updates the private fun property .fun.xdot.sym (right hand side of the differential equation)

param xdot new right hand side of the differential equation

retval xdot void

noret::substitute amimodel::updateModelName(matlabtypesubstitute modelname)

updateModelName updates the modelname

param modelname new modelname

retval modelname void

noret::substitute amimodel::updateWrapPath(matlabtypesubstitute wrap_path)

updateModelName updates the modelName

param wrap_path new wrap_path

retval wrap_path void

noret::substitute amimodel::parseModel()

parseModel parses the model definition and computes all necessary symbolic expressions.

retval void

noret::substitute amimodel::generateC()

generateC generates the c files which will be used in the compilation.

retval void

noret::substitute amimodel::generateRebuildM()

generateRebuildM generates a Matlab script for recompilation of this model

retval void

noret::substitute amimodel::compileC()

compileC compiles the mex simulation file

retval void

noret::substitute amimodel::generateM(::amimodel amimodelo2)

generateM generates the matlab wrapper for the compiled C files.

param amimodelo2 this struct must contain all necessary symbolic definitions for second order sensitivities

retval amimodelo2 void

noret::substitute amimodel::getFun(::struct HTable, ::string funstr)

getFun generates symbolic expressions for the requested function.

param HTable struct with hashes of symbolic definition from the previous compilation

param funstr function for which symbolic expressions should be computed

retval funstr void

noret::substitute amimodel::makeEvents()

makeEvents extracts discontinuities from the model right hand side and converts them into events

retval void

noret::substitute amimodel::makeSyms()

makeSyms extracts symbolic definition from the user provided model and checks them for consistency

retval void

mlhsInnerSubst<:bool > amimodel::checkDeps(:struct HTable, :cell deps)

checkDeps checks the dependencies of functions and populates sym fields if necessary

param HTable struct with reference hashes of functions in its fields

param deps cell array with containing a list of dependencies

retval cflag boolean indicating whether any of the dependencies have changed with respect to the hashes stored in HTable

mlhsInnerSubst<:struct > amimodel::loadOldHashes()

loadOldHashes loads information from a previous compilation of the model.

retval HTable struct with hashes of symbolic definition from the previous compilation

mlhsInnerSubst< matlabtypesubstitute > amimodel::augmento2()

augmento2 augments the system equation to also include equations for sensitivity equation. This will enable us to compute second order sensitivities in a forward-adjoint or forward-forward approach later on.

retval this augmented system which contains symbolic definition of the original system and its sensitivities

mlhsInnerSubst<:amimodel > amimodel::augmento2vec()

augmento2 augments the system equation to also include equations for sensitivity equation. This will enable us to compute second order sensitivities in a forward-adjoint or forward-forward approach later on.

retval modelo2vec augmented system which contains symbolic definition of the original system and its sensitivities

Public Members

::struct sym = struct.empty("")

symbolic definition struct

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** struct.empty("")

::struct fun = struct.empty("")

struct which stores information for which functions c code needs to be generated

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** struct.empty("")

::amievent event = amievent.empty("")

struct which stores information for which functions c code needs to be generated

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** amievent.empty("")

::string modelname = char.empty("")

name of the model

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** char.empty("")

::struct HTable = struct.empty("")

struct that contains hash values for the symbolic model definitions

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** struct.empty("")

::bool debug = false

flag indicating whether debugging symbols should be compiled

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** false

::bool adjoint = true

flag indicating whether adjoint sensitivities should be enabled

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** true

::bool forward = true

flag indicating whether forward sensitivities should be enabled

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** true

::double t0 = 0

default initial time

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** 0

::string wtype = char.empty("")

type of wrapper (cvides/idas)

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** char.empty("")

::int nx = double.empty("")

number of states

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

::int nxtrue = double.empty("")

number of original states for second order sensitivities

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

::int ny = double.empty("")

number of observables

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

::int nytrue = double.empty("")

number of original observables for second order sensitivities

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

::int np = double.empty("")

number of parameters

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

::int nk = double.empty("")

number of constants

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

```
::int ng = double.empty("")
```

number of objective functions

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

```
::int nevent = double.empty("")
```

number of events

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

```
::int nz = double.empty("")
```

number of event outputs

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

```
::int nztrue = double.empty("")
```

number of original event outputs for second order sensitivities

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

```
::*int id = double.empty("")
```

flag for DAEs

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

::int ubw = `double.empty("")`

upper Jacobian bandwidth

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

::int lbw = `double.empty("")`

lower Jacobian bandwidth

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

::int nnz = `double.empty("")`

number of nonzero entries in Jacobian

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

::*int sparseidx = `double.empty("")`

dataindexes of sparse Jacobian

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `double.empty("")`

::*int rowvals = `double.empty("")`

rowindexes of sparse Jacobian

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

::*int colptrs = double.empty("")
columnindexes of sparse Jacobian

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

::*int sparseidxB = double.empty("")
dataindexes of sparse Jacobian

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

::*int rowvalsB = double.empty("")
rowindexes of sparse Jacobian

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

::*int colptrsB = double.empty("")
columnindexes of sparse Jacobian

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** double.empty("")

::*cell funs = `cell.empty("")`

cell array of functions to be compiled

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `cell.empty("")`

::*cell mfuns = `cell.empty("")`

cell array of matlab functions to be compiled

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `cell.empty("")`

::string coptim = `"-O3"`

optimisation flag for compilation

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `"-O3"`

::string param = `"lin"`

default parametrisation

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `"lin"`

matlabtypesubstitute wrap_path = `char.empty("")`

path to wrapper

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `char.empty("")`

matlabtypesubstitute recompile = false

flag to enforce recompilation of the model

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `false`

matlabtypesubstitute cfun = struct.empty("")

storage for flags determining recompilation of individual functions

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `struct.empty("")`

matlabtypesubstitute o2flag = 0

flag which identifies augmented models 0 indicates no augmentation 1 indicates augmentation by first order sensitivities (yields second order sensitivities) 2 indicates augmentation by one linear combination of first order sensitivities (yields hessian-vector product)

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `0`

matlabtypesubstitute z2event = double.empty("")

vector that maps outputs to events

Default: `double.empty("")`

matlabtypesubstitute splineflag = false

flag indicating whether the model contains spline functions

Default: `false`

matlabtypesubstitute minflag = false

flag indicating whether the model contains min functions

Default: `false`

matlabtypesubstitute maxflag = false

flag indicating whether the model contains max functions

Default: false

::int nw = 0

number of derived variables w, w is used for code optimization to reduce the number of frequently occurring expressions

Default: 0

::int ndwdx = 0

number of derivatives of derived variables w, dwdx

Default: 0

::int ndwdp = 0

number of derivatives of derived variables w, dwdp

Default: 0

Public Static Functions

**noret::substitute amimodel::compileAndLinkModel(matlabtypesubstitute modelname,
matlabtypesubstitute modelSourceFolder, matlabtypesubstitute coptim,
matlabtypesubstitute debug, matlabtypesubstitute funs, matlabtypesubstitute cfun)**

compileAndLinkModel compiles the mex simulation file. It does not check if the model files have changed since generating C++ code or whether all files are still present. Use only if you know what you are doing. The safer alternative is rerunning *amiwrap()*.

param modelname name of the model as specified for *amiwrap()*

param modelSourceFolder path to model source directory

param coptim optimization flags

param debug enable debugging

param funs array with names of the model functions, will be guessed from source files if left empty

param cfun struct indicating which files should be recompiled

retval cfun void

**noret::substitute amimodel::generateMatlabWrapper(matlabtypesubstitute nx,
matlabtypesubstitute ny, matlabtypesubstitute np, matlabtypesubstitute nk,
matlabtypesubstitute nz, matlabtypesubstitute o2flag, ::amimodel amimodelo2,
matlabtypesubstitute wrapperFilename, matlabtypesubstitute modelname,
matlabtypesubstitute pscale, matlabtypesubstitute forward,
matlabtypesubstitute adjoint)**

generateMatlabWrapper generates the matlab wrapper for the compiled C files.

param nx number of states

param ny number of observables

param np number of parameters
param nk number of fixed parameters
param nz number of events
param o2flag o2flag
param amimodelo2 this struct must contain all necessary symbolic definitions for second order sensitivities
param wrapperFilename output filename
param modelname name of the model
param pscale default parameter scaling
param forward has forward sensitivity equations
param adjoint has adjoint sensitivity equations
retval adjoint void

Class amioption

- Defined in file_matlab_@amioption_amioption.m

Inheritance Relationships

Base Type

- public matlab::mixin::CustomDisplay

Class Documentation

amioption : public matlab::mixin::CustomDisplay

AMIOPTION provides an option container to pass simulation parameters to the simulation routine.

Public Functions

amioption::amioption(matlabtypesubstitute varargin)

amioptions Construct a new amioptions object `OPTS = amioption()` creates a set of options with each option set to its default value.

`OPTS = amioption(PARAM, VAL, ...)` creates a set of options with the named parameters altered with the specified values.

`OPTS = amioption(OLDOPTS, PARAM, VAL, ...)` creates a copy of OLDOPTS with the named parameters altered with the specified value

Note: to see the parameters, check the documentation page for amioption

param varargin input to construct amioption object, see function function description

Public Members

matlabtypesubstitute atol = 1e-16

absolute integration tolerance

Default: 1e-16

matlabtypesubstitute rtol = 1e-8

relative integration tolerance

Default: 1e-8

matlabtypesubstitute maxsteps = 1e4

maximum number of integration steps

Default: 1e4

matlabtypesubstitute quad_atol = 1e-12

absolute quadrature tolerance

Default: 1e-12

matlabtypesubstitute quad_rtol = 1e-8

relative quadrature tolerance

Default: 1e-8

matlabtypesubstitute maxstepsB = 0

maximum number of integration steps

Default: 0

matlabtypesubstitute ss_atol = 1e-16

absolute steady state tolerance

Default: 1e-16

matlabtypesubstitute ss_rtol = 1e-8

relative steady state tolerance

Default: 1e-8

matlabtypesubstitute sens_ind = double.empty("")

index of parameters for which the sensitivities are computed

Default: double.empty("")

matlabtypesubstitute tstart = 0

starting time of the simulation

Default: 0

matlabtypesubstitute lmm = 2

linear multistep method.

Default: 2

matlabtypesubstitute iter = 2

iteration method for linear multistep.

Default: 2

matlabtypesubstitute linsol = 9

linear solver

Default: 9

matlabtypesubstitute stldet = true

stability detection flag

Default: true

matlabtypesubstitute interpType = 1

interpolation type

Default: 1

matlabtypesubstitute ism = 1

forward sensitivity mode

Default: 1

matlabtypesubstitute sensi_meth = 1

sensitivity method

Default: 1

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute sensi_meth_preeq = 1

sensitivity method for preequilibration

Default: 1

matlabtypesubstitute sensi = 0

sensitivity order

Default: 0

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute nmaxevent = 10

number of reported events

Default: 10

matlabtypesubstitute ordering = 0

reordering of states

Default: 0

matlabtypesubstitute ss = 0

steady state sensitivity flag

Default: 0

matlabtypesubstitute x0 = double.empty("")

custom initial state

Default: double.empty("")

matlabtypesubstitute sx0 = double.empty("")

custom initial sensitivity

Default: double.empty("")

matlabtypesubstitute newton_maxsteps = 40

newton solver: maximum newton steps

Default: 40

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute z2event = double.empty("")

mapping of event outputs to events

Default: double.empty("")

matlabtypesubstitute pscale = "["]

parameter scaling Single value or vector matching sens_ind. Valid options are “log”, “log10” and “lin” for log, log10 or unscaled parameters p. Use [] for default as specified in the model (fallback: lin).

Default: “[”

Note: This property has custom functionality when its value is changed.

matlabtypesubstitute steadyStateSensitivityMode = 0

Mode for computing sensitivities ({0: Newton}, 1: Simulation)

Default: 0

Public Static Functions

```
mlhsInnerSubst< matlabtypesubstitute > amioption::
getIntegerPScale(matlabtypesubstitute pscaleString)
```

pscaleInt converts a parameter scaling string into the corresponding integer representation

```
param pscaleString parameter scaling string
retval pscaleString int
```

Class amised

- Defined in file_matlab_@amised_amised.m

Inheritance Relationships

Base Type

- public handle

Class Documentation

amised : public handle

AMISED is a container for SED-ML objects.

Public Functions

```
amised::amised(matlabtypesubstitute sedname)
```

amised reads in an SEDML document using the JAVA binding of of libSEDML

```
param sedname name/path of the SEDML document
```

Public Members

```
matlabtypesubstitute model = struct("'event',[],'sym',[]")
```

amimodel from the specified model

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: Matlab documentation of property attributes. **Default:** struct("'event',[],'sym',[]")

matlabtypesubstitute modelname = {""}

cell array of model identifiers

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** {""}

matlabtypesubstitute sedml = struct.empty("")

stores the struct tree from the xml definition

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** struct.empty("")

matlabtypesubstitute outputcount = "[]"

count the number of outputs per model

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** ""

matlabtypesubstitute varidx = "[]"

indexes for dataGenerators

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** ""

matlabtypesubstitute varsym = sym("[]")

symbolic expressions for variables

Note: This property has non-standard access specifiers: SetAccess = Private, GetAccess = Public

Note: [Matlab documentation of property attributes](#). **Default:** `sym("[]")`

matlabtypesubstitute datasym = `sym("[]")`

symbolic expressions for data

Note: This property has non-standard access specifiers: `SetAccess = Private`, `GetAccess = Public`

Note: [Matlab documentation of property attributes](#). **Default:** `sym("[]")`

Class optsym

- Defined in file_matlab_@optsym_optsym.m

Inheritance Relationships

Base Type

- public sym

Class Documentation

optsym : public sym

OPTSYM is an auxiliary class to gain access to the private symbolic property `s` which is necessary to be able to call `symobj::optimize` on it.

Public Functions

optsym::optsym(::sym symbol)

optsym converts the symbolic object into a optsym object

param symbol symbolic object

mlhsInnerSubst<::sym > optsym::getoptimized()

getoptimized calls `symobj::optimize` on the optsym object

retval out optimized symbolic object

Functions

Function `am_and`

- Defined in `file_matlab_symbolic_am_and.m`

Function Documentation

mlhsInnerSubst< **matlabtypesubstitute** > **am_and**(::sym a, ::sym b)

`am_and` is the amici implementation of the symbolic and function

param a first input parameter

param b second input parameter

retval fun logical value, negative for false, positive for true

Function `am_eq`

- Defined in `file_matlab_symbolic_am_eq.m`

Function Documentation

mlhsInnerSubst< **matlabtypesubstitute** > **am_eq**(**matlabtypesubstitute** varargin)

`am_eq` is currently a placeholder that simply produces an error message

param varargin elements for chain of equalities

retval fun logical value, negative for false, positive for true

Function `am_ge`

- Defined in `file_matlab_symbolic_am_ge.m`

Function Documentation

mlhsInnerSubst< **matlabtypesubstitute** > **am_ge**(::sym varargin)

`am_ge` is the amici implementation of the n-ary mathml greaterorequal function this is an n-ary function, for more than 2 input parameters it will check whether `and(varargin{1} >= varargin{2}, varargin{2} >= varargin{3}, ...)`

param varargin chain of input parameters

retval fun `a >= b` logical value, negative for false, positive for true

Function am_gt

- Defined in file_matlab_symbolic_am_gt.m

Function Documentation

mlhsInnerSubst< matlabtypesubstitute > am_gt(::sym varargin)

am_gt is the amici implementation of the n-ary mathml greaterthan function this is an n-ary function, for more than 2 input parameters it will check whether and(varargin{1} > varargin{2}, varargin{2} > varargin{3},...)

param varargin chain of input parameters

retval fun a > b logical value, negative for false, positive for true

Function am_if

- Defined in file_matlab_symbolic_am_if.m

Function Documentation

mlhsInnerSubst< matlabtypesubstitute > am_if(::sym condition, ::sym truepart, ::sym falsepart)

am_if is the amici implementation of the symbolic if function

param condition logical value

param truepart value if condition is true

param falsepart value if condition is false

retval fun if condition is true truepart, else falsepart

Function am_le

- Defined in file_matlab_symbolic_am_le.m

Function Documentation

mlhsInnerSubst< matlabtypesubstitute > am_le(::sym varargin)

am_le is the amici implementation of the n-ary mathml lessorequal function this is an n-ary function, for more than 2 input parameters it will check whether and(varargin{1} <= varargin{2}, varargin{2} <= varargin{3},...)

param varargin chain of input parameters

retval fun a <= b logical value, negative for false, positive for true

Function am_lt

- Defined in file_matlab_symbolic_am_lt.m

Function Documentation

mlhsInnerSubst< matlabtypesubstitute > am_lt(::sym varargin)

am_lt is the amici implementation of the n-ary mathml lessthan function this is an n-ary function, for more than 2 input parameters it will check whether and(varargin{1} < varargin{2}, varargin{2} < varargin{3},...)

param varargin chain of input parameters

retval fun a < b logical value, negative for false, positive for true

Function am_max

- Defined in file_matlab_symbolic_am_max.m

Function Documentation

mlhsInnerSubst< matlabtypesubstitute > am_max(::sym a, ::sym b)

am_max is the amici implementation of the symbolic max function

param a first input parameter

param b second input parameter

retval fun maximum of a and b

Function am_min

- Defined in file_matlab_symbolic_am_min.m

Function Documentation

mlhsInnerSubst< matlabtypesubstitute > am_min(::sym a, ::sym b)

am_min is the amici implementation of the symbolic min function

param a first input parameter

param b second input parameter

retval fun minimum of a and b

Function `am_or`

- Defined in `file_matlab_symbolic_am_or.m`

Function Documentation

`mlhsInnerSubst< matlabtypesubstitute > am_or(::sym a, ::sym b)`

`am_or` is the amici implementation of the symbolic or function

param a first input parameter

param b second input parameter

retval fun logical value, negative for false, positive for true

Function `am_piecewise`

- Defined in `file_matlab_symbolic_am_piecewise.m`

Function Documentation

`mlhsInnerSubst< matlabtypesubstitute > am_piecewise(matlabtypesubstitute piece, matlabtypesubstitute condition, matlabtypesubstitute default)`

`am_piecewise` is the amici implementation of the mathml piecewise function

param piece value if condition is true

param condition logical value

param default value if condition is false

retval fun return value, piece if condition is true, default if not

Function `am_spline`

- Defined in `file_matlab_symbolic_am_spline.m`

Function Documentation

`mlhsInnerSubst< matlabtypesubstitute > am_spline(matlabtypesubstitute varargin)`

Function `am_spline_pos`

- Defined in file `_matlab_symbolic_am_spline_pos.m`

Function Documentation

`mlhsInnerSubst< matlabtypesubstitute > am_spline_pos(matlabtypesubstitute varargin)`

Function `am_stepfun`

- Defined in file `_matlab_symbolic_am_stepfun.m`

Function Documentation

`mlhsInnerSubst< matlabtypesubstitute > am_stepfun(::sym t, matlabtypesubstitute tstart, matlabtypesubstitute vstart, matlabtypesubstitute tend, matlabtypesubstitute vend)`

`am_stepfun` is the amici implementation of the step function

param t input variable

param tstart input variable value at which the step starts

param vstart value during the step

param tend input variable value at which the step end

param vend value after the step

retval fun 0 before tstart, vstart between tstart and tend and vend after tend

Function `am_xor`

- Defined in file `_matlab_symbolic_am_xor.m`

Function Documentation

`mlhsInnerSubst< matlabtypesubstitute > am_xor(::sym a, ::sym b)`

`am_xor` is the amici implementation of the symbolic exclusive or function

param a first input parameter

param b second input parameter

retval fun logical value, negative for false, positive for true

Function AMICI2D2D

- Defined in file_matlab_AMICI2D2D.m

Function Documentation

**noret::substitute AMICI2D2D(matlabtypesubstitute filename,
matlabtypesubstitute modelname)**

Function amiwrap

- Defined in file_matlab_amiwrap.m

Function Documentation

noret::substitute amiwrap(matlabtypesubstitute varargin)

AMIWRAP generates c++ mex files for the simulation of systems of differential equations via CVODES and IDAS.

param varargin

```
amiwrap ( modelname, symfun, tdir, o2flag )
```

Required Parameters for varargin:

- modelname specifies the name of the model which will be later used for the naming of the simulation file
- symfun specifies a function which executes model definition
- tdir target directory where the simulation file should be placed **Default:** \$AMICI-CIDIR/models/modelname
- o2flag boolean whether second order sensitivities should be enabled **Default:** false

retval o2flag void

Function installAMICI

- Defined in file_matlab_installAMICI.m

Function Documentation

noret::substitute installAMICI()

Function SBML2AMICI

- Defined in file_matlab_SBML2AMICI.m

Function Documentation

**noret::substitute SBML2AMICI(matlabtypesubstitute filename,
matlabtypesubstitute modelname)**

SBML2AMICI generates AMICI model definition files from SBML.

param filename name of the SBML file (withouth extension)

param modelname name of the model, this will define the name of the output file (default: input filename)

retval modelname void

12.5 AMICI developer's guide

This document contains information for AMICI developers, not too relevant to regular users.

12.5.1 Branches / releases

AMICI roughly follows the [GitFlow](#). All new contributions are merged into `develop`. These changes are regularly merged into `master` as new releases. For release versioning we are trying to follow [semantic versioning](#). New releases are created on Github and are automatically deployed to [Zenodo](#) for archiving and to obtain a digital object identifier (DOI) to make them citable. Furthermore, our [CI pipeline](#) will automatically create and deploy a new release on [PyPI](#).

We try to keep a clean git history. Therefore, feature pull requests are squash-merged to `develop`. Merging of release branches to master is done via merge commits.

12.5.2 When starting to work on some issue

When starting to work on some Github issue, please assign yourself to let other developers know that you are working on it to avoid duplicate work. If the respective issue is not completely clear, it is generally a good idea to ask for clarification before starting to work on it.

If you want to work on something new, please create a Github issue first.

12.5.3 Code contributions

When making code contributions, please follow our style guide and the process described below:

- Check if you agree to release your contribution under the conditions provided in LICENSE. By opening a pull requests you confirm us that you do agree.
- Start a new branch from `develop` (on your fork, or at the main repository if you have access)
- Implement your changes
- Submit a pull request to the `develop` branch
- Make sure your code is documented appropriately
 - Run `scripts/run-doxxygen.sh` to check completeness of your documentation
- Make sure your code is compatible with C++14, `gcc` and `clang` (our CI pipeline will do this for you)
- When adding new functionality, please also provide test cases (see `tests/cpp/` and `documentation/CI.md`)
- Write meaningful commit messages
- Run all tests to ensure nothing was broken ([more details](#))
 - Run `scripts/buildAll.sh && scripts/run-cpp-tests.sh`.
 - If you made changes to the Matlab or C++ code and have a Matlab license, please also run `tests/cpp/wrapTestModels.m` and `tests/testModels.m`
 - If you made changes to the Python or C++ code, run `make python-tests` in `build`
- When all tests are passing and you think your code is ready to merge, request a code review (see also our [code review guideline](#))
- Wait for feedback. If you do not receive feedback to your pull request within a week, please give us a friendly reminder.

Style guide

General

- All files and functions should come with file-level and function-level documentation.
- All new functionality should be covered by unit or integration tests. Runtime of those tests should be kept as short as possible.

Python

- We want to be compatible with Python 3.8
- For the Python code we want to follow [PEP8](#). Although this is not the case for all existing code, any new contributions should do so.
- We use Python [type hints](#) for all functions (but not for class attributes, since they are not supported by the current Python doxygen filter). In Python code type hints should be used instead of doxygen `@type`.

For function docstrings, follow this format:

```
"""One-line description.

Possible a more detailed description

Arguments:
    Argument1: This needs to start on the same line, otherwise the current
               doxygen filter will fail.

Returns:
    Return value

Raises:
    SomeError in case of some error.
"""
```

C++

- We use C++14
- We want to maintain compatibility with g++, clang and the Intel C++ compiler
- For code formatting, we use the settings from `.clang-format` in the root directory
- *Details to be defined*

Matlab

To be defined

12.5.4 Further topics

AMICI documentation

This file describes how the AMICI documentation is organized and compiled.

Building documentation

Multi-interface documentation

AMICI documentation hosted at [Read the Docs \(RTD\)](#) is generated using [Sphinx](#) and related packages. The legacy GitHub Pages URL <https://amici-dev.github.io/AMICI/> is set up as a redirect to RTD.

The main configuration file is `documentation/conf.py` and the documentation is generated using `scripts/run-sphinx.sh`. The documentation is written to `documentation/_build/`.

The documentation comprises:

- reStructuredText / Markdown files from `documentation/`
- Python API documentation of native Python modules
- Python API documentation of Python generated via SWIG (doxygen-style comments translated to docstrings by SWIG)

- C++ API documentation (doxygen -> exhale -> breathe -> sphinx)
- Matlab API documentation (mtocpp -> doxygen -> exhale -> breathe -> sphinx)

Doxygen-only (legacy)

(Parts of the) AMICI documentation can also be directly created using [doxygen](#) directly. It combines Markdown files from the root directory, from `documentation/` and in-source documentation from the C++ and Matlab source files.

The documentation is generated by running

```
scripts/run-doxygen.sh
```

The resulting HTML and PDF documentation will be created in `doc/`. `scripts/run-doxygen.sh` also checks for any missing in-source documentation.

Doxygen configuration

The main doxygen configuration file is located in `matlab/mtoc/config/Doxyfile.template`. Edit this file for inclusion or exclusion of additional files.

Matlab documentation

Matlab documentation is processed by `mtoc++`. This is configured in `matlab/mtoc/config`.

Python documentation

Python documentation is processed by doxygen and doxypy using the script and filters in `scripts/`.

Writing documentation

Out-of-source documentation

Out-of-source documentation files should be written in reStructuredText if intended for Read the Docs or in Markdown if intended for rendering on GitHub. Files to be included in the Sphinx/RTD documentation live in `documentation/`. Graphics for documentation are kept in `documentation/gfx/`.

When using Markdown

- Note that there are some incompatibilities of GitHub Markdown and Doxygen Markdown. Ideally documentation should be written in a format compatible with both. This affects for example images links which currently cause trouble in Doxygen.
- Where possible, relative links are preferred over absolute links. However, they should work with both Github and Doxygen and ideally with local files for offline use.
- Please stick to the limit of 80 characters per line for readability of raw Markdown files where possible.

However, note that some Markdown interpreters can handle line breaks within links and headings, whereas others cannot. Here, compatibility is preferred over linebreaks.

- Avoid trailing whitespace

Maintaining the list of publications

We want to maintain a list of publications / projects using AMICI. This is located at `documentation/references.md`. This file is created by `documentation/recreate_reference_list.py` based on the bibtex file `documentation/amici_refs.bib`.

After any changes to `documentation/amici_refs.bib`, please run

```
documentation/recreate_reference_list.py
```

(requires `biblib`)

Code review guide

A guide for reviewing code and having your code reviewed by others.

Everyone

- Don't be too protective of your code
- Accept that, to a large extent, coding decisions are a matter of personal preference
- Don't get personal
- Ask for clarification
- Avoid strong language
- Try to understand your counterpart's perspective
- Clarify how strong you feel about each discussion point

Reviewing code

- If there are no objective advantages, don't force your style on others
- Ask questions instead of making demands
- Assume the author gave his best
- Mind the scope (many things are nice to have, but might be out of scope of the current change - open a new issue)
- The goal is "good enough", not "perfect"
- Be constructive
- You do not always have to request changes

Having your code reviewed

- Don't take it personal - the review is on the code, not on you
- Code reviews take time, appreciate the reviewer's comments
- Assume the reviewer did his best (but might still be wrong)
- Keep code changes small (e.g. separate wide reformatting from actual code changes to facility review)
- If the reviewer does not understand your code, probably many others won't either

Checklist

- ☐ Adherence to project-specific style guide
- ☐ The code is self-explanatory
- ☐ The code is concise / expressive
- ☐ Meaningful identifiers are used
- ☐ Corner-cases are covered, cases not covered fail loudly
- ☐ The code can be expected to scale well (enough)
- ☐ The code is well documented (e.g., input, operation, output), but without trivial comments
- ☐ The code is **SOLID**
- ☐ New code is added in the most meaningful place (i.e. matches the current architecture)
- ☐ No magic numbers
- ☐ No hard-coded values that should be user inputs
- ☐ No dead code left
- ☐ The changes make sense
- ☐ The changes are not obviously degrading performance
- ☐ There is no duplicated code
- ☐ The API is convenient
- ☐ Code block length and complexity is adequate
- ☐ Spelling okay
- ☐ The code is tested

Continuous integration (CI) and tests

AMICI uses a continuous integration pipeline running via <https://github.com/features/actions>. This includes the following steps:

- Checking existence and format of documentation
- Static code analysis (<http://cppcheck.sourceforge.net/>)
- Unit and integration tests
- Memory leak detection

More details are provided in the sections below.

The CI scripts and tests can be found in `tests/` and `scripts/`. Some of the tests are integrated with CMake, see `make help` in the build directory.

C++ unit and integration tests

To run C++ tests, build AMICI with `make` or `scripts/buildAll.sh`, then run `scripts/run-cpp-tests.sh`.

Python unit and integration tests

To run Python tests, run `../scripts/run-python-tests.sh` from anywhere (assumes build directory is `build/`) or run `make python-tests` in your build directory.

SBML Test Suite

We test Python-AMICI SBML support using the test cases from the semantic [SBML Test Suite](#). When making changes to the model import functions, make sure to run these tests.

To run the SBML Test Suite test cases, the easiest way is:

1. Running `scripts/installAmiciSource.sh` which creates a virtual Python environment and performs a development installation of AMICI from the current repository. (This needs to be run only once or after AMICI model generation or C++ changes).
2. Running `scripts/run-SBMLTestsuite.sh`. This will download the test cases if necessary and run them all. A subset of test cases can be selected with an optional argument (e.g. `scripts/run-SBMLTestsuite.sh 1, 3-6, 8`, to run cases 1, 3, 4, 5, 6 and 8).

Once the test cases are available locally, for debugging it might be easier to directly use `pytest` with `tests/testSBMLSuite.py`.

Matlab tests (not included in CI pipeline)

To execute the Matlab test suite, run `tests/testModels.m`.

Model simulation integration tests

Many of our integration tests are model simulations. The simulation results obtained from the Python and C++ are compared to results saved in an HDF5 file (`tests/cpp/expectedResults.h5`). Settings and data for the test simulations are also specified in this file.

Note: The C++ code for the models is included in the repository under `models/`. This code is to be updated whenever `amici::Model` changes.

Regenerating C++ code of the test models

Regeneration of the model code has to be done whenever `amici::Model` or the Matlab model import routines change.


This is done with

```
tests/cpp/wrapTestModels.m
```

Note: This is currently only possible from Matlab < R2018a. This should change as soon as 1) all second-order sensitivity code is ported to C++/Python, 2) a non-SBML import exists for Python and 3) support for events has been added for Python.

Regenerating expected results

To update test results, run `make test` in the build directory, replace `tests/cpp/expectedResults.h5` by `tests/cpp/writeResults.h5.bak` [ONLY DO THIS AFTER TRIPLE CHECKING CORRECTNESS OF RESULTS] Before replacing the test results, confirm that only expected datasets have changed, e.g. using

```
h5diff -v --relative 1e-8 tests/cpp/expectedResults.h5 tests/cpp/writeResults.h5.bak |  less
```

Adding/Updating tests

To add new tests add a new corresponding python script (see, e.g., `./tests/generateTestConfig/example_dirac.py`) and add it to and run `tests/generateTestConfigurationForExamples.sh`. Then regenerate the expected test results (see above).

Debugging AMICI

This document contains some information on how to debug any issues in AMICI, in particular for C++ Python extensions.

Caveman debugging / printf-debugging

The simplest approach may often be adding some print-statements to the code, as this does not require any special tools.

Note that after each change of the C++ files, the AMICI extension *as well as the model extension* (if any model functions are called), need to be recompiled. The simplest and safest approach would be re-installation of the amici package and re-import of the model. As this can be very time-consuming, the following shortcut is possible, assuming you are using a development installation (`pip install -e .`):

```
# rebuild the amici base extension, from within the amici root directory
# (note that this only recompiles the amici source files, NOT third-party
# dependencies such as sundials):
cd python/sdist/
python setup.py build_ext --build-lib .

# rebuild the model, from within the model package directory:
python setup.py build_ext --force --build-lib .
```

Note: Be careful when working interactively, Python may not pick up any changes in already imported modules. The safest is to start a new Python process after any changes.

Using a proper debugger

Debugging with with [gdb](<https://www.sourceware.org/gdb/>) is most convenient with a minimal reproducible example that is directly invoked from gdb. For example:

```
# start gdb
gdb --args python -m pytest ../tests/test_sbml_import.py::test_nosensi

# inside gdb, set a meaningful breakpoint and launch:
break amici::runAmiciSimulation
run
# ... (see one of the many gdb tutorials)
```

Alternative, gdb can attach to a running process by passing the `--pid` argument.

For many users, it may be more convenient to use gdb via some graphical user interface as provided by various C++ IDEs.

Note: For better debugging experience, but at the cost of runtime performance, consider building the amici and model extension with environment variable `ENABLE_AMICI_DEBUGGING=TRUE`. This will include debugging symbols and disable compiler optimizations.

12.6 Handling of Discontinuities

This document provides guidance and rationale on the implementation of events in AMICI. Events include any discontinuities in the right hand side of the differential equation. There are three types of discontinuities:

- **Solution Jump Discontinuities** can be created by SBML events or delta functions in the right hand side.
- **Right-Hand-Side Jump Discontinuities** result in removable discontinuities in the solution and can be created by Piecewise, Heaviside functions and other logical operators in the right hand side.
- **Right-Hand-Side Removable Discontinuities** do not lead to discontinuities in the solution, but may lead to discontinuous higher order temporal derivatives and can be created by functions such as max or min in the right hand side.

12.6.1 Mathematical Considerations

A detailed mathematical description of the required sensitivity formulas is provided in

- Fröhlich, F., Theis, F. J., Rädler, J. O., & Hasenauer, J. (2017). Parameter estimation for dynamical systems with discrete events and logical operations. *Bioinformatics*, 33(7), 1049-1056. doi:[10.1093/bioinformatics/btw764](https://doi.org/10.1093/bioinformatics/btw764).

12.6.2 Algorithmic Considerations

Solution Jump Discontinuities

SUNDIALS by itself does not support solution jump discontinuities. We implement support by accessing private SUNDIALS API in `amici::Solver::resetState()`, `amici::Solver::reInitPostProcess()` and `amici::Solver::reInitPostProcessB()`. These functions reset interval variables to initial values to simulate a fresh integration start, but keep/update the solution history, which is important for adjoint solutions.

Right-Hand-Side Jump Discontinuities

In principle these discontinuities do not need any special treatment, but empirically, the solver may overstep or completely ignore the discontinuity, leading to poor solution quality. This is particularly problematic when step size is large and changes in step size, which can be caused by parameter changes, inclusion of forward sensitivities or during backward solves, may alter solutions in unexpected ways. Accordingly, finite difference approximations, forward sensitivities as well as adjoint sensitivities will yield poor derivative approximations.

To address these issues, we use the built-in rootfinding functionality in SUNDIALS, which pauses the solver at the locations of discontinuities and avoids overstepping or ignoring of discontinuities.

Another difficulty comes with the evaluation of Heaviside functions. After or during processing of discontinuities, Heaviside functions need to be evaluated at the left and right hand limit of discontinuities. This is challenging as the solver may slightly over- or understep the discontinuity timepoint by a small epsilon and limits have to be correctly computed in both forward and backward passes.

To address this issue, AMICI uses a vector of Heaviside helper variables h that keeps track of the values of the Heaviside functions that have the respective root function as argument. These will be automatically updated during events and take either 0 or 1 values as appropriate pre/post event limits.

In order to fully support SBML events and Piecewise functions, AMICI uses the SUNDIALS functionality to only track zero crossings from negative to positive. Accordingly, two root functions are necessary to keep track of Heaviside functions and two Heaviside function helper variables will be created, where one corresponds to the value of $\text{Heaviside}(\dots)$ and one to the value of $1 - \text{Heaviside}(\dots)$. To ensure that Heaviside functions are correctly evaluated at the beginning of the simulation, Heaviside functions are implemented as unit steps that evaluate to 1 at 0. The arguments of Heaviside functions are normalized such that respective properties of Piecewise functions are conserved for the first Heaviside function variable. Accordingly, the value of the second helper variable is incorrect when simulation starts when the respective Heaviside function evaluates to zero at initialization and should generally not be used.

Right-Hand-Side Removable Discontinuities

Removable discontinuities do not require any special treatment. Numerically, this may be advantageous, but is currently not implemented.

INDICES AND TABLES

- `genindex`
- `modindex`
- `search`

PYTHON MODULE INDEX

a

- `amici`, 179
- `amici.amici`, 180
- `amici.bngl_import`, 240
- `amici.conservated_quantities_demartino`, 280
- `amici.conservated_quantities_rref`, 281
- `amici.gradient_check`, 276
- `amici.import_utils`, 251
- `amici.logging`, 275
- `amici.numpy`, 282
- `amici.ode_export`, 256
- `amici.ode_model`, 266
- `amici.pandas`, 272
- `amici.parameter_mapping`, 277
- `amici.petab_import`, 240
- `amici.petab_import_pysb`, 245
- `amici.petab_objective`, 246
- `amici.petab_simulate`, 250
- `amici.plotting`, 270
- `amici.pysb_import`, 237
- `amici.sbml_import`, 233

Symbols

`_USE_MATH_DEFINES` (*C macro*), 544

A

`adams` (*amici.amici.LinearMultistepMethod attribute*), 189

`add_component()` (*amici.ode_export.ODEModel method*), 259

`add_conservation_law()` (*amici.ode_export.ODEModel method*), 259

`add_d_dt()` (*amici.sbml_import.SbmlImporter method*), 234

`add_local_symbol()` (*amici.sbml_import.SbmlImporter method*), 234

`add_path` (*class in amici*), 180

`adjoint` (*amici.amici.SensitivityMethod attribute*), 218

`amici`
module, 179

`amici.amici`
module, 180

`amici.bngl_import`
module, 240

`amici.conservated_quantities_demartino`
module, 280

`amici.conservated_quantities_rref`
module, 281

`amici.gradient_check`
module, 276

`amici.import_utils`
module, 251

`amici.logging`
module, 275

`amici.numpy`
module, 282

`amici.ode_export`
module, 256

`amici.ode_model`
module, 266

`amici.pandas`
module, 272

`amici.parameter_mapping`

module, 277

`amici.petab_import`
module, 240

`amici.petab_import_pysb`
module, 245

`amici.petab_objective`
module, 246

`amici.petab_simulate`
module, 250

`amici.plotting`
module, 270

`amici.pysb_import`
module, 237

`amici.sbml_import`
module, 233

`amici::AbstractModel` (*C++ class*), 303

`amici::AbstractModel::~~AbstractModel` (*C++ function*), 303

`amici::AbstractModel::fdeltaqB` (*C++ function*), 313

`amici::AbstractModel::fdeltasx` (*C++ function*), 312

`amici::AbstractModel::fdeltax` (*C++ function*), 312

`amici::AbstractModel::fdeltaxB` (*C++ function*), 313

`amici::AbstractModel::fdJrzdsigma` (*C++ function*), 317

`amici::AbstractModel::fdJrzdz` (*C++ function*), 317

`amici::AbstractModel::fdJydsigma` (*C++ function*), 316

`amici::AbstractModel::fdJydy` (*C++ function*), 315

`amici::AbstractModel::fdJydy_colptrs` (*C++ function*), 316

`amici::AbstractModel::fdJydy_rowvals` (*C++ function*), 316

`amici::AbstractModel::fdJzdsigma` (*C++ function*), 316

`amici::AbstractModel::fdJzdz` (*C++ function*), 316

`amici::AbstractModel::fdrzdp` (*C++ function*), 311

`amici::AbstractModel::fdrzdx` (*C++ function*), 311

amici::AbstractModel::fdsigmaydp (C++ function), 314
 amici::AbstractModel::fdsigmaydy (C++ function), 314
 amici::AbstractModel::fdsigmazdp (C++ function), 314
 amici::AbstractModel::fdtotal_cldp (C++ function), 321
 amici::AbstractModel::fdtotal_cldx_rdata (C++ function), 321
 amici::AbstractModel::fdtotal_cldx_rdata_colptrs (C++ function), 321
 amici::AbstractModel::fdtotal_cldx_rdata_rowvals (C++ function), 321
 amici::AbstractModel::fdwdp (C++ function), 318
 amici::AbstractModel::fdwdp_colptrs (C++ function), 318
 amici::AbstractModel::fdwdp_rowvals (C++ function), 318
 amici::AbstractModel::fdwdw (C++ function), 319
 amici::AbstractModel::fdwdw_colptrs (C++ function), 319
 amici::AbstractModel::fdwdw_rowvals (C++ function), 319
 amici::AbstractModel::fdwdx (C++ function), 319
 amici::AbstractModel::fdwdx_colptrs (C++ function), 319
 amici::AbstractModel::fdwdx_rowvals (C++ function), 319
 amici::AbstractModel::fdx0 (C++ function), 307
 amici::AbstractModel::fdx_rdatadp (C++ function), 320
 amici::AbstractModel::fdx_rdatadtcl (C++ function), 320
 amici::AbstractModel::fdx_rdatadtcl_colptrs (C++ function), 320
 amici::AbstractModel::fdx_rdatadtcl_rowvals (C++ function), 320
 amici::AbstractModel::fdx_rdatadx_solver (C++ function), 319
 amici::AbstractModel::fdx_rdatadx_solver_colptrs (C++ function), 320
 amici::AbstractModel::fdx_rdatadx_solver_rowvals (C++ function), 320
 amici::AbstractModel::fdxdotdp (C++ function), 306
 amici::AbstractModel::fdydp (C++ function), 308
 amici::AbstractModel::fdydx (C++ function), 309
 amici::AbstractModel::fdzdp (C++ function), 310
 amici::AbstractModel::fdzdx (C++ function), 311
 amici::AbstractModel::fJ (C++ function), 304
 amici::AbstractModel::fJB (C++ function), 304
 amici::AbstractModel::fJDiag (C++ function), 305
 amici::AbstractModel::fJrz (C++ function), 315
 amici::AbstractModel::fJSparse (C++ function), 305
 amici::AbstractModel::fJSparseB (C++ function), 305
 amici::AbstractModel::fJSparseB_ss (C++ function), 304
 amici::AbstractModel::fJv (C++ function), 306
 amici::AbstractModel::fJy (C++ function), 314
 amici::AbstractModel::fJz (C++ function), 315
 amici::AbstractModel::froot (C++ function), 303
 amici::AbstractModel::frz (C++ function), 310
 amici::AbstractModel::fsigmay (C++ function), 313
 amici::AbstractModel::fsigmaz (C++ function), 314
 amici::AbstractModel::fsrz (C++ function), 310
 amici::AbstractModel::fstau (C++ function), 307
 amici::AbstractModel::fsx0 (C++ function), 307
 amici::AbstractModel::fsx0_fixedParameters (C++ function), 307
 amici::AbstractModel::fsxdot (C++ function), 303
 amici::AbstractModel::fsz (C++ function), 309
 amici::AbstractModel::fw (C++ function), 317
 amici::AbstractModel::fx0 (C++ function), 306
 amici::AbstractModel::fx0_fixedParameters (C++ function), 306
 amici::AbstractModel::fxBdot_ss (C++ function), 303
 amici::AbstractModel::fxdot (C++ function), 303
 amici::AbstractModel::fy (C++ function), 308
 amici::AbstractModel::fz (C++ function), 309
 amici::AbstractModel::getAmiciCommit (C++ function), 306
 amici::AbstractModel::getAmiciVersion (C++ function), 306
 amici::AbstractModel::getSolver (C++ function), 303
 amici::AbstractModel::isFixedParameterStateReinitialization (C++ function), 306
 amici::AbstractModel::writeSteadystateJB (C++ function), 304
 amici::addSlice (C++ function), 511
 amici::AMICI_CONV_FAILURE (C++ member), 539
 amici::AMICI_DAMPING_FACTOR_ERROR (C++ member), 539
 amici::AMICI_DATA_RETURN (C++ member), 539
 amici::amici_daxpy (C++ function), 511
 amici::amici_dgemm (C++ function), 512
 amici::amici_dgemv (C++ function), 513
 amici::AMICI_ERR_FAILURE (C++ member), 539
 amici::AMICI_ERROR (C++ member), 539
 amici::AMICI_FIRST_RHSFUNC_ERR (C++ member), 540
 amici::AMICI_ILL_INPUT (C++ member), 540

amici::AMICI_MAX_TIME_EXCEEDED (C++ member), 540
 amici::AMICI_NO_STEADY_STATE (C++ member), 540
 amici::AMICI_NORMAL (C++ member), 541
 amici::AMICI_NOT_IMPLEMENTED (C++ member), 541
 amici::AMICI_NOT_RUN (C++ member), 541
 amici::AMICI_ONE_STEP (C++ member), 541
 amici::AMICI_ONEOUTPUT (C++ member), 541
 amici::AMICI_PREEQUILIBRATE (C++ member), 542
 amici::AMICI_RECOVERABLE_ERROR (C++ member), 542
 amici::AMICI_RHSFUNC_FAIL (C++ member), 542
 amici::AMICI_ROOT_RETURN (C++ member), 542
 amici::AMICI_SINGULAR_JACOBIAN (C++ member), 543
 amici::AMICI_SUCCESS (C++ member), 543
 amici::AMICI_TOO_MUCH_ACC (C++ member), 543
 amici::AMICI_TOO_MUCH_WORK (C++ member), 543
 amici::AMICI_UNRECOVERABLE_ERROR (C++ member), 543
 amici::AmiException (C++ class), 322
 amici::AmiException::AmiException (C++ function), 322
 amici::AmiException::getBacktrace (C++ function), 322
 amici::AmiException::storeBacktrace (C++ function), 322
 amici::AmiException::storeMessage (C++ function), 323
 amici::AmiException::what (C++ function), 322
 amici::AmiVector (C++ class), 323
 amici::AmiVector::~~AmiVector (C++ function), 324
 amici::AmiVector::abs (C++ function), 325
 amici::AmiVector::AmiVector (C++ function), 323, 324
 amici::AmiVector::at (C++ function), 325
 amici::AmiVector::begin (C++ function), 324
 amici::AmiVector::copy (C++ function), 325
 amici::AmiVector::data (C++ function), 324
 amici::AmiVector::end (C++ function), 324
 amici::AmiVector::getLength (C++ function), 325
 amici::AmiVector::getNVector (C++ function), 324
 amici::AmiVector::getVector (C++ function), 324
 amici::AmiVector::minus (C++ function), 325
 amici::AmiVector::operator*= (C++ function), 324
 amici::AmiVector::operator/= (C++ function), 324
 amici::AmiVector::operator= (C++ function), 324
 amici::AmiVector::operator[] (C++ function), 325
 amici::AmiVector::set (C++ function), 325
 amici::AmiVector::zero (C++ function), 325
 amici::AmiVectorArray (C++ class), 326
 amici::AmiVectorArray::~~AmiVectorArray (C++ function), 326
 amici::AmiVectorArray::AmiVectorArray (C++ function), 326
 amici::AmiVectorArray::at (C++ function), 326, 327
 amici::AmiVectorArray::copy (C++ function), 327
 amici::AmiVectorArray::data (C++ function), 326
 amici::AmiVectorArray::flatten_to_vector (C++ function), 327
 amici::AmiVectorArray::getLength (C++ function), 327
 amici::AmiVectorArray::getNVector (C++ function), 327
 amici::AmiVectorArray::getNVectorArray (C++ function), 327
 amici::AmiVectorArray::operator= (C++ function), 326
 amici::AmiVectorArray::operator[] (C++ function), 327
 amici::AmiVectorArray::zero (C++ function), 327
 amici::backtraceString (C++ function), 513
 amici::BackwardProblem (C++ class), 328
 amici::BackwardProblem::BackwardProblem (C++ function), 328
 amici::BackwardProblem::getAdjointQuadrature (C++ function), 328
 amici::BackwardProblem::getAdjointState (C++ function), 328
 amici::BackwardProblem::getdJydx (C++ function), 328
 amici::BackwardProblem::gett (C++ function), 328
 amici::BackwardProblem::getwhich (C++ function), 328
 amici::BackwardProblem::getwhichptr (C++ function), 328
 amici::BackwardProblem::workBackwardProblem (C++ function), 328
 amici::BLASLayout (C++ enum), 499
 amici::BLASLayout::colMajor (C++ enumerator), 499
 amici::BLASLayout::rowMajor (C++ enumerator), 499
 amici::BLASTranspose (C++ enum), 500
 amici::BLASTranspose::conjTrans (C++ enumerator), 500
 amici::BLASTranspose::noTrans (C++ enumerator), 500
 amici::BLASTranspose::trans (C++ enumerator), 500
 amici::checkBufferSize (C++ function), 514
 amici::checkSigmaPositivity (C++ function), 514
 amici::ConditionContext (C++ class), 329
 amici::ConditionContext::~~ConditionContext (C++ function), 329
 amici::ConditionContext::applyCondition

(C++ function), 329
 amici::ConditionContext::ConditionContext
 (C++ function), 329
 amici::ConditionContext::operator= (C++ function), 329
 amici::ConditionContext::restore (C++ function), 329
 amici::const_N_Vector (C++ type), 548
 amici::ContextManager (C++ class), 330
 amici::ContextManager::ContextManager (C++ function), 330
 amici::CvodeException (C++ class), 331
 amici::CvodeException::CvodeException (C++ function), 331
 amici::CvodeSolver (C++ class), 331
 amici::CvodeSolver::~CvodeSolver (C++ function), 331
 amici::CvodeSolver::adjInit (C++ function), 337
 amici::CvodeSolver::allocateSolver (C++ function), 335
 amici::CvodeSolver::allocateSolverB (C++ function), 337
 amici::CvodeSolver::binit (C++ function), 339
 amici::CvodeSolver::boost::serialization::serialize (C++ function), 340
 amici::CvodeSolver::calcIC (C++ function), 334
 amici::CvodeSolver::calcICB (C++ function), 334
 amici::CvodeSolver::clone (C++ function), 331
 amici::CvodeSolver::diag (C++ function), 338
 amici::CvodeSolver::diagB (C++ function), 338
 amici::CvodeSolver::getAdjBmem (C++ function), 338
 amici::CvodeSolver::getB (C++ function), 334
 amici::CvodeSolver::getDky (C++ function), 332
 amici::CvodeSolver::getDkyB (C++ function), 333
 amici::CvodeSolver::getLastOrder (C++ function), 338
 amici::CvodeSolver::getModel (C++ function), 333
 amici::CvodeSolver::getNumErrTestFails (C++ function), 338
 amici::CvodeSolver::getNumNonlinSolvConvFails (C++ function), 338
 amici::CvodeSolver::getNumRhsEvals (C++ function), 338
 amici::CvodeSolver::getNumSteps (C++ function), 338
 amici::CvodeSolver::getQuad (C++ function), 334
 amici::CvodeSolver::getQuadB (C++ function), 334
 amici::CvodeSolver::getQuadDky (C++ function), 334
 amici::CvodeSolver::getQuadDkyB (C++ function), 333
 amici::CvodeSolver::getRootInfo (C++ function), 333
 amici::CvodeSolver::getSens (C++ function), 334
 amici::CvodeSolver::getSensDky (C++ function), 333
 amici::CvodeSolver::init (C++ function), 339
 amici::CvodeSolver::initSteadystate (C++ function), 339
 amici::CvodeSolver::operator== (C++ function), 340
 amici::CvodeSolver::qbinit (C++ function), 339
 amici::CvodeSolver::quadInit (C++ function), 337
 amici::CvodeSolver::quadReInitB (C++ function), 332
 amici::CvodeSolver::quadSStolerances (C++ function), 337
 amici::CvodeSolver::quadSStolerancesB (C++ function), 337
 amici::CvodeSolver::reInit (C++ function), 331
 amici::CvodeSolver::reInitB (C++ function), 332
 amici::CvodeSolver::reInitPostProcess (C++ function), 335
 amici::CvodeSolver::reInitPostProcessB (C++ function), 335
 amici::CvodeSolver::reInitPostProcessF (C++ function), 335
 amici::CvodeSolver::resetState (C++ function), 336
 amici::CvodeSolver::rootInit (C++ function), 339
 amici::CvodeSolver::sensInit1 (C++ function), 339
 amici::CvodeSolver::sensReInit (C++ function), 331
 amici::CvodeSolver::sensToggleOff (C++ function), 332
 amici::CvodeSolver::setBandJacFn (C++ function), 340
 amici::CvodeSolver::setBandJacFnB (C++ function), 340
 amici::CvodeSolver::setDenseJacFn (C++ function), 340
 amici::CvodeSolver::setDenseJacFnB (C++ function), 340
 amici::CvodeSolver::setErrHandlerFn (C++ function), 336
 amici::CvodeSolver::setId (C++ function), 336
 amici::CvodeSolver::setJacTimesVecFn (C++ function), 340
 amici::CvodeSolver::setJacTimesVecFnB (C++ function), 340
 amici::CvodeSolver::setLinearSolver (C++ function), 333
 amici::CvodeSolver::setLinearSolverB (C++ function), 333
 amici::CvodeSolver::setMaxNumSteps (C++ function), 336

```

amici::CCodeSolver::setMaxNumStepsB      (C++      346
function), 337
amici::CCodeSolver::setNonLinearSolver (C++
function), 333
amici::CCodeSolver::setNonLinearSolverB
(C++ function), 334
amici::CCodeSolver::setNonLinearSolverSens
(C++ function), 334
amici::CCodeSolver::setQuadErrCon (C++ func-
tion), 335
amici::CCodeSolver::setQuadErrConB (C++ func-
tion), 335
amici::CCodeSolver::setSensErrCon (C++ func-
tion), 335
amici::CCodeSolver::setSensParams (C++ func-
tion), 336
amici::CCodeSolver::setSensSStolerances
(C++ function), 335
amici::CCodeSolver::setSparseJacFn (C++ func-
tion), 340
amici::CCodeSolver::setSparseJacFn_ss (C++
function), 340
amici::CCodeSolver::setSparseJacFnB (C++
function), 340
amici::CCodeSolver::setSStolerances (C++
function), 335
amici::CCodeSolver::setSStolerancesB (C++
function), 337
amici::CCodeSolver::setStabLimDet (C++ func-
tion), 336
amici::CCodeSolver::setStabLimDetB (C++ func-
tion), 336
amici::CCodeSolver::setStopTime (C++ function),
333
amici::CCodeSolver::setSuppressAlg (C++ func-
tion), 336
amici::CCodeSolver::setUserData (C++ function),
336
amici::CCodeSolver::setUserDataB (C++ func-
tion), 336
amici::CCodeSolver::solve (C++ function), 332
amici::CCodeSolver::solveB (C++ function), 332
amici::CCodeSolver::solveF (C++ function), 332
amici::CCodeSolver::Solver (C++ function), 334
amici::CCodeSolver::turnOffRootFinding (C++
function), 333
amici::deserializeFromChar (C++ function), 515
amici::deserializeFromString (C++ function), 515
amici::dotProd (C++ function), 515
amici::ExpData (C++ class), 341
amici::ExpData::~~ExpData (C++ function), 342
amici::ExpData::applyDataDimension (C++ func-
tion), 346
amici::ExpData::applyDimensions (C++ function),
346
amici::ExpData::applyEventDimension (C++
function), 346
amici::ExpData::checkDataDimension (C++ func-
tion), 346
amici::ExpData::checkEventsDimension (C++
function), 346
amici::ExpData::ExpData (C++ function), 341, 342
amici::ExpData::getObservedData (C++ function),
343
amici::ExpData::getObservedDataPtr (C++ func-
tion), 343
amici::ExpData::getObservedDataStdDev (C++
function), 344
amici::ExpData::getObservedDataStdDevPtr
(C++ function), 344
amici::ExpData::getObservedEvents (C++ func-
tion), 345
amici::ExpData::getObservedEventsPtr (C++
function), 345
amici::ExpData::getObservedEventsStdDev
(C++ function), 346
amici::ExpData::getObservedEventsStdDevPtr
(C++ function), 346
amici::ExpData::getTimepoint (C++ function), 343
amici::ExpData::getTimepoints (C++ function),
343
amici::ExpData::id (C++ member), 346
amici::ExpData::isSetObservedData (C++ func-
tion), 343
amici::ExpData::isSetObservedDataStdDev
(C++ function), 344
amici::ExpData::isSetObservedEvents (C++
function), 345
amici::ExpData::isSetObservedEventsStdDev
(C++ function), 345
amici::ExpData::nmaxevent (C++ function), 343
amici::ExpData::nmaxevent_ (C++ member), 347
amici::ExpData::nt (C++ function), 343
amici::ExpData::nytrue (C++ function), 342
amici::ExpData::nytrue_ (C++ member), 347
amici::ExpData::nztrue (C++ function), 342
amici::ExpData::nztrue_ (C++ member), 347
amici::ExpData::observed_data_ (C++ member),
347
amici::ExpData::observed_data_std_dev_ (C++
member), 347
amici::ExpData::observed_events_ (C++ mem-
ber), 347
amici::ExpData::observed_events_std_dev_
(C++ member), 347
amici::ExpData::operator== (C++ function), 347
amici::ExpData::setObservedData (C++ function),
343

```


amici::ExpData::setObservedDataStdDev (C++ function), 344
 amici::ExpData::setObservedEvents (C++ function), 344
 amici::ExpData::setObservedEventsStdDev (C++ function), 345
 amici::ExpData::setTimepoints (C++ function), 343
 amici::FinalStateStorer (C++ class), 348
 amici::FinalStateStorer::~~FinalStateStorer (C++ function), 348
 amici::FinalStateStorer::FinalStateStorer (C++ function), 348
 amici::FinalStateStorer::operator= (C++ function), 348
 amici::FixedParameterContext (C++ enum), 500
 amici::FixedParameterContext::preequilibration (C++ enumerator), 500
 amici::FixedParameterContext::presimulation (C++ enumerator), 500
 amici::FixedParameterContext::simulation (C++ enumerator), 500
 amici::ForwardProblem (C++ class), 348
 amici::ForwardProblem::~~ForwardProblem (C++ function), 348
 amici::ForwardProblem::edata (C++ member), 351
 amici::ForwardProblem::ForwardProblem (C++ function), 348
 amici::ForwardProblem::getAdjointUpdates (C++ function), 349
 amici::ForwardProblem::getCurrentTimeIteration (C++ function), 350
 amici::ForwardProblem::getDiscontinuities (C++ function), 349
 amici::ForwardProblem::getDJdydx (C++ function), 349
 amici::ForwardProblem::getDJzdx (C++ function), 350
 amici::ForwardProblem::getEventCounter (C++ function), 350
 amici::ForwardProblem::getFinalSimulationState (C++ function), 351
 amici::ForwardProblem::getFinalTime (C++ function), 350
 amici::ForwardProblem::getInitialSimulationState (C++ function), 350
 amici::ForwardProblem::getNumberOfRoots (C++ function), 349
 amici::ForwardProblem::getRHSAtDiscontinuities (C++ function), 349
 amici::ForwardProblem::getRHSBeforeDiscontinuities (C++ function), 349
 amici::ForwardProblem::getRootCounter (C++ function), 350
 amici::ForwardProblem::getRootIndexes (C++ function), 349
 amici::ForwardProblem::getSimulationStateEvent (C++ function), 350
 amici::ForwardProblem::getSimulationStateTimepoint (C++ function), 350
 amici::ForwardProblem::getState (C++ function), 349
 amici::ForwardProblem::getStateDerivative (C++ function), 349
 amici::ForwardProblem::getStateDerivativePointer (C++ function), 350
 amici::ForwardProblem::getStateDerivativeSensitivityPointer (C++ function), 350
 amici::ForwardProblem::getStatePointer (C++ function), 350
 amici::ForwardProblem::getStatesAtDiscontinuities (C++ function), 349
 amici::ForwardProblem::getStateSensitivity (C++ function), 349
 amici::ForwardProblem::getStateSensitivityPointer (C++ function), 350
 amici::ForwardProblem::getTime (C++ function), 349
 amici::ForwardProblem::model (C++ member), 351
 amici::ForwardProblem::solver (C++ member), 351
 amici::ForwardProblem::workForwardProblem (C++ function), 348
 amici::getScaledParameter (C++ function), 516
 amici::getUnscaledParameter (C++ function), 516
 amici::hdf5::attributeExists (C++ function), 516, 517
 amici::hdf5::createAndWriteDouble1DDataset (C++ function), 517
 amici::hdf5::createAndWriteDouble2DDataset (C++ function), 517
 amici::hdf5::createAndWriteDouble3DDataset (C++ function), 518
 amici::hdf5::createAndWriteInt1DDataset (C++ function), 518
 amici::hdf5::createAndWriteInt2DDataset (C++ function), 519
 amici::hdf5::createGroup (C++ function), 519
 amici::hdf5::createOrOpenForWriting (C++ function), 519
 amici::hdf5::getDoubleDataset1D (C++ function), 520
 amici::hdf5::getDoubleDataset2D (C++ function), 520
 amici::hdf5::getDoubleDataset3D (C++ function), 520
 amici::hdf5::getDoubleScalarAttribute (C++ function), 521

amici::hdf5::getIntDatasetID (C++ function), 521
 amici::hdf5::getIntScalarAttribute (C++ function), 522
 amici::hdf5::getStringAttribute (C++ function), 522
 amici::hdf5::locationExists (C++ function), 522, 523
 amici::hdf5::readModelDataFromHDF5 (C++ function), 523
 amici::hdf5::readSimulationExpData (C++ function), 524
 amici::hdf5::readSolverSettingsFromHDF5 (C++ function), 524, 525
 amici::hdf5::writeReturnData (C++ function), 525
 amici::hdf5::writeReturnDataDiagnosis (C++ function), 526
 amici::hdf5::writeSimulationExpData (C++ function), 526
 amici::hdf5::writeSolverSettingsToHDF5 (C++ function), 526, 527
 amici::IDAException (C++ class), 351
 amici::IDAException::IDAException (C++ function), 351
 amici::IDASolver (C++ class), 352
 amici::IDASolver::~~IDASolver (C++ function), 352
 amici::IDASolver::adjInit (C++ function), 358
 amici::IDASolver::allocateSolver (C++ function), 356
 amici::IDASolver::allocateSolverB (C++ function), 358
 amici::IDASolver::binit (C++ function), 360
 amici::IDASolver::calcIC (C++ function), 355
 amici::IDASolver::calcICB (C++ function), 355
 amici::IDASolver::clone (C++ function), 352
 amici::IDASolver::diag (C++ function), 358
 amici::IDASolver::diagB (C++ function), 358
 amici::IDASolver::getAdjBmem (C++ function), 359
 amici::IDASolver::getB (C++ function), 354
 amici::IDASolver::getDky (C++ function), 354
 amici::IDASolver::getDkyB (C++ function), 354
 amici::IDASolver::getLastOrder (C++ function), 359
 amici::IDASolver::getModel (C++ function), 355
 amici::IDASolver::getNumErrTestFails (C++ function), 359
 amici::IDASolver::getNumNonlinSolvConvFails (C++ function), 359
 amici::IDASolver::getNumRhsEvals (C++ function), 359
 amici::IDASolver::getNumSteps (C++ function), 359
 amici::IDASolver::getQuad (C++ function), 355
 amici::IDASolver::getQuadB (C++ function), 354
 amici::IDASolver::getQuadDky (C++ function), 355
 amici::IDASolver::getQuadDkyB (C++ function), 354
 amici::IDASolver::getRootInfo (C++ function), 354
 amici::IDASolver::getSens (C++ function), 354
 amici::IDASolver::getSensDky (C++ function), 354
 amici::IDASolver::init (C++ function), 360
 amici::IDASolver::initSteadystate (C++ function), 360
 amici::IDASolver::qbinit (C++ function), 360
 amici::IDASolver::quadInit (C++ function), 358
 amici::IDASolver::quadReInitB (C++ function), 353
 amici::IDASolver::quadSStolerances (C++ function), 353
 amici::IDASolver::quadSStolerancesB (C++ function), 353
 amici::IDASolver::reInit (C++ function), 352
 amici::IDASolver::reInitB (C++ function), 353
 amici::IDASolver::reInitPostProcess (C++ function), 356
 amici::IDASolver::reInitPostProcessB (C++ function), 352
 amici::IDASolver::reInitPostProcessF (C++ function), 352
 amici::IDASolver::resetState (C++ function), 357
 amici::IDASolver::rootInit (C++ function), 360
 amici::IDASolver::sensInit1 (C++ function), 360
 amici::IDASolver::sensReInit (C++ function), 352
 amici::IDASolver::sensToggleOff (C++ function), 352
 amici::IDASolver::setBandJacFn (C++ function), 361
 amici::IDASolver::setBandJacFnB (C++ function), 361
 amici::IDASolver::setDenseJacFn (C++ function), 360
 amici::IDASolver::setDenseJacFnB (C++ function), 361
 amici::IDASolver::setErrHandlerFn (C++ function), 357
 amici::IDASolver::setId (C++ function), 357
 amici::IDASolver::setJacTimesVecFn (C++ function), 361
 amici::IDASolver::setJacTimesVecFnB (C++ function), 361
 amici::IDASolver::setLinearSolver (C++ function), 355
 amici::IDASolver::setLinearSolverB (C++ function), 355
 amici::IDASolver::setMaxNumSteps (C++ function), 357
 amici::IDASolver::setMaxNumStepsB (C++ function), 358

amici::IDASolver::setNonLinearSolver (C++ function), 355
 amici::IDASolver::setNonLinearSolverB (C++ function), 356
 amici::IDASolver::setNonLinearSolverSens (C++ function), 355
 amici::IDASolver::setQuadErrCon (C++ function), 357
 amici::IDASolver::setQuadErrConB (C++ function), 356
 amici::IDASolver::setSensErrCon (C++ function), 356
 amici::IDASolver::setSensParams (C++ function), 358
 amici::IDASolver::setSensSTolerances (C++ function), 356
 amici::IDASolver::setSparseJacFn (C++ function), 360
 amici::IDASolver::setSparseJacFn_ss (C++ function), 361
 amici::IDASolver::setSparseJacFnB (C++ function), 361
 amici::IDASolver::setSTolerances (C++ function), 356
 amici::IDASolver::setSTolerancesB (C++ function), 358
 amici::IDASolver::setStabLimDet (C++ function), 357
 amici::IDASolver::setStabLimDetB (C++ function), 357
 amici::IDASolver::setStopTime (C++ function), 355
 amici::IDASolver::setSuppressAlg (C++ function), 357
 amici::IDASolver::setUserData (C++ function), 357
 amici::IDASolver::setUserDataB (C++ function), 357
 amici::IDASolver::solve (C++ function), 353
 amici::IDASolver::solveB (C++ function), 354
 amici::IDASolver::solveF (C++ function), 353
 amici::IDASolver::Solver (C++ function), 356
 amici::IDASolver::turnOffRootFinding (C++ function), 355
 amici::IntegrationFailure (C++ class), 361
 amici::IntegrationFailure::error_code (C++ member), 362
 amici::IntegrationFailure::IntegrationFailure (C++ function), 362
 amici::IntegrationFailure::time (C++ member), 362
 amici::IntegrationFailureB (C++ class), 362
 amici::IntegrationFailureB::error_code (C++ member), 363
 amici::IntegrationFailureB::IntegrationFailureB (C++ function), 362
 amici::IntegrationFailureB::time (C++ member), 363
 amici::InternalSensitivityMethod (C++ enum), 500
 amici::InternalSensitivityMethod::simultaneous (C++ enumerator), 500
 amici::InternalSensitivityMethod::staggered (C++ enumerator), 500
 amici::InternalSensitivityMethod::staggered1 (C++ enumerator), 501
 amici::InterpolationType (C++ enum), 501
 amici::InterpolationType::hermite (C++ enumerator), 501
 amici::InterpolationType::polynomial (C++ enumerator), 501
 amici::is_equal (C++ function), 527
 amici::LinearMultistepMethod (C++ enum), 501
 amici::LinearMultistepMethod::adams (C++ enumerator), 501
 amici::LinearMultistepMethod::BDF (C++ enumerator), 501
 amici::LinearSolver (C++ enum), 502
 amici::LinearSolver::band (C++ enumerator), 502
 amici::LinearSolver::dense (C++ enumerator), 502
 amici::LinearSolver::diag (C++ enumerator), 502
 amici::LinearSolver::KLU (C++ enumerator), 502
 amici::LinearSolver::LAPACKBand (C++ enumerator), 502
 amici::LinearSolver::LAPACKDense (C++ enumerator), 502
 amici::LinearSolver::SPBCG (C++ enumerator), 502
 amici::LinearSolver::SPGMR (C++ enumerator), 502
 amici::LinearSolver::SPTFQMR (C++ enumerator), 502
 amici::LinearSolver::SuperLUMT (C++ enumerator), 502
 amici::linearSum (C++ function), 527
 amici::Logger (C++ class), 363
 amici::Logger::items (C++ member), 364
 amici::Logger::log (C++ function), 363
 amici::Logger::Logger (C++ function), 363
 amici::LogItem (C++ struct), 293
 amici::LogItem::identifier (C++ member), 294
 amici::LogItem::LogItem (C++ function), 293
 amici::LogItem::message (C++ member), 294
 amici::LogItem::severity (C++ member), 294
 amici::LogSeverity (C++ enum), 502
 amici::LogSeverity::debug (C++ enumerator), 502
 amici::LogSeverity::error (C++ enumerator), 502

amici::LogSeverity::warning (C++ *enumerator*), 502
 amici::Model (C++ *class*), 364
 amici::Model::~~Model (C++ *function*), 365
 amici::Model::addAdjointQuadratureEventUpdate (C++ *function*), 380
 amici::Model::addAdjointStateEventUpdate (C++ *function*), 380
 amici::Model::addEventObjective (C++ *function*), 378
 amici::Model::addEventObjectiveRegularization (C++ *function*), 378
 amici::Model::addEventObjectiveSensitivity (C++ *function*), 378
 amici::Model::addObservableObjective (C++ *function*), 375
 amici::Model::addObservableObjectiveSensitivity (C++ *function*), 375
 amici::Model::addPartialEventObjectiveSensitivity (C++ *function*), 378
 amici::Model::addPartialObservableObjectiveSensitivity (C++ *function*), 375
 amici::Model::addStateEventUpdate (C++ *function*), 379
 amici::Model::addStateSensitivityEventUpdate (C++ *function*), 380
 amici::Model::always_check_finite_ (C++ *member*), 407
 amici::Model::any_state_non_negative_ (C++ *member*), 406
 amici::Model::boost::serialization::serialize (C++ *function*), 407
 amici::Model::checkFinite (C++ *function*), 381
 amici::Model::checkLLHBufferSize (C++ *function*), 398
 amici::Model::clone (C++ *function*), 365
 amici::Model::computeX_pos (C++ *function*), 405, 406
 amici::Model::derived_state_ (C++ *member*), 406
 amici::Model::fdeltaqB (C++ *function*), 383
 amici::Model::fdeltasx (C++ *function*), 383
 amici::Model::fdeltax (C++ *function*), 384
 amici::Model::fdeltaxB (C++ *function*), 384
 amici::Model::fdJrzsiga (C++ *function*), 384, 403
 amici::Model::fdJrzd (C++ *function*), 385, 403
 amici::Model::fdJydp (C++ *function*), 400
 amici::Model::fdJydsiga (C++ *function*), 385, 400
 amici::Model::fdJydx (C++ *function*), 400
 amici::Model::fdJydy (C++ *function*), 385, 400
 amici::Model::fdJydy_colptrs (C++ *function*), 385
 amici::Model::fdJydy_rowvals (C++ *function*), 386
 amici::Model::fdJzdp (C++ *function*), 402
 amici::Model::fdJzdsiga (C++ *function*), 386, 402
 amici::Model::fdJzdx (C++ *function*), 403
 amici::Model::fdJzdz (C++ *function*), 386, 402
 amici::Model::fdrzdp (C++ *function*), 386, 401
 amici::Model::fdrzdx (C++ *function*), 387, 401
 amici::Model::fdsigmaydp (C++ *function*), 387, 399
 amici::Model::fdsigmaydy (C++ *function*), 387, 399
 amici::Model::fdsigmazdp (C++ *function*), 387, 402
 amici::Model::fdtotal_cldp (C++ *function*), 397
 amici::Model::fdtotal_cldx_rdata (C++ *function*), 397
 amici::Model::fdtotal_cldx_rdata_colptrs (C++ *function*), 397
 amici::Model::fdtotal_cldx_rdata_rowvals (C++ *function*), 397
 amici::Model::fdwdp (C++ *function*), 388, 404
 amici::Model::fdwdp_colptrs (C++ *function*), 388
 amici::Model::fdwdp_rowvals (C++ *function*), 389
 amici::Model::fdwdw (C++ *function*), 389, 404
 amici::Model::fdwdw_colptrs (C++ *function*), 389
 amici::Model::fdwdw_rowvals (C++ *function*), 390
 amici::Model::fdwdx (C++ *function*), 389, 404
 amici::Model::fdwdx_colptrs (C++ *function*), 389
 amici::Model::fdwdx_rowvals (C++ *function*), 389
 amici::Model::fdx_rdatadp (C++ *function*), 396
 amici::Model::fdx_rdatadtcl (C++ *function*), 397
 amici::Model::fdx_rdatadtcl_colptrs (C++ *function*), 397
 amici::Model::fdx_rdatadtcl_rowvals (C++ *function*), 397
 amici::Model::fdx_rdatadx_solver (C++ *function*), 396
 amici::Model::fdx_rdatadx_solver_colptrs (C++ *function*), 396
 amici::Model::fdx_rdatadx_solver_rowvals (C++ *function*), 396
 amici::Model::fdydp (C++ *function*), 390, 399
 amici::Model::fdydx (C++ *function*), 390, 399
 amici::Model::fdzdp (C++ *function*), 391, 400
 amici::Model::fdzdx (C++ *function*), 391, 401
 amici::Model::fJrz (C++ *function*), 391, 403
 amici::Model::fJy (C++ *function*), 392, 399
 amici::Model::fJz (C++ *function*), 392, 402
 amici::Model::frz (C++ *function*), 392, 401
 amici::Model::fsdx0 (C++ *function*), 382
 amici::Model::fsigmay (C++ *function*), 392, 399
 amici::Model::fsigmaz (C++ *function*), 393, 401
 amici::Model::fsrz (C++ *function*), 393
 amici::Model::fstau (C++ *function*), 393
 amici::Model::fstotal_cl (C++ *function*), 405
 amici::Model::fsx0 (C++ *function*), 382, 394
 amici::Model::fsx0_fixedParameters (C++ *function*), 382, 394
 amici::Model::fsx_rdata (C++ *function*), 382, 404
 amici::Model::fsx_solver (C++ *function*), 405

amici::Model::fsz (C++ function), 394
 amici::Model::ftotal_cl (C++ function), 405
 amici::Model::fw (C++ function), 395, 403
 amici::Model::fx0 (C++ function), 381, 395
 amici::Model::fx0_fixedParameters (C++ function), 382, 395
 amici::Model::fx_rdata (C++ function), 382, 404
 amici::Model::fx_solver (C++ function), 405
 amici::Model::fy (C++ function), 395, 399
 amici::Model::fz (C++ function), 396, 400
 amici::Model::get_dxdotdp (C++ function), 382
 amici::Model::get_dxdotdp_full (C++ function), 383
 amici::Model::getAddSigmaResiduals (C++ function), 373
 amici::Model::getAdjointStateEventUpdate (C++ function), 379
 amici::Model::getAdjointStateObservableUpdate (C++ function), 376
 amici::Model::getAlwaysCheckFinite (C++ function), 381
 amici::Model::getEvent (C++ function), 376
 amici::Model::getEventRegularization (C++ function), 377
 amici::Model::getEventRegularizationSensitivity (C++ function), 377
 amici::Model::getEventSensitivity (C++ function), 376
 amici::Model::getEventSigma (C++ function), 377
 amici::Model::getEventSigmaSensitivity (C++ function), 377
 amici::Model::getEventTimeSensitivity (C++ function), 379
 amici::Model::getExpression (C++ function), 374
 amici::Model::getExpressionIds (C++ function), 371
 amici::Model::getExpressionNames (C++ function), 370
 amici::Model::getFixedParameterById (C++ function), 368
 amici::Model::getFixedParameterByName (C++ function), 368
 amici::Model::getFixedParameterIds (C++ function), 371
 amici::Model::getFixedParameterNames (C++ function), 370
 amici::Model::getFixedParameters (C++ function), 368
 amici::Model::getInitialStates (C++ function), 373
 amici::Model::getInitialStateSensitivities (C++ function), 373
 amici::Model::getMinimumSigmaResiduals (C++ function), 372
 amici::Model::getModelState (C++ function), 372
 amici::Model::getName (C++ function), 369
 amici::Model::getObservable (C++ function), 374
 amici::Model::getObservableIds (C++ function), 371
 amici::Model::getObservableNames (C++ function), 370
 amici::Model::getObservableScaling (C++ function), 374
 amici::Model::getObservableSensitivity (C++ function), 374
 amici::Model::getObservableSigma (C++ function), 375
 amici::Model::getObservableSigmaSensitivity (C++ function), 375
 amici::Model::getParameterById (C++ function), 367
 amici::Model::getParameterByName (C++ function), 367
 amici::Model::getParameterIds (C++ function), 370
 amici::Model::getParameterList (C++ function), 373
 amici::Model::getParameterNames (C++ function), 369
 amici::Model::getParameters (C++ function), 367
 amici::Model::getParameterScale (C++ function), 367
 amici::Model::getReinitializationStateIdxs (C++ function), 382
 amici::Model::getReinitializeFixedParameterInitialStates (C++ function), 374
 amici::Model::getStateIds (C++ function), 371
 amici::Model::getStateIdsSolver (C++ function), 371
 amici::Model::getStateIsNonNegative (C++ function), 372
 amici::Model::getStateNames (C++ function), 370
 amici::Model::getStateNamesSolver (C++ function), 370
 amici::Model::getSteadyStateSensitivityMode (C++ function), 374
 amici::Model::getTimepoint (C++ function), 371
 amici::Model::getTimepoints (C++ function), 371
 amici::Model::getUnobservedEventSensitivity (C++ function), 376
 amici::Model::getUnscaledParameters (C++ function), 367
 amici::Model::hasCustomInitialStates (C++ function), 373
 amici::Model::hasCustomInitialStateSensitivities (C++ function), 373
 amici::Model::hasExpressionIds (C++ function), 371

amici::Model::hasExpressionNames (C++ function), 370
 amici::Model::hasFixedParameterIds (C++ function), 371
 amici::Model::hasFixedParameterNames (C++ function), 370
 amici::Model::hasObservableIds (C++ function), 371
 amici::Model::hasObservableNames (C++ function), 370
 amici::Model::hasParameterIds (C++ function), 370
 amici::Model::hasParameterNames (C++ function), 369
 amici::Model::hasQuadraticLLH (C++ function), 371
 amici::Model::hasStateIds (C++ function), 370
 amici::Model::hasStateNames (C++ function), 369
 amici::Model::idlist (C++ member), 398
 amici::Model::initEvents (C++ function), 366
 amici::Model::initialize (C++ function), 365
 amici::Model::initializeB (C++ function), 365
 amici::Model::initializeStates (C++ function), 365
 amici::Model::initializeStateSensitivities (C++ function), 365
 amici::Model::initializeVectors (C++ function), 399
 amici::Model::k (C++ function), 366
 amici::Model::logger (C++ member), 398
 amici::Model::min_sigma_ (C++ member), 407
 amici::Model::Model (C++ function), 364
 amici::Model::ncl (C++ function), 366
 amici::Model::nk (C++ function), 366
 amici::Model::nMaxEvent (C++ function), 366
 amici::Model::nmaxevent_ (C++ member), 406
 amici::Model::np (C++ function), 366
 amici::Model::nplist (C++ function), 366
 amici::Model::nt (C++ function), 366
 amici::Model::nx_reinit (C++ function), 366
 amici::Model::o2mode (C++ member), 398
 amici::Model::operator= (C++ function), 365
 amici::Model::operator== (C++ function), 407
 amici::Model::plist (C++ function), 373
 amici::Model::pythonGenerated (C++ member), 398
 amici::Model::requireSensitivitiesForAllParameters (C++ function), 374
 amici::Model::root_initial_values_ (C++ member), 406
 amici::Model::setAddSigmaResiduals (C++ function), 372
 amici::Model::setAllStatesNonNegative (C++ function), 372
 amici::Model::setAlwaysCheckFinite (C++ function), 381
 amici::Model::setFixedParameterById (C++ function), 369
 amici::Model::setFixedParameterByName (C++ function), 369
 amici::Model::setFixedParameters (C++ function), 369
 amici::Model::setFixedParametersByIdRegex (C++ function), 369
 amici::Model::setFixedParametersByNameRegex (C++ function), 369
 amici::Model::setInitialStates (C++ function), 373
 amici::Model::setInitialStateSensitivities (C++ function), 373
 amici::Model::setMinimumSigmaResiduals (C++ function), 372
 amici::Model::setModelState (C++ function), 372
 amici::Model::setNMaxEvent (C++ function), 366
 amici::Model::setParameterById (C++ function), 367
 amici::Model::setParameterByName (C++ function), 368
 amici::Model::setParameterList (C++ function), 373
 amici::Model::setParameters (C++ function), 367
 amici::Model::setParametersByIdRegex (C++ function), 368
 amici::Model::setParametersByNameRegex (C++ function), 368
 amici::Model::setParameterScale (C++ function), 367
 amici::Model::setReinitializationStateIdxs (C++ function), 382
 amici::Model::setReinitializeFixedParameterInitialStates (C++ function), 374
 amici::Model::setStateIsNonNegative (C++ function), 372
 amici::Model::setSteadyStateSensitivityMode (C++ function), 373
 amici::Model::setT0 (C++ function), 372
 amici::Model::setTimepoints (C++ function), 372
 amici::Model::setUnscaledInitialStateSensitivities (C++ function), 373
 amici::Model::sigma_res_ (C++ member), 407
 amici::Model::state_ (C++ member), 406
 amici::Model::state_is_non_negative_ (C++ member), 406
 amici::Model::steadystate_sensitivity_mode_ (C++ member), 406
 amici::Model::sx0data_ (C++ member), 406
 amici::Model::t0 (C++ function), 372
 amici::Model::updateHeaviside (C++ function),

381
 amici::Model::updateHeavisideB (C++ function), 381
 amici::Model::writeLLHSensitivitySlice (C++ function), 398
 amici::Model::writeSensitivitySliceEvent (C++ function), 398
 amici::Model::writeSliceEvent (C++ function), 398
 amici::Model::x0data_ (C++ member), 406
 amici::Model::z2event_ (C++ member), 406
 amici::Model_DAE (C++ class), 408
 amici::Model_DAE::fdxdotdp (C++ function), 414, 416
 amici::Model_DAE::fJ (C++ function), 408
 amici::Model_DAE::fJB (C++ function), 409
 amici::Model_DAE::fJDiag (C++ function), 410
 amici::Model_DAE::fJSparse (C++ function), 409, 415
 amici::Model_DAE::fJSparseB (C++ function), 410
 amici::Model_DAE::fJSparseB_ss (C++ function), 413
 amici::Model_DAE::fJv (C++ function), 411
 amici::Model_DAE::fJvB (C++ function), 411
 amici::Model_DAE::fM (C++ function), 415, 416
 amici::Model_DAE::fqBdot (C++ function), 413
 amici::Model_DAE::fqBdot_ss (C++ function), 413
 amici::Model_DAE::froot (C++ function), 411, 412, 415
 amici::Model_DAE::fsxdot (C++ function), 414
 amici::Model_DAE::fxBdot (C++ function), 412
 amici::Model_DAE::fxBdot_ss (C++ function), 413
 amici::Model_DAE::fxdot (C++ function), 412, 416
 amici::Model_DAE::getSolver (C++ function), 415
 amici::Model_DAE::Model_DAE (C++ function), 408
 amici::Model_DAE::writeSteadystateJB (C++ function), 413
 amici::Model_ODE (C++ class), 417
 amici::Model_ODE::fdxdotdp (C++ function), 425, 427
 amici::Model_ODE::fdxdotdp_explicit (C++ function), 425
 amici::Model_ODE::fdxdotdp_explicit_colptrs (C++ function), 426
 amici::Model_ODE::fdxdotdp_explicit_rowvals (C++ function), 426
 amici::Model_ODE::fdxdotdw (C++ function), 426, 427
 amici::Model_ODE::fdxdotdw_colptrs (C++ function), 426
 amici::Model_ODE::fdxdotdw_rowvals (C++ function), 427
 amici::Model_ODE::fdxdotdx_explicit (C++ function), 426
 amici::Model_ODE::fdxdotdx_explicit_colptrs (C++ function), 426
 amici::Model_ODE::fdxdotdx_explicit_rowvals (C++ function), 426
 amici::Model_ODE::fJ (C++ function), 417, 418
 amici::Model_ODE::fJB (C++ function), 418
 amici::Model_ODE::fJDiag (C++ function), 420
 amici::Model_ODE::fJSparse (C++ function), 419, 424
 amici::Model_ODE::fJSparse_colptrs (C++ function), 424
 amici::Model_ODE::fJSparse_rowvals (C++ function), 424
 amici::Model_ODE::fJSparseB (C++ function), 419
 amici::Model_ODE::fJSparseB_ss (C++ function), 422
 amici::Model_ODE::fJv (C++ function), 420
 amici::Model_ODE::fJvB (C++ function), 420
 amici::Model_ODE::fqBdot (C++ function), 422
 amici::Model_ODE::fqBdot_ss (C++ function), 422
 amici::Model_ODE::froot (C++ function), 421, 424
 amici::Model_ODE::fsxdot (C++ function), 423
 amici::Model_ODE::fxBdot (C++ function), 421
 amici::Model_ODE::fxBdot_ss (C++ function), 422
 amici::Model_ODE::fxdot (C++ function), 421, 425
 amici::Model_ODE::getSolver (C++ function), 423
 amici::Model_ODE::Model_ODE (C++ function), 417
 amici::Model_ODE::writeSteadystateJB (C++ function), 422
 amici::model_quantity_to_str (C++ member), 544
 amici::ModelContext (C++ class), 428
 amici::ModelContext::~ModelContext (C++ function), 428
 amici::ModelContext::ModelContext (C++ function), 428
 amici::ModelContext::operator= (C++ function), 428
 amici::ModelContext::restore (C++ function), 428
 amici::ModelDimensions (C++ struct), 294
 amici::ModelDimensions::lbw (C++ member), 297
 amici::ModelDimensions::ModelDimensions (C++ function), 294
 amici::ModelDimensions::ndJydy (C++ member), 296
 amici::ModelDimensions::ndtotal_cldx_rdata (C++ member), 297
 amici::ModelDimensions::ndwdp (C++ member), 296
 amici::ModelDimensions::ndwdw (C++ member), 296
 amici::ModelDimensions::ndwdx (C++ member), 296
 amici::ModelDimensions::ndxdotdw (C++ member), 296

amici::ModelDimensions::ndxrdatatdctl (C++ member), 296
 amici::ModelDimensions::ndxrdatadxsolver (C++ member), 296
 amici::ModelDimensions::ne (C++ member), 296
 amici::ModelDimensions::nJ (C++ member), 297
 amici::ModelDimensions::nk (C++ member), 296
 amici::ModelDimensions::nnz (C++ member), 297
 amici::ModelDimensions::np (C++ member), 296
 amici::ModelDimensions::nw (C++ member), 296
 amici::ModelDimensions::nx_rdata (C++ member), 295
 amici::ModelDimensions::nx_solver (C++ member), 295
 amici::ModelDimensions::nx_solver_reinit (C++ member), 295
 amici::ModelDimensions::nxtrue_rdata (C++ member), 295
 amici::ModelDimensions::nxtrue_solver (C++ member), 295
 amici::ModelDimensions::ny (C++ member), 296
 amici::ModelDimensions::nytrue (C++ member), 296
 amici::ModelDimensions::nz (C++ member), 296
 amici::ModelDimensions::nztrue (C++ member), 296
 amici::ModelDimensions::ubw (C++ member), 297
 amici::ModelQuantity (C++ enum), 503
 amici::ModelQuantity::deltaqB (C++ enumerator), 505
 amici::ModelQuantity::deltasx (C++ enumerator), 504
 amici::ModelQuantity::deltax (C++ enumerator), 504
 amici::ModelQuantity::deltaxB (C++ enumerator), 504
 amici::ModelQuantity::dJrzdsigma (C++ enumerator), 505
 amici::ModelQuantity::dJrzdx (C++ enumerator), 505
 amici::ModelQuantity::dJrzdz (C++ enumerator), 505
 amici::ModelQuantity::dJydsigma (C++ enumerator), 505
 amici::ModelQuantity::dJydx (C++ enumerator), 505
 amici::ModelQuantity::dJydy (C++ enumerator), 504
 amici::ModelQuantity::dJydy_matlab (C++ enumerator), 504
 amici::ModelQuantity::dJzdsigma (C++ enumerator), 505
 amici::ModelQuantity::dJzdx (C++ enumerator), 505
 amici::ModelQuantity::dJzdz (C++ enumerator), 505
 amici::ModelQuantity::drzdp (C++ enumerator), 505
 amici::ModelQuantity::drzdx (C++ enumerator), 505
 amici::ModelQuantity::dsigmaaydp (C++ enumerator), 505
 amici::ModelQuantity::dsigmaaydy (C++ enumerator), 505
 amici::ModelQuantity::dsigmazdp (C++ enumerator), 505
 amici::ModelQuantity::dwdp (C++ enumerator), 504
 amici::ModelQuantity::dwdw (C++ enumerator), 504
 amici::ModelQuantity::dwdx (C++ enumerator), 504
 amici::ModelQuantity::dydp (C++ enumerator), 504
 amici::ModelQuantity::dydx (C++ enumerator), 504
 amici::ModelQuantity::dzdp (C++ enumerator), 505
 amici::ModelQuantity::dzdx (C++ enumerator), 505
 amici::ModelQuantity::J (C++ enumerator), 503
 amici::ModelQuantity::JB (C++ enumerator), 503
 amici::ModelQuantity::JDiag (C++ enumerator), 503
 amici::ModelQuantity::JSparseB_ss (C++ enumerator), 504
 amici::ModelQuantity::Jv (C++ enumerator), 503
 amici::ModelQuantity::JvB (C++ enumerator), 503
 amici::ModelQuantity::k (C++ enumerator), 504
 amici::ModelQuantity::p (C++ enumerator), 504
 amici::ModelQuantity::qBdot (C++ enumerator), 504
 amici::ModelQuantity::qBdot_ss (C++ enumerator), 504
 amici::ModelQuantity::root (C++ enumerator), 504
 amici::ModelQuantity::srz (C++ enumerator), 503
 amici::ModelQuantity::ssigmaay (C++ enumerator), 503
 amici::ModelQuantity::ssigmaz (C++ enumerator), 503
 amici::ModelQuantity::sx (C++ enumerator), 503
 amici::ModelQuantity::sxdot (C++ enumerator), 503
 amici::ModelQuantity::sy (C++ enumerator), 503
 amici::ModelQuantity::sz (C++ enumerator), 503
 amici::ModelQuantity::ts (C++ enumerator), 504
 amici::ModelQuantity::w (C++ enumerator), 504

amici::ModelQuantity::x (C++ enumerator), 504
 amici::ModelQuantity::x0 (C++ enumerator), 503
 amici::ModelQuantity::x0_rdata (C++ enumerator), 503
 amici::ModelQuantity::x_rdata (C++ enumerator), 503
 amici::ModelQuantity::xBdot (C++ enumerator), 503
 amici::ModelQuantity::xBdot_ss (C++ enumerator), 504
 amici::ModelQuantity::xdot (C++ enumerator), 503
 amici::ModelQuantity::y (C++ enumerator), 504
 amici::ModelState (C++ struct), 297
 amici::ModelState::fixedParameters (C++ member), 297
 amici::ModelState::h (C++ member), 297
 amici::ModelState::plist (C++ member), 298
 amici::ModelState::stotal_cl (C++ member), 297
 amici::ModelState::total_cl (C++ member), 297
 amici::ModelState::unscaledParameters (C++ member), 297
 amici::ModelStateDerived (C++ struct), 298
 amici::ModelStateDerived::deltaqB_ (C++ member), 301
 amici::ModelStateDerived::deltasx_ (C++ member), 301
 amici::ModelStateDerived::deltax_ (C++ member), 301
 amici::ModelStateDerived::deltaxB_ (C++ member), 301
 amici::ModelStateDerived::dJrzdsigma_ (C++ member), 300
 amici::ModelStateDerived::dJrzdz_ (C++ member), 300
 amici::ModelStateDerived::dJydp_ (C++ member), 300
 amici::ModelStateDerived::dJydsigma_ (C++ member), 299
 amici::ModelStateDerived::dJydx_ (C++ member), 299
 amici::ModelStateDerived::dJydy_ (C++ member), 299
 amici::ModelStateDerived::dJydy_matlab_ (C++ member), 299
 amici::ModelStateDerived::dJzdp_ (C++ member), 300
 amici::ModelStateDerived::dJzdsigma_ (C++ member), 300
 amici::ModelStateDerived::dJzdx_ (C++ member), 300
 amici::ModelStateDerived::dJzdz_ (C++ member), 300
 amici::ModelStateDerived::drzdp_ (C++ member), 300
 amici::ModelStateDerived::drzdx_ (C++ member), 300
 amici::ModelStateDerived::dsigmaydp_ (C++ member), 301
 amici::ModelStateDerived::dsigmaydy_ (C++ member), 301
 amici::ModelStateDerived::dsigmazdp_ (C++ member), 301
 amici::ModelStateDerived::dtotal_cldx_rdata (C++ member), 299
 amici::ModelStateDerived::dwdp_ (C++ member), 298
 amici::ModelStateDerived::dwdx_ (C++ member), 298
 amici::ModelStateDerived::dx_rdatadtcl (C++ member), 299
 amici::ModelStateDerived::dx_rdatadx_solver (C++ member), 299
 amici::ModelStateDerived::dxdotdp (C++ member), 299
 amici::ModelStateDerived::dxdotdp_explicit (C++ member), 299
 amici::ModelStateDerived::dxdotdp_full (C++ member), 298
 amici::ModelStateDerived::dxdotdp_implicit (C++ member), 299
 amici::ModelStateDerived::dxdotdw_ (C++ member), 298
 amici::ModelStateDerived::dxdotdx_explicit (C++ member), 299
 amici::ModelStateDerived::dxdotdx_implicit (C++ member), 299
 amici::ModelStateDerived::dydp_ (C++ member), 300
 amici::ModelStateDerived::dydx_ (C++ member), 300
 amici::ModelStateDerived::dzdp_ (C++ member), 300
 amici::ModelStateDerived::dzdx_ (C++ member), 300
 amici::ModelStateDerived::J_ (C++ member), 298
 amici::ModelStateDerived::JB_ (C++ member), 298
 amici::ModelStateDerived::M_ (C++ member), 298
 amici::ModelStateDerived::ModelStateDerived (C++ function), 298
 amici::ModelStateDerived::rz_ (C++ member), 301
 amici::ModelStateDerived::sigmay_ (C++ member), 301
 amici::ModelStateDerived::sigmaz_ (C++ member), 301
 amici::ModelStateDerived::sx_ (C++ member), 300

300

`amici::ModelStateDerived::sx_rdata_` (C++ member), 301

`amici::ModelStateDerived::w_` (C++ member), 300

`amici::ModelStateDerived::x_pos_tmp_` (C++ member), 301

`amici::ModelStateDerived::x_rdata_` (C++ member), 301

`amici::ModelStateDerived::y_` (C++ member), 301

`amici::ModelStateDerived::z_` (C++ member), 301

`amici::N_VGetArrayPointerConst` (C++ function), 528

`amici::NewtonDampingFactorMode` (C++ enum), 506

`amici::NewtonDampingFactorMode::off` (C++ enumerator), 506

`amici::NewtonDampingFactorMode::on` (C++ enumerator), 506

`amici::NewtonFailure` (C++ class), 428

`amici::NewtonFailure::error_code` (C++ member), 429

`amici::NewtonFailure::NewtonFailure` (C++ function), 428

`amici::NewtonSolver` (C++ class), 429

`amici::NewtonSolver::~~NewtonSolver` (C++ function), 430

`amici::NewtonSolver::computeNewtonSensis` (C++ function), 429

`amici::NewtonSolver::dxB_` (C++ member), 431

`amici::NewtonSolver::getSolver` (C++ function), 430

`amici::NewtonSolver::getStep` (C++ function), 429

`amici::NewtonSolver::is_singular` (C++ function), 430

`amici::NewtonSolver::NewtonSolver` (C++ function), 429

`amici::NewtonSolver::prepareLinearSystem` (C++ function), 429

`amici::NewtonSolver::prepareLinearSystemB` (C++ function), 430

`amici::NewtonSolver::reinitialize` (C++ function), 430

`amici::NewtonSolver::solveLinearSystem` (C++ function), 430

`amici::NewtonSolver::x_` (C++ member), 431

`amici::NewtonSolver::xB_` (C++ member), 431

`amici::NewtonSolver::xdot_` (C++ member), 431

`amici::NewtonSolverDense` (C++ class), 431

`amici::NewtonSolverDense::~~NewtonSolverDense` (C++ function), 431

`amici::NewtonSolverDense::is_singular` (C++ function), 432

`amici::NewtonSolverDense::NewtonSolverDense` (C++ function), 431

`amici::NewtonSolverDense::operator=` (C++ function), 431

`amici::NewtonSolverDense::prepareLinearSystem` (C++ function), 431

`amici::NewtonSolverDense::prepareLinearSystemB` (C++ function), 432

`amici::NewtonSolverDense::reinitialize` (C++ function), 432

`amici::NewtonSolverDense::solveLinearSystem` (C++ function), 431

`amici::NewtonSolverSparse` (C++ class), 432

`amici::NewtonSolverSparse::~~NewtonSolverSparse` (C++ function), 433

`amici::NewtonSolverSparse::is_singular` (C++ function), 433

`amici::NewtonSolverSparse::NewtonSolverSparse` (C++ function), 433

`amici::NewtonSolverSparse::operator=` (C++ function), 433

`amici::NewtonSolverSparse::prepareLinearSystem` (C++ function), 433

`amici::NewtonSolverSparse::prepareLinearSystemB` (C++ function), 433

`amici::NewtonSolverSparse::reinitialize` (C++ function), 433

`amici::NewtonSolverSparse::solveLinearSystem` (C++ function), 433

`amici::NonlinearSolverIteration` (C++ enum), 506

`amici::NonlinearSolverIteration::fixedpoint` (C++ enumerator), 506

`amici::NonlinearSolverIteration::functional` (C++ enumerator), 506

`amici::NonlinearSolverIteration::newton` (C++ enumerator), 506

`amici::ObservableScaling` (C++ enum), 506

`amici::ObservableScaling::lin` (C++ enumerator), 506

`amici::ObservableScaling::log` (C++ enumerator), 506

`amici::ObservableScaling::log10` (C++ enumerator), 506

`amici::operator==` (C++ function), 528, 529

`amici::ParameterScaling` (C++ enum), 507

`amici::ParameterScaling::ln` (C++ enumerator), 507

`amici::ParameterScaling::log10` (C++ enumerator), 507

`amici::ParameterScaling::none` (C++ enumerator), 507

`amici::pi` (C++ member), 544

`amici::printfToString` (C++ function), 530

`amici::RDataReporting` (C++ enum), 507

`amici::RDataReporting::full` (C++ enumerator), 507

`amici::RDataReporting::likelihood` (C++ *enumerator*), 507

`amici::RDataReporting::residuals` (C++ *enumerator*), 507

`amici::realtype` (C++ *type*), 548

`amici::regexErrorToString` (C++ *function*), 530

`amici::ReturnData` (C++ *class*), 434

`amici::ReturnData::~~ReturnData` (C++ *function*), 435

`amici::ReturnData::applyChainRuleFactorToSimulationResults` (C++ *function*), 443

`amici::ReturnData::boost::serialization::serialize` (C++ *function*), 445

`amici::ReturnData::chi2` (C++ *member*), 439

`amici::ReturnData::computingFSA` (C++ *function*), 443

`amici::ReturnData::cpu_time` (C++ *member*), 437

`amici::ReturnData::cpu_time_total` (C++ *member*), 437

`amici::ReturnData::cpu_timeB` (C++ *member*), 437

`amici::ReturnData::dx_solver_` (C++ *member*), 444

`amici::ReturnData::fchi2` (C++ *function*), 442

`amici::ReturnData::fFIM` (C++ *function*), 442

`amici::ReturnData::FIM` (C++ *member*), 436

`amici::ReturnData::fres` (C++ *function*), 442

`amici::ReturnData::fsres` (C++ *function*), 442

`amici::ReturnData::getDataOutput` (C++ *function*), 443

`amici::ReturnData::getDataSensisFSA` (C++ *function*), 443

`amici::ReturnData::getEventOutput` (C++ *function*), 443

`amici::ReturnData::getEventSensisFSA` (C++ *function*), 443

`amici::ReturnData::handleSx0Backward` (C++ *function*), 443

`amici::ReturnData::handleSx0Forward` (C++ *function*), 444

`amici::ReturnData::id` (C++ *member*), 435

`amici::ReturnData::initializeFullReporting` (C++ *function*), 440

`amici::ReturnData::initializeLikelihoodReporting` (C++ *function*), 440

`amici::ReturnData::initializeObjectiveFunction` (C++ *function*), 441

`amici::ReturnData::initializeResidualReporting` (C++ *function*), 440

`amici::ReturnData::invalidate` (C++ *function*), 442

`amici::ReturnData::invalidateLLH` (C++ *function*), 442

`amici::ReturnData::invalidateSLH` (C++ *function*), 443

`amici::ReturnData::J` (C++ *member*), 435

`amici::ReturnData::llh` (C++ *member*), 439

`amici::ReturnData::messages` (C++ *member*), 440

`amici::ReturnData::newton_maxsteps` (C++ *member*), 440

`amici::ReturnData::nmaxevent` (C++ *member*), 440

`amici::ReturnData::nplist` (C++ *member*), 440

`amici::ReturnData::nroots_` (C++ *member*), 444

`amici::ReturnData::nt` (C++ *member*), 440

`amici::ReturnData::numerrtestfails` (C++ *member*), 437

`amici::ReturnData::numerrtestfailsB` (C++ *member*), 437

`amici::ReturnData::numnonlinsolvconvfails` (C++ *member*), 437

`amici::ReturnData::numnonlinsolvconvfailsB` (C++ *member*), 437

`amici::ReturnData::numrhsevals` (C++ *member*), 437

`amici::ReturnData::numrhsevalsB` (C++ *member*), 437

`amici::ReturnData::numsteps` (C++ *member*), 436

`amici::ReturnData::numstepsB` (C++ *member*), 437

`amici::ReturnData::nx` (C++ *member*), 439

`amici::ReturnData::nxtrue` (C++ *member*), 439

`amici::ReturnData::o2mode` (C++ *member*), 440

`amici::ReturnData::order` (C++ *member*), 437

`amici::ReturnData::posteq_cpu_time` (C++ *member*), 438

`amici::ReturnData::posteq_cpu_timeB` (C++ *member*), 438

`amici::ReturnData::posteq_numsteps` (C++ *member*), 438

`amici::ReturnData::posteq_numstepsB` (C++ *member*), 438

`amici::ReturnData::posteq_status` (C++ *member*), 438

`amici::ReturnData::posteq_t` (C++ *member*), 438

`amici::ReturnData::posteq_wrms` (C++ *member*), 439

`amici::ReturnData::preeq_cpu_time` (C++ *member*), 437

`amici::ReturnData::preeq_cpu_timeB` (C++ *member*), 438

`amici::ReturnData::preeq_numsteps` (C++ *member*), 438

`amici::ReturnData::preeq_numstepsB` (C++ *member*), 438

`amici::ReturnData::preeq_status` (C++ *member*), 437

`amici::ReturnData::preeq_t` (C++ *member*), 438

`amici::ReturnData::preeq_wrms` (C++ *member*), 438

`amici::ReturnData::processBackwardProblem`

(C++ function), 441

`amici::ReturnData::processForwardProblem` (C++ function), 441

`amici::ReturnData::processPostEquilibration` (C++ function), 441

`amici::ReturnData::processPreEquilibration` (C++ function), 441

`amici::ReturnData::processSimulationObjects` (C++ function), 435

`amici::ReturnData::processSolver` (C++ function), 441

`amici::ReturnData::pscale` (C++ member), 440

`amici::ReturnData::rdata_reporting` (C++ member), 440

`amici::ReturnData::readSimulationState` (C++ function), 442

`amici::ReturnData::res` (C++ member), 436

`amici::ReturnData::ReturnData` (C++ function), 434, 435

`amici::ReturnData::rz` (C++ member), 436

`amici::ReturnData::s2llh` (C++ member), 439

`amici::ReturnData::s2rz` (C++ member), 436

`amici::ReturnData::sensi` (C++ member), 440

`amici::ReturnData::sensi_meth` (C++ member), 440

`amici::ReturnData::sigma_offset` (C++ member), 444

`amici::ReturnData::sigma_res` (C++ member), 440

`amici::ReturnData::sigmay` (C++ member), 436

`amici::ReturnData::sigmaz` (C++ member), 435

`amici::ReturnData::sllh` (C++ member), 439

`amici::ReturnData::sres` (C++ member), 436

`amici::ReturnData::srz` (C++ member), 436

`amici::ReturnData::ssigmay` (C++ member), 436

`amici::ReturnData::ssigmaz` (C++ member), 436

`amici::ReturnData::status` (C++ member), 439

`amici::ReturnData::storeJacobianAndDerivativeInReturnData` (C++ function), 441

`amici::ReturnData::sx` (C++ member), 436

`amici::ReturnData::sx0` (C++ member), 439

`amici::ReturnData::sx_rdata_` (C++ member), 444

`amici::ReturnData::sx_solver_` (C++ member), 444

`amici::ReturnData::sx_ss` (C++ member), 439

`amici::ReturnData::sy` (C++ member), 436

`amici::ReturnData::sz` (C++ member), 436

`amici::ReturnData::t_` (C++ member), 444

`amici::ReturnData::ts` (C++ member), 435

`amici::ReturnData::w` (C++ member), 435

`amici::ReturnData::x` (C++ member), 436

`amici::ReturnData::x0` (C++ member), 439

`amici::ReturnData::x_rdata_` (C++ member), 444

`amici::ReturnData::x_solver_` (C++ member), 444

`amici::ReturnData::x_ss` (C++ member), 439

`amici::ReturnData::xdot` (C++ member), 435

`amici::ReturnData::y` (C++ member), 436

`amici::ReturnData::z` (C++ member), 435

`amici::runAmiciSimulation` (C++ function), 530

`amici::runAmiciSimulations` (C++ function), 531

`amici::scaleParameters` (C++ function), 531

`amici::SecondOrderMode` (C++ enum), 508

`amici::SecondOrderMode::directional` (C++ enumerator), 508

`amici::SecondOrderMode::full` (C++ enumerator), 508

`amici::SecondOrderMode::none` (C++ enumerator), 508

`amici::SensitivityMethod` (C++ enum), 508

`amici::SensitivityMethod::adjoint` (C++ enumerator), 508

`amici::SensitivityMethod::forward` (C++ enumerator), 508

`amici::SensitivityMethod::none` (C++ enumerator), 508

`amici::SensitivityOrder` (C++ enum), 509

`amici::SensitivityOrder::first` (C++ enumerator), 509

`amici::SensitivityOrder::none` (C++ enumerator), 509

`amici::SensitivityOrder::second` (C++ enumerator), 509

`amici::serializeToChar` (C++ function), 532

`amici::serializeToStdVec` (C++ function), 532

`amici::serializeToString` (C++ function), 532

`amici::SetupFailure` (C++ class), 445

`amici::SetupFailure::SetupFailure` (C++ function), 445

`amici::simulation_status_to_str` (C++ function), 533

`amici::SimulationParameters` (C++ class), 446

`amici::SimulationParameters::fixedParameters` (C++ member), 447

`amici::SimulationParameters::fixedParametersPreequilibration` (C++ member), 447

`amici::SimulationParameters::fixedParametersPresimulation` (C++ member), 447

`amici::SimulationParameters::parameters` (C++ member), 447

`amici::SimulationParameters::plist` (C++ member), 448

`amici::SimulationParameters::pscale` (C++ member), 448

`amici::SimulationParameters::reinitialization_state_idxsp` (C++ member), 448

`amici::SimulationParameters::reinitialization_state_idxss` (C++ member), 448

`amici::SimulationParameters::reinitializeAllFixedParameters` (C++ function), 447

amici::SimulationParameters::reinitializeAllFixedParametersDependentInitialStatesForPresim
 (C++ function), 447
 amici::SimulationParameters::reinitializeAllFixedParametersDependentInitialStatesForSimulation
 (C++ function), 447
 amici::SimulationParameters::reinitializeFixedParametersInitialStates (C++ member), 448
 amici::SimulationParameters::SimulationParameters (C++ function), 446
 amici::SimulationParameters::sx0 (C++ member), 447
 amici::SimulationParameters::t_presim (C++ member), 448
 amici::SimulationParameters::ts_ (C++ member), 448
 amici::SimulationParameters::tstart_ (C++ member), 448
 amici::SimulationParameters::x0 (C++ member), 447
 amici::SimulationState (C++ struct), 302
 amici::SimulationState::dx (C++ member), 302
 amici::SimulationState::state (C++ member), 302
 amici::SimulationState::sx (C++ member), 302
 amici::SimulationState::t (C++ member), 302
 amici::SimulationState::x (C++ member), 302
 amici::slice (C++ function), 533
 amici::Solver (C++ class), 449
 amici::Solver::~~Solver (C++ function), 449
 amici::Solver::adjInit (C++ function), 466
 amici::Solver::allocateSolver (C++ function), 463
 amici::Solver::allocateSolverB (C++ function), 466
 amici::Solver::applyQuadTolerances (C++ function), 469
 amici::Solver::applyQuadTolerancesASA (C++ function), 469
 amici::Solver::applySensitivityTolerances (C++ function), 469
 amici::Solver::applyTolerances (C++ function), 469
 amici::Solver::applyTolerancesASA (C++ function), 469
 amici::Solver::applyTolerancesFSA (C++ function), 469
 amici::Solver::binit (C++ function), 462
 amici::Solver::boost::serialization::serialize (C++ function), 472
 amici::Solver::calcIC (C++ function), 451
 amici::Solver::calcICB (C++ function), 451
 amici::Solver::checkSensitivityMethod (C++ function), 470
 amici::Solver::clone (C++ function), 449
 amici::Solver::computingASA (C++ function), 459
 amici::Solver::diag (C++ function), 469
 amici::Solver::dky_ (C++ member), 471
 amici::Solver::dxB_ (C++ member), 472
 amici::Solver::force_reinit_postprocess_B_ (C++ member), 472
 amici::Solver::force_reinit_postprocess_F_ (C++ member), 472
 amici::Solver::getAbsoluteTolerance (C++ function), 452
 amici::Solver::getAbsoluteToleranceB (C++ function), 453
 amici::Solver::getAbsoluteToleranceFSA (C++ function), 453
 amici::Solver::getAbsoluteToleranceQuadratures (C++ function), 453
 amici::Solver::getAbsoluteToleranceSteadyState (C++ function), 454
 amici::Solver::getAbsoluteToleranceSteadyStateSensi (C++ function), 454
 amici::Solver::getAdjBmem (C++ function), 469
 amici::Solver::getAdjInitDone (C++ function), 468
 amici::Solver::getAdjointDerivativeState (C++ function), 458
 amici::Solver::getAdjointQuadrature (C++ function), 458
 amici::Solver::getAdjointState (C++ function), 457
 amici::Solver::getB (C++ function), 462
 amici::Solver::getCpuTime (C++ function), 459
 amici::Solver::getCpuTimeB (C++ function), 459
 amici::Solver::getDerivativeState (C++ function), 457
 amici::Solver::getDky (C++ function), 465
 amici::Solver::getDkyB (C++ function), 465
 amici::Solver::getInitDone (C++ function), 468
 amici::Solver::getInitDoneB (C++ function), 468
 amici::Solver::getInternalSensitivityMethod (C++ function), 456
 amici::Solver::getInterpolationType (C++ function), 456
 amici::Solver::getLastOrder (C++ function), 460, 467
 amici::Solver::getLinearMultistepMethod (C++ function), 455
 amici::Solver::getLinearSolver (C++ function), 456
 amici::Solver::getMaxSteps (C++ function), 455
 amici::Solver::getMaxStepsBackwardProblem (C++ function), 455
 amici::Solver::getMaxTime (C++ function), 455

amici::Solver::getModel (C++ function), 468
 amici::Solver::getNewtonDampingFactorLowerBound (C++ function), 452
 amici::Solver::getNewtonDampingFactorMode (C++ function), 452
 amici::Solver::getNewtonMaxSteps (C++ function), 451
 amici::Solver::getNewtonStepSteadyStateCheck (C++ function), 460
 amici::Solver::getNonlinearSolverIteration (C++ function), 456
 amici::Solver::getNumErrTestFails (C++ function), 460, 467
 amici::Solver::getNumErrTestFailsB (C++ function), 460
 amici::Solver::getNumNonlinSolvConvFails (C++ function), 460, 467
 amici::Solver::getNumNonlinSolvConvFailsB (C++ function), 460
 amici::Solver::getNumRhsEvals (C++ function), 460, 467
 amici::Solver::getNumRhsEvalsB (C++ function), 460
 amici::Solver::getNumSteps (C++ function), 460, 467
 amici::Solver::getNumStepsB (C++ function), 460
 amici::Solver::getQuad (C++ function), 462
 amici::Solver::getQuadB (C++ function), 462
 amici::Solver::getQuadDky (C++ function), 466
 amici::Solver::getQuadDkyB (C++ function), 466
 amici::Solver::getQuadInitDone (C++ function), 469
 amici::Solver::getQuadInitDoneB (C++ function), 468
 amici::Solver::getQuadrature (C++ function), 458
 amici::Solver::getRelativeTolerance (C++ function), 452
 amici::Solver::getRelativeToleranceB (C++ function), 453
 amici::Solver::getRelativeToleranceFSA (C++ function), 452
 amici::Solver::getRelativeToleranceQuadratures (C++ function), 453
 amici::Solver::getRelativeToleranceSteadyState (C++ function), 454
 amici::Solver::getRelativeToleranceSteadyStateSensi (C++ function), 454
 amici::Solver::getReturnDataReportingMode (C++ function), 457
 amici::Solver::getRootInfo (C++ function), 451
 amici::Solver::getSens (C++ function), 462
 amici::Solver::getSensDky (C++ function), 466
 amici::Solver::getSensInitDone (C++ function), 468
 amici::Solver::getSensiSteadyStateCheck (C++ function), 460
 amici::Solver::getSensitivityMethod (C++ function), 451
 amici::Solver::getSensitivityMethodPreequilibration (C++ function), 451
 amici::Solver::getSensitivityOrder (C++ function), 452
 amici::Solver::getStabilityLimitFlag (C++ function), 456
 amici::Solver::getState (C++ function), 457
 amici::Solver::getStateOrdering (C++ function), 456
 amici::Solver::getStateSensitivity (C++ function), 457
 amici::Solver::getSteadyStateSensiToleranceFactor (C++ function), 454
 amici::Solver::getSteadyStateToleranceFactor (C++ function), 453
 amici::Solver::gett (C++ function), 459
 amici::Solver::init (C++ function), 462
 amici::Solver::initializeLinearSolver (C++ function), 467
 amici::Solver::initializeLinearSolverB (C++ function), 468
 amici::Solver::initializeNonLinearSolver (C++ function), 467
 amici::Solver::initializeNonLinearSolverB (C++ function), 468
 amici::Solver::initializeNonLinearSolverSens (C++ function), 463
 amici::Solver::initSteadystate (C++ function), 462
 amici::Solver::interp_type_ (C++ member), 471
 amici::Solver::ism_ (C++ member), 470
 amici::Solver::iter_ (C++ member), 470
 amici::Solver::linear_solver_ (C++ member), 471
 amici::Solver::linear_solver_B_ (C++ member), 471
 amici::Solver::lmm_ (C++ member), 470
 amici::Solver::logger (C++ member), 461
 amici::Solver::maxsteps_ (C++ member), 471
 amici::Solver::maxtime_ (C++ member), 471
 amici::Solver::non_linear_solver_ (C++ member), 471
 amici::Solver::non_linear_solver_B_ (C++ member), 471
 amici::Solver::non_linear_solver_sens_ (C++ member), 471
 amici::Solver::nplist (C++ function), 459
 amici::Solver::nquad (C++ function), 459
 amici::Solver::nx (C++ function), 459
 amici::Solver::operator== (C++ function), 472

amici::Solver::qbinit (C++ function), 463
 amici::Solver::quadInit (C++ function), 466
 amici::Solver::quadReInitB (C++ function), 459
 amici::Solver::quadSStolerances (C++ function), 467
 amici::Solver::quadSStolerancesB (C++ function), 466
 amici::Solver::reInit (C++ function), 458
 amici::Solver::reInitB (C++ function), 458
 amici::Solver::reInitPostProcessB (C++ function), 461
 amici::Solver::reInitPostProcessF (C++ function), 461
 amici::Solver::resetDiagnosis (C++ function), 459
 amici::Solver::resetMutableMemory (C++ function), 469
 amici::Solver::rootInit (C++ function), 463
 amici::Solver::run (C++ function), 449
 amici::Solver::runB (C++ function), 450
 amici::Solver::sdx_ (C++ member), 472
 amici::Solver::sens_initialized_ (C++ member), 472
 amici::Solver::sensInit1 (C++ function), 462
 amici::Solver::sensReInit (C++ function), 458
 amici::Solver::sensToggleOff (C++ function), 458
 amici::Solver::setAbsoluteTolerance (C++ function), 452
 amici::Solver::setAbsoluteToleranceB (C++ function), 453
 amici::Solver::setAbsoluteToleranceFSA (C++ function), 453
 amici::Solver::setAbsoluteToleranceQuadratures (C++ function), 453
 amici::Solver::setAbsoluteToleranceSteadyState (C++ function), 454
 amici::Solver::setAbsoluteToleranceSteadyStateSensi (C++ function), 455
 amici::Solver::setAdjInitDone (C++ function), 470
 amici::Solver::setBandJacFn (C++ function), 463
 amici::Solver::setBandJacFnB (C++ function), 463
 amici::Solver::setDenseJacFn (C++ function), 463
 amici::Solver::setDenseJacFnB (C++ function), 463
 amici::Solver::setErrHandlerFn (C++ function), 464
 amici::Solver::setId (C++ function), 465
 amici::Solver::setInitDone (C++ function), 470
 amici::Solver::setInitDoneB (C++ function), 470
 amici::Solver::setInternalSensitivityMethod (C++ function), 456
 amici::Solver::setInterpolationType (C++ function), 456
 amici::Solver::setJacTimesVecFn (C++ function), 463
 amici::Solver::setJacTimesVecFnB (C++ function), 463
 amici::Solver::setLinearMultistepMethod (C++ function), 455
 amici::Solver::setLinearSolver (C++ function), 456, 468
 amici::Solver::setLinearSolverB (C++ function), 468
 amici::Solver::setMaxNumSteps (C++ function), 464
 amici::Solver::setMaxNumStepsB (C++ function), 464
 amici::Solver::setMaxSteps (C++ function), 455
 amici::Solver::setMaxStepsBackwardProblem (C++ function), 455
 amici::Solver::setMaxTime (C++ function), 455
 amici::Solver::setNewtonDampingFactorLowerBound (C++ function), 452
 amici::Solver::setNewtonDampingFactorMode (C++ function), 452
 amici::Solver::setNewtonMaxSteps (C++ function), 451
 amici::Solver::setNewtonStepSteadyStateCheck (C++ function), 461
 amici::Solver::setNonLinearSolver (C++ function), 468
 amici::Solver::setNonLinearSolverB (C++ function), 468
 amici::Solver::setNonlinearSolverIteration (C++ function), 456
 amici::Solver::setNonLinearSolverSens (C++ function), 468
 amici::Solver::setQuadErrCon (C++ function), 464
 amici::Solver::setQuadErrConB (C++ function), 464
 amici::Solver::setQuadInitDone (C++ function), 470
 amici::Solver::setQuadInitDoneB (C++ function), 470
 amici::Solver::setRelativeTolerance (C++ function), 452
 amici::Solver::setRelativeToleranceB (C++ function), 453
 amici::Solver::setRelativeToleranceFSA (C++ function), 453
 amici::Solver::setRelativeToleranceQuadratures (C++ function), 453
 amici::Solver::setRelativeToleranceSteadyState (C++ function), 454
 amici::Solver::setRelativeToleranceSteadyStateSensi (C++ function), 454
 amici::Solver::setReturnDataReportingMode

(C++ function), 457

`amici::Solver::setSensErrCon` (C++ function), 464

`amici::Solver::setSensInitDone` (C++ function), 470

`amici::Solver::setSensInitOff` (C++ function), 470

`amici::Solver::setSensiSteadyStateCheck` (C++ function), 461

`amici::Solver::setSensitivityMethod` (C++ function), 451

`amici::Solver::setSensitivityMethodPreequilibrium` (C++ function), 451

`amici::Solver::setSensitivityOrder` (C++ function), 452

`amici::Solver::setSensParams` (C++ function), 465

`amici::Solver::setSensStolerances` (C++ function), 464

`amici::Solver::setSparseJacFn` (C++ function), 463

`amici::Solver::setSparseJacFn_ss` (C++ function), 463

`amici::Solver::setSparseJacFnB` (C++ function), 463

`amici::Solver::setStolerances` (C++ function), 463

`amici::Solver::setStolerancesB` (C++ function), 466

`amici::Solver::setStabilityLimitFlag` (C++ function), 456

`amici::Solver::setStabLimDet` (C++ function), 465

`amici::Solver::setStabLimDetB` (C++ function), 465

`amici::Solver::setStateOrdering` (C++ function), 456

`amici::Solver::setSteadyStateSensiToleranceFactor` (C++ function), 454

`amici::Solver::setSteadyStateToleranceFactor` (C++ function), 454

`amici::Solver::setStopTime` (C++ function), 461

`amici::Solver::setSuppressAlg` (C++ function), 465

`amici::Solver::setup` (C++ function), 450

`amici::Solver::setupB` (C++ function), 450

`amici::Solver::setupSteadystate` (C++ function), 450

`amici::Solver::setUserData` (C++ function), 464

`amici::Solver::setUserDataB` (C++ function), 464

`amici::Solver::solve` (C++ function), 461

`amici::Solver::solveB` (C++ function), 451

`amici::Solver::solveF` (C++ function), 461

`amici::Solver::Solver` (C++ function), 449

`amici::Solver::solver_memory_` (C++ member), 470

`amici::Solver::solver_memory_B_` (C++ member), 470

`amici::Solver::solver_was_called_B_` (C++ member), 471

`amici::Solver::solver_was_called_F_` (C++ member), 471

`amici::Solver::starttime_` (C++ member), 471

`amici::Solver::startTimer` (C++ function), 455

`amici::Solver::step` (C++ function), 449

`amici::Solver::storeDiagnosis` (C++ function), 459

`amici::Solver::storeDiagnosisB` (C++ function), 460

`amici::Solver::switchForwardSensisOff` (C++ function), 451

`amici::Solver::sx_` (C++ member), 471

`amici::Solver::t_` (C++ member), 472

`amici::Solver::timeExceeded` (C++ function), 455

`amici::Solver::turnOffRootFinding` (C++ function), 451

`amici::Solver::updateAndReinitStatesAndSensitivities` (C++ function), 450

`amici::Solver::user_data` (C++ member), 470

`amici::Solver::user_data_type` (C++ type), 449

`amici::Solver::writeSolution` (C++ function), 457

`amici::Solver::writeSolutionB` (C++ function), 457

`amici::Solver::x_` (C++ member), 471

`amici::Solver::xB_` (C++ member), 472

`amici::Solver::xQ_` (C++ member), 472

`amici::Solver::xQB_` (C++ member), 472

`amici::SteadyStateContext` (C++ enum), 509

`amici::SteadyStateContext::newtonSensi` (C++ enumerator), 509

`amici::SteadyStateContext::sensiStorage` (C++ enumerator), 509

`amici::SteadyStateContext::solverCreation` (C++ enumerator), 509

`amici::SteadystateProblem` (C++ class), 473

`amici::SteadystateProblem::checkSteadyStateSuccess` (C++ function), 475

`amici::SteadystateProblem::getAdjointQuadrature` (C++ function), 475

`amici::SteadystateProblem::getAdjointState` (C++ function), 474

`amici::SteadystateProblem::getAdjointUpdates` (C++ function), 474

`amici::SteadystateProblem::getCPUTime` (C++ function), 474

`amici::SteadystateProblem::getCPUTimeB` (C++ function), 474

`amici::SteadystateProblem::getDJydx` (C++ function), 474

`amici::SteadystateProblem::getEquilibrationQuadratures` (C++ function), 473

amici::SteadystateProblem::getFinalSimulationState (C++ function), 473
 amici::SteadystateProblem::getNumSteps (C++ function), 474
 amici::SteadystateProblem::getNumStepsB (C++ function), 474
 amici::SteadystateProblem::getResidualNorm (C++ function), 474
 amici::SteadystateProblem::getState (C++ function), 474
 amici::SteadystateProblem::getStateSensitivity (C++ function), 474
 amici::SteadystateProblem::getSteadyStateStatus (C++ function), 474
 amici::SteadystateProblem::getSteadyStateTime (C++ function), 474
 amici::SteadystateProblem::hasQuadrature (C++ function), 475
 amici::SteadystateProblem::SteadystateProblem (C++ function), 473
 amici::SteadystateProblem::workSteadyStateBackward (C++ function), 473
 amici::SteadystateProblem::workSteadyStateProblem (C++ function), 473
 amici::SteadyStateSensitivityMode (C++ enum), 510
 amici::SteadyStateSensitivityMode::integrateIfFailed (C++ enumerator), 510
 amici::SteadyStateSensitivityMode::integrationOnly (C++ enumerator), 510
 amici::SteadyStateSensitivityMode::newtonOnly (C++ enumerator), 510
 amici::SteadyStateStatus (C++ enum), 510
 amici::SteadyStateStatus::failed (C++ enumerator), 510
 amici::SteadyStateStatus::failed_convergence (C++ enumerator), 510
 amici::SteadyStateStatus::failed_damping (C++ enumerator), 510
 amici::SteadyStateStatus::failed_factorization (C++ enumerator), 510
 amici::SteadyStateStatus::failed_too_long_simulation (C++ enumerator), 510
 amici::SteadyStateStatus::not_run (C++ enumerator), 510
 amici::SteadyStateStatus::success (C++ enumerator), 510
 amici::SUNLinSolBand (C++ class), 475
 amici::SUNLinSolBand::getMatrix (C++ function), 476
 amici::SUNLinSolBand::SUNLinSolBand (C++ function), 475
 amici::SUNLinSolDense (C++ class), 476
 amici::SUNLinSolDense::getMatrix (C++ function), 476
 amici::SUNLinSolDense::SUNLinSolDense (C++ function), 476
 amici::SUNLinSolKLU (C++ class), 477
 amici::SUNLinSolKLU::getMatrix (C++ function), 477
 amici::SUNLinSolKLU::reInit (C++ function), 477
 amici::SUNLinSolKLU::setOrdering (C++ function), 478
 amici::SUNLinSolKLU::StateOrdering (C++ enum), 477
 amici::SUNLinSolKLU::StateOrdering::AMD (C++ enumerator), 477
 amici::SUNLinSolKLU::StateOrdering::COLAMD (C++ enumerator), 477
 amici::SUNLinSolKLU::StateOrdering::natural (C++ enumerator), 477
 amici::SUNLinSolKLU::SUNLinSolKLU (C++ function), 477
 amici::SUNLinSolPCG (C++ class), 478
 amici::SUNLinSolPCG::getMatrix (C++ function), 479
 amici::SUNLinSolPCG::getNumIters (C++ function), 479
 amici::SUNLinSolPCG::getResid (C++ function), 479
 amici::SUNLinSolPCG::getResNorm (C++ function), 479
 amici::SUNLinSolPCG::setATimes (C++ function), 478
 amici::SUNLinSolPCG::setPreconditioner (C++ function), 478
 amici::SUNLinSolPCG::setScalingVectors (C++ function), 479
 amici::SUNLinSolPCG::SUNLinSolPCG (C++ function), 478
 amici::SUNLinSolSPBCGS (C++ class), 479
 amici::SUNLinSolSPBCGS::getMatrix (C++ function), 480
 amici::SUNLinSolSPBCGS::getNumIters (C++ function), 480
 amici::SUNLinSolSPBCGS::getResid (C++ function), 481
 amici::SUNLinSolSPBCGS::getResNorm (C++ function), 481
 amici::SUNLinSolSPBCGS::setATimes (C++ function), 480
 amici::SUNLinSolSPBCGS::setPreconditioner (C++ function), 480
 amici::SUNLinSolSPBCGS::setScalingVectors (C++ function), 480
 amici::SUNLinSolSPBCGS::SUNLinSolSPBCGS (C++ function), 480
 amici::SUNLinSolSPFGMR (C++ class), 481
 amici::SUNLinSolSPFGMR::getMatrix (C++ function), 482
 amici::SUNLinSolSPFGMR::getNumIters (C++ function), 482
 amici::SUNLinSolSPFGMR::getResid (C++ function), 482

<code>amici::SUNLinSolSPFGMR::getResNorm</code> (C++ function), 482	<code>amici::SUNLinSolWrapper::setup</code> (C++ function), 487
<code>amici::SUNLinSolSPFGMR::setATimes</code> (C++ function), 481	<code>amici::SUNLinSolWrapper::Solve</code> (C++ function), 487
<code>amici::SUNLinSolSPFGMR::setPreconditioner</code> (C++ function), 481	<code>amici::SUNLinSolWrapper::solver_</code> (C++ member), 488
<code>amici::SUNLinSolSPFGMR::setScalingVectors</code> (C++ function), 482	<code>amici::SUNLinSolWrapper::space</code> (C++ function), 487
<code>amici::SUNLinSolSPFGMR::SUNLinSolSPFGMR</code> (C++ function), 481	<code>amici::SUNLinSolWrapper::SUNLinSolWrapper</code> (C++ function), 486
<code>amici::SUNLinSolSPGMR</code> (C++ class), 483	<code>amici::SUNMatrixWrapper</code> (C++ class), 488
<code>amici::SUNLinSolSPGMR::getNumIters</code> (C++ function), 483	<code>amici::SUNMatrixWrapper::~SUNMatrixWrapper</code> (C++ function), 489
<code>amici::SUNLinSolSPGMR::getResid</code> (C++ function), 484	<code>amici::SUNMatrixWrapper::capacity</code> (C++ function), 490
<code>amici::SUNLinSolSPGMR::getResNorm</code> (C++ function), 483	<code>amici::SUNMatrixWrapper::columns</code> (C++ function), 490
<code>amici::SUNLinSolSPGMR::setATimes</code> (C++ function), 483	<code>amici::SUNMatrixWrapper::data</code> (C++ function), 490
<code>amici::SUNLinSolSPGMR::setPreconditioner</code> (C++ function), 483	<code>amici::SUNMatrixWrapper::get</code> (C++ function), 489
<code>amici::SUNLinSolSPGMR::setScalingVectors</code> (C++ function), 483	<code>amici::SUNMatrixWrapper::get_data</code> (C++ function), 490
<code>amici::SUNLinSolSPGMR::SUNLinSolSPGMR</code> (C++ function), 483	<code>amici::SUNMatrixWrapper::get_indexptr</code> (C++ function), 491
<code>amici::SUNLinSolSPTFQMR</code> (C++ class), 484	<code>amici::SUNMatrixWrapper::get_indexval</code> (C++ function), 491
<code>amici::SUNLinSolSPTFQMR::getNumIters</code> (C++ function), 485	<code>amici::SUNMatrixWrapper::matrix_id</code> (C++ function), 494
<code>amici::SUNLinSolSPTFQMR::getResid</code> (C++ function), 485	<code>amici::SUNMatrixWrapper::multiply</code> (C++ function), 492
<code>amici::SUNLinSolSPTFQMR::getResNorm</code> (C++ function), 485	<code>amici::SUNMatrixWrapper::num_indexptrs</code> (C++ function), 490
<code>amici::SUNLinSolSPTFQMR::setATimes</code> (C++ function), 484	<code>amici::SUNMatrixWrapper::num_nonzeros</code> (C++ function), 490
<code>amici::SUNLinSolSPTFQMR::setPreconditioner</code> (C++ function), 485	<code>amici::SUNMatrixWrapper::operator=</code> (C++ function), 489
<code>amici::SUNLinSolSPTFQMR::setScalingVectors</code> (C++ function), 485	<code>amici::SUNMatrixWrapper::realloc</code> (C++ function), 489
<code>amici::SUNLinSolSPTFQMR::SUNLinSolSPTFQMR</code> (C++ function), 484	<code>amici::SUNMatrixWrapper::reallocate</code> (C++ function), 489
<code>amici::SUNLinSolWrapper</code> (C++ class), 486	<code>amici::SUNMatrixWrapper::refresh</code> (C++ function), 494
<code>amici::SUNLinSolWrapper::~SUNLinSolWrapper</code> (C++ function), 486	<code>amici::SUNMatrixWrapper::rows</code> (C++ function), 490
<code>amici::SUNLinSolWrapper::get</code> (C++ function), 487	<code>amici::SUNMatrixWrapper::scale</code> (C++ function), 492
<code>amici::SUNLinSolWrapper::getLastFlag</code> (C++ function), 487	<code>amici::SUNMatrixWrapper::scatter</code> (C++ function), 493
<code>amici::SUNLinSolWrapper::getMatrix</code> (C++ function), 487	<code>amici::SUNMatrixWrapper::set_data</code> (C++ function), 490, 491
<code>amici::SUNLinSolWrapper::getType</code> (C++ function), 487	<code>amici::SUNMatrixWrapper::set_indexptr</code> (C++ function), 491
<code>amici::SUNLinSolWrapper::initialize</code> (C++ function), 488	<code>amici::SUNMatrixWrapper::set_indexptrs</code> (C++ function), 491
<code>amici::SUNLinSolWrapper::operator=</code> (C++ function), 486	

amici::SUNMatrixWrapper::set_indexval (C++ function), 491
 amici::SUNMatrixWrapper::set_indexvals (C++ function), 491
 amici::SUNMatrixWrapper::sparse_add (C++ function), 493
 amici::SUNMatrixWrapper::sparse_multiply (C++ function), 493
 amici::SUNMatrixWrapper::sparse_sum (C++ function), 493
 amici::SUNMatrixWrapper::sparsetype (C++ function), 491
 amici::SUNMatrixWrapper::SUNMatrixWrapper (C++ function), 488, 489
 amici::SUNMatrixWrapper::to_dense (C++ function), 494
 amici::SUNMatrixWrapper::to_diag (C++ function), 494
 amici::SUNMatrixWrapper::transpose (C++ function), 494
 amici::SUNMatrixWrapper::zero (C++ function), 494
 amici::SUNNonLinSolFixedPoint (C++ class), 495
 amici::SUNNonLinSolFixedPoint::getSysFn (C++ function), 495
 amici::SUNNonLinSolFixedPoint::SUNNonLinSolFixedPoint (C++ function), 495
 amici::SUNNonLinSolNewton (C++ class), 496
 amici::SUNNonLinSolNewton::getSysFn (C++ function), 496
 amici::SUNNonLinSolNewton::SUNNonLinSolNewton (C++ function), 496
 amici::SUNNonLinSolWrapper (C++ class), 497
 amici::SUNNonLinSolWrapper::~SUNNonLinSolWrapper (C++ function), 497
 amici::SUNNonLinSolWrapper::get (C++ function), 497
 amici::SUNNonLinSolWrapper::getCurIter (C++ function), 498
 amici::SUNNonLinSolWrapper::getNumConvFails (C++ function), 499
 amici::SUNNonLinSolWrapper::getNumIters (C++ function), 498
 amici::SUNNonLinSolWrapper::getType (C++ function), 497
 amici::SUNNonLinSolWrapper::initialize (C++ function), 499
 amici::SUNNonLinSolWrapper::operator= (C++ function), 497
 amici::SUNNonLinSolWrapper::setConvTestFn (C++ function), 498
 amici::SUNNonLinSolWrapper::setLSetupFn (C++ function), 498
 amici::SUNNonLinSolWrapper::setLSolveFn (C++ function), 498
 amici::SUNNonLinSolWrapper::setMaxIters (C++ function), 498
 amici::SUNNonLinSolWrapper::setSysFn (C++ function), 498
 amici::SUNNonLinSolWrapper::setup (C++ function), 497
 amici::SUNNonLinSolWrapper::Solve (C++ function), 497
 amici::SUNNonLinSolWrapper::solver (C++ member), 499
 amici::SUNNonLinSolWrapper::SUNNonLinSolWrapper (C++ function), 497
 amici::unravel_index (C++ function), 534
 amici::unscaleParameters (C++ function), 534
 amici::wrapErrHandlerFn (C++ function), 535
 amici::writeSlice (C++ function), 535, 536
 AMICI_H5_RESTORE_ERROR_HANDLER (C macro), 544
 AMICI_H5_SAVE_ERROR_HANDLER (C macro), 545
 amici_path (in module amici), 180
 amici_to_petab_scale() (in module amici.parameter_mapping), 278
 AMICI_VERSION (C macro), 545
 amiciModulePath (in module amici), 180
 amiciSrcPath (in module amici), 180
 amiciStdPath (in module amici), 180
 AmiciVersionError, 179
 amievent (built-in class), 561
 amifun (built-in class), 562
 append() (amici.parameter_mapping.ParameterMapping method), 277
 apply_template() (in module amici.ode_export), 264
 assignmentRules2observables() (in module amici.sbml_import), 236

B

band (amici.amici.LinearSolver attribute), 190
 BDF (amici.amici.LinearMultistepMethod attribute), 189
 BNGL, 53
 bngl2amici() (in module amici.bngl_import), 240
 BoolVector (class in amici.amici), 182
 boost::serialization::archiveVector (C++ function), 536
 boost::serialization::serialize (C++ function), 537, 538
 by_id() (amici.numpy.ReturnDataView method), 282

C

cast_to_sym() (in module amici.import_utils), 252
 check_derivatives() (in module amici.gradient_check), 276
 check_event_support() (amici.sbml_import.SbmlImporter method), 234

[check_finite_difference\(\)](#) (in module *amici.gradient_check*), 276
[check_model\(\)](#) (in module *amici.petab_import*), 241
[check_support\(\)](#) (*amici.sbml_import.SbmlImporter* method), 235
[chi2](#) (*amici.amici.ReturnData* property), 207
[chi2](#) (*amici.amici.ReturnDataPtr* property), 212
[CircularDependencyError](#), 252
[clone\(\)](#) (*amici.amici.Model* method), 191
[clone\(\)](#) (*amici.amici.Solver* method), 220
[colptrs\(\)](#) (*amici.ode_export.ODEModel* method), 259
[compile_model\(\)](#) (*amici.ode_export.ODEExporter* method), 257
[compiledWithOpenMP\(\)](#) (in module *amici.amici*), 231
[compute_moiety_conservation_laws\(\)](#) (in module *amici.conservated_quantities_demartino*), 280
[computingASA\(\)](#) (*amici.amici.Solver* method), 220
[computingFSA\(\)](#) (*amici.amici.Solver* method), 220
[conservation_law_has_multispecies\(\)](#) (*amici.ode_export.ODEModel* method), 259
[ConservationLaw](#) (class in *amici.ode_model*), 267
[Constant](#) (class in *amici.ode_model*), 267
[cpu_time](#) (*amici.amici.ReturnData* property), 207
[cpu_time](#) (*amici.amici.ReturnDataPtr* property), 212
[cpu_time_total](#) (*amici.amici.ReturnData* property), 208
[cpu_time_total](#) (*amici.amici.ReturnDataPtr* property), 212
[cpu_timeB](#) (*amici.amici.ReturnData* property), 207
[cpu_timeB](#) (*amici.amici.ReturnDataPtr* property), 212
[create_dummy_sbml\(\)](#) (in module *amici.petab_import_pysb*), 246
[create_edata_for_condition\(\)](#) (in module *amici.petab_objective*), 247
[create_edatas\(\)](#) (in module *amici.petab_objective*), 247
[create_parameter_mapping\(\)](#) (in module *amici.petab_objective*), 247
[create_parameter_mapping_for_condition\(\)](#) (in module *amici.petab_objective*), 248
[create_parameterized_edatas\(\)](#) (in module *amici.petab_objective*), 248
[CVODES](#), 53

D

[DAE](#), 53
[delimiter](#) (*amici.ode_export.TemplateAmici* attribute), 263
[dense](#) (*amici.amici.LinearSolver* attribute), 190
[diag](#) (*amici.amici.LinearSolver* attribute), 190
[directional](#) (*amici.amici.SecondOrderMode* attribute), 218
[DoubleVector](#) (class in *amici.amici*), 182
[dx](#) (*amici.amici.SimulationState* property), 220

E

[element_is_state\(\)](#) (in module *amici.petab_import*), 241
[enum\(\)](#) (in module *amici.amici*), 231
[eq\(\)](#) (*amici.ode_export.ODEModel* method), 259
[Event](#) (class in *amici.ode_model*), 268
[EventObservable](#) (class in *amici.ode_model*), 268
[ExpData](#) (class in *amici.amici*), 183
[ExpDataPtr](#) (class in *amici.amici*), 188
[ExpDataPtrVector](#) (class in *amici.amici*), 189
[ExpDataView](#) (class in *amici.numpy*), 282
[Expression](#) (class in *amici.ode_model*), 268
[extract_monomers\(\)](#) (in module *amici.pysb_import*), 237

F

[failed](#) (*amici.amici.SteadyStateStatus* attribute), 230
[failed_convergence](#) (*amici.amici.SteadyStateStatus* attribute), 230
[failed_damping](#) (*amici.amici.SteadyStateStatus* attribute), 230
[failed_factorization](#) (*amici.amici.SteadyStateStatus* attribute), 230
[failed_too_long_simulation](#) (*amici.amici.SteadyStateStatus* attribute), 231
[fdsigmaydy\(\)](#) (*amici.amici.Model* method), 191
[fdtotal_cldp\(\)](#) (*amici.amici.Model* method), 191
[fdtotal_cldx_rdata\(\)](#) (*amici.amici.Model* method), 191
[fdx_rdatadp\(\)](#) (*amici.amici.Model* method), 192
[fdx_rdatadtcl\(\)](#) (*amici.amici.Model* method), 192
[fdx_rdatadx_solver\(\)](#) (*amici.amici.Model* method), 192
[fill_in_parameters\(\)](#) (in module *amici.parameter_mapping*), 278
[fill_in_parameters_for_condition\(\)](#) (in module *amici.parameter_mapping*), 279
[FIM](#) (*amici.amici.ReturnData* property), 207
[FIM](#) (*amici.amici.ReturnDataPtr* property), 212
[first](#) (*amici.amici.SensitivityOrder* attribute), 218
[fixed parameters](#), 53
[FixedParameterContext](#) (class in *amici.amici*), 189
[fixedParameters](#) (*amici.amici.ExpDataPtr* property), 188
[fixedParameters](#) (*amici.amici.SimulationParameters* property), 218
[fixedParametersPreequilibration](#) (*amici.amici.ExpDataPtr* property), 188
[fixedParametersPreequilibration](#) (*amici.amici.SimulationParameters* property), 218
[fixedParametersPresimulation](#) (*amici.amici.ExpDataPtr* property), 188

fixedParametersPresimulation (amici.amici.SimulationParameters property), 218

fixedpoint (amici.amici.NonlinearSolverIteration attribute), 206

forward (amici.amici.SensitivityMethod attribute), 218

free_symbols (amici.parameter_mapping.ParameterMapping property), 277

free_symbols (amici.parameter_mapping.ParameterMappingForContinuation), 267

free_symbols (amici.ode_export.ODEModel method), 260

from_files() (amici.petab_import_pysb.PysbPetabProblem static method), 245

from_yaml() (amici.petab_import_pysb.PysbPetabProblem static method), 245

full (amici.amici.RDataReporting attribute), 207

full (amici.amici.SecondOrderMode attribute), 218

functional (amici.amici.NonlinearSolverIteration attribute), 207

G

generate_basic_variables() (amici.ode_export.ODEModel method), 260

generate_flux_symbol() (in module amici.import_utils), 252

generate_measurement_symbol() (in module amici.import_utils), 252

generate_model_code() (amici.ode_export.ODEExporter method), 257

generate_regularization_symbol() (in module amici.import_utils), 252

get_appearance_counts() (amici.ode_export.ODEModel method), 260

get_conservation_laws() (amici.ode_export.ODEModel method), 260

get_dt() (amici.ode_model.State method), 269

get_dx_rdata_dx_solver() (amici.ode_model.State method), 269

get_event() (amici.ode_model.EventObservable method), 268

get_expressions_as_dataframe() (in module amici.pandas), 274

get_fixed_parameters() (in module amici.petab_import), 241

get_free_symbols() (amici.ode_model.State method), 270

get_function_extern_declaration() (in module amici.ode_export), 264

get_id() (amici.ode_model.ModelQuantity method), 268

get_initial_value() (amici.ode_model.Event method), 268

get_logger() (in module amici.logging), 275

get_measurement_symbol() (amici.ode_model.Observable method), 269

get_model() (amici.ModelModule method), 179

get_model_override_implementation() (in module amici.ode_export), 264

get_name() (amici.ode_model.ModelQuantity method), 268

get_ncoeff() (amici.ode_model.ConservationLaw method), 267

get_observable_transformations() (amici.ode_export.ODEModel method), 260

get_observation_model() (in module amici.petab_import), 241

get_regularization_symbol() (amici.ode_model.Observable method), 269

get_solver_indices() (amici.ode_export.ODEModel method), 260

get_species_initial() (in module amici.sbml_import), 237

get_sunindex_extern_declaration() (in module amici.ode_export), 264

get_sunindex_override_implementation() (in module amici.ode_export), 264

get_val() (amici.ode_model.ModelQuantity method), 268

get_x_rdata() (amici.ode_model.ConservationLaw method), 267

get_x_rdata() (amici.ode_model.State method), 270

getAbsoluteTolerance() (amici.amici.Solver method), 221

getAbsoluteToleranceB() (amici.amici.Solver method), 221

getAbsoluteToleranceFSA() (amici.amici.Solver method), 221

getAbsoluteToleranceQuadratures() (amici.amici.Solver method), 221

getAbsoluteToleranceSteadyState() (amici.amici.Solver method), 221

getAbsoluteToleranceSteadyStateSensi() (amici.amici.Solver method), 221

getAddSigmaResiduals() (amici.amici.Model method), 192

getAlwaysCheckFinite() (amici.amici.Model method), 192

getCpuTime() (amici.amici.Solver method), 221

getCpuTimeB() (amici.amici.Solver method), 221

getDataObservablesAsDataFrame() (in module amici.pandas), 272

getEdataFromDataFrame() (in module amici.pandas), 273

getExpressionIds() (amici.amici.Model method), 193

getExpressionNames() (amici.amici.Model method), 193

getFixedParameterById() (amici.amici.Model

method), 193

getFixedParameterByName() (amici.amici.Model method), 193

getFixedParameterIds() (amici.amici.Model method), 193

getFixedParameterNames() (amici.amici.Model method), 193

getFixedParameters() (amici.amici.Model method), 193

getInitialStates() (amici.amici.Model method), 194

getInitialStateSensitivities() (amici.amici.Model method), 193

getInternalSensitivityMethod() (amici.amici.Solver method), 221

getInterpolationType() (amici.amici.Solver method), 222

getLastOrder() (amici.amici.Solver method), 222

getLinearMultistepMethod() (amici.amici.Solver method), 222

getLinearSolver() (amici.amici.Solver method), 222

getMaxSteps() (amici.amici.Solver method), 222

getMaxStepsBackwardProblem() (amici.amici.Solver method), 222

getMaxTime() (amici.amici.Solver method), 222

getMinimumSigmaResiduals() (amici.amici.Model method), 194

getModel() (amici.ModelModule method), 179

getName() (amici.amici.Model method), 194

getNewtonDampingFactorLowerBound() (amici.amici.Solver method), 222

getNewtonDampingFactorMode() (amici.amici.Solver method), 222

getNewtonMaxSteps() (amici.amici.Solver method), 223

getNewtonStepSteadyStateCheck() (amici.amici.Solver method), 223

getNonlinearSolverIteration() (amici.amici.Solver method), 223

getNumErrTestFails() (amici.amici.Solver method), 223

getNumErrTestFailsB() (amici.amici.Solver method), 223

getNumNonlinSolvConvFails() (amici.amici.Solver method), 223

getNumNonlinSolvConvFailsB() (amici.amici.Solver method), 223

getNumRhsEvals() (amici.amici.Solver method), 223

getNumRhsEvalsB() (amici.amici.Solver method), 223

getNumSteps() (amici.amici.Solver method), 223

getNumStepsB() (amici.amici.Solver method), 224

getObservableIds() (amici.amici.Model method), 194

getObservableNames() (amici.amici.Model method), 194

getObservableScaling() (amici.amici.Model method), 194

getObservedData() (amici.amici.ExpData method), 183

getObservedDataPtr() (amici.amici.ExpData method), 183

getObservedDataStdDev() (amici.amici.ExpData method), 183

getObservedDataStdDevPtr() (amici.amici.ExpData method), 183

getObservedEvents() (amici.amici.ExpData method), 183

getObservedEventsPtr() (amici.amici.ExpData method), 183

getObservedEventsStdDev() (amici.amici.ExpData method), 183

getObservedEventsStdDevPtr() (amici.amici.ExpData method), 183

getParameterById() (amici.amici.Model method), 194

getParameterByName() (amici.amici.Model method), 194

getParameterIds() (amici.amici.Model method), 195

getParameterList() (amici.amici.Model method), 195

getParameterNames() (amici.amici.Model method), 195

getParameters() (amici.amici.Model method), 195

getParameterScale() (amici.amici.Model method), 195

getReinitializationStateIdxs() (amici.amici.Model method), 195

getReinitializeFixedParameterInitialStates() (amici.amici.Model method), 195

getRelativeTolerance() (amici.amici.Solver method), 224

getRelativeToleranceB() (amici.amici.Solver method), 224

getRelativeToleranceFSA() (amici.amici.Solver method), 224

getRelativeToleranceQuadratures() (amici.amici.Solver method), 224

getRelativeToleranceSteadyState() (amici.amici.Solver method), 224

getRelativeToleranceSteadyStateSensi() (amici.amici.Solver method), 224

getResidualsAsDataFrame() (in module amici.pandas), 273

getReturnDataReportingMode() (amici.amici.Solver method), 224

getScaledParameter() (in module amici.amici), 231

getSensiSteadyStateCheck() (amici.amici.Solver method), 224

getSensitivityMethod() (amici.amici.Solver method), 225

getSensitivityMethodPreequilibration() (amici.amici.Solver method), 225

[getSensitivityOrder\(\)](#) (*amici.amici.Solver method*), 225
[getSimulationObservablesAsDataFrame\(\)](#) (*in module amici.pandas*), 273
[getSimulationStatesAsDataFrame\(\)](#) (*in module amici.pandas*), 274
[getStabilityLimitFlag\(\)](#) (*amici.amici.Solver method*), 225
[getStateIds\(\)](#) (*amici.amici.Model method*), 195
[getStateIdsSolver\(\)](#) (*amici.amici.Model method*), 195
[getStateIsNonNegative\(\)](#) (*amici.amici.Model method*), 196
[getStateNames\(\)](#) (*amici.amici.Model method*), 196
[getStateNamesSolver\(\)](#) (*amici.amici.Model method*), 196
[getStateOrdering\(\)](#) (*amici.amici.Solver method*), 225
[getSteadyStateSensitivityMode\(\)](#) (*amici.amici.Model method*), 196
[getSteadyStateSensiToleranceFactor\(\)](#) (*amici.amici.Solver method*), 225
[getSteadyStateToleranceFactor\(\)](#) (*amici.amici.Solver method*), 225
[gett\(\)](#) (*amici.amici.Solver method*), 225
[getTimepoint\(\)](#) (*amici.amici.ExpData method*), 184
[getTimepoint\(\)](#) (*amici.amici.Model method*), 196
[getTimepoints\(\)](#) (*amici.amici.ExpData method*), 184
[getTimepoints\(\)](#) (*amici.amici.Model method*), 196
[getUnscaledParameter\(\)](#) (*in module amici.amici*), 231
[getUnscaledParameters\(\)](#) (*amici.amici.Model method*), 196
[grouper\(\)](#) (*in module amici.import_utils*), 253
[gsl::make_span](#) (C++ function), 538

H

[has_conservation_law\(\)](#) (*amici.ode_model.State method*), 270
[has_fixed_parameter_ic\(\)](#) (*in module amici.pysb_import*), 238
[hasCustomInitialStates\(\)](#) (*amici.amici.Model method*), 196
[hasCustomInitialStateSensitivities\(\)](#) (*amici.amici.Model method*), 196
[hasExpressionIds\(\)](#) (*amici.amici.Model method*), 196
[hasExpressionNames\(\)](#) (*amici.amici.Model method*), 197
[hasFixedParameterIds\(\)](#) (*amici.amici.Model method*), 197
[hasFixedParameterNames\(\)](#) (*amici.amici.Model method*), 197
[hasObservableIds\(\)](#) (*amici.amici.Model method*), 197
[hasObservableNames\(\)](#) (*amici.amici.Model method*), 197

[hasParameterIds\(\)](#) (*amici.amici.Model method*), 197
[hasParameterNames\(\)](#) (*amici.amici.Model method*), 197
[hasQuadraticLLH\(\)](#) (*amici.amici.Model method*), 197
[hasStateIds\(\)](#) (*amici.amici.Model method*), 198
[hasStateNames\(\)](#) (*amici.amici.Model method*), 198
[hdf5_enabled](#) (*in module amici*), 180
[hermite](#) (*amici.amici.InterpolationType attribute*), 189

I

[id](#) (*amici.amici.ExpData property*), 184
[id](#) (*amici.amici.ExpDataPtr property*), 188
[id](#) (*amici.amici.ReturnData property*), 208
[id](#) (*amici.amici.ReturnDataPtr property*), 212
[IDAS](#), 53
[identifier](#) (*amici.amici.LogItem property*), 190
[idlist](#) (*amici.amici.Model property*), 198
[idlist](#) (*amici.amici.ModelPtr property*), 205
[import_from_sbml_importer\(\)](#) (*amici.ode_export.ODEModel method*), 260
[import_model\(\)](#) (*in module amici.petab_import*), 242
[import_model_module\(\)](#) (*in module amici*), 180
[import_model_pysb\(\)](#) (*in module amici.petab_import_pysb*), 246
[import_model_sbml\(\)](#) (*in module amici.petab_import*), 242
[import_petab_problem\(\)](#) (*in module amici.petab_import*), 243
[integrateIfNewtonFails](#) (*amici.amici.SteadyStateSensitivityMode attribute*), 230
[integrationOnly](#) (*amici.amici.SteadyStateSensitivityMode attribute*), 230
[InternalSensitivityMethod](#) (*class in amici.amici*), 189
[InterpolationType](#) (*class in amici.amici*), 189
[IntVector](#) (*class in amici.amici*), 189
[is_assignment_rule_target\(\)](#) (*amici.sbml_import.SbmlImporter method*), 235
[is_rate_rule_target\(\)](#) (*amici.sbml_import.SbmlImporter method*), 235
[is_valid_identifier\(\)](#) (*in module amici.ode_export*), 265
[isSetObservedData\(\)](#) (*amici.amici.ExpData method*), 184
[isSetObservedDataStdDev\(\)](#) (*amici.amici.ExpData method*), 184
[isSetObservedEvents\(\)](#) (*amici.amici.ExpData method*), 184
[isSetObservedEventsStdDev\(\)](#) (*amici.amici.ExpData method*), 184

items (*amici.amici.Logger* property), 190

J

J (*amici.amici.ReturnData* property), 207

J (*amici.amici.ReturnDataPtr* property), 212

K

k() (*amici.amici.Model* method), 198

KLU (*amici.amici.LinearSolver* attribute), 189

L

LAPACKBand (*amici.amici.LinearSolver* attribute), 189

LAPACKDense (*amici.amici.LinearSolver* attribute), 189

lbw (*amici.amici.ModelDimensions* property), 204

lbw (*amici.amici.ModelPtr* property), 205

lbw (*amici.amici.ReturnDataPtr* property), 212

likelihood (*amici.amici.RDataReporting* attribute), 207

lin (*amici.amici.ObservableScaling* attribute), 207

LIN (*amici.import_utils.ObservableTransformation* attribute), 252

LinearMultistepMethod (*class in amici.amici*), 189

LinearSolver (*class in amici.amici*), 189

llh (*amici.amici.ReturnData* property), 208

llh (*amici.amici.ReturnDataPtr* property), 212

ln (*amici.amici.ParameterScaling* attribute), 207

log (*amici.amici.ObservableScaling* attribute), 207

LOG (*amici.import_utils.ObservableTransformation* attribute), 252

log() (*amici.amici.Logger* method), 190

log10 (*amici.amici.ObservableScaling* attribute), 207

log10 (*amici.amici.ParameterScaling* attribute), 207

LOG10 (*amici.import_utils.ObservableTransformation* attribute), 252

log_execution_time() (*in module amici.logging*), 275

logger (*amici.amici.Model* property), 198

logger (*amici.amici.ModelPtr* property), 205

logger (*amici.amici.Solver* property), 226

logger (*amici.amici.SolverPtr* property), 230

Logger (*class in amici.amici*), 190

LogItem (*class in amici.amici*), 190

LogItemVector (*class in amici.amici*), 190

LogLikelihoodRZ (*class in amici.ode_model*), 268

LogLikelihoodY (*class in amici.ode_model*), 268

LogLikelihoodZ (*class in amici.ode_model*), 268

M

M_1_PI (*C macro*), 545

M_2_PI (*C macro*), 545

M_2_SQRTPI (*C macro*), 546

M_E (*C macro*), 546

M_LN10 (*C macro*), 546

M_LN2 (*C macro*), 546

M_LOG10E (*C macro*), 546

M_LOG2E (*C macro*), 547

M_PI (*C macro*), 547

M_PI_2 (*C macro*), 547

M_PI_4 (*C macro*), 547

M_SQRT1_2 (*C macro*), 548

M_SQRT2 (*C macro*), 548

message (*amici.amici.LogItem* property), 190

messages (*amici.amici.ReturnData* property), 208

messages (*amici.amici.ReturnDataPtr* property), 212

Model (*class in amici.amici*), 191

ModelDimensions (*class in amici.amici*), 203

ModelModule (*class in amici*), 179

ModelPtr (*class in amici.amici*), 205

ModelQuantity (*class in amici.ode_model*), 268

module

amici, 179

amici.amici, 180

amici.bngl_import, 240

amici.conservated_quantities_demartino, 280

amici.conservated_quantities_rref, 281

amici.gradient_check, 276

amici.import_utils, 251

amici.logging, 275

amici.numpy, 282

amici.ode_export, 256

amici.ode_model, 266

amici.pandas, 272

amici.parameter_mapping, 277

amici.petab_import, 240

amici.petab_import_pysb, 245

amici.petab_objective, 246

amici.petab_simulate, 250

amici.plotting, 270

amici.pysb_import, 237

amici.sbml_import, 233

N

name() (*amici.ode_export.ODEModel* method), 260

nc1() (*amici.amici.Model* method), 198

ndJydy (*amici.amici.ModelDimensions* property), 204

ndJydy (*amici.amici.ModelPtr* property), 205

ndJydy (*amici.amici.ReturnDataPtr* property), 213

ndtotal_cldx_rdata (*amici.amici.ModelDimensions* property), 204

ndtotal_cldx_rdata (*amici.amici.ModelPtr* property), 205

ndtotal_cldx_rdata (*amici.amici.ReturnDataPtr* property), 213

ndwdp (*amici.amici.ModelDimensions* property), 204

ndwdp (*amici.amici.ModelPtr* property), 205

ndwdp (*amici.amici.ReturnDataPtr* property), 213

ndwdw (*amici.amici.ModelDimensions* property), 204

ndwdw (*amici.amici.ModelPtr* property), 205

- `ndwdw` (*amici.amici.ReturnDataPtr* property), 213
- `ndwdx` (*amici.amici.ModelDimensions* property), 204
- `ndwdx` (*amici.amici.ModelPtr* property), 205
- `ndwdx` (*amici.amici.ReturnDataPtr* property), 213
- `ndxdotdw` (*amici.amici.ModelDimensions* property), 204
- `ndxdotdw` (*amici.amici.ModelPtr* property), 205
- `ndxdotdw` (*amici.amici.ReturnDataPtr* property), 213
- `ndxrdatadtcl` (*amici.amici.ModelDimensions* property), 204
- `ndxrdatadtcl` (*amici.amici.ModelPtr* property), 205
- `ndxrdatadtcl` (*amici.amici.ReturnDataPtr* property), 213
- `ndxrdatadxsolver` (*amici.amici.ModelDimensions* property), 204
- `ndxrdatadxsolver` (*amici.amici.ModelPtr* property), 205
- `ndxrdatadxsolver` (*amici.amici.ReturnDataPtr* property), 213
- `ne` (*amici.amici.ModelDimensions* property), 204
- `ne` (*amici.amici.ModelPtr* property), 206
- `ne` (*amici.amici.ReturnDataPtr* property), 213
- `newton` (*amici.amici.NonlinearSolverIteration* attribute), 207
- `newton_maxsteps` (*amici.amici.ReturnData* property), 208
- `newton_maxsteps` (*amici.amici.ReturnDataPtr* property), 213
- `NewtonDampingFactorMode` (class in *amici.amici*), 206
- `newtonOnly` (*amici.amici.SteadyStateSensitivityMode* attribute), 230
- `nJ` (*amici.amici.ModelDimensions* property), 204
- `nJ` (*amici.amici.ModelPtr* property), 205
- `nJ` (*amici.amici.ReturnDataPtr* property), 212
- `nk` (*amici.amici.ModelDimensions* property), 204
- `nk` (*amici.amici.ReturnDataPtr* property), 213
- `nk()` (*amici.amici.Model* method), 198
- `nmaxevent` (*amici.amici.ReturnData* property), 208
- `nmaxevent` (*amici.amici.ReturnDataPtr* property), 213
- `nmaxevent()` (*amici.amici.ExpData* method), 185
- `nMaxEvent()` (*amici.amici.Model* method), 198
- `nnz` (*amici.amici.ModelDimensions* property), 204
- `nnz` (*amici.amici.ModelPtr* property), 206
- `nnz` (*amici.amici.ReturnDataPtr* property), 213
- `noise_distribution_to_cost_function()` (in module *amici.import_utils*), 253
- `noise_distribution_to_observable_transformation()` (in module *amici.import_utils*), 254
- `none` (*amici.amici.ParameterScaling* attribute), 207
- `none` (*amici.amici.SecondOrderMode* attribute), 218
- `none` (*amici.amici.SensitivityMethod* attribute), 218
- `none` (*amici.amici.SensitivityOrder* attribute), 218
- `NonlinearSolverIteration` (class in *amici.amici*), 206
- `NonlinearSolverIteration_fixedpoint` (in module *amici.amici*), 207
- `not_run` (*amici.amici.SteadyStateStatus* attribute), 231
- `np` (*amici.amici.ModelDimensions* property), 204
- `np` (*amici.amici.ReturnDataPtr* property), 213
- `np()` (*amici.amici.Model* method), 198
- `nplist` (*amici.amici.ReturnData* property), 208
- `nplist` (*amici.amici.ReturnDataPtr* property), 213
- `nplist()` (*amici.amici.Model* method), 198
- `nplist()` (*amici.amici.Solver* method), 226
- `nquad()` (*amici.amici.Solver* method), 226
- `nt` (*amici.amici.ReturnData* property), 208
- `nt` (*amici.amici.ReturnDataPtr* property), 213
- `nt()` (*amici.amici.ExpData* method), 185
- `nt()` (*amici.amici.Model* method), 199
- `nullspace_by_rref()` (in module *amici.conservated_quantities_rref*), 281
- `num_cons_law()` (*amici.ode_export.ODEModel* method), 261
- `num_const()` (*amici.ode_export.ODEModel* method), 261
- `num_eventobs()` (*amici.ode_export.ODEModel* method), 261
- `num_events()` (*amici.ode_export.ODEModel* method), 261
- `num_expr()` (*amici.ode_export.ODEModel* method), 261
- `num_obs()` (*amici.ode_export.ODEModel* method), 261
- `num_par()` (*amici.ode_export.ODEModel* method), 261
- `num_state_reinits()` (*amici.ode_export.ODEModel* method), 261
- `num_states_rdata()` (*amici.ode_export.ODEModel* method), 261
- `num_states_solver()` (*amici.ode_export.ODEModel* method), 262
- `numerrtestfails` (*amici.amici.ReturnData* property), 208
- `numerrtestfails` (*amici.amici.ReturnDataPtr* property), 213
- `numerrtestfailsB` (*amici.amici.ReturnData* property), 208
- `numerrtestfailsB` (*amici.amici.ReturnDataPtr* property), 213
- `numnonlinsolvconvfails` (*amici.amici.ReturnData* property), 208
- `numnonlinsolvconvfails` (*amici.amici.ReturnDataPtr* property), 213
- `numnonlinsolvconvfailsB` (*amici.amici.ReturnData* property), 208
- `numnonlinsolvconvfailsB` (*amici.amici.ReturnDataPtr* property), 214
- `numrhsevals` (*amici.amici.ReturnData* property), 208
- `numrhsevals` (*amici.amici.ReturnDataPtr* property), 214

numrhsevalsB (*amici.amici.ReturnData property*), 208
 numrhsevalsB (*amici.amici.ReturnDataPtr property*), 214
 numsteps (*amici.amici.ReturnData property*), 208
 numsteps (*amici.amici.ReturnDataPtr property*), 214
 numstepsB (*amici.amici.ReturnData property*), 208
 numstepsB (*amici.amici.ReturnDataPtr property*), 214
 nw (*amici.amici.ModelDimensions property*), 204
 nw (*amici.amici.ModelPtr property*), 206
 nw (*amici.amici.ReturnDataPtr property*), 214
 nx (*amici.amici.ReturnData property*), 209
 nx (*amici.amici.ReturnDataPtr property*), 214
 nx() (*amici.amici.Solver method*), 226
 nx_rdata (*amici.amici.ModelDimensions property*), 204
 nx_rdata (*amici.amici.ModelPtr property*), 206
 nx_rdata (*amici.amici.ReturnDataPtr property*), 214
 nx_reinit() (*amici.amici.Model method*), 199
 nx_solver (*amici.amici.ModelDimensions property*), 204
 nx_solver (*amici.amici.ModelPtr property*), 206
 nx_solver (*amici.amici.ReturnDataPtr property*), 214
 nx_solver_reinit (*amici.amici.ModelDimensions property*), 204
 nx_solver_reinit (*amici.amici.ModelPtr property*), 206
 nx_solver_reinit (*amici.amici.ReturnDataPtr property*), 214
 nxtrue (*amici.amici.ReturnData property*), 209
 nxtrue (*amici.amici.ReturnDataPtr property*), 214
 nxtrue_rdata (*amici.amici.ModelDimensions property*), 204
 nxtrue_rdata (*amici.amici.ModelPtr property*), 206
 nxtrue_rdata (*amici.amici.ReturnDataPtr property*), 214
 nxtrue_solver (*amici.amici.ModelDimensions property*), 205
 nxtrue_solver (*amici.amici.ModelPtr property*), 206
 nxtrue_solver (*amici.amici.ReturnDataPtr property*), 214
 ny (*amici.amici.ModelDimensions property*), 205
 ny (*amici.amici.ModelPtr property*), 206
 ny (*amici.amici.ReturnDataPtr property*), 214
 nytrue (*amici.amici.ModelDimensions property*), 205
 nytrue (*amici.amici.ModelPtr property*), 206
 nytrue (*amici.amici.ReturnDataPtr property*), 214
 nytrue() (*amici.amici.ExpData method*), 185
 nz (*amici.amici.ModelDimensions property*), 205
 nz (*amici.amici.ModelPtr property*), 206
 nz (*amici.amici.ReturnDataPtr property*), 214
 nztrue (*amici.amici.ModelDimensions property*), 205
 nztrue (*amici.amici.ModelPtr property*), 206
 nztrue (*amici.amici.ReturnDataPtr property*), 214
 nztrue() (*amici.amici.ExpData method*), 185

O

o2mode (*amici.amici.Model property*), 199
 o2mode (*amici.amici.ModelPtr property*), 206
 o2mode (*amici.amici.ReturnData property*), 209
 o2mode (*amici.amici.ReturnDataPtr property*), 214
 Observable (*class in amici.ode_model*), 269
 ObservableScaling (*class in amici.amici*), 207
 ObservableTransformation (*class in amici.import_utils*), 252
 ODE, 53
 ode_model_from_pysb_importer() (*in module amici.pysb_import*), 238
 ODEExporter (*class in amici.ode_export*), 256
 ODEModel (*class in amici.ode_export*), 257
 off (*amici.amici.NewtonDampingFactorMode attribute*), 206
 on (*amici.amici.NewtonDampingFactorMode attribute*), 206
 order (*amici.amici.ReturnData property*), 209
 order (*amici.amici.ReturnDataPtr property*), 214

P

Parameter (*class in amici.ode_model*), 269
 ParameterMapping (*class in amici.parameter_mapping*), 277
 ParameterMappingForCondition (*class in amici.parameter_mapping*), 277
 parameters (*amici.amici.ExpDataPtr property*), 188
 parameters (*amici.amici.SimulationParameters property*), 219
 ParameterScaling (*class in amici.amici*), 207
 parameterScalingFromIntVector() (*in module amici.amici*), 231
 ParameterScalingVector (*class in amici.amici*), 207
 parse_events() (*amici.ode_export.ODEModel method*), 262
 pattern (*amici.ode_export.TemplateAmici attribute*), 263
 PEtab, 53
 petab_noise_distributions_to_amici() (*in module amici.petab_import*), 244
 petab_scale_to_amici_scale() (*in module amici.petab_import*), 244
 petab_to_amici_scale() (*in module amici.parameter_mapping*), 279
 PetabSimulator (*class in amici.petab_simulate*), 251
 pivots() (*in module amici.conservated_quantities_rref*), 281
 plist (*amici.amici.ExpDataPtr property*), 188
 plist (*amici.amici.SimulationParameters property*), 219
 plist() (*amici.amici.Model method*), 199
 plot_jacobian() (*in module amici.plotting*), 271
 plot_observable_trajectories() (*in module amici.plotting*), 271

plot_state_trajectories() (in module *amici.plotting*), 272
 plotObservableTrajectories() (in module *amici.plotting*), 270
 plotStateTrajectories() (in module *amici.plotting*), 271
 polynomial (*amici.amici.InterpolationType* attribute), 189
 posteq_cpu_time (*amici.amici.ReturnData* property), 209
 posteq_cpu_time (*amici.amici.ReturnDataPtr* property), 215
 posteq_cpu_timeB (*amici.amici.ReturnData* property), 209
 posteq_cpu_timeB (*amici.amici.ReturnDataPtr* property), 215
 posteq_numsteps (*amici.amici.ReturnData* property), 209
 posteq_numsteps (*amici.amici.ReturnDataPtr* property), 215
 posteq_numstepsB (*amici.amici.ReturnData* property), 209
 posteq_numstepsB (*amici.amici.ReturnDataPtr* property), 215
 posteq_status (*amici.amici.ReturnData* property), 209
 posteq_status (*amici.amici.ReturnDataPtr* property), 215
 posteq_t (*amici.amici.ReturnData* property), 209
 posteq_t (*amici.amici.ReturnDataPtr* property), 215
 posteq_wrms (*amici.amici.ReturnData* property), 209
 posteq_wrms (*amici.amici.ReturnDataPtr* property), 215
 preeq_cpu_time (*amici.amici.ReturnData* property), 209
 preeq_cpu_time (*amici.amici.ReturnDataPtr* property), 215
 preeq_cpu_timeB (*amici.amici.ReturnData* property), 209
 preeq_cpu_timeB (*amici.amici.ReturnDataPtr* property), 215
 preeq_numsteps (*amici.amici.ReturnData* property), 210
 preeq_numsteps (*amici.amici.ReturnDataPtr* property), 215
 preeq_numstepsB (*amici.amici.ReturnData* property), 210
 preeq_numstepsB (*amici.amici.ReturnDataPtr* property), 215
 preeq_status (*amici.amici.ReturnData* property), 210
 preeq_status (*amici.amici.ReturnDataPtr* property), 216
 preeq_t (*amici.amici.ReturnData* property), 210
 preeq_t (*amici.amici.ReturnDataPtr* property), 216
 preeq_wrms (*amici.amici.ReturnData* property), 210

preeq_wrms (*amici.amici.ReturnDataPtr* property), 216
 preequilibration, 53
 preequilibration (*amici.amici.FixedParameterContext* attribute), 189
 presimulation, 53
 presimulation (*amici.amici.FixedParameterContext* attribute), 189
 process_conservation_laws() (*amici.sbml_import.SbmlImporter* method), 235
 pscale (*amici.amici.ExpDataPtr* property), 188
 pscale (*amici.amici.ReturnData* property), 210
 pscale (*amici.amici.ReturnDataPtr* property), 216
 pscale (*amici.amici.SimulationParameters* property), 219
 PySB, 53
 pysb2amici() (in module *amici.pysb_import*), 238
 pysb_model_from_path() (in module *amici.pysb_import*), 239
 PysbPetabProblem (class in *amici.petab_import_pysb*), 245
 pythonGenerated (*amici.amici.Model* property), 199
 pythonGenerated (*amici.amici.ModelPtr* property), 206

R

rdata_reporting (*amici.amici.ReturnData* property), 210
 rdata_reporting (*amici.amici.ReturnDataPtr* property), 216
 RDataReporting (class in *amici.amici*), 207
 rdatas_to_measurement_df() (in module *amici.petab_objective*), 249
 rdatas_to_simulation_df() (in module *amici.petab_objective*), 249
 reinitialization_state_idxs_presim (*amici.amici.ExpDataPtr* property), 188
 reinitialization_state_idxs_presim (*amici.amici.SimulationParameters* property), 219
 reinitialization_state_idxs_sim (*amici.amici.ExpDataPtr* property), 188
 reinitialization_state_idxs_sim (*amici.amici.SimulationParameters* property), 219
 reinitializeAllFixedParameterDependentInitialStates() (*amici.amici.SimulationParameters* method), 219
 reinitializeAllFixedParameterDependentInitialStatesForPresim (*amici.amici.SimulationParameters* method), 219
 reinitializeAllFixedParameterDependentInitialStatesForSimulation (*amici.amici.SimulationParameters* method),

219
 reinitializeFixedParameterInitialStates (*amici.amici.ExpDataPtr* property), 188
 reinitializeFixedParameterInitialStates (*amici.amici.SimulationParameters* property), 219
 remove_argument_types() (in module *amici.ode_export*), 265
 replace_logx() (in module *amici.sbml_import*), 237
 requireSensitivitiesForAllParameters() (*amici.amici.Model* method), 199
 res (*amici.amici.ReturnData* property), 210
 res (*amici.amici.ReturnDataPtr* property), 216
 residuals (*amici.amici.RDataReporting* attribute), 207
 ReturnData (class in *amici.amici*), 207
 ReturnDataPtr (class in *amici.amici*), 212
 ReturnDataView (class in *amici.numpy*), 282
 rowvals() (*amici.ode_export.ODEModel* method), 262
 rref() (in module *amici.conservd_quantities_rref*), 281
 runAmiciSimulation() (in module *amici.amici*), 231
 runAmiciSimulations() (in module *amici.amici*), 232
 rz (*amici.amici.ReturnData* property), 210
 rz (*amici.amici.ReturnDataPtr* property), 216

S

s2llh (*amici.amici.ReturnData* property), 210
 s2llh (*amici.amici.ReturnDataPtr* property), 216
 s2rz (*amici.amici.ReturnData* property), 210
 s2rz (*amici.amici.ReturnDataPtr* property), 216
 SBML, 53
 sbml2amici() (*amici.sbml_import.SbmlImporter* method), 235
 SBMLException, 233
 SbmlImporter (class in *amici.sbml_import*), 233
 scale_parameter() (in module *amici.parameter_mapping*), 279
 scale_parameters_dict() (in module *amici.parameter_mapping*), 279
 scaleParameters() (in module *amici.amici*), 232
 second (*amici.amici.SensitivityOrder* attribute), 218
 SecondOrderMode (class in *amici.amici*), 217
 sensi (*amici.amici.ReturnData* property), 210
 sensi (*amici.amici.ReturnDataPtr* property), 216
 sensi_meth (*amici.amici.ReturnData* property), 210
 sensi_meth (*amici.amici.ReturnDataPtr* property), 216
 SensitivityMethod (class in *amici.amici*), 218
 SensitivityMethod_adjoint (in module *amici.amici*), 218
 SensitivityMethod_forward (in module *amici.amici*), 218
 SensitivityMethod_none (in module *amici.amici*), 218
 SensitivityOrder (class in *amici.amici*), 218

SensitivityOrder_first (in module *amici.amici*), 218
 SensitivityOrder_none (in module *amici.amici*), 218
 SensitivityOrder_second (in module *amici.amici*), 218
 set_conservation_law() (*amici.ode_model.State* method), 270
 set_dt() (*amici.ode_model.State* method), 270
 set_log_level() (in module *amici.logging*), 275
 set_name() (*amici.ode_export.ODEExporter* method), 257
 set_paths() (*amici.ode_export.ODEExporter* method), 257
 set_val() (*amici.ode_model.ModelQuantity* method), 269
 setAbsoluteTolerance() (*amici.amici.Solver* method), 226
 setAbsoluteToleranceB() (*amici.amici.Solver* method), 226
 setAbsoluteToleranceFSA() (*amici.amici.Solver* method), 226
 setAbsoluteToleranceQuadratures() (*amici.amici.Solver* method), 226
 setAbsoluteToleranceSteadyState() (*amici.amici.Solver* method), 226
 setAbsoluteToleranceSteadyStateSensi() (*amici.amici.Solver* method), 227
 setAddSigmaResiduals() (*amici.amici.Model* method), 199
 setAllStatesNonNegative() (*amici.amici.Model* method), 199
 setAlwaysCheckFinite() (*amici.amici.Model* method), 199
 setFixedParameterById() (*amici.amici.Model* method), 200
 setFixedParameterByName() (*amici.amici.Model* method), 200
 setFixedParameters() (*amici.amici.Model* method), 200
 setFixedParametersByIdRegex() (*amici.amici.Model* method), 200
 setFixedParametersByNameRegex() (*amici.amici.Model* method), 200
 setInitialStates() (*amici.amici.Model* method), 200
 setInitialStateSensitivities() (*amici.amici.Model* method), 200
 setInternalSensitivityMethod() (*amici.amici.Solver* method), 227
 setInterpolationType() (*amici.amici.Solver* method), 227
 setLinearMultistepMethod() (*amici.amici.Solver* method), 227
 setLinearSolver() (*amici.amici.Solver* method), 227
 setMaxSteps() (*amici.amici.Solver* method), 227

setMaxStepsBackwardProblem() (*amici.amici.Solver method*), 227
 setMaxTime() (*amici.amici.Solver method*), 227
 setMinimumSigmaResiduals() (*amici.amici.Model method*), 201
 setNewtonDampingFactorLowerBound() (*amici.amici.Solver method*), 227
 setNewtonDampingFactorMode() (*amici.amici.Solver method*), 227
 setNewtonMaxSteps() (*amici.amici.Solver method*), 228
 setNewtonStepSteadyStateCheck() (*amici.amici.Solver method*), 228
 setNMaxEvent() (*amici.amici.Model method*), 201
 setNonlinearSolverIteration() (*amici.amici.Solver method*), 228
 setObservedData() (*amici.amici.ExpData method*), 185
 setObservedDataStdDev() (*amici.amici.ExpData method*), 185
 setObservedEvents() (*amici.amici.ExpData method*), 186
 setObservedEventsStdDev() (*amici.amici.ExpData method*), 187
 setParameterById() (*amici.amici.Model method*), 201
 setParameterByName() (*amici.amici.Model method*), 201
 setParameterList() (*amici.amici.Model method*), 202
 setParameters() (*amici.amici.Model method*), 202
 setParametersByIdRegex() (*amici.amici.Model method*), 202
 setParametersByNameRegex() (*amici.amici.Model method*), 202
 setParameterScale() (*amici.amici.Model method*), 202
 setReinitializationStateIdxs() (*amici.amici.Model method*), 203
 setReinitializeFixedParameterInitialStates() (*amici.amici.Model method*), 203
 setRelativeTolerance() (*amici.amici.Solver method*), 228
 setRelativeToleranceB() (*amici.amici.Solver method*), 228
 setRelativeToleranceFSA() (*amici.amici.Solver method*), 228
 setRelativeToleranceQuadratures() (*amici.amici.Solver method*), 228
 setRelativeToleranceSteadyState() (*amici.amici.Solver method*), 228
 setRelativeToleranceSteadyStateSensi() (*amici.amici.Solver method*), 229
 setReturnDataReportingMode() (*amici.amici.Solver method*), 229
 setSensiSteadyStateCheck() (*amici.amici.Solver method*), 229
 setSensitivityMethod() (*amici.amici.Solver method*), 229
 setSensitivityMethodPreequilibration() (*amici.amici.Solver method*), 229
 setSensitivityOrder() (*amici.amici.Solver method*), 229
 setStabilityLimitFlag() (*amici.amici.Solver method*), 229
 setStateIsNonNegative() (*amici.amici.Model method*), 203
 setStateOrdering() (*amici.amici.Solver method*), 229
 setSteadyStateSensitivityMode() (*amici.amici.Model method*), 203
 setSteadyStateSensiToleranceFactor() (*amici.amici.Solver method*), 229
 setSteadyStateToleranceFactor() (*amici.amici.Solver method*), 230
 setT0() (*amici.amici.Model method*), 203
 setTimepoints() (*amici.amici.ExpData method*), 187
 setTimepoints() (*amici.amici.Model method*), 203
 setUnscaledInitialStateSensitivities() (*amici.amici.Model method*), 203
 severity (*amici.amici.LogItem property*), 190
 show_model_info() (in module *amici.petab_import*), 244
 sigma_res (*amici.amici.ReturnData property*), 210
 sigma_res (*amici.amici.ReturnDataPtr property*), 216
 sigmay (*amici.amici.ReturnData property*), 210
 sigmay (*amici.amici.ReturnDataPtr property*), 216
 SigmaY (*class in amici.ode_model*), 269
 sigmaz (*amici.amici.ReturnData property*), 210
 sigmaz (*amici.amici.ReturnDataPtr property*), 216
 SigmaZ (*class in amici.ode_model*), 269
 simulate_petab() (in module *amici.petab_objective*), 249
 simulate_without_noise() (*amici.petab_simulate.PetabSimulator method*), 251
 simulation (*amici.amici.FixedParameterContext attribute*), 189
 simulation_status_to_str() (in module *amici.amici*), 232
 SimulationParameters (*class in amici.amici*), 218
 SimulationState (*class in amici.amici*), 220
 simultaneous (*amici.amici.InternalSensitivityMethod attribute*), 189
 sl1h (*amici.amici.ReturnData property*), 210
 sl1h (*amici.amici.ReturnDataPtr property*), 216
 smart_is_zero_matrix() (in module *amici.ode_export*), 265
 smart_jacobian() (in module *amici.ode_export*), 265
 smart_multiply() (in module *amici.ode_export*), 265
 smart_subs() (in module *amici.import_utils*), 254

- smart_subs_dict() (in module amici.import_utils), 255
- Solver (class in amici.amici), 220
- SolverPtr (class in amici.amici), 230
- sparseeq() (amici.ode_export.ODEModel method), 262
- sparsesym() (amici.ode_export.ODEModel method), 262
- SPBCG (amici.amici.LinearSolver attribute), 190
- species_to_parameters() (in module amici.petab_import), 244
- SPGMR (amici.amici.LinearSolver attribute), 190
- SPTFQMR (amici.amici.LinearSolver attribute), 190
- sres (amici.amici.ReturnData property), 211
- sres (amici.amici.ReturnDataPtr property), 216
- srz (amici.amici.ReturnData property), 211
- srz (amici.amici.ReturnDataPtr property), 216
- ssigmay (amici.amici.ReturnData property), 211
- ssigmay (amici.amici.ReturnDataPtr property), 216
- ssigmaz (amici.amici.ReturnData property), 211
- ssigmaz (amici.amici.ReturnDataPtr property), 216
- staggered (amici.amici.InternalSensitivityMethod attribute), 189
- staggered1 (amici.amici.InternalSensitivityMethod attribute), 189
- startTimer() (amici.amici.Solver method), 230
- state (amici.amici.SimulationState property), 220
- State (class in amici.ode_model), 269
- state_has_conservation_law() (amici.ode_export.ODEModel method), 262
- state_has_fixed_parameter_initial_condition() (amici.ode_export.ODEModel method), 262
- state_is_constant() (amici.ode_export.ODEModel method), 263
- status (amici.amici.ReturnData property), 211
- status (amici.amici.ReturnDataPtr property), 217
- SteadyStateSensitivityMode (class in amici.amici), 230
- SteadyStateStatus (class in amici.amici), 230
- SteadyStateStatusVector (class in amici.amici), 231
- StringDoubleMap (class in amici.amici), 231
- StringVector (class in amici.amici), 231
- strip_pysb() (in module amici.import_utils), 255
- success (amici.amici.SteadyStateStatus attribute), 231
- SUNDIALS, 53
- SuperLUMT (amici.amici.LinearSolver attribute), 190
- SWIG, 53
- SwigPtrView (class in amici.numpy), 282
- switchForwardSensisOff() (amici.amici.Solver method), 230
- sx (amici.amici.ReturnData property), 211
- sx (amici.amici.ReturnDataPtr property), 217
- sx (amici.amici.SimulationState property), 220
- sx0 (amici.amici.ExpDataPtr property), 188
- sx0 (amici.amici.ReturnData property), 211
- sx0 (amici.amici.ReturnDataPtr property), 217
- sx0 (amici.amici.SimulationParameters property), 219
- sx_ss (amici.amici.ReturnData property), 211
- sx_ss (amici.amici.ReturnDataPtr property), 217
- sy (amici.amici.ReturnData property), 211
- sy (amici.amici.ReturnDataPtr property), 217
- sym() (amici.ode_export.ODEModel method), 263
- sym_names() (amici.ode_export.ODEModel method), 263
- sym_or_eq() (amici.ode_export.ODEModel method), 263
- symbol_with_assumptions() (in module amici.import_utils), 255
- sz (amici.amici.ReturnData property), 211
- sz (amici.amici.ReturnDataPtr property), 217
- ## T
- t (amici.amici.SimulationState property), 220
- t0() (amici.amici.Model method), 203
- t_presim (amici.amici.ExpDataPtr property), 188
- t_presim (amici.amici.SimulationParameters property), 219
- TemplateAmici (class in amici.ode_export), 263
- timeExceeded() (amici.amici.Solver method), 230
- toposort_symbols() (in module amici.import_utils), 255
- ts (amici.amici.ReturnData property), 211
- ts (amici.amici.ReturnDataPtr property), 217
- ts_ (amici.amici.ExpDataPtr property), 188
- ts_ (amici.amici.SimulationParameters property), 220
- tstart_ (amici.amici.ExpDataPtr property), 189
- tstart_ (amici.amici.SimulationParameters property), 220
- ## U
- ubw (amici.amici.ModelDimensions property), 205
- ubw (amici.amici.ModelPtr property), 206
- ubw (amici.amici.ReturnDataPtr property), 217
- unscale_parameter() (in module amici.parameter_mapping), 280
- unscale_parameters_dict() (in module amici.parameter_mapping), 280
- unscaleParameters() (in module amici.amici), 232
- ## V
- val() (amici.ode_export.ODEModel method), 263
- var_in_function_signature() (in module amici.ode_export), 266
- ## W
- w (amici.amici.ReturnData property), 211
- w (amici.amici.ReturnDataPtr property), 217

X

`x` (*amici.amici.ReturnData* property), 211
`x` (*amici.amici.ReturnDataPtr* property), 217
`x` (*amici.amici.SimulationState* property), 220
`x0` (*amici.amici.ExpDataPtr* property), 189
`x0` (*amici.amici.ReturnData* property), 211
`x0` (*amici.amici.ReturnDataPtr* property), 217
`x0` (*amici.amici.SimulationParameters* property), 220
`x_ss` (*amici.amici.ReturnData* property), 211
`x_ss` (*amici.amici.ReturnDataPtr* property), 217
`xdot` (*amici.amici.ReturnData* property), 211
`xdot` (*amici.amici.ReturnDataPtr* property), 217

Y

`y` (*amici.amici.ReturnData* property), 212
`y` (*amici.amici.ReturnDataPtr* property), 217

Z

`z` (*amici.amici.ReturnData* property), 212
`z` (*amici.amici.ReturnDataPtr* property), 217